INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

TO: Interested Parties / Applicant

DATE: February 5, 2009

RE: Iroquois Bio-Energy Company, LLC / 073-26405-00037

FROM: Matthew Stuckey, Branch Chief
Permits Branch
Office of Air Quality

Notice of Decision: Approval - Effective Immediately

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the enclosed matter. Pursuant to IC 13-15-5-3, this permit is effective immediately, unless a petition for stay of effectiveness is filed and granted according to IC 13-15-6-3, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

If you wish to challenge this decision, IC 4-21.5-3 and IC 13-15-6-1 require that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Office of Environmental Adjudication, 100 North Senate Avenue, Government Center North, Suite N 501E, Indianapolis, IN 46204, **within eighteen (18) calendar days of the mailing of this notice**. The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

(1) the date the document is delivered to the Office of Environmental Adjudication (OEA);
(2) the date of the postmark on the envelope containing the document, if the document is mailed to OEA by U.S. mail; or
(3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OEA by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

(1) the name and address of the person making the request;
(2) the interest of the person making the request;
(3) identification of any persons represented by the person making the request;
(4) the reasons, with particularity, for the request;
(5) the issues, with particularity, proposed for considerations at any hearing; and
(6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.

Enclosures
FNPER.dot12/03/07

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

Federally Enforceable State Operating Permit Renewal
OFFICE OF AIR QUALITY

Iroquois Bio-Energy Company, LLC
751 West State Road 114
Rensselaer, Indiana 47978

(herein known as the Permittee) is hereby authorized to operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this permit.

The Permittee must comply with all conditions of this permit. Noncompliance with any provisions of this permit is grounds for enforcement action; permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. An emergency does constitute an affirmative defense in an enforcement action provided the Permittee complies with the applicable requirements set forth in Section B, Emergency Provisions.

This permit is issued in accordance with 326 IAC 2 and 40 CFR Part 70 Appendix A and contains the conditions and provisions specified in 326 IAC 2-8 as required by 42 U.S.C. 7401, et. seq. (Clean Air Act as amended by the 1990 Clean Air Act Amendments), 40 CFR Part 70.6, IC 13-15 and IC 13-17.

Indiana statutes from IC 13 and rules from 326 IAC, quoted in conditions in this permit, are those applicable at the time the permit was issued. The issuance or possession of this permit shall not alone constitute a defense against an alleged violation of any law, regulation or standard, except for the requirement to obtain a FESOP under 326 IAC 2-8.

Operation Permit No.: F073-26405-00037	
Issued by: Iryn Calilung, Section Chief Permits Branch Office of Air Quality	Issuance Date: February 5, 2009 Expiration Date: February 5, 2019

TABLE OF CONTENTS

A. SOURCE SUMMARY 6
A.1 General Information [326 IAC 2-8-3(b)]
A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-8-3(c)(3)]
A.3 Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-8-3(c)(3)(I)]
A.4 FESOP Applicability [326 IAC 2-8-2]

B. GENERAL CONDITIONS 11
B.1 Definitions [326 IAC 2-8-1]
B.2 Permit Term [326 IAC 2-8-4(2)][326 IAC 2-1.1-9.5][IC 13-15-3-6(a)]
B.3 Term of Conditions [326 IAC 2-1.1-9.5]
B.4 Enforceability [326 IAC 2-8-6] [IC 13-17-12]
B.5 Severability [326 IAC 2-8-4(4)]
B.6 Property Rights or Exclusive Privilege [326 IAC 2-8-4(5)(D)]
B.7 Duty to Provide Information [326 IAC 2-8-4(5)(E)]
B.8 Certification [326 IAC 2-8-3(d)][326 IAC 2-8-4(3)(C)(i)][326 IAC 2-8-5(1)]
B.9 Annual Compliance Certification [326 IAC 2-8-5(a)(1)]
B.10 Compliance Order Issuance [326 IAC 2-8-5(b)]
B.11 Preventive Maintenance Plan [326 IAC 1-6-3][326 IAC 2-8-4(9)] [326 IAC 2-8-5(a)(1)]
B.12 Emergency Provisions [326 IAC 2-8-12]
B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5]
B.14 Termination of Right to Operate [326 IAC 2-8-9][326 IAC 2-8-3(h)]
B.15 Deviations from Permit Requirements and Conditions [326 IAC 2-8-4(3)(C)(ii)]
B.16 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-8-4(5)(C)][326 IAC 2-8-7(a)][326 IAC 2-8-8]
B.17 Permit Renewal [326 IAC 2-8-3(h)]
B.18 Permit Amendment or Revision [326 IAC 2-8-10][326 IAC 2-8-11.1]
B.19 Operational Flexibility [326 IAC 2-8-15][326 IAC 2-8-11.1]
B.20 Source Modification Requirement [326 IAC 2-8-11.1]
B.21 Inspection and Entry [326 IAC 2-8-5(a)(2)][IC 13-14-2-2][IC 13-17-3-2] [IC 13-30-3-1]
B.22 Transfer of Ownership or Operational Control [326 IAC 2-8-10]
B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-8-4(6)] [326 IAC 2-8-16] [326 IAC 2-1.1-7]
B.24 Credible Evidence [326 IAC 2-8-4(3)][326 IAC 2-8-5][62 FR 8314] [326 IAC 1-1-6]

C. SOURCE OPERATION CONDITIONS 20

Emission Limitations and Standards [326 IAC 2-8-4(1)]
C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]
C.2 Overall Source Limit [326 IAC 2-8]
C.3 Opacity [326 IAC 5-1]
C.4 Open Burning [326 IAC 4-1] [IC 13-17-9]
C.5 Incineration [326 IAC 4-2] [326 IAC 9-1-2]
C.6 Fugitive Dust Emissions [326 IAC 6-4]
C.7 Stack Height [326 IAC 1-7]
C.8 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

Testing Requirements [326 IAC 2-8-4(3)]
C.9 Performance Testing [326 IAC 3-6]

Compliance Requirements [326 IAC 2-1.1-11]
C.10 Compliance Requirements [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-8-4][326 IAC 2-8-5(a)(1)]
C.11 Compliance Monitoring [326 IAC 2-8-4(3)][326 IAC 2-8-5(a)(1)]
C.12 Monitoring Methods [326 IAC 3] [40 CFR 60] [40 CFR 63]
C.13 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-8-4(3)] [326 IAC 2-8-5(1)]

Corrective Actions and Response Steps [326 IAC 2-8-4][326 IAC 2-8-5(a)(1)]
C.14 Risk Management Plan [326 IAC 2-8-4] [40 CFR 68]
C.15 Response to Excursions or Exceedances [326 IAC 2-8-4] [326 IAC 2-8-5]
C.16 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-8-4] [326 IAC 2-8-5]

Record Keeping and Reporting Requirements [326 IAC 2-8-4(3)]
C.17 General Record Keeping Requirements [326 IAC 2-8-4(3)] [326 IAC 2-8-5]
C.18 General Reporting Requirements [326 IAC 2-8-4(3)(C)] [326 IAC 2-1.1-11]

Stratospheric Ozone Protection
C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

D.1. EMISSIONS UNIT OPERATION CONDITIONS 27

Emission Limitations and Standards [326 IAC 2-8-4(1)]
D.1.1 FESOP and PSD Limits [326 IAC 2-8-4] [326 IAC 2-2]
D.1.2 Particulate Emission Limitations [326 IAC 6-3-2]
D.1.3 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

Compliance Determination Requirements
D.1.4 PM, PM10 and PM2.5 Control
D.1.5 Testing Requirements [326 IAC 2-8-5(a)(1), (4)] [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-8-4][326 IAC 2-8-5(a)(1)]
D.1.6 Visible Emissions Notations
D.1.7 Parametric Monitoring
D.1.8 Broken or Failed Bag Detection

Record Keeping and Reporting Requirements [326 IAC 2-8-4(3)]
D.1.9 Record Keeping Requirements
D.1.10 Reporting Requirements

D.2. EMISSIONS UNIT OPERATION CONDITIONS 32

Emission Limitations and Standards [326 IAC 2-8-4(1)]
D.2.1 FESOP Limits [326 IAC 2-2] [326 IAC 2-8-4]
D.2.2 Best Available Control Technology [326 IAC 8-1-6]
D.2.3 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

Compliance Determination Requirements
D.2.4 VOC and HAP Control
D.2.5 Testing Requirements [326 IAC 2-8-5(a)(1), (4)][326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]
D.2.6 Parametric Monitoring

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]
D.2.6 Parametric Monitoring

Record Keeping Requirements [326 IAC 2-8-4(3)] [326 IAC 2-8-16]

D.2.7 Record Keeping Requirements
D.2.8 Reporting Requirements

D.3. EMISSIONS UNIT OPERATION CONDITIONS 35

Emission Limitations and Standards [326 IAC 2-8-4(1)]
D.3.1 FESOP and PSD Limits [326 IAC 2-8-4] [326 IAC 2-2]
D.3.2 Best Available Control Technology [326 IAC 8-1-6]
D.3.3 General Provisions Relating to NSPS [326 IAC 12-1][40 CFR Part 60, Subpart A]
D.3.4 Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units [40 CFR Part 60, Subpart Db] [326 IAC 20-14]
D.3.5 Particulate Emissions [326 IAC 6-2-4]
D.3.6 Particulate Emission Limitations [326 IAC 6-3-2]
D.3.7 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

Compliance Determination Requirements
D.3.8 VOC and HAP Control
D.3.9 Testing Requirements [326 IAC 2-8-5(a)(1), (4)][326 IAC 2-1.1-11] [40 CFR 60 Subpart Db] [326 IAC 2-2]

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]
D.3.10 Visible Emissions Notations
D.3.11 Thermal Oxidizer Temperature
D.3.12 Parametric Monitoring

Record Keeping and Reporting Requirement [326 IAC 2-8-4(3)] [326 IAC 2-8-16]
D.3.13 Record Keeping Requirements
D.3.14 Reporting Requirements

D.4 FACILITY OPERATION CONDITIONS 42

Emission Limitations and Standards [326 IAC 2-8-4(1)]
D.4.1 FESOP Limits [326 IAC 2-2] [326 IAC 2-8-4]
D.4.2 VOC Emissions [326 IAC 8-1-6]
D.4.3 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

Compliance Determination Requirements
D.4.4 VOC and HAP Control

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]
D.4.5 Flare Pilot Flame

Record Keeping and Reporting Requirement [326 IAC 2-8-4(3)] [326 IAC 2-8-16]
D.4.6 Record Keeping Requirements
D.4.7 Reporting Requirements

D.5 FACILITY OPERATION ONDITIONS..... 44

Emission Limitations and Standards [326 IAC 2-8-4(1)]
D.5.1 FESOP Limit [326 IAC 2-2] [326 IAC 2-8-4]

Record Keeping and Reporting Requirement [326 IAC 2-8-4(3)] [326 IAC 2-8-16]
D.5.2 Record Keeping Requirements
D.5.3 Reporting Requirements

D.6 FACILITY OPERATION CONDITIONS.....45

D.6.1 General Provisions Relating to NSPS [326 IAC 12-1][40 CFR Part 60, Subpart A]
D.6.2 New Source Performance Standards [326 IAC 12][40 CFR 60 Subpart Kb]

Certificati D.7 FACILITY OPERATION CONDITIONS.....46

D.7.1 General Provisions Relating to NSPS [326 IAC 12-1][40 CFR Part 60, Subpart A]
D.7.2 New Source Performance Standards [326 IAC 12][40 CFR 60 Subpart VV]

Certification Form 47
Emergency Occurrence Form.....48
Quarterly Report Form.....51
Quarterly Deviation and Compliance Monitoring Report Form.....55

SECTION A SOURCE SUMMARY

This permit is based on information requested by the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ). The information describing the source contained in conditions A.1 through A.3 is descriptive information and does not constitute enforceable conditions. However, the Permittee should be aware that a physical change or a change in the method of operation that may render this descriptive information obsolete or inaccurate may trigger requirements for the Permittee to obtain additional permits or seek modification of this permit pursuant to 326 IAC 2, or change other applicable requirements presented in the permit application.

A.1 General Information [326 IAC 2-8-3(b)]

The Permittee owns and operates a stationary an ethanol manufacturing plant.

Source Address:	751 West State Road 114, Rensselaer, Indiana 47978
Mailing Address:	P. O. Box 218, Rensselaer, Indiana 47978-0218
General Source Phone Number:	(219) 866-5990
SIC Code:	2869
County Location:	Jasper
Source Location Status:	Attainment for all criteria pollutants
Source Status:	Federally Enforceable State Operating Permit Program Minor Source, under PSD and Emission Offset Rules Minor Source, Section 112 of the Clean Air Act Not 1 of 28 Source Categories

A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-8-3(c)(3)]

This emission source consists of the following emission units and pollution control devices:

(a) One (1) grain receiving and storage operation, identified as P20, constructed in 2005, with a maximum capacity of 420 tons of grain per hour, controlled by baghouse C20, exhausting through stack S20, and consisting of the following:

(1) One (1) grain unloading operation.

(2) One (1) elevator leg.

(3) One (1) storage bin fill conveyor.

(4) Four (4) grain storage silos, with a total storage capacity of less than 1,000,000 bushels.

(5) One (1) storage bin emptying conveyor.

(6) One (1) day storage bin, with a maximum capacity of 5,000 bushels.

(b) Two (2) hammermills, identified as P30, constructed in 2005, each with a maximum capacity of 100 tons of grain per hour, controlled by baghouse C30, and exhausting through stack S30.

(c) One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system, identified as P70, constructed in 2005, with a maximum throughput rate of 20 tons of DDGS per hour, equipped with an integral cyclone and controlled by baghouse C70, and exhausting through stack S70.

(d) One (1) DDGS loadout operation, identified as P90, constructed in 2005, with a maximum throughput rate of 400 tons/hr, controlled by baghouse C90, and exhausting through stack S90.

(e) One (1) fermentation process, identified as P40, constructed in 2005, with a maximum

throughput rate of 6,500 gallons per hour, consisting of four (4) fermenters and one (1) beer well system, controlled by a CO_2 scrubber C40, and exhausting through stack S40.

(f) One (1) recuperative thermal oxidizer/heat recovery steam generator, identified as C10, constructed in 2005, using natural gas and process waste gases from the dryers as fuels, with a maximum heat input capacity of 125 MMBtu/hr, and exhausting through stack S10.

Under the New Source Performance Standard for Industrial-Commercial-Institutional Steam Generating Units (40 CFR 60, Subpart Db) (326 IAC 12), this emission unit is considered to be an affected source.

(g) One (1) mashing, cooking and liquefication operation, identified as P10, constructed in 2005, with a maximum wet dryer feed rate of 48 tons of wet cake (with 65% water) per hour, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, exhausting through stack S10, consisting of the following:

(1) Meal conveying operations.

(2) One (1) mash mixer, where process water and/or hot water is added to meal to form mash.

(3) Two (2) slurry tanks, where ammonia is added to mash as needed to adjust pH levels, each with a maximum capacity of 16,000 gallons.

(4) One (1) cook tube, where steam is injected to sterilize mash and gelatinize starch, with a maximum capacity of 5,000 gallons.

(5) One (1) flash tank, with a maximum capacity of 2,000 gallons.

(6) One (1) receiver tank.

(7) One (1) yeast tank, with a maximum capacity of 21,000 gallons.

(h) One (1) distillation and dehydration operation, constructed in 2005, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, exhausting through stack S10, and consisting of the following:

(1) One (1) beer column.

(2) One (1) side stripper.

(3) One (1) rectifier column.

(4) One (1) 190 proof condenser.

(5) Three (3) molecular sieves.

(6) One (1) 200 proof condenser.

(7) Four (4) centrifuges.

(8) One (1) centrate storage tank, with a maximum capacity of 990 gallons.

(9) Eight (8) evaporators.

(i) Two (2) natural gas fired DDGS dryers in series, identified as Dryers A and B, constructed in 2005, each with a maximum heat input capacity of 42 MMBtu/hr and a maximum throughput rate of 20 tons of DDGS per hour, controlled by recuperative

thermal oxidizer/heat recovery steam generator C10, and exhausting through stack S10.

(j) One (1) ethanol loading terminal for both trucks and railcars, identified as P50, constructed in 2005, with a maximum loading rate of 36,000 gallons per hour for truck loading and a maximum loading rate of 72,000 gallons per hour for railcar loading. The truck loading process is controlled by an open flare C50, which is fueled by natural gas and has a maximum heat input capacity of 6.4 MMBtu/hr, and exhausting through stack S50.

A.3 Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-8-3(c)(3)(I)]

This source also includes the following insignificant activities, as defined in 326 IAC 2-7-1(21):

(a) Combustion source flame safety purging on startup.

(b) A gasoline fuel transfer dispensing operation handling less than or equal to 1,300 gallons per day and filling storage tanks having a capacity equal to or less than 10,500 gallons.

(c) A petroleum fuel other than gasoline dispensing facility, having a storage tank capacity less than or equal to 10,500 gallons, and dispensing 3,500 gallons per day or less.

(d) Cleaners and solvents characterized as:

(1) having a vapor pressure equal to or less than two (2.0) kilo Pascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pound per square inch) measured at thirty-eight (38) degrees Centigrade (one hundred (100) degrees Fahrenheit); or

(2) having a vapor pressure equal to or less than seven-tenths (0.7) kilo Pascal (five (5) millimeters of mercury or one-tenth (0.1) pound per square inch) measured at twenty (20) degrees Centigrade (sixty-eight (68) degrees Fahrenheit);

the use of which, for all cleaners and solvents combined, does not exceed one hundred forty-five (145) gallons per twelve (12) months.

(e) One (1) process cooling tower, identified as P80, with a maximum water circulation rate of 1,200,000 gallons per hour, consisting of four (4) cells.

(f) Blowdown for any of the following:

(1) Sight glass.

(2) Boilers.

(3) Cooling tower.

(4) Compressors.

(5) Pumps.

(g) Replacement or repair of bags in baghouses, and filters in other air filtration equipment.

(h) Heat exchanger cleaning and repair.

(i) Paved roads and parking lots with public access.

(j) Diesel fired emergency generators not exceeding 1,600 horsepower, including one (1) emergency diesel fired water pump, identified as EP-16, with a maximum power output of 190 hp.

(k) Filter or coalescer media changeout.

(l) Other emission units, not regulated by a NESHAP, with PM10, NOx, and SO_2 emissions less than five (5) pounds per hour or twenty-five (25) pounds per day, CO emissions less than twenty-five (25) pounds per day, VOC emissions less than three (3) pounds per hour or fifteen (15) pounds per day, lead emissions less than six-tenths (0.6) tons per year or three and twenty-nine hundredths (3.29) pounds per day, and emitting greater than one (1) pound per day but less than five (5) pounds per day or one (1) ton per year of a single HAP, or emitting greater than one (1) pound per day but less than twelve and five tenths (12.5) pounds per day or two and five tenths (2.5) ton per year of any combination of HAPs:

(1) Two (2) final product storage tanks, identified as TK61 and TK62, constructed in 2005, which store denatured ethanol, each with a maximum capacity of 500,000 gallons, and equipped with internal floating roofs.

(2) Two (2) shift tanks, identified as TK63 and TK65, constructed in 2005, which store 190 and 200 proof ethanol, each with a maximum capacity of 100,000 gallons, and equipped with internal floating roofs.

(3) One (1) denaturant (gasoline) storage tank, identified as TK64, constructed in 2005, which stores gasoline, with a maximum capacity of 100,000 gallons, and equipped with an internal floating roof.

Under the New Source Performance Standard for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced After July 23, 1984 (40 CFR 60, Subpart Kb) (326 IAC 12), each of the final product storage tanks (TK61 and TK62), shift tanks (TK63 and TK65) is considered to be an affected source.

(4) One (1) additive tank, identified as Additive TK, constructed in 2005, which stores corrosion inhibitor, with a maximum capacity of 2,301 gallons.

(5) One (1) thin stillage tank, constructed in 2005, with a maximum capacity of 146,000 gallons.

(6) One (1) syrup tank, constructed in 2005, with a maximum capacity of 51,000 gallons.

(7) One (1) cook water tank, constructed in 2005, with a maximum capacity of 146,000 gallons.

(8) Two (2) liquefaction tanks, constructed in 2005, each with a maximum capacity of 51,000 gallons.

(9) One (1) whole stillage tank, constructed in 2005, with a maximum capacity of 51,000 gallons.

(10) Two (2) methanators, used to clean up the contact waste water that will be recirculated back into the cook tank, exhausting to the DDGS dryers as supplement fuel. When the dryers are down, methane emissions from the methanators are controlled by flare C60, which has a maximum heat input capacity of 3.2 MMBtu/hr and exhausts through stack S60.

(11) Heat exchangers, identified as mash coolers, which are part of the mashing, cooking and liquefaction operations.

(j) The group of all equipment at the source (pump, compressor, pressure relief device,

sampling connection system, open-ended valve or line, valve, and flange or other connector) which meets all of the following criteria:

1) Contacts ethanol, and

2) Part of the process which involves processing, producing or storing ethanol at intermediate or final stage.

Under the NSPS for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for which Construction, Reconstruction, or Modification Commenced After January 5, 1981, and on or Before November 7, 2006 ,(40 CFR 60, Subpart Db) (326 IAC 12), Subpart VV, this equipment is considered to be affected facilities.

A.4 FESOP Applicability [326 IAC 2-8-2]

This stationary source, otherwise required to have a Part 70 permit as described in 326 IAC 2-7-2(a), has applied to the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ) to renew a Federally Enforceable State Operating Permit (FESOP).

SECTION B GENERAL CONDITIONS

B.1 Definitions [326 IAC 2-8-1]

Terms in this permit shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-7) shall prevail.

B.2 Permit Term [326 IAC 2-8-4(2)][326 IAC 2-1.1-9.5][IC 13-15-3-6(a)]

(a) This permit, F073-26405-00037, is issued for a fixed term of ten (10) years from the issuance date of this permit, as determined in accordance with IC 4-21.5-3-5(f) and IC 13-15-5-3. Subsequent revisions, modifications, or amendments of this permit do not affect the expiration date of this permit.

(b) If IDEM, OAQ, upon receiving a timely and complete renewal permit application, fails to issue or deny the permit renewal prior to the expiration date of this permit, this existing permit shall not expire and all terms and conditions shall continue in effect, until the renewal permit has been issued or denied.

B.3 Term of Conditions [326 IAC 2-1.1-9.5]

Notwithstanding the permit term of a permit to construct, a permit to operate, or a permit modification, any condition established in a permit issued pursuant to a permitting program approved in the state implementation plan shall remain in effect until:

(a) the condition is modified in a subsequent permit action pursuant to Title I of the Clean Air Act; or

(b) the emission unit to which the condition pertains permanently ceases operation.

B.4 Enforceability [326 IAC 2-8-6] [IC 13-17-12]

Unless otherwise stated, all terms and conditions in this permit, including any provisions designed to limit the source's potential to emit, are enforceable by IDEM, the United States Environmental Protection Agency (U.S. EPA) and by citizens in accordance with the Clean Air Act.

B.5 Severability [326 IAC 2-8-4(4)]

The provisions of this permit are severable; a determination that any portion of this permit is invalid shall not affect the validity of the remainder of the permit.

B.6 Property Rights or Exclusive Privilege [326 IAC 2-8-4(5)(D)]

This permit does not convey any property rights of any sort or any exclusive privilege.

B.7 Duty to Provide Information [326 IAC 2-8-4(5)(E)]

(a) The Permittee shall furnish to IDEM, OAQ, within a reasonable time, any information that IDEM, OAQ may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. The submittal by the Permittee does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1). Upon request, the Permittee shall also furnish to IDEM, OAQ copies of records required to be kept by this permit.

(b) For information furnished by the Permittee to IDEM, OAQ, the Permittee may include a claim of confidentiality in accordance with 326 IAC 17.1. When furnishing copies of requested records directly to U. S. EPA, the Permittee may assert a claim of confidentiality in accordance with 40 CFR 2, Subpart B.

B.8 Certification [326 IAC 2-8-3(d)][326 IAC 2-8-4(3)(C)(i)][326 IAC 2-8-5(1)]

(a) Where specifically designated by this permit or required by an applicable requirement, any application form, report, or compliance certification submitted shall contain certification by an "authorized individual" of truth, accuracy, and completeness. This

certification shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

(b) One (1) certification shall be included, using the attached Certification Form, with each submittal requiring certification. One (1) certification may cover multiple forms in one (1) submittal.

(c) An "authorized individual" is defined at 326 IAC 2-1.1-1(1).

B.9 Annual Compliance Certification [326 IAC 2-8-5(a)(1)]

(a) The Permittee shall annually submit a compliance certification report which addresses the status of the source's compliance with the terms and conditions contained in this permit, including emission limitations, standards, or work practices. All certifications shall cover the time period from January 1 to December 31 of the previous year, and shall be submitted no later than July 1 of each year to:

Indiana Department of Environmental Management
Compliance Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(b) The annual compliance certification report required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(c) The annual compliance certification report shall include the following:

(1) The appropriate identification of each term or condition of this permit that is the basis of the certification;

(2) The compliance status;

(3) Whether compliance was continuous or intermittent;

(4) The methods used for determining the compliance status of the source, currently and over the reporting period consistent with 326 IAC 2-8-4(3); and

(5) Such other facts, as specified in Sections D of this permit, as IDEM, OAQ may require to determine the compliance status of the source.

The submittal by the Permittee does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

B.10 Compliance Order Issuance [326 IAC 2-8-5(b)]

IDEM, OAQ may issue a compliance order to this Permittee upon discovery that this permit is in nonconformance with an applicable requirement. The order may require immediate compliance or contain a schedule for expeditious compliance with the applicable requirement.

B.11 Preventive Maintenance Plan [326 IAC 1-6-3][326 IAC 2-8-4(9)][326 IAC 2-8-5(a)(1)]

(a) If required by specific condition(s) in Section D of this permit, the Permittee shall maintain and implement Preventive Maintenance Plans (PMPs) including the following information on each facility:

(1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;

(2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and

(3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

(b) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Permittee to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions or potential to emit. The PMPs do not require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(c) To the extent the Permittee is required by 40 CFR Part 60/63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

B.12 Emergency Provisions [326 IAC 2-8-12]

(a) An emergency, as defined in 326 IAC 2-7-1(12), is not an affirmative defense for an action brought for noncompliance with a federal or state health-based emission limitation except as provided in 326 IAC 2-8-12.

(b) An emergency, as defined in 326 IAC 2-7-1(12), constitutes an affirmative defense to an action brought for noncompliance with a health-based or technology-based emission limitation if the affirmative defense of an emergency is demonstrated through properly signed, contemporaneous operating logs or other relevant evidence that describe the following:

(1) An emergency occurred and the Permittee can, to the extent possible, identify the causes of the emergency;

(2) The permitted facility was at the time being properly operated;

(3) During the period of an emergency, the Permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards or other requirements in this permit;

(4) For each emergency lasting one (1) hour or more, the Permittee notified IDEM, OAQ, within four (4) daytime business hours after the beginning of the emergency, or after the emergency was discovered or reasonably should have been discovered;

Telephone Number: 1-800-451-6027 (ask for Office of Air Quality, Compliance Section), or
Telephone Number: 317-233-0178 (ask for Compliance Section)
Facsimile Number: 317-233-6865

(5) For each emergency lasting one (1) hour or more, the Permittee submitted the attached Emergency Occurrence Report Form or its equivalent, either by mail or facsimile to:

Indiana Department of Environmental Management
Compliance Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

within two (2) working days of the time when emission limitations were exceeded due to the emergency.

The notice fulfills the requirement of 326 IAC 2-8-4(3)(C)(ii) and must contain the following:

(A) A description of the emergency;

(B) Any steps taken to mitigate the emissions; and

(C) Corrective actions taken.

The notification which shall be submitted by the Permittee does not require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(6) The Permittee immediately took all reasonable steps to correct the emergency.

(c) In any enforcement proceeding, the Permittee seeking to establish the occurrence of an emergency has the burden of proof.

(d) This emergency provision supersedes 326 IAC 1-6 (Malfunctions). This permit condition is in addition to any emergency or upset provision contained in any applicable requirement.

(e) The Permittee seeking to establish the occurrence of an emergency shall make records available upon request to ensure that failure to implement a PMP did not cause or contribute to an exceedance of any limitations on emissions. However, IDEM, OAQ may require that the Preventive Maintenance Plans required under 326 IAC 2-8-3(c)(6) be revised in response to an emergency.

(f) Failure to notify IDEM, OAQ by telephone or facsimile of an emergency lasting more than one (1) hour in accordance with (b)(4) and (5) of this condition shall constitute a violation of 326 IAC 2-8 and any other applicable rules.

(g) Operations may continue during an emergency only if the following conditions are met:

(1) If the emergency situation causes a deviation from a technology-based limit, the Permittee may continue to operate the affected emitting facilities during the emergency provided the Permittee immediately takes all reasonable steps to correct the emergency and minimize emissions.

(2) If an emergency situation causes a deviation from a health-based limit, the Permittee may not continue to operate the affected emissions facilities unless:

(A) The Permittee immediately takes all reasonable steps to correct the emergency situation and to minimize emissions; and

(B) Continued operation of the facilities is necessary to prevent imminent injury to persons, severe damage to equipment, substantial loss of capital investment, or loss of product or raw material of substantial economic value.

Any operations shall continue no longer than the minimum time required to prevent the situations identified in (g)(2)(B) of this condition.

(h) The Permittee shall include all emergencies in the Quarterly Deviation and Compliance Monitoring Report.

B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5]

(a) All terms and conditions of permits established prior to F073-26405-00037 and issued pursuant to permitting programs approved into the state implementation plan have been either:

(1) incorporated as originally stated,

(2) revised, or

(3) deleted.

(b) All previous registrations and permits are superseded by this permit.

B.14 Termination of Right to Operate [326 IAC 2-8-9][326 IAC 2-8-3(h)]

The Permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least nine (9) months prior to the date of expiration of the source's existing permit, consistent with 326 IAC 2-8-3(h) and 326 IAC 2-8-9.

B.15 Deviations from Permit Requirements and Conditions [326 IAC 2-8-4(3)(C)(ii)]

(a) Deviations from any permit requirements (for emergencies see Section B - Emergency Provisions), the probable cause of such deviations, and any response steps or preventive measures taken shall be reported to:

Indiana Department of Environmental Management
Compliance Data Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

using the attached Quarterly Deviation and Compliance Monitoring Report, or its equivalent. A deviation required to be reported pursuant to an applicable requirement that exists independent of this permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report.

The Quarterly Deviation and Compliance Monitoring Report does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(b) A deviation is an exceedance of a permit limitation or a failure to comply with a requirement of the permit.

B.16 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-8-4(5)(C)][326 IAC 2-8-7(a)][326 IAC 2-8-8]

(a) This permit may be modified, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a Federally Enforceable State Operating Permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any condition of this permit. [326 IAC 2-8-4(5)(C)] The notification by the Permittee does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(b) This permit shall be reopened and revised under any of the circumstances listed in IC 13-15-7-2 or if IDEM, OAQ determines any of the following:

(1) That this permit contains a material mistake.

(2) That inaccurate statements were made in establishing the emissions standards or other terms or conditions.

(3) That this permit must be revised or revoked to assure compliance with an applicable requirement. [326 IAC 2-8-8(a)]

(c) Proceedings by IDEM, OAQ to reopen and revise this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening and revision shall be made as expeditiously as practicable. [326 IAC 2-8-8(b)]

(d) The reopening and revision of this permit, under 326 IAC 2-8-8(a), shall not be initiated before notice of such intent is provided to the Permittee by IDEM, OAQ at least thirty (30) days in advance of the date this permit is to be reopened, except that IDEM, OAQ may provide a shorter time period in the case of an emergency. [326 IAC 2-8-8(c)]

B.17 Permit Renewal [326 IAC 2-8-3(h)]

(a) The application for renewal shall be submitted using the application form or forms prescribed by IDEM, OAQ and shall include the information specified in 326 IAC 2-8-3. Such information shall be included in the application for each emission unit at this source, except those emission units included on the trivial or insignificant activities list contained in 326 IAC 2-7-1(21) and 326 IAC 2-7-1(40). The renewal application does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

Request for renewal shall be submitted to:

Indiana Department of Environmental Management
Permits Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(b) A timely renewal application is one that is:

(1) Submitted at least nine (9) months prior to the date of the expiration of this permit; and

(2) If the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(c) If the Permittee submits a timely and complete application for renewal of this permit, the source's failure to have a permit is not a violation of 326 IAC 2-8 until IDEM, OAQ takes final action on the renewal application, except that this protection shall cease to apply if, subsequent to the completeness determination, the Permittee fails to submit by the deadline specified in writing by IDEM, OAQ any additional information identified as being needed to process the application.

B.18 Permit Amendment or Revision [326 IAC 2-8-10][326 IAC 2-8-11.1]

(a) Permit amendments and revisions are governed by the requirements of 326 IAC 2-8-10 or 326 IAC 2-8-11.1 whenever the Permittee seeks to amend or modify this permit.

(b) Any application requesting an amendment or modification of this permit shall be submitted to:

Indiana Department of Environmental Management
Permits Branch, Office of Air Quality
100 North Senate Avenue

MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

Any such application shall be certified by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-8-10(b)(3)]

B.19 Operational Flexibility [326 IAC 2-8-15][326 IAC 2-8-11.1]

(a) The Permittee may make any change or changes at the source that are described in 326 IAC 2-8-15(b) through (d) without a prior permit revision, if each of the following conditions is met:

(1) The changes are not modifications under any provision of Title I of the Clean Air Act;

(2) Any approval required by 326 IAC 2-8-11.1 has been obtained;

(3) The changes do not result in emissions which exceed the limitations provided in this permit (whether expressed herein as a rate of emissions or in terms of total emissions);

(4) The Permittee notifies the:

Indiana Department of Environmental Management
Permits Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V
Air and Radiation Division, Regulation Development Branch - Indiana (AR-18J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

in advance of the change by written notification at least ten (10) days in advance of the proposed change. The Permittee shall attach every such notice to the Permittee's copy of this permit; and

(5) The Permittee maintains records on-site, on a rolling five (5) year basis, which document all such changes and emission trades that are subject to 326 IAC 2-8-15(b) through (d). The Permittee shall make such records available, upon reasonable request, for public review.

Such records shall consist of all information required to be submitted to IDEM, OAQ in the notices specified in 326 IAC 2-8-15(b)(2), (c)(1), and (d).

(b) Emission Trades [326 IAC 2-8-15(c)]
The Permittee may trade emissions increases and decreases at the source, where the applicable SIP provides for such emission trades without requiring a permit revision, subject to the constraints of Section (a) of this condition and those in 326 IAC 2-8-15(c).

(c) Alternative Operating Scenarios [326 IAC 2-8-15(d)]
The Permittee may make changes at the source within the range of alternative operating scenarios that are described in the terms and conditions of this permit in accordance with 326 IAC 2-8-4(7). No prior notification of IDEM, OAQ, or U.S. EPA is required.

(d) Backup fuel switches specifically addressed in, and limited under, Section D of this permit shall not be considered alternative operating scenarios. Therefore, the notification requirements of part (a) of this condition do not apply.

B.20 Source Modification Requirement [326 IAC 2-8-11.1]

A modification, construction, or reconstruction is governed by the requirements of 326 IAC 2 and 326 IAC 2-8-11.1.

B.21 Inspection and Entry [326 IAC 2-8-5(a)(2)][IC 13-14-2-2][IC 13-17-3-2][IC 13-30-3-1]

Upon presentation of proper identification cards, credentials, and other documents as may be required by law, and subject to the Permittee's right under all applicable laws and regulations to assert that the information collected by the agency is confidential and entitled to be treated as such, the Permittee shall allow IDEM, OAQ, U.S. EPA, or an authorized representative to perform the following:

(a) Enter upon the Permittee's premises where a FESOP source is located, or emissions related activity is conducted, or where records must be kept under the conditions of this permit;

(b) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;

(c) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, inspect, at reasonable times, any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit;

(d) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, sample or monitor, at reasonable times, substances or parameters for the purpose of assuring compliance with this permit or applicable requirements; and

(e) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, utilize any photographic, recording, testing, monitoring, or other equipment for the purpose of assuring compliance with this permit or applicable requirements.

B.22 Transfer of Ownership or Operational Control [326 IAC 2-8-10]

(a) The Permittee must comply with the requirements of 326 IAC 2-8-10 whenever the Permittee seeks to change the ownership or operational control of the source and no other change in the permit is necessary.

(b) Any application requesting a change in the ownership or operational control of the source shall contain a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new Permittee. The application shall be submitted to:

Indiana Department of Environmental Management
Permits Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

The application which shall be submitted by the Permittee does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-8-10(b)(3)]

B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-8-4(6)] [326 IAC 2-8-16][326 IAC 2-1.1-7]

(a) The Permittee shall pay annual fees to IDEM, OAQ within thirty (30) calendar days of receipt of a billing. Pursuant to 326 IAC 2-7-19(b), if the Permittee does not receive a bill from IDEM, OAQ the applicable fee is due April 1 of each year.

(b) Failure to pay may result in administrative enforcement action or revocation of this permit.

(c) The Permittee may call the following telephone numbers: 1-800-451-6027 or 317-233-4230 (ask for OAQ, Billing, Licensing, and Training Section), to determine the appropriate permit fee.

B.24 Credible Evidence [326 IAC 2-8-4(3)][326 IAC 2-8-5][62 FR 8314] [326 IAC 1-1-6]

For the purpose of submitting compliance certifications or establishing whether or not the Permittee has violated or is in violation of any condition of this permit, nothing in this permit shall preclude the use, including the exclusive use, of any credible evidence or information relevant to whether the Permittee would have been in compliance with the condition of this permit if the appropriate performance or compliance test or procedure had been performed.

SECTION C SOURCE OPERATION CONDITIONS

Entire Source

Emission Limitations and Standards [326 IAC 2-8-4(1)]

C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2(e)(2), particulate emissions from any process not exempt under 326 IAC 6-3-1(b) or (c) which has a maximum process weight rate less than 100 pounds per hour and the methods in 326 IAC 6-3-2(b) through (d) do not apply shall not exceed 0.551 pounds per hour.

C.2 Overall Source Limit [326 IAC 2-8]

The purpose of this permit is to limit this source's potential to emit to less than major source levels for the purpose of Section 502(a) of the Clean Air Act.

(a) Pursuant to 326 IAC 2-8:

(1) The potential to emit any regulated pollutant, except particulate matter (PM), from the entire source shall be limited to less than one hundred (100) tons per twelve (12) consecutive month period.

(2) The potential to emit any individual hazardous air pollutant (HAP) from the entire source shall be limited to less than ten (10) tons per twelve (12) consecutive month period; and

(3) The potential to emit any combination of HAPs from the entire source shall be limited to less than twenty-five (25) tons per twelve (12) consecutive month period.

(b) Pursuant to 326 IAC 2-2 (PSD), potential to emit particulate matter (PM) from the entire source shall be limited to less than two hundred fifty (250) tons per twelve (12) consecutive month period.

(c) This condition shall include all emission points at this source including those that are insignificant as defined in 326 IAC 2-7-1(21). The source shall be allowed to add insignificant activities not already listed in this permit, provided that the source's potential to emit does not exceed the above specified limits.

(d) Section D of this permit contains independently enforceable provisions to satisfy this requirement.

C.3 Opacity [326 IAC 5-1]

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

(a) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.

(b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

C.4 Open Burning [326 IAC 4-1] [IC 13-17-9]

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

C.5 Incineration [326 IAC 4-2] [326 IAC 9-1-2]

The Permittee shall not operate an incinerator or incinerate any waste or refuse except as provided in 326 IAC 4-2 and 326 IAC 9-1-2.

C.6 Fugitive Dust Emissions [326 IAC 6-4]

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions).

C.7 Stack Height [326 IAC 1-7]

The Permittee shall comply with the applicable provisions of 326 IAC 1-7 (Stack Height Provisions), for all exhaust stacks through which a potential (before controls) of twenty-five (25) tons per year or more of particulate matter or sulfur dioxide is emitted.

C.8 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

(a) Notification requirements apply to each owner or operator. If the combined amount of regulated asbestos containing material (RACM) to be stripped, removed or disturbed is at least 260 linear feet on pipes or 160 square feet on other facility components, or at least thirty-five (35) cubic feet on all facility components, then the notification requirements of 326 IAC 14-10-3 are mandatory. All demolition projects require notification whether or not asbestos is present.

(b) The Permittee shall ensure that a written notification is sent on a form provided by the Commissioner at least ten (10) working days before asbestos stripping or removal work or before demolition begins, per 326 IAC 14-10-3, and shall update such notice as necessary, including, but not limited to the following:

(1) When the amount of affected asbestos containing material increases or decreases by at least twenty percent (20%); or

(2) If there is a change in the following:

(A) Asbestos removal or demolition start date;

(B) Removal or demolition contractor; or

(C) Waste disposal site.

(c) The Permittee shall ensure that the notice is postmarked or delivered according to the guidelines set forth in 326 IAC 14-10-3(2).

(d) The notice to be submitted shall include the information enumerated in 326 IAC 14-10-3(3).

All required notifications shall be submitted to:

Indiana Department of Environmental Management
Asbestos Section, Office of Air Quality
100 North Senate Avenue

MC 61-52 IGCN 1003
Indianapolis, Indiana 46204-2251

The notice shall include a signed certification from the owner or operator that the information provided in this notification is correct and that only Indiana licensed workers and project supervisors will be used to implement the asbestos removal project. The notifications do not require a certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(e) Procedures for Asbestos Emission Control
The Permittee shall comply with the applicable emission control procedures in 326 IAC 14-10-4 and 40 CFR 61.145(c). Per 326 IAC 14-10-1, emission control requirements are applicable for any removal or disturbance of RACM greater than three (3) linear feet on pipes or three (3) square feet on any other facility components or a total of at least 0.75 cubic feet on all facility components.

(f) Demolition and Renovation
The Permittee shall thoroughly inspect the affected facility or part of the facility where the demolition or renovation will occur for the presence of asbestos pursuant to 40 CFR 61.145(a).

(g) Indiana Licensed Asbestos Inspector
The Permittee shall comply with 326 IAC 14-10-1(a) that requires the owner or operator, prior to a renovation/demolition, to use an Indiana Licensed Asbestos Inspector to thoroughly inspect the affected portion of the facility for the presence of asbestos.

Testing Requirements [326 IAC 2-8-4(3)]

C.9 Performance Testing [326 IAC 3-6]

(a) All testing shall be performed according to the provisions of 326 IAC 3-6 (Source Sampling Procedures), except as provided elsewhere in this permit, utilizing any applicable procedures and analysis methods specified in 40 CFR 51, 40 CFR 60, 40 CFR 61, 40 CFR 63, 40 CFR 75, or other procedures approved by IDEM, OAQ.

A test protocol, except as provided elsewhere in this permit, shall be submitted to:

Indiana Department of Environmental Management
Compliance Data Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

no later than thirty-five (35) days prior to the intended test date. The protocol submitted by the Permittee does not require certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(b) The Permittee shall notify IDEM, OAQ of the actual test date at least fourteen (14) days prior to the actual test date. The notification submitted by the Permittee does not require certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(c) Pursuant to 326 IAC 3-6-4(b), all test reports must be received by IDEM, OAQ not later than forty-five (45) days after the completion of the testing. An extension may be granted by IDEM, OAQ if the Permittee submits to IDEM, OAQ a reasonable written explanation not later than five (5) days prior to the end of the initial forty-five (45) day period.

Compliance Requirements [326 IAC 2-1.1-11]

C.10 Compliance Requirements [326 IAC 2-1.1-11]

The commissioner may require stack testing, monitoring, or reporting at any time to assure compliance with all applicable requirements by issuing an order under 326 IAC 2-1.1-11. Any monitoring or testing shall be performed in accordance with 326 IAC 3 or other methods approved by the commissioner or the U. S. EPA.

Compliance Monitoring Requirements [326 IAC 2-8-4][326 IAC 2-8-5(a)(1)]

C.11 Compliance Monitoring [326 IAC 2-8-4(3)][326 IAC 2-8-5(a)(1)]

Unless otherwise specified in this permit, all monitoring and record keeping requirements not already legally required shall be implemented within ninety (90) days of permit issuance or ninety (90) days of initial start-up, whichever is later. If required by Section D, the Permittee shall be responsible for installing any necessary equipment and initiating any required monitoring related to that equipment. If due to circumstances beyond its control, that equipment cannot be installed and operated within ninety (90) days, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification which shall be submitted by the Permittee does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

Unless otherwise specified in the approval for the new emission unit(s), compliance monitoring for new emission units or emission units added through a permit revision shall be implemented when operation begins.

C.12 Monitoring Methods [326 IAC 3] [40 CFR 60] [40 CFR 63]

Any monitoring or testing required by Section D of this permit shall be performed according to the provisions of 326 IAC 3, 40 CFR 60, Appendix A, 40 CFR 60, Appendix B, 40 CFR 63, or other approved methods as specified in this permit.

C.13 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-8-4(3)][326 IAC 2-8-5(1)]

(a) When required by any condition of this permit, an analog instrument used to measure a parameter related to the operation of an air pollution control device shall have a scale such that the expected maximum reading for the normal range shall be no less than twenty percent (20%) of full scale.

(b) The Permittee may request that the IDEM, OAQ approve the use of an instrument that does not meet the above specifications provided the Permittee can demonstrate that an alternative instrument specification will adequately ensure compliance with permit conditions requiring the measurement of the parameters.

Corrective Actions and Response Steps [326 IAC 2-8-4][326 IAC 2-8-5(a)(1)]

C.14 Risk Management Plan [326 IAC 2-8-4] [40 CFR 68]

If a regulated substance, as defined in 40 CFR 68, is present at a source in more than a threshold quantity, the Permittee must comply with the applicable requirements of 40 CFR 68.

C.15 Response to Excursions or Exceedances [326 IAC 2-8-4] [326 IAC 2-8-5]

(a) Upon detecting an excursion or exceedance, the Permittee shall restore operation of the

emissions unit (including any control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions.

(b) The response shall include minimizing the period of any startup, shutdown or malfunction and taking any necessary corrective actions to restore normal operation and prevent the likely recurrence of the cause of an excursion or exceedance (other than those caused by excused startup or shutdown conditions). Corrective actions may include, but are not limited to, the following:

(1) initial inspection and evaluation;

(2) recording that operations returned to normal without operator action (such as through response by a computerized distribution control system); or

(3) any necessary follow-up actions to return operation to within the indicator range, designated condition, or below the applicable emission limitation or standard, as applicable.

(c) A determination of whether the Permittee has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include, but is not limited to, the following:

(1) monitoring results;

(2) review of operation and maintenance procedures and records; and/or

(3) inspection of the control device, associated capture system, and the process.

(d) Failure to take reasonable response steps shall be considered a deviation from the permit.

(e) The Permittee shall maintain the following records:

(1) monitoring data;

(2) monitor performance data, if applicable; and

(3) corrective actions taken.

C.16 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-8-4][326 IAC 2-8-5]

(a) When the results of a stack test performed in conformance with Section C - Performance Testing, of this permit exceed the level specified in any condition of this permit, the Permittee shall take appropriate response actions. The Permittee shall submit a description of these response actions to IDEM, OAQ, within thirty (30) days of receipt of the test results. The Permittee shall take appropriate action to minimize excess emissions from the affected facility while the response actions are being implemented.

(b) A retest to demonstrate compliance shall be performed within one hundred twenty (120) days of receipt of the original test results. Should the Permittee demonstrate to IDEM, OAQ that retesting in one hundred twenty (120) days is not practicable, IDEM, OAQ may extend the retesting deadline.

(c) IDEM, OAQ reserves the authority to take any actions allowed under law in response to noncompliant stack tests.

The response action documents submitted pursuant to this condition do require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

Record Keeping and Reporting Requirements [326 IAC 2-8-4(3)]

C.17 General Record Keeping Requirements [326 IAC 2-8-4(3)] [326 IAC 2-8-5]

(a) Records of all required monitoring data, reports and support information required by this permit shall be retained for a period of at least five (5) years from the date of monitoring sample, measurement, report, or application. These records shall be physically present or electronically accessible at the source location for a minimum of three (3) years. The records may be stored elsewhere for the remaining two (2) years as long as they are available upon request. If the Commissioner makes a request for records to the Permittee, the Permittee shall furnish the records to the Commissioner within a reasonable time.

(b) Unless otherwise specified in this permit, all record keeping requirements not already legally required shall be implemented within ninety (90) days of permit issuance or ninety (90) days of initial start-up, whichever is later.

C.18 General Reporting Requirements [326 IAC 2-8-4(3)(C)] [326 IAC 2-1.1-11]

(a) The Permittee shall submit the attached Quarterly Deviation and Compliance Monitoring Report or its equivalent. Any deviation from permit requirements, the date(s) of each deviation, the cause of the deviation, and the response steps taken must be reported. This report shall be submitted within thirty (30) days of the end of the reporting period. The Quarterly Deviation and Compliance Monitoring Report shall include the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(b) The report required in (a) of this condition and reports required by conditions in Section D of this permit shall be submitted to:

Indiana Department of Environmental Management
Compliance Data Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(c) Unless otherwise specified in this permit, any notice, report, or other submission required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(d) Unless otherwise specified in this permit, all reports required in Section D of this permit shall be submitted within thirty (30) days of the end of the reporting period. All reports do require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

(e) Reporting periods are based on calendar years, unless otherwise specified in this permit. For the purpose of this permit “calendar year” means the twelve (12) month period from January 1 to December 31 inclusive.

Stratospheric Ozone Protection

C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

Pursuant to 40 CFR 82 (Protection of Stratospheric Ozone), Subpart F, except as provided for motor vehicle air conditioners in Subpart B, the Permittee shall comply with the standards for recycling and emissions reduction:

(a) Persons opening appliances for maintenance, service, repair, or disposal must comply with the required practices pursuant to 40 CFR 82.156.

(b) Equipment used during the maintenance, service, repair, or disposal of appliances must comply with the standards for recycling and recovery equipment pursuant to 40 CFR 82.158.

(c) Persons performing maintenance, service, repair, or disposal of appliances must be certified by an approved technician certification program pursuant to 40 CFR 82.161.

SECTION D.1 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-8-4(10)]

(a) One (1) grain receiving and storage operation, identified as P20, constructed in 2005, with a maximum capacity of 420 tons of grain per hour, controlled by baghouse C20, exhausting through stack S20, and consisting of the following:

(1) One (1) grain unloading operation.

(2) One (1) elevator leg.

(3) One (1) storage bin fill conveyor.

(4) Four (4) grain storage silos, with a total storage capacity of less than 1,000,000 bushels.

(5) One (1) storage bin emptying conveyor.

(6) One (1) day storage bin, with a maximum capacity of 5,000 bushels.

(b) Two (2) hammermills, identified as P30, constructed in 2005, each with a maximum capacity of 100 tons of grain per hour, controlled by baghouse C30, and exhausting through stack S30.

(c) One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system, identified as P70, constructed in 2005, with a maximum throughput rate of 20 tons of DDGS per hour, equipped with an integral cyclone and controlled by baghouse C70, and exhausting through stack S70.

(d) One (1) DDGS loadout operation, identified as P90, constructed in 2005, with a maximum throughput rate of 400 tons/hr, controlled by baghouse C90, and exhausting through stack S90.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-8-4(1)]

D.1.1 FESOP and PSD Limits [326 IAC 2-8-4] [326 IAC 2-2]

Pursuant to 326 IAC 2-8-4 (FESOP) (for PM10, PM2.5, VOC, SO2, and single HAP (Acetaldehyde)) and in order to render 326 IAC 2-2 (PSD) not applicable (for PM):

(a) The DDGS production rate shall not exceed 162,218 tons per twelve (12) consecutive month period with compliance determined at the end of each month.

(b) The PM emissions from the following units shall not exceed the limits listed in the table below.

Unit ID	Unit Description	PM Limit (lbs/hr)
P20	Grain Receiving and Storage	1.34
P30	Hammermills	0.60
P70	DDGS Cooling System	0.38
P90	DDGS Loadout	0.16

Compliance with the these PM limits in conjunction with the condition D.3.1(a) and (b), and PM emissions from other emission units shall limit the PM emissions from the entire source to less than 250 tons per year and therefore, render the requirements of 326 IAC 2-2 (PSD) not applicable.

(c) The PM10 emissions from the following units shall not exceed the limits listed in the table below.

Unit ID	Unit Description	PM10 Limit (lbs/hr)
P20	Grain Receiving and Storage	1.34
P30	Hammermills	0.60
P70	DDGS Cooling System	0.38
P90	DDGS Loadout	0.16

Compliance with these PM10 limits in conjunction with condition D.3.1(a) and (c), and PM10 emissions from other emission units shall limit the PM10 emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

(d) The PM2.5 emissions from the following units shall not exceed the limits listed in the table below.

Unit ID	Unit Description	PM2.5 Limit (lbs/hr)
P20	Grain Receiving and Storage	1.34
P30	Hammermills	0.60
P70	DDGS Cooling System	0.38
P90	DDGS Loadout	0.16

Compliance with these PM2.5 limits in conjunction with the condition D.3.1(a) and (d), and PM2.5 emissions from other emission units shall limit the PM2.5 emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

(e) The VOC emissions from the DDGS cooling system (P70) shall not exceed 0.1 pounds per ton of DDGS produced.

Compliance with this VOC limit and the DDGS production rate above in conjunction with the Conditions D.2.1(a) and (b); D.3.1(e) ; D.4.1(a), (b) and (c); and VOC emissions from other emission units at the source shall limit the VOC emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

(f) Total HAP emissions from the DDGS cooling system (P70) shall not exceed 0.01 pounds per ton of DDGS produced.

Compliance with this total HAPs limit and the DDGS production rate above in conjunction with the Conditions D.2.1(a) and (c); and D.4.1(a), (b) and (d); and HAPs emissions from other emission units at the source shall limit the total HAPs emissions from the entire

source to less than 25 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

(g) Acetaldehyde emissions from the DDGS cooling system (P70) shall not exceed 0.008 pounds per ton of DDGS produced.

Compliance with this single HAP (Acetaldehyde) limit and DDGS production rate above in conjunction with the Conditions D.2.1(a) and (d); D.3.1(g); and Acetaldehyde emissions from other emission units at the source shall limit the single HAP (Acetaldehyde) emissions from the entire source to less than 10 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

D.1.2 Particulate Emission Limitations [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2, particulate emissions from each of the following operations shall not exceed the pound per hour limit listed in the table below:

Unit ID	Process Description	Max. Throughput Rate (tons/hr)	Particulate Emission Limit (lbs/hr)
P20	Grain Receiving and Storage Operation	420	66.9
P30	Each of the Hammermills	100	51.3
P70	DDGS Cooling System	20	30.5
P90	DDGS Loadout Operation	400	66.3

The pounds per hour limitations were calculated using one of the following equations:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 4.10\ P^{0.67}$ where E = rate of emission in pounds per hour and
P = process weight rate in tons per hour

Interpolation and extrapolation of the data for the process weight rate in excess of sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 55.0\ P^{0.11} - 40$ where E = rate of emission in pounds per hour; and
P = process weight rate in tons per hour

D.1.3 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for these facilities and any control devices.

Compliance Determination Requirements

D.1.4 PM, PM10 and PM2.5 Control

(a) In order to comply with Conditions D.1.1(b), (c), and (d); and D.1.2; each of the following emission units shall be controlled by the associated baghouse, as listed in the table below, when these units are in operation:

Unit ID	Process Description	Baghouse ID
P20	Grain Receiving and Storage Operation	C20
P30	Each of the Hammermills	C30
P70	DDGS Cooling System	C70
P90	DDGS Loadout Operation	C90

(b) In the event that bag failure is observed in a multi-compartment baghouse, if operations will continue for ten (10) days or more after the failure is observed before the failed units will be repaired or replaced, the Permittee shall promptly notify the IDEM, OAQ of the expected date the failed units will be repaired or replaced. The notification shall also include the status of the applicable compliance monitoring parameters with respect to normal, and the results of any response actions taken up to the time of notification.

D.1.5 Testing Requirements [326 IAC 2-8-5(a)(1), (4)] [326 IAC 2-1.1-11]

In order to demonstrate compliance with Conditions D.1.1(e) and (g), the Permittee shall perform VOC and acetaldehyde testing for the DDGS cooling system (P70) within five (5) years after the most recent VOC and acetaldehyde test performed for the DDGS cooling system (P70), utilizing methods approved by the Commissioner. These tests shall be repeated every five (5) years from the date of this valid compliance demonstration. Testing shall be conducted in accordance with Section C - Performance Testing.

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]

D.1.6 Visible Emissions Notations

(a) Visible emission notations of the baghouse stack exhausts (stacks S20, S30, S70, and S90) shall be performed once per day during normal daylight operations when exhausting to the atmosphere. A trained employee shall record whether emissions are normal or abnormal.

(b) For processes operated continuously, "normal" means those conditions prevailing, or expected to prevail, eighty percent (80%) of the time the process is in operation, not counting startup or shut down time.

(c) In the case of batch or discontinuous operations, readings shall be taken during that part of the operation that would normally be expected to cause the greatest emissions.

(d) A trained employee is an employee who has worked at the plant at least one (1) month and has been trained in the appearance and characteristics of normal visible emissions for that specific process.

(e) If abnormal emissions are observed, the Permittee shall take reasonable response steps in accordance with Section C- Response to Excursions or Exceedances. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

D.1.7 Parametric Monitoring

The Permittee shall record the pressure drop across the baghouses used in conjunction with the grain receiving and storage operation (P20), the hammermills (P30), the DDGS cooling system (P70), and the DDGS loadout operation (P90) at least once per day when these units are in operation. When for any one reading the pressure drop across the baghouse is outside the normal range of 3.0 to 10.0 inches of water or a range established during the latest stack test, the

Permittee shall take reasonable response steps in accordance with Section C - Response to Excursions or Exceedances. A pressure reading that is outside the above mentioned range is not a deviation from this permit. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

The instrument used for determining the pressure shall comply with Section C - Instrument Specifications of this permit, shall be subject to approval by IDEM, OAQ and shall be calibrated at least once every six (6) months.

D.1.8 Broken or Failed Bag Detection

(a) For a single compartment baghouse controlling emissions from a process operated continuously, a failed unit and the associated process shall be shut down immediately until the failed unit has been repaired or replaced. Operations may continue only if the event qualifies as an emergency and the Permittee satisfies the requirements of the emergency provisions of this permit (Section B - Emergency Provisions).

(b) For a single compartment baghouse controlling emissions from a batch process, the feed to the process shall be shut down immediately until the failed unit has been repaired or replaced. The emissions unit shall be shut down no later than the completion of the processing of the material in the line. Operations may continue only if the event qualifies as an emergency and the Permittee satisfies the requirements of the emergency provisions of this permit (Section B - Emergency Provisions).

Bag failure can be indicated by a significant drop in the baghouse's pressure reading with abnormal visible emissions, by an opacity violation, or by other means such as gas temperature, flow rate, air infiltration, leaks, dust traces or triboflows.

Record Keeping and Reporting Requirement [326 IAC 2-8-4(3)] [326 IAC 2-8-16]

D.1.9 Record Keeping Requirements

(a) To document compliance with Condition D.1.1(a), the Permittee shall maintain monthly records of the DDGS produced.

(b) To document compliance with Condition D.1.6, the Permittee shall maintain daily records of visible emission notations of the baghouse stack exhausts. The Permittee shall include in its daily record when a visible emission notation is not taken and the reason for the lack of visible emission notation, (i.e. the process did not operate that day).

(c) To document compliance with Condition D.1.7, the Permittee shall maintain daily records of the pressure drop. The Permittee shall include in its daily record when a pressure drop reading is not taken and the reason for the lack of a pressure drop reading, (i.e. the process did not operate that day).

(d) All records shall be maintained in accordance with Section C - General Record Keeping Requirements, of this permit.

D.1.10 Reporting Requirements

A quarterly summary of the information to document compliance with Condition D.1.1(a) shall be submitted to the address listed in Section C - General Reporting Requirements, of this permit, using the reporting forms located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by an authorized individual as defined by 326 IAC 2-1.1-1(1).

SECTION D.2 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-8-4(10)]:

(e) One (1) fermentation process, identified as P40, constructed in 2005, with a maximum throughput rate of 6,500 gallons per hour, consisting of four (4) fermenters and one (1) beer well system, controlled by a CO_2 scrubber C40, and exhausting through stack S40.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-8-4(1)]

D.2.1 FESOP Limits [326 IAC 2-8-4]

Pursuant to 326 IAC 2-8-4 (FESOP):

(a) The ethanol production rate shall not exceed 50 million gallons (MMgal) per twelve (12) consecutive month period with compliance determined at the end of each month.

(b) VOC emissions shall not exceed 1.8 pounds per 1,000 gallons of ethanol produced.

Compliance with this VOC limit and above ethanol production rate in conjunction with the Conditions D.1.1(a) and (e); D.3.1(a) and (e); D.4.1(a), (b) and (c); and VOC emissions from other emission units at the source shall limit the VOC emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

(c) Total HAP emissions shall not exceed 0.271 pounds per 1,000 gallons of ethanol produced.

Compliance with this total HAP limit and above ethanol production rate in conjunction with the Conditions D.1.1(a) and (f); D.4.1(a), (b) and (d); and HAPs emissions from other emission units at the source shall limit the total HAPs emissions from the entire source to less than 25 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

(d) Acetaldehyde emissions shall not exceed 0.245 pounds per 1,000 gallons of ethanol produced.

Compliance with this single HAP (Acetaldehyde) limit and above ethanol production rate in conjunction with the Conditions D.1.1(a) and (g); D.3.1(a) and (g); and Acetaldehyde emissions from other emission units at the source shall limit the single HAP (Acetaldehyde) emissions from the entire source to less than 10 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

D.2.2 Best Available Control Technology [326 IAC 8-1-6]

Pursuant to 326 IAC 8-1-6 (General Reduction Requirements), the Permittee shall control the fermentation process with a BACT (Best Available Control Technology) which has been determined to be the following:

(a) The VOC emissions from the fermentation process shall be controlled by wet scrubber C40.

(b) The control efficiency for the wet scrubber C40 shall be at least 98%; or the outlet VOC concentration shall not exceed 20 ppmv when the inlet VOC concentration is lower than 200 ppmv.

(c) The capture efficiency shall be 100% as defined in EPA Method 204.

(d) VOC emissions from wet scrubber C40 shall not exceed 1.8 pounds per 1,000 gallons of ethanol produced.

D.2.3 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for this facility and its control device.

Compliance Determination Requirements

D.2.4 VOC and HAP Control

In order to comply with Conditions D.2.1(b), (c) and (d) and D.2.2, wet scrubber C40 shall be in operation and control emissions from the fermentation process at all times that this process is in operation.

D.2.5 Testing Requirements [326 IAC 2-8-5(a)(1), (4)][326 IAC 2-1.1-11]

In order to demonstrate compliance with Conditions D.2.1(b) and (d), the Permittee shall perform VOC and acetaldehyde testing for the DDGS cooling system (P70) within five (5) years after the most recent VOC (including emission rate and overall control efficiency) and acetaldehyde test performed for scrubber C40 utilizing methods approved by the Commissioner. These tests shall be repeated at least once every five years from the date of the most recent valid compliance demonstration. Testing shall be conducted in accordance with Section C - Performance Testing.

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]

D.2.6 Parametric Monitoring

The Permittee shall monitor and record the flow rate of scrubber C40 at least once per day when the fermentation process is in operation. When for any one reading the flow rate of the scrubber is less than the minimum of 35 gallons per minute, or a minimum flow established during the latest stack test, the Permittee shall take reasonable response steps in accordance with Section C - Response to Excursions or Exceedances. A flow rate that is below the above mentioned minimum is not a deviation from this permit. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

The instruments used for determining the flow rate shall comply with Section C - Instrument Specifications of this permit, shall be subject to approval by IDEM, OAQ, and shall be calibrated at least once every six (6) months.

Record Keeping Requirements [326 IAC 2-8-4(3)] [326 IAC 2-8-16]

D.2.7 Record Keeping Requirements

(a) To document compliance with Condition D.2.1(a), the Permittee shall maintain monthly records of the total ethanol production rate.

(b) To document compliance with Condition D.2.6, the Permittee shall maintain once per day records of flow rate for scrubber C40. The Permittee shall include in its daily record when a flow rate reading is not taken and the reason for the lack of a flow rate reading, (i.e. the process did not operate that day).

(c) All records shall be maintained in accordance with Section C - General Record Keeping Requirements, of this permit.

D.2.8 Reporting Requirements

A quarterly summary of the information to document compliance with Condition D.2.1(a) shall be submitted to the address listed in Section C - General Reporting Requirements, of this permit, using the reporting forms located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

SECTION D.3 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-8-4(10)]

(f) One (1) recuperative thermal oxidizer/heat recovery steam generator, identified as C10, constructed in 2005, using natural gas and process waste gases from the dryers as fuels, with a maximum heat input capacity of 125 MMBtu/hr, and exhausting through stack S10.

Under the New Source Performance Standard for Industrial-Commercial-Institutional Steam Generating Units (40 CFR 60, Subpart Db) (326 IAC 12), this emission unit is considered to be an affected source.

(g) One (1) mashing, cooking and liquefication operation, identified as P10, constructed in 2005, with a maximum wet dryer feed rate of 48 tons of wet cake (with 65% water) per hour, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, exhausting through stack S10, consisting of the following:

(1) Meal conveying operations.
(2) One (1) mash mixer, where process water and/or hot water is added to meal to form mash.
(3) Two (2) slurry tanks, where ammonia is added to mash as needed to adjust pH levels, each with a maximum capacity of 16,000 gallons.
(4) One (1) cook tube, where steam is injected to sterilize mash and gelatinize starch, with a maximum capacity of 5,000 gallons.
(5) One (1) flash tank, with a maximum capacity of 2,000 gallons.
(6) One (1) receiver tank.
(7) One (1) yeast tank, with a maximum capacity of 21,000 gallons.

(h) One (1) distillation and dehydration operation, constructed in 2005, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, exhausting through stack S10, and consisting of the following:

(1) One (1) beer column.
(2) One (1) side stripper.
(3) One (1) rectifier column.
(4) One (1) 190 proof condenser.
(5) Three (3) molecular sieves.
(6) One (1) 200 proof condenser.
(7) Four (4) centrifuges.
(8) One (1) centrate storage tank, with a maximum capacity of 990 gallons.
(9) Eight (8) evaporators.

(i) Two (2) natural gas fired DDGS dryers in series, identified as Dryers A and B, constructed in 2005, each with a maximum heat input capacity of 42 MMBtu/hr and a maximum throughput rate of 20 tons of DDGS per hour, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, and exhausting through stack S10.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-8-4(1)]

D.3.1 FESOP and PSD Limits [326 IAC 2-8-4] [326 IAC 2-2]

Pursuant to 326 IAC 2-8-4 (FESOP) (for PM10, VOC, SO2, and single HAP (Acetaldehyde)) and in order to render 326 IAC 2-2 (PSD) not applicable (for PM and PM2.5):

(a) The DDGS production rate shall not exceed 162,218 tons per twelve (12) consecutive month period with compliance determined at the end of each month.

(b) The PM emissions from the stack S10 shall not exceed 0.2 pounds per ton of DDGS produced.

Compliance with this PM limit and the DDGS production rate above in conjunction with condition D.1.1(b), and PM emissions from other emission units shall limit the PM emissions from the entire source to less than 250 tons per year and therefore, render the requirements of 326 IAC 2-2 (PSD) not applicable.

(c) The PM10 emissions from the stack S10 shall not exceed 0.2 pounds per ton of DDGS produced.

Compliance with this PM10 limit and the DDGS production rate above in conjunction with condition D.1.1(c), and PM10 emissions from other emission units shall limit the PM10 emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

(d) The PM2.5 emissions from the stack S10 shall not exceed 0.2 pounds per ton of DDGS produced.

Compliance with this PM2.5 limit and the DDGS production rate above in conjunction with condition D.1.1(d), and PM2.5 emissions from other emission units shall limit the PM2.5 emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

(e) The VOC emissions from stack S10 shall not exceed 5.55 lbs/hr or 0.3 pounds per ton of DDGS produced.

Compliance with this VOC limit and the DDGS production rate above in conjunction with the Conditions D.1.1(e); D.2.1(a) and (b); and D.4.1(a), (b) and (c); and VOC emissions from other emission units at the source shall limit the VOC emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

(f) The SO_2 emissions from stack S10 shall not exceed 8.52 lbs/hr or 0.46 pounds per ton of DDGS produced.

Compliance with this SO2 limit and the DDGS production rate above in conjunction with SO2 emissions from other emission units shall limit the SO2 emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

(g) The Acetaldehyde emissions from stack S10 shall not exceed 0.39 lbs/hr or 0.021 pounds per ton of DDGS produced.

Compliance with this single HAP (Acetaldehyde) limit and the DDGS production rate above in conjunction with the Conditions D.1.1(g) ; D.2.1(a) and (d); and Acetaldehyde emissions from other emission units at the source shall limit the single HAP (Acetaldehyde) emissions from the entire source to less than 10 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

(h) The NOx emissions from the stack (S10) shall not exceed 20.9 pound per hour.

Compliance with this NOx limit in conjunction with conditions D.4.1(b) and (f); D.5.1 and NOx emissions from other emission units shall limit the NOX emissions from the entire

source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

(i) The CO emissions from the stack (S10) shall not exceed 22.2 pound per hour.

Compliance with this CO limit and the DDGS production rate above in conjunction with conditions D.4.1(b) and (e); D.5.1; and CO emissions from other emission units shall limit the CO emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

D.3.2 Best Available Control Technology [326 IAC 8-1-6]

Pursuant to 326 IAC 8-1-6 (General Reduction Requirements), the Permittee shall control the VOC emissions from the DDGS dryers and the distillation and dehydration process with a BACT (Best Available Control Technology) which has been determined to be the following:

(a) The VOC emissions from the distillation and dehydration process and DDGS dyers shall be controlled by recuperative thermal oxidizer/heat recovery steam generator C10.

(b) The destruction efficiency for recuperative thermal oxidizer/heat recovery steam generator C10 shall be at least 98%.

(c) The capture efficiency shall be 100% as defined in EPA Method 204.

(d) The VOC emissions from the recuperative thermal oxidizer/heat recovery steam generator (C10) shall not exceed 5.55 lbs/hr or 0.3 pounds per ton of DDGS produced.

D.3.3 General Provisions Relating to NSPS [326 IAC 12-1][40 CFR Part 60, Subpart A]

The provisions of 40 CFR Part 60, Subpart A - General Provisions, which are incorporated by reference in 326 IAC 12-1, apply to recuperative thermal oxidizer/heat recovery steam generator C10, except when otherwise specified in 40 CFR Part 60, Subpart Db.

D.3.4 Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units [40 CFR Part 60, Subpart Db] [326 IAC 20-14]

Pursuant to 40 CFR Part 60, Subpart Db, the Permittee shall comply with the following provisions of 40 CFR Part 60, Subpart Db (included as Attachment A), which are incorporated by reference as 326 IAC 20-12, for the recuperative thermal oxidizer/heat recovery steam generator C10:

(1) 40 CFR 60.40b(a), (b), (g), (j)
(2) 40 CFR 60.41b
(3) 40 CFR 60.44b(a), (h), (i), (l)(2)
(4) 40 CFR 60.46b(c), (e)(1), (e)(3)
(5) 40 CFR 60.48b(b)(1), (c), (d), (e)(2)(i), (e)(3), (f)
(6) 40 CFR 60.49b(a)(1), (a)(2), (a)(3), (b), (h)(2)(ii), (h)(3), (h)(4), (i), (k)(1), (k)(5) through (k)(11), (o), (p), (v), (w)

D.3.5 Particulate Emissions [326 IAC 6-2-4]

Pursuant to 326 IAC 6-2-4 (Particulate Emission Limitations for Sources of Indirect Heating), particulate emissions from the 125 MMBtu per hour heat input recuperative thermal oxidizer/heat recovery steam generator (C10) shall be limited to 0.31 pounds per MMBtu heat input.

The limit was calculated using the following equation:

$$Pt = \frac{1.09}{Q^{0.26}}$$

Where Pt = emission rate limit (lbs/MMBtu)

Q = total source heat input capacity (MMBtu/hr)

D.3.6 Particulate Emission Limitations [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2, particulate emissions from each of the following operations shall not exceed the pound per hour limit listed in the table below:

Process Description	Max. Throughput Rate (tons/hr)	Particulate Emission Limit (lbs/hr)
Mashing, Cooking, and Liquefaction Operation	42	44.2
Each of the DDGS Dryers	20	30.5

The pounds per hour limitations were calculated using one of the following equations:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 4.10\ P^{0.67}$ where E = rate of emission in pounds per hour and
P = process weight rate in tons per hour

Interpolation and extrapolation of the data for the process weight rate in excess of sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 55.0\ P^{0.11} - 40$ where E = rate of emission in pounds per hour; and
P = process weight rate in tons per hour

D.3.7 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for these facilities and their control devices.

Compliance Determination Requirements

D.3.8 VOC and HAP Control

In order to comply with Conditions D.3.1 (b) through (i), and D.3.2, the recuperative thermal oxidizer/heat recovery steam generator (C10) shall be in operation and control emissions from the DDGS dryers and the distillation and dehydration process at all times that these units are in operation.

D.3.9 Testing Requirements [326 IAC 2-8-5(a)(1), (4)][326 IAC 2-1.1-11] [40 CFR 60 Subpart Db] [326 IAC 2-2]

(a) In order to demonstrate compliance with NOx limit (0.1 lb/MMBtu) specified in 40 CFR Part 60, Subpart Db, the Permittee shall perform NOx testing for thermal oxidizer/heat recovery steam generator C10 within 60 days after achieving the maximum capacity, but not later than 180 days after initial startup, utilizing methods as approved by the Commissioner.

(b) In order to demonstrate compliance with Conditions D.3.1(b) through (d), the Permittee shall perform PM, PM10, and PM2.5 testing for recuperative thermal oxidizer/heat recovery steam generator C10 when the DDGS dryers on whichever later date from the time period specified in (i) and (ii) below.

(i) Within 180 days of publication of the new or revised condensable PM test method(s) referenced in the U. S. EPA's Final Rule for Implementation of the New Source Review (NSR) Program for Particulate Matter Less Than 2.5

Micrometers (PM2.5), signed on May 8th, 2008.

(ii) Within 5 years after the most recent PM/PM10 test performed for the 'Dryer Baghouse'

(c) In order to demonstrate compliance with Conditions D.3.1(e), the Permittee shall perform VOC (including emission rate and overall control efficiency) testing for recuperative thermal oxidizer/heat recovery steam generator C10 when the DDGS dryers are in operation within 5 years of the most recent testing.

(d) In order to demonstrate compliance with Conditions D.3.1(f), the Permittee shall perform SO_2 testing for recuperative thermal oxidizer/heat recovery steam generator C10 when the DDGS dryers are in operation within 5 years of the most recent testing.

(e) In order to demonstrate compliance with Conditions D.3.1(g), the Permittee shall perform Acetaldehyde testing for recuperative thermal oxidizer/heat recovery steam generator C10 when the DDGS dryers are in operation within 5 years of the most recent testing.

(f) In order to demonstrate compliance with Conditions D.3.1(h), the Permittee shall perform NOx testing for recuperative thermal oxidizer/heat recovery steam generator C10 when the DDGS dryers are in operation within 5 years of the most recent testing.

(g) In order to demonstrate compliance with Conditions D.3.1(i), the Permittee shall perform CO testing for recuperative thermal oxidizer/heat recovery steam generator C10 when the DDGS dryers are in operation within 5 years of the most recent testing.

All above testing shall be performed utilizing methods as approved by the Commissioner. These test shall be repeated at least once every five (5) years from the date of last valid compliance demonstration. Testing shall be conducted in accordance with Section C - Performance Testing.

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]

D.3.10 Visible Emissions Notations

(a) Visible emission notations of the stack exhaust from stack S10 shall be performed once per day during normal daylight operations when exhausting to the atmosphere. A trained employee shall record whether emissions are normal or abnormal.

(b) For processes operated continuously, "normal" means those conditions prevailing, or expected to prevail, eighty percent (80%) of the time the process is in operation, not counting startup or shut down time.

(c) In the case of batch or discontinuous operations, readings shall be taken during that part of the operation that would normally be expected to cause the greatest emissions.

(d) A trained employee is an employee who has worked at the plant at least one (1) month and has been trained in the appearance and characteristics of normal visible emissions for that specific process.

(e) If abnormal emissions are observed, the Permittee shall take reasonable response steps in accordance with Section C- Response to Excursions or Exceedances. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

D.3.11 Thermal Oxidizer Temperature

(a) A continuous monitoring system shall be calibrated, maintained, and operated on the recuperative thermal oxidizer/heat recovery steam generator C10 for measuring operating temperature. For the purpose of this condition, continuous means no less than once per minute. The output of this system shall be recorded as a 3-hour average. From

the date of issuance of this permit until the approved stack test results are available, the Permittee shall operate the thermal oxidizer at or above the 3-hour average temperature of 1,450 degree Fahrenheit

(b) The Permittee shall determine the hourly average temperature from the most recent valid stack test that demonstrates compliance with limits in Conditions D.3.1(b) through (i), and D.3.3, as approved by IDEM.

(c) On and after the date the approved stack test results are available, the Permittee shall operate the thermal oxidizer at or above the 3-hour average temperature as observed during the compliant stack test.

D.3.12 Parametric Monitoring

(a) The Permittee shall determine the appropriate duct pressure or fan amperage from the most recent valid stack test that demonstrates compliance with limits in Conditions D.3.1(b) through (i), and D.3.3, as approved by IDEM.

(b) The duct pressure or fan amperage shall be observed at least once per day when the recuperative thermal oxidizer/heat recovery steam generator (C10) is in operation. On and after the date the approved stack test results are available, the duct pressure or fan amperage shall be maintained within the normal range as established in most recent compliant stack test.

Record Keeping and Reporting Requirement [326 IAC 2-8-4(3)] [326 IAC 2-8-16]

D.3.13 Record Keeping Requirements

(a) To document compliance with Condition D.3.1(a), the Permittee shall maintain monthly records of the weight of DDGS produced.

(b) To document compliance with Condition D.3.10, the Permittee shall maintain records of daily visible emission notations of the stack S10. The Permittee shall include in its daily record when a visible emission notation is not taken and the reason for the lack of visible emission notation, (i.e. the process did not operate that day).

(c) To document compliance with Condition D.3.11(b) and (c), the Permittee shall maintain continuous temperature records for the thermal oxidizer and the 3-hour average temperature used to demonstrate compliance during the most recent compliant stack test.

(d) To document compliance with Condition D.3.12, the Permittee shall maintain daily records of the duct pressure or fan amperage for the thermal oxidizer/heat recovery steam generator. The Permittee shall include in its daily record when a duct pressure or fan amperage reading is not taken and the reason for the lack of the reading, (i.e. the process did not operate that day).

(e) All records shall be maintained in accordance with Section C - General Record Keeping Requirements, of this permit.

D.3.14 Reporting Requirements

A quarterly summary of the information to document compliance with Conditions D.3.1(a) shall be submitted to the address listed in Section C - General Reporting Requirements, of this permit, using the reporting forms located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by an “authorized individual” as defined by 326 IAC 2-1.1-1(1).

SECTION D.4 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-8-4(10)]:

(j) One (1) ethanol loading terminal for both trucks and railcars, identified as P50, constructed in 2005, with a maximum loading rate of 36,000 gallons per hour for truck loading and a maximum loading rate of 72,000 gallons per hour for railcar loading. The truck loading process is controlled by an open flare C50, which is fueled by natural gas and has a maximum heat input capacity of 6.4 MMBtu/hr, and exhausting through stack S50.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-8-4(1)]

D.4.1 FESOP Limits [326 IAC 2-2] [326 IAC 2-8-4]

Pursuant to 326 IAC 2-8-4 (FESOP):

(a) The total ethanol loadout rate (including trucks and railcars) shall not exceed 50 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

(b) The ethanol loadout rate from the truck loadout process shall not exceed 35 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

(c) The VOC emissions from the flare C50 during the truck loadout process shall not exceed 0.69 pounds per thousand gallons of ethanol loaded out to trucks.

Compliance with this VOC limit and above ethanol loadout rates in conjunction with the Conditions D.1.1(a) and (e), D.2.1(a) and (b); and D.3.1(e) and (a); and VOC emissions from other emission units at the source shall limit the VOC emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2 2 (PSD) not applicable.

(d) The total HAP emissions from the flare C50 during the truck loadout process shall not exceed 0.69 pounds per thousand gallons of ethanol loaded out to trucks..

Compliance with this total HAPs limit and above ethanol loadout rates in conjunction with the Conditions D.1.1(a) and (f), D.2.1(c); and HAPs emissions from other emission units at the source shall limit the total HAPs emissions from the entire source to less than 25 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

(e) CO emissions from flare C50 during the truck loadout process shall not exceed 0.13 pounds per thousand gallons of ethanol loaded out to trucks.

Compliance with this CO limit and above ethanol loadout rates in conjunction with the Conditions D.3.1(a) and (i); D.5.1 and; CO emissions from other emission units at the source shall limit the CO emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2 2 (PSD) not applicable.

(f) NOx emissions from flare C50 during the truck loadout process shall not exceed 0.10 pounds per thousand gallons of ethanol loaded out to trucks.

Compliance with this NOx limit and above ethanol loadout rates in conjunction with the Conditions D.3.1(h), D.5.1, and NOx emissions from other emission units at the source shall limit the NOx emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2 2 (PSD) not applicable.

D.4.2 VOC Emissions [326 IAC 8-1-6]

Pursuant to 326 IAC 8-1-6 (BACT), the Permittee shall collect and control the VOC emissions from the ethanol loading terminal, when loading ethanol to trucks, with a Best Available Control Technology (BACT). The BACT for this unit has been determined to be the following:

(a) The VOC emissions from the ethanol loading terminal shall be collected and controlled by open flare C50 when loading denatured ethanol to trucks.

(b) The overall control efficiency (including destruction efficiency and capture efficiency) for flare C50 shall be at least 98%.

(c) The VOC emissions from the flare C50 shall not exceed 0.69 lbs/hr.

D.4.3 Preventive Maintenance Plan [326 IAC 2-8-4(9)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for this facility and its control device.

Compliance Determination Requirements

D.4.4 VOC and HAP Control

In order to comply with Conditions D.4.1(c) and (d), and D.4.2, flare C50 shall be in operation and control emissions from the ethanol loading terminal at all times when this unit is loading ethanol to trucks.

Compliance Monitoring Requirements [326 IAC 2-8-4] [326 IAC 2-8-5(a)(1)]

D.4.5 Flare Pilot Flame

In order to comply with Conditions D.4.1(c) and (d), and D.4.2, the Permittee shall monitor the presence of a flare pilot flame using a thermocouple or any other equivalent device to detect the presence of a flame when the ethanol loading terminal is in operation and is loading ethanol to trucks.

Record Keeping and Reporting Requirement [326 IAC 2-8-4(3)] [326 IAC 2-8-16]

D.4.6 Record Keeping Requirements

(a) To document compliance with Condition D.4.1(a), the Permittee shall maintain monthly records of the total amount of denatured ethanol loaded out.

(b) To document compliance with Condition D.4.1(b), the Permittee shall maintain monthly records of the amount of denatured ethanol loaded out to trucks.

(c) To document compliance with Condition D.4.5, the Permittee shall maintain records of temperature or other parameters sufficient to demonstrate the presence of a pilot flame when the loading terminal is in operation and is loading ethanol to trucks.

(d) All records shall be maintained in accordance with Section C - General Record Keeping Requirements, of this permit.

D.4.7 Reporting Requirements

A quarterly summary of the information to document compliance with Conditions D.4.1(a) and (b) shall be submitted to the address listed in Section C - General Reporting Requirements, of this

permit, using the reporting forms located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by an "authorized individual" as defined by 326 IAC 2-1.1-1(1).

SECTION D.5 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-8-4(10)]: Insignificant Activities

(l) Other emission units, not regulated by a NESHAP, with PM10, NOx, and SO_2 emissions less than five (5) pounds per hour or twenty-five (25) pounds per day, CO emissions less than twenty-five (25) pounds per day, VOC emissions less than three (3) pounds per hour or fifteen (15) pounds per day, lead emissions less than six-tenths (0.6) tons per year or three and twenty-nine hundredths (3.29) pounds per day, and emitting greater than one (1) pound per day but less than five (5) pounds per day or one (1) ton per year of a single HAP, or emitting greater than one (1) pound per day but less than twelve and five tenths (12.5) pounds per day or two and five tenths (2.5) ton per year of any combination of HAPs:

(10) Two (2) methanators, used to clean up the contact waste water that will be recirculated back into the cook tank, exhausting to the DDGS dryers as supplement fuel. When the dryers are down, methane emissions from the methanators are controlled by flare C60, which has a maximum heat input capacity of 3.2 MMBtu/hr and exhausts through stack S60.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-8-4(1)]

D.5.1 FESOP Limit [326 IAC 2-2] [326 IAC 2-8-4]

Pursuant to 326 IAC 2-8-4 (FESOP), the operating hours of the biomethanator flare EP-15 shall be less than 500 hours per twelve (12) consecutive month period with compliance determined at the end of each month.

Compliance with the above operating hours limitation in conjunction with the conditions D.3.1(a) and (i); D.4.1(b) and (e); and CO emissions from other emission units shall limit the CO emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2-2 (PSD) not applicable.

Compliance with the above operating hours limitation in conjunction with the Conditions D.3.1(h); D.4.1(b) and (f), and NOx emissions from other emission units shall limit the NOx emissions from the entire source to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

Record Keeping and Reporting Requirement [326 IAC 2-8-4(3)] [326 IAC 2-8-16]

D.5.2 Record Keeping Requirements

(a) To document compliance with Condition D.5.1, the Permittee shall maintain monthly records of the operating hours of the biomethanator flare EP-15.

(b) All records shall be maintained in accordance with Section C - General Record Keeping Requirements, of this permit.

D.5.3 Reporting Requirements

A quarterly summary of the information to document compliance with Condition D.5.1 shall be submitted to the address listed in Section C - General Reporting Requirements, of this permit, using the reporting forms located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by an authorized individual as defined by 326 IAC 2-1.1-1(1).

SECTION D.6 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-8-4(10)]: Insignificant Activities

(l) Other emission units, not regulated by a NESHAP, with PM10, NOx, and SO_2 emissions less than five (5) pounds per hour or twenty-five (25) pounds per day, CO emissions less than twenty-five (25) pounds per day, VOC emissions less than three (3) pounds per hour or fifteen (15) pounds per day, lead emissions less than six-tenths (0.6) tons per year or three and twenty-nine hundredths (3.29) pounds per day, and emitting greater than one (1) pound per day but less than five (5) pounds per day or one (1) ton per year of a single HAP, or emitting greater than one (1) pound per day but less than twelve and five tenths (12.5) pounds per day or two and five tenths (2.5) ton per year of any combination of HAPs:

(1) Two (2) final product storage tanks, identified as TK61 and TK62, constructed in 2005, which store denatured ethanol, each with a maximum capacity of 500,000 gallons, and equipped with internal floating roofs.

(2) Two (2) shift tanks, identified as TK63 and TK65, constructed in 2005, which store 190 and 200 proof ethanol, each with a maximum capacity of 100,000 gallons, and equipped with internal floating roofs.

(3) One (1) denaturant (gasoline) storage tank, identified as TK64, constructed in 2005, which stores gasoline, with a maximum capacity of 100,000 gallons, and equipped with an internal floating roof.

Under the New Source Performance Standard for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced After July 23, 1984 (40 CFR 60, Subpart Kb) (326 IAC 12), each of the final product storage tanks (TK61 and TK62), shift tanks (TK63 and TK65) is considered to be an affected source.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

D.6.1 General Provisions Relating to NSPS [326 IAC 12-1][40 CFR Part 60, Subpart A]

The provisions of 40 CFR Part 60, Subpart A - General Provisions, which are incorporated by reference in 326 IAC 12-1, apply to all the tanks listed in this section, except when otherwise specified in 40 CFR Part 60, Subpart Kb.

D.6.2 New Source Performance Standards [326 IAC 12][40 CFR 60 Subpart Kb]

Pursuant to 40 CFR Part 60, Subpart Kb, the Permittee shall comply with the following provisions of 40 CFR Part 60, Subpart Kb (included as Attachment B), which are incorporated by reference as 326 IAC 20-12, for the tanks listed in this section:

(1) 40 CFR 60.110b(a)
(2) 40 CFR 60.111b
(3) 40 CFR 60.112b(a)(1)
(4) 40 CFR 60.113b(a)
(5) 40 CFR 60.115b(a)(1), (a)(3), (a)(4)
(6) 40 CFR 60.116b(a), (b), (e)(1), (e)(3)
(7) 40 CFR 60.117b

SECTION D.7 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-8-4(10)]: Insignificant Activities

(j) The group of all equipment at the source (pump, compressor, pressure relief device, sampling connection system, open-ended valve or line, valve, and flange or other connector) which meets all of the following criteria:

1) Contacts ethanol, and

2) Part of the process which involves processing, producing or storing ethanol at intermediate or final stage.

Under the NSPS for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for which Construction, Reconstruction, or Modification Commenced After January 5, 1981, and on or Before November 7, 2006 ,(40 CFR 60, Subpart Db) (326 IAC 12), Subpart VV, this equipment is considered to be affected facilities.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

D.7.1 General Provisions Relating to NSPS [326 IAC 12-1][40 CFR Part 60, Subpart A]

The provisions of 40 CFR Part 60, Subpart A - General Provisions, which are incorporated by reference in 326 IAC 12-1, apply to group of all equipment at the source identified in this section, except when otherwise specified in 40 CFR Part 60, Subpart VV.

D.7.2 New Source Performance Standards [326 IAC 12][40 CFR 60 Subpart VV]

Pursuant to 40 CFR Part 60, Subpart VV, the Permittee shall comply with the following provisions of 40 CFR Part 60, Subpart VV (included as Attachment C), which are incorporated by reference as 326 IAC 20-12, for the equipment listed in this section:

(1) 40 CFR 60.480(a), (b) and (f)
(2) 40 CFR 60.481
(3) 40 CFR 60.482-1 through 40 CFR 60.482-10
(4) 40 CFR 60.482-4
(5) 40 CFR 60.485
(6) 40 CFR 60.486
(7) 40 CFR 60.487
(8) 40 CFR 60.488
(9) 40 CFR 60.489

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY

FEDERALLY ENFORCEABLE STATE OPERATING PERMIT (FESOP) CERTIFICATION

Source Name: Iroquois Bio-Energy Company, LLC
Source Address: 751 West State Road 114, Rensselaer, Indiana 47978-0218
Mailing Address: P. O. Box 218, Rensselaer, Indiana 47978-0218
FESOP Permit No.: F073-26405-00037

This certification shall be included when submitting monitoring, testing reports/results or other documents as required by this permit.

Please check what document is being certified:

- ☐ Annual Compliance Certification Letter
- ☐ Test Result (specify)_____
- ☐ Report (specify)_____
- ☐ Notification (specify)_____
- ☐ Affidavit (specify)_____
- ☐ Other (specify)_____

I certify that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete. Signature:
Printed Name:
Title/Position:
Date:

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE BRANCH
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
Phone: (317) 233-0178
Fax: (317) 233-6865

FEDERALLY ENFORCEABLE STATE OPERATING PERMIT (FESOP) EMERGENCY OCCURRENCE REPORT

Source Name: Iroquois Bio-Energy Company, LLC
Source Address: 751 West State Road 114, Rensselaer, Indiana 47978
Mailing Address: P. O. Box 218, Rensselaer, Indiana 47978-0218
FESOP Permit No.: F073-26405-00037

This form consists of 2 pages **Page 1 of 2**

☐ This is an emergency as defined in 326 IAC 2-7-1(12)
- The Permittee must notify the Office of Air Quality (OAQ), within four (**4**) business hours (1-800-451-6027 or 317-233-0178, ask for Compliance Section); and
- The Permittee must submit notice in writing or by facsimile within two (**2**) working days (Facsimile Number: 317-233-6865), and follow the other requirements of 326 IAC 2-7-16

If any of the following are not applicable, mark N/A

Facility/Equipment/Operation:
Control Equipment:
Permit Condition or Operation Limitation in Permit:
Description of the Emergency:
Describe the cause of the Emergency:

If any of the following are not applicable, mark N/A **Page 2 of 2**

Date/Time Emergency started:
Date/Time Emergency was corrected:
Was the facility being properly operated at the time of the emergency? Y N Describe:
Type of Pollutants Emitted: TSP, PM-10, SO_2, VOC, NOX, CO, Pb, other:
Estimated amount of pollutant(s) emitted during emergency:
Describe the steps taken to mitigate the problem:
Describe the corrective actions/response steps taken:
Describe the measures taken to minimize emissions:
If applicable, describe the reasons why continued operation of the facilities are necessary to prevent imminent injury to persons, severe damage to equipment, substantial loss of capital investment, or loss of product or raw materials of substantial economic value:

Form Completed by:_____

Title / Position:_____

Date:_____

Phone: _____

A certification is not required for this report.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE DATA SECTION

FESOP Quarterly Report

Source Name: Iroquois Bio-Energy Company, LLC
Source Address: 751 W. State Road 114, Rensselaer Indiana 47978
Mailing Address: P. O. Box 218, Rensselaer, Indiana 47978-0218
Permit No.: 073-26405-00037
Facility: Entire Source
Parameter: DDGS Production Rate
Limit: Less than 162,218 tons per twelve (12) consecutive month period with compliance determined at the end of each month.

YEAR:

Month	Column 1	Column 2	Column 1 + Column 2
	This Month	Previous 11 Months	12 Month Total
Month 1			
Month 2			
Month 3			

☐ No deviation occurred in this quarter.

☐ Deviation/s occurred in this quarter.
Deviation has been reported on:

Submitted by: _____
Title / Position: _____
Signature: _____
Date: _____
Phone: _____

Attach a signed certification to complete this report.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE DATA SECTION

FESOP Quarterly Report

Source Name: Iroquois Bio-Energy Company, LLC
Source Address: 751 W. State Road 114, Rensselaer Indiana 47978-7265
Mailing Address: P. O. Box 218, Rensselaer, Indiana 47978-0218
Permit No.: 073-26405-00037
Facility: Entire Source
Parameter: Total Ethanol Production Rate
Limit: Less than 50 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

YEAR:

Month	Column 1	Column 2	Column 1 + Column 2
	This Month	Previous 11 Months	12 Month Total
Month 1			
Month 2			
Month 3			

☐ No deviation occurred in this quarter.

☐ Deviation/s occurred in this quarter.
Deviation has been reported on:

Submitted by: _____
Title / Position: _____
Signature: _____
Date: _____
Phone: _____

Attach a signed certification to complete this report.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE DATA SECTION

FESOP Quarterly Report

Source Name: Iroquois Bio-Energy Company, LLC
Source Address: 751 W. State Road 114, Rensselaer Indiana 47978-7265
Mailing Address: P. O. Box 218, Rensselaer, Indiana 47978-0218
Permit No.: 073-26405-00037
Facility: Ethanol Truck Loading Terminal
Parameter: Truck Loadout Process Rate
Limit: Not to exceed 35 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

YEAR:

Month	Column 1	Column 2	Column 1 + Column 2
	This Month	Previous 11 Months	12 Month Total
Month 1			
Month 2			
Month 3			

☐ No deviation occurred in this quarter.

☐ Deviation/s occurred in this quarter.
Deviation has been reported on:

Submitted by: _____
Title / Position: _____
Signature: _____
Date: _____
Phone: _____

Attach a signed certification to complete this report.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE DATA SECTION

FESOP Quarterly Report

Source Name: Iroquois Bio-Energy Company, LLC
Source Address: 751 W. State Road 114, Rensselaer Indiana 47978-7265
Mailing Address: P. O. Box 218, Rensselaer, Indiana 47978-0218
Permit No.: 073-26405-00037
Facility: Biomethanator Flare EP-15
Parameter: Operating Hours
Limit: Less than 500 hours per twelve (12) consecutive month period with compliance determined at the end of each month.

YEAR:

Month	Column 1	Column 2	Column 1 + Column 2
	This Month	Previous 11 Months	12 Month Total
Month 1			
Month 2			
Month 3			

☐ No deviation occurred in this quarter.

☐ Deviation/s occurred in this quarter.
Deviation has been reported on:

Submitted by: _____
Title / Position: _____
Signature: _____
Date: _____
Phone: _____

Attach a signed certification to complete this report.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE DATA SECTION

FEDERALLY ENFORCEABLE STATE OPERATING PERMIT (FESOP)
SEMIANNUAL DEVIATION AND COMPLIANCE MONITORING REPORT

Source Name:	Iroquois Bio-Energy Company, LLC
Source Address:	751 W. State Road 114, Rensselaer Indiana 47978-7265
Mailing Address:	P. O. Box 218, Rensselaer, Indiana 47978-0218
Permit No.:	073-26405-00037

Months: _____ **to** _____ **Year:** _____

This report is an affirmation that the source has met all the requirements stated in this permit. This report shall be submitted quarterly based on a calendar year. Any deviation from the requirements, the date(s) of each deviation, the probable cause of the deviation, and the response steps taken must be reported. Deviations that are required to be reported by an applicable requirement shall be reported according to the schedule stated in the applicable requirement and do not need to be included in this report. Additional pages may be attached if necessary. If no deviations occurred, please specify in the box marked "No deviations occurred this reporting period".
NO DEVIATIONS OCCURRED THIS REPORTING PERIOD.
THE FOLLOWING DEVIATIONS OCCURRED THIS REPORTING PERIOD

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Form Completed by:_____

Title / Position:_____

Date:_____

Phone: _____

Attach a signed certification to complete this report.

Attachment A

NSPS, Subpart Db

Iroquois Bio-Energy Company, LLC
751 West State Road 114, Rensselaer, Indiana 47978

Permit Renewal No.:F073-26405-00037

Subpart Db—Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units

Source: 72 FR 32742, June 13, 2007, unless otherwise noted.

§ 60.40b Applicability and delegation of authority.

(a) The affected facility to which this subpart applies is each steam generating unit that commences construction, modification, or reconstruction after June 19, 1984, and that has a heat input capacity from fuels combusted in the steam generating unit of greater than 29 megawatts (MW) (100 million British thermal units per hour (MMBtu/hr)).

(b) Any affected facility meeting the applicability requirements under paragraph (a) of this section and commencing construction, modification, or reconstruction after June 19, 1984, but on or before June 19, 1986, is subject to the following standards:

(1) Coal-fired affected facilities having a heat input capacity between 29 and 73 MW (100 and 250 MMBtu/hr), inclusive, are subject to the particulate matter (PM) and nitrogen oxides (NO_X) standards under this subpart.

(2) Coal-fired affected facilities having a heat input capacity greater than 73 MW (250 MMBtu/hr) and meeting the applicability requirements under subpart D (Standards of performance for fossil-fuel-fired steam generators; §60.40) are subject to the PM and NO_Xstandards under this subpart and to the sulfur dioxide (SO_2) standards under subpart D (§60.43).

(3) Oil-fired affected facilities having a heat input capacity between 29 and 73 MW (100 and 250 MMBtu/hr), inclusive, are subject to the NO_Xstandards under this subpart.

(4) Oil-fired affected facilities having a heat input capacity greater than 73 MW (250 MMBtu/hr) and meeting the applicability requirements under subpart D (Standards of performance for fossil-fuel-fired steam generators; §60.40) are also subject to the NO_Xstandards under this subpart and the PM and SO_2standards under subpart D (§60.42 and §60.43).

(c) Affected facilities that also meet the applicability requirements under subpart J (Standards of performance for petroleum refineries; §60.104) are subject to the PM and NO_Xstandards under this subpart and the SO_2standards under subpart J (§60.104).

(d) Affected facilities that also meet the applicability requirements under subpart E (Standards of performance for incinerators; §60.50) are subject to the $NO_X$and PM standards under this subpart.

(e) Steam generating units meeting the applicability requirements under subpart Da (Standards of performance for electric utility steam generating units; §60.40Da) are not subject to this subpart.

(f) Any change to an existing steam generating unit for the sole purpose of combusting gases containing total reduced sulfur (TRS) as defined under §60.281 is not considered a modification under §60.14 and the steam generating unit is not subject to this subpart.

(g) In delegating implementation and enforcement authority to a State under section 111(c) of the Clean Air Act, the following authorities shall be retained by the Administrator and not transferred to a State.

(1) Section 60.44b(f).

(2) Section 60.44b(g).

(3) Section 60.49b(a)(4).

(h) Any affected facility that meets the applicability requirements and is subject to subpart Ea, subpart Eb, or subpart AAAA of this part is not covered by this subpart.

(i) Heat recovery steam generators that are associated with combined cycle gas turbines and that meet the applicability requirements of subpart GG or KKKK of this part are not subject to this subpart. This subpart will continue to apply to all other heat recovery steam generators that are capable of combusting more than 29 MW (100 MMBtu/hr) heat input of fossil fuel. If the heat recovery steam generator is subject to this subpart, only emissions resulting from combustion of fuels in the steam generating unit are subject to this subpart. (The gas turbine emissions are subject to subpart GG or KKKK, as applicable, of this part.)

(j) Any affected facility meeting the applicability requirements under paragraph (a) of this section and commencing construction, modification, or reconstruction after June 19, 1986 is not subject to subpart D (Standards of Performance for Fossil-Fuel-Fired Steam Generators, §60.40).

(k) Any affected facility that meets the applicability requirements and is subject to an EPA approved State or Federal section 111(d)/129 plan implementing subpart Cb or subpart BBBB of this part is not covered by this subpart.

§ 60.41b Definitions.

As used in this subpart, all terms not defined herein shall have the meaning given them in the Clean Air Act and in subpart A of this part.

Annual capacity factor means the ratio between the actual heat input to a steam generating unit from the fuels listed in §60.42b(a), §60.43b(a), or §60.44b(a), as applicable, during a calendar year and the potential heat input to the steam generating unit had it been operated for 8,760 hours during a calendar year at the maximum steady state design heat input capacity. In the case of steam generating units that are rented or leased, the actual heat input shall be determined based on the combined heat input from all operations of the affected facility in a calendar year.

Byproduct/waste means any liquid or gaseous substance produced at chemical manufacturing plants, petroleum refineries, or pulp and paper mills (except natural gas, distillate oil, or residual oil) and combusted in a steam generating unit for heat recovery or for disposal. Gaseous substances with carbon dioxide (CO_2) levels greater than 50 percent or carbon monoxide levels greater than 10 percent are not byproduct/waste for the purpose of this subpart.

Chemical manufacturing plants mean industrial plants that are classified by the Department of Commerce under Standard Industrial Classification (SIC) Code 28.

Coal means all solid fuels classified as anthracite, bituminous, subbituminous, or lignite by the American Society of Testing and Materials in ASTM D388 (incorporated by reference, see §60.17), coal refuse, and petroleum coke. Coal-derived synthetic fuels, including but not limited to solvent refined coal, gasified coal, coal-oil mixtures, coke oven gas, and coal-water mixtures, are also included in this definition for the purposes of this subpart.

Coal refuse means any byproduct of coal mining or coal cleaning operations with an ash content greater than 50 percent, by weight, and a heating value less than 13,900 kJ/kg (6,000 Btu/lb) on a dry basis.

Cogeneration , also known as combined heat and power, means a facility that simultaneously produces both electric (or mechanical) and useful thermal energy from the same primary energy source.

Coke oven gas means the volatile constituents generated in the gaseous exhaust during the carbonization of bituminous coal to form coke.

Combined cycle system means a system in which a separate source, such as a gas turbine, internal combustion engine, kiln, etc., provides exhaust gas to a steam generating unit.

Conventional technology means wet flue gas desulfurization (FGD) technology, dry FGD technology, atmospheric fluidized bed combustion technology, and oil hydrodesulfurization technology.

Distillate oil means fuel oils that contain 0.05 weight percent nitrogen or less and comply with the specifications for fuel oil numbers 1 and 2, as defined by the American Society of Testing and Materials in ASTM D396 (incorporated by reference, see §60.17).

Dry flue gas desulfurization technology means a SO_2control system that is located downstream of the steam generating unit and removes sulfur oxides from the combustion gases of the steam generating unit by contacting the combustion gases with an alkaline reagent and water, whether introduced separately or as a premixed slurry or solution and forming a dry powder material. This definition includes devices where the dry powder material is subsequently converted to another form. Alkaline slurries or solutions used in dry flue gas desulfurization technology include but are not limited to lime and sodium.

Duct burner means a device that combusts fuel and that is placed in the exhaust duct from another source, such as a stationary gas turbine, internal combustion engine, kiln, etc., to allow the firing of additional fuel to heat the exhaust gases before the exhaust gases enter a steam generating unit.

Emerging technology means any SO_2control system that is not defined as a conventional technology under this section, and for which the owner or operator of the facility has applied to the Administrator and received approval to operate as an emerging technology under §60.49b(a)(4).

Federally enforceable means all limitations and conditions that are enforceable by the Administrator, including the requirements of 40 CFR parts 60 and 61, requirements within any applicable State Implementation Plan, and any permit requirements established under 40 CFR 52.21 or under 40 CFR 51.18 and 51.24.

Fluidized bed combustion technology means combustion of fuel in a bed or series of beds (including but not limited to bubbling bed units and circulating bed units) of limestone aggregate (or other sorbent materials) in which these materials are forced upward by the flow of combustion air and the gaseous products of combustion.

Fuel pretreatment means a process that removes a portion of the sulfur in a fuel before combustion of the fuel in a steam generating unit.

Full capacity means operation of the steam generating unit at 90 percent or more of the maximum steady-state design heat input capacity.

Gaseous fuel means any fuel that is present as a gas at ISO conditions.

Gross output means the gross useful work performed by the steam generated. For units generating only electricity, the gross useful work performed is the gross electrical output from the turbine/generator set. For cogeneration units, the gross useful work performed is the gross electrical or mechanical output plus

75 percent of the useful thermal output measured relative to ISO conditions that is not used to generate additional electrical or mechanical output (i.e., steam delivered to an industrial process).

Heat input means heat derived from combustion of fuel in a steam generating unit and does not include the heat derived from preheated combustion air, recirculated flue gases, or exhaust gases from other sources, such as gas turbines, internal combustion engines, kilns, etc.

Heat release rate means the steam generating unit design heat input capacity (in MW or Btu/hr) divided by the furnace volume (in cubic meters or cubic feet); the furnace volume is that volume bounded by the front furnace wall where the burner is located, the furnace side waterwall, and extending to the level just below or in front of the first row of convection pass tubes.

Heat transfer medium means any material that is used to transfer heat from one point to another point.

High heat release rate means a heat release rate greater than 730,000 J/sec-m^3 (70,000 Btu/hr-ft^3).

ISO Conditions means a temperature of 288 Kelvin, a relative humidity of 60 percent, and a pressure of 101.3 kilopascals.

Lignite means a type of coal classified as lignite A or lignite B by the American Society of Testing and Materials in ASTM D388 (incorporated by reference, see §60.17).

Low heat release rate means a heat release rate of 730,000 J/sec-m^3 (70,000 Btu/hr-ft^3) or less.

Mass-feed stoker steam generating unit means a steam generating unit where solid fuel is introduced directly into a retort or is fed directly onto a grate where it is combusted.

Maximum heat input capacity means the ability of a steam generating unit to combust a stated maximum amount of fuel on a steady state basis, as determined by the physical design and characteristics of the steam generating unit.

Municipal-type solid waste means refuse, more than 50 percent of which is waste consisting of a mixture of paper, wood, yard wastes, food wastes, plastics, leather, rubber, and other combustible materials, and noncombustible materials such as glass and rock.

Natural gas means: (1) A naturally occurring mixture of hydrocarbon and nonhydrocarbon gases found in geologic formations beneath the earth's surface, of which the principal constituent is methane; or (2) liquefied petroleum gas, as defined by the American Society for Testing and Materials in ASTM D1835 (incorporated by reference, see §60.17).

Noncontinental area means the State of Hawaii, the Virgin Islands, Guam, American Samoa, the Commonwealth of Puerto Rico, or the Northern Mariana Islands.

Oil means crude oil or petroleum or a liquid fuel derived from crude oil or petroleum, including distillate and residual oil.

Petroleum refinery means industrial plants as classified by the Department of Commerce under Standard Industrial Classification (SIC) Code 29.

Potential sulfur dioxide emission rate means the theoretical SO_2emissions (nanograms per joule (ng/J) or lb/MMBtu heat input) that would result from combusting fuel in an uncleaned state and without using emission control systems.

Process heater means a device that is primarily used to heat a material to initiate or promote a chemical reaction in which the material participates as a reactant or catalyst.

Pulp and paper mills means industrial plants that are classified by the Department of Commerce under North American Industry Classification System (NAICS) Code 322 or Standard Industrial Classification (SIC) Code 26.

Pulverized coal-fired steam generating unit means a steam generating unit in which pulverized coal is introduced into an air stream that carries the coal to the combustion chamber of the steam generating unit where it is fired in suspension. This includes both conventional pulverized coal-fired and micropulverized coal-fired steam generating units. Residual oil means crude oil, fuel oil numbers 1 and 2 that have a nitrogen content greater than 0.05 weight percent, and all fuel oil numbers 4, 5 and 6, as defined by the American Society of Testing and Materials in ASTM D396 (incorporated by reference, see §60.17).

Spreader stoker steam generating unit means a steam generating unit in which solid fuel is introduced to the combustion zone by a mechanism that throws the fuel onto a grate from above. Combustion takes place both in suspension and on the grate.

Steam generating unit means a device that combusts any fuel or byproduct/waste and produces steam or heats water or any other heat transfer medium. This term includes any municipal-type solid waste incinerator with a heat recovery steam generating unit or any steam generating unit that combusts fuel and is part of a cogeneration system or a combined cycle system. This term does not include process heaters as they are defined in this subpart.

Steam generating unit operating day means a 24-hour period between 12:00 midnight and the following midnight during which any fuel is combusted at any time in the steam generating unit. It is not necessary for fuel to be combusted continuously for the entire 24-hour period.

Very low sulfur oil means for units constructed, reconstructed, or modified on or before February 28, 2005, an oil that contains no more than 0.5 weight percent sulfur or that, when combusted without SO_2emission control, has a SO_2emission rate equal to or less than 215 ng/J (0.5 lb/MMBtu) heat input. For units constructed, reconstructed, or modified after February 28, 2005, *very low sulfur oil* means an oil that contains no more than 0.3 weight percent sulfur or that, when combusted without SO_2emission control, has a SO_2emission rate equal to or less than 140 ng/J (0.32 lb/MMBtu) heat input.

Wet flue gas desulfurization technology means a SO_2control system that is located downstream of the steam generating unit and removes sulfur oxides from the combustion gases of the steam generating unit by contacting the combustion gas with an alkaline slurry or solution and forming a liquid material. This definition applies to devices where the aqueous liquid material product of this contact is subsequently converted to other forms. Alkaline reagents used in wet flue gas desulfurization technology include, but are not limited to, lime, limestone, and sodium.

Wet scrubber system means any emission control device that mixes an aqueous stream or slurry with the exhaust gases from a steam generating unit to control emissions of PM or SO_2.

Wood means wood, wood residue, bark, or any derivative fuel or residue thereof, in any form, including, but not limited to, sawdust, sanderdust, wood chips, scraps, slabs, millings, shavings, and processed pellets made from wood or other forest residues.

§ 60.42b Standard for sulfur dioxide (SO2).

(a) Except as provided in paragraphs (b), (c), (d), or (k) of this section, on and after the date on which the performance test is completed or required to be completed under §60.8, whichever comes first, no owner

or operator of an affected facility that commenced construction, reconstruction, or modification on or before February 28, 2005, that combusts coal or oil shall cause to be discharged into the atmosphere any gases that contain SO_2in excess of 87 ng/J (0.20 lb/MMBtu) or 10 percent (0.10) of the potential SO_2emission rate (90 percent reduction) and the emission limit determined according to the following formula:

$$E_s = \frac{(K_a H_a + K_b H_b)}{(H_a + H_b)}$$

Where:

E_s= SO_2emission limit, in ng/J or lb/MMBtu heat input;

K_a= 520 ng/J (or 1.2 lb/MMBtu);

K_b= 340 ng/J (or 0.80 lb/MMBtu);

H_a= Heat input from the combustion of coal, in J (MMBtu); and

H_b= Heat input from the combustion of oil, in J (MMBtu).

Only the heat input supplied to the affected facility from the combustion of coal and oil is counted under this section. No credit is provided for the heat input to the affected facility from the combustion of natural gas, wood, municipal-type solid waste, or other fuels or heat derived from exhaust gases from other sources, such as gas turbines, internal combustion engines, kilns, etc.

(b) On and after the date on which the performance test is completed or required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that commenced construction, reconstruction, or modification on or before February 28, 2005, that combusts coal refuse alone in a fluidized bed combustion steam generating unit shall cause to be discharged into the atmosphere any gases that contain SO_2in excess of 87 ng/J (0.20 lb/MMBtu) or 20 percent (0.20) of the potential SO_2emission rate (80 percent reduction) and 520 ng/J (1.2 lb/MMBtu) heat input. If coal or oil is fired with coal refuse, the affected facility is subject to paragraph (a) or (d) of this section, as applicable.

(c) On and after the date on which the performance test is completed or is required to be completed under §60.8, whichever comes first, no owner or operator of an affected facility that combusts coal or oil, either alone or in combination with any other fuel, and that uses an emerging technology for the control of SO_2emissions, shall cause to be discharged into the atmosphere any gases that contain SO_2in excess of 50 percent of the potential SO_2emission rate (50 percent reduction) and that contain SO_2in excess of the emission limit determined according to the following formula:

$$E_s = \frac{(K_c H_c + K_d H_d)}{(H_c + H_d)}$$

Where:

E_s= SO_2emission limit, in ng/J or lb/MM Btu heat input;

K_c= 260 ng/J (or 0.60 lb/MMBtu);

K_d= 170 ng/J (or 0.40 lb/MMBtu);

H_c= Heat input from the combustion of coal, in J (MMBtu); and

H_d= Heat input from the combustion of oil, in J (MMBtu).

Only the heat input supplied to the affected facility from the combustion of coal and oil is counted under this section. No credit is provided for the heat input to the affected facility from the combustion of natural gas, wood, municipal-type solid waste, or other fuels, or from the heat input derived from exhaust gases from other sources, such as gas turbines, internal combustion engines, kilns, etc.

(d) On and after the date on which the performance test is completed or required to be completed under §60.8, whichever comes first, no owner or operator of an affected facility that commenced construction, reconstruction, or modification on or before February 28, 2005 and listed in paragraphs (d)(1), (2), (3), or (4) of this section shall cause to be discharged into the atmosphere any gases that contain SO_2in excess of 520 ng/J (1.2 lb/MMBtu) heat input if the affected facility combusts coal, or 215 ng/J (0.5 lb/MMBtu) heat input if the affected facility combusts oil other than very low sulfur oil. Percent reduction requirements are not applicable to affected facilities under paragraphs (d)(1), (2), (3) or (4) of this section.

(1) Affected facilities that have an annual capacity factor for coal and oil of 30 percent (0.30) or less and are subject to a federally enforceable permit limiting the operation of the affected facility to an annual capacity factor for coal and oil of 30 percent (0.30) or less;

(2) Affected facilities located in a noncontinental area; or

(3) Affected facilities combusting coal or oil, alone or in combination with any fuel, in a duct burner as part of a combined cycle system where 30 percent (0.30) or less of the heat entering the steam generating unit is from combustion of coal and oil in the duct burner and 70 percent (0.70) or more of the heat entering the steam generating unit is from the exhaust gases entering the duct burner; or

(4) The affected facility burns coke oven gas alone or in combination with natural gas or very low sulfur distillate oil.

(e) Except as provided in paragraph (f) of this section, compliance with the emission limits, fuel oil sulfur limits, and/or percent reduction requirements under this section are determined on a 30-day rolling average basis.

(f) Except as provided in paragraph (j)(2) of this section, compliance with the emission limits or fuel oil sulfur limits under this section is determined on a 24-hour average basis for affected facilities that (1) have a federally enforceable permit limiting the annual capacity factor for oil to 10 percent or less, (2) combust only very low sulfur oil, and (3) do not combust any other fuel.

(g) Except as provided in paragraph (i) of this section and §60.45b(a), the SO_2emission limits and percent reduction requirements under this section apply at all times, including periods of startup, shutdown, and malfunction.

(h) Reductions in the potential SO_2emission rate through fuel pretreatment are not credited toward the percent reduction requirement under paragraph (c) of this section unless:

(1) Fuel pretreatment results in a 50 percent or greater reduction in potential SO_2emissions and

(2) Emissions from the pretreated fuel (without combustion or post-combustion SO_2control) are equal to or less than the emission limits specified in paragraph (c) of this section.

(i) An affected facility subject to paragraph (a), (b), or (c) of this section may combust very low sulfur oil or natural gas when the SO_2control system is not being operated because of malfunction or maintenance of the SO_2control system.

(j) Percent reduction requirements are not applicable to affected facilities combusting only very low sulfur oil. The owner or operator of an affected facility combusting very low sulfur oil shall demonstrate that the oil meets the definition of very low sulfur oil by: (1) Following the performance testing procedures as described in §60.45b(c) or §60.45b(d), and following the monitoring procedures as described in §60.47b(a) or §60.47b(b) to determine SO_2emission rate or fuel oil sulfur content; or (2) maintaining fuel records as described in §60.49b(r).

(k)(1) Except as provided in paragraphs (k)(2), (k)(3), and (k)(4) of this section, on and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that commences construction, reconstruction, or modification after February 28, 2005, and that combusts coal, oil, natural gas, a mixture of these fuels, or a mixture of these fuels with any other fuels shall cause to be discharged into the atmosphere any gases that contain SO_2in excess of 87 ng/J (0.20 lb/MMBtu) heat input or 8 percent (0.08) of the potential SO_2emission rate (92 percent reduction) and 520 ng/J (1.2 lb/MMBtu) heat input.

(2) Units firing only very low sulfur oil and/or a mixture of gaseous fuels with a potential SO_2emission rate of 140 ng/J (0.32 lb/MMBtu) heat input or less are exempt from the SO_2emissions limit in paragraph 60.42b(k)(1).

(3) Units that are located in a noncontinental area and that combust coal or oil shall not discharge any gases that contain SO_2in excess of 520 ng/J (1.2 lb/MMBtu) heat input if the affected facility combusts coal, or 215 ng/J (0.50 lb/MMBtu) heat input if the affected facility combusts oil.

(4) As an alternative to meeting the requirements under paragraph (k)(1) of this section, modified facilities that combust coal or a mixture of coal with other fuels shall not cause to be discharged into the atmosphere any gases that contain SO_2in excess of 87 ng/J (0.20 lb/MMBtu) heat input or 10 percent (0.10) of the potential SO_2emission rate (90 percent reduction) and 520 ng/J (1.2 lb/MMBtu) heat input.

§ 60.43b Standard for particulate matter (PM).

(a) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever comes first, no owner or operator of an affected facility that commenced construction, reconstruction, or modification on or before February 28, 2005 that combusts coal or combusts mixtures of coal with other fuels, shall cause to be discharged into the atmosphere from that affected facility any gases that contain PM in excess of the following emission limits:

(1) 22 ng/J (0.051 lb/MMBtu) heat input, (i) If the affected facility combusts only coal, or

(ii) If the affected facility combusts coal and other fuels and has an annual capacity factor for the other fuels of 10 percent (0.10) or less.

(2) 43 ng/J (0.10 lb/MMBtu) heat input if the affected facility combusts coal and other fuels and has an annual capacity factor for the other fuels greater than 10 percent (0.10) and is subject to a federally enforceable requirement limiting operation of the affected facility to an annual capacity factor greater than 10 percent (0.10) for fuels other than coal.

(3) 86 ng/J (0.20 lb/MMBtu) heat input if the affected facility combusts coal or coal and other fuels and

(i) Has an annual capacity factor for coal or coal and other fuels of 30 percent (0.30) or less,

(ii) Has a maximum heat input capacity of 73 MW (250 MMBtu/hr) or less,

(iii) Has a federally enforceable requirement limiting operation of the affected facility to an annual capacity factor of 30 percent (0.30) or less for coal or coal and other solid fuels, and

(iv) Construction of the affected facility commenced after June 19, 1984, and before November 25, 1986.

(4) An affected facility burning coke oven gas alone or in combination with other fuels not subject to a PM standard under §60.43b and not using a post-combustion technology (except a wet scrubber) for reducing PM or SO_2emissions is not subject to the PM limits under §60.43b(a).

(b) On and after the date on which the performance test is completed or required to be completed under §60.8, whichever comes first, no owner or operator of an affected facility that commenced construction, reconstruction, or modification on or before February 28, 2005, and that combusts oil (or mixtures of oil with other fuels) and uses a conventional or emerging technology to reduce SO_2emissions shall cause to be discharged into the atmosphere from that affected facility any gases that contain PM in excess of 43 ng/J (0.10 lb/MMBtu) heat input.

(c) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever comes first, no owner or operator of an affected facility that commenced construction, reconstruction, or modification on or before February 28, 2005, and that combusts wood, or wood with other fuels, except coal, shall cause to be discharged from that affected facility any gases that contain PM in excess of the following emission limits:

(1) 43 ng/J (0.10 lb/MMBtu) heat input if the affected facility has an annual capacity factor greater than 30 percent (0.30) for wood.

(2) 86 ng/J (0.20 lb/MMBtu) heat input if (i) The affected facility has an annual capacity factor of 30 percent (0.30) or less for wood;

(ii) Is subject to a federally enforceable requirement limiting operation of the affected facility to an annual capacity factor of 30 percent (0.30) or less for wood; and

(iii) Has a maximum heat input capacity of 73 MW (250 MMBtu/hr) or less.

(d) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that combusts municipal-type solid waste or mixtures of municipal-type solid waste with other fuels, shall cause to be discharged into the atmosphere from that affected facility any gases that contain PM in excess of the following emission limits:

(1) 43 ng/J (0.10 lb/MMBtu) heat input;

(i) If the affected facility combusts only municipal-type solid waste; or

(ii) If the affected facility combusts municipal-type solid waste and other fuels and has an annual capacity factor for the other fuels of 10 percent (0.10) or less.

(2) 86 ng/J (0.20 lb/MMBtu) heat input if the affected facility combusts municipal-type solid waste or municipal-type solid waste and other fuels; and

(i) Has an annual capacity factor for municipal-type solid waste and other fuels of 30 percent (0.30) or less;

(ii) Has a maximum heat input capacity of 73 MW (250 MMBtu/hr) or less;

(iii) Has a federally enforceable requirement limiting operation of the affected facility to an annual capacity factor of 30 percent (0.30) or less for municipal-type solid waste, or municipal-type solid waste and other fuels; and

(iv) Construction of the affected facility commenced after June 19, 1984, but on or before November 25, 1986.

(e) For the purposes of this section, the annual capacity factor is determined by dividing the actual heat input to the steam generating unit during the calendar year from the combustion of coal, wood, or municipal-type solid waste, and other fuels, as applicable, by the potential heat input to the steam generating unit if the steam generating unit had been operated for 8,760 hours at the maximum heat input capacity.

(f) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that combusts coal, oil, wood, or mixtures of these fuels with any other fuels shall cause to be discharged into the atmosphere any gases that exhibit greater than 20 percent opacity (6-minute average), except for one 6-minute period per hour of not more than 27 percent opacity.

(g) The PM and opacity standards apply at all times, except during periods of startup, shutdown or malfunction.

(h)(1) Except as provided in paragraphs (h)(2), (h)(3), (h)(4), and (h)(5) of this section, on and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that commenced construction, reconstruction, or modification after February 28, 2005, and that combusts coal, oil, wood, a mixture of these fuels, or a mixture of these fuels with any other fuels shall cause to be discharged into the atmosphere from that affected facility any gases that contain PM in excess of 13 ng/J (0.030 lb/MMBtu) heat input,

(2) As an alternative to meeting the requirements of paragraph (h)(1) of this section, the owner or operator of an affected facility for which modification commenced after February 28, 2005, may elect to meet the requirements of this paragraph. On and after the date on which the initial performance test is completed or required to be completed under §60.8, no owner or operator of an affected facility that commences modification after February 28, 2005 shall cause to be discharged into the atmosphere from that affected facility any gases that contain PM in excess of both:

(i) 22 ng/J (0.051 lb/MMBtu) heat input derived from the combustion of coal, oil, wood, a mixture of these fuels, or a mixture of these fuels with any other fuels; and

(ii) 0.2 percent of the combustion concentration (99.8 percent reduction) when combusting coal, oil, wood, a mixture of these fuels, or a mixture of these fuels with any other fuels.

(3) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that commences modification after February 28, 2005, and that combusts over 30 percent wood (by heat input) on an annual basis and has a maximum heat input capacity of 73 MW (250 MMBtu/h) or less shall cause to be

discharged into the atmosphere from that affected facility any gases that contain PM in excess of 43 ng/J (0.10 lb/MMBtu) heat input.

(4) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that commences modification after February 28, 2005, and that combusts over 30 percent wood (by heat input) on an annual basis and has a maximum heat input capacity greater than 73 MW (250 MMBtu/h) shall cause to be discharged into the atmosphere from that affected facility any gases that contain PM in excess of 37 ng/J (0.085 lb/MMBtu) heat input.

(5) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, an owner or operator of an affected facility that commences construction, reconstruction, or modification after February 28, 2005, and that combusts only oil that contains no more than 0.3 weight percent sulfur, coke oven gas, a mixture of these fuels, or either fuel (or a mixture of these fuels) in combination with other fuels not subject to a PM standard under §60.43b and not using a post-combustion technology (except a wet scrubber) to reduce SO_2or PM emissions is not subject to the PM limits under §60.43b(h)(1).

§ 60.44b Standard for nitrogen oxides (NOX).

(a) Except as provided under paragraphs (k) and (l) of this section, on and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that is subject to the provisions of this section and that combusts only coal, oil, or natural gas shall cause to be discharged into the atmosphere from that affected facility any gases that contain NO_X(expressed as NO_2) in excess of the following emission limits:

Fuel/steam generating unit type	Nitrogen oxide emission limits (expressed as NO_2) heat input	
	ng/J	lb/MMBTu
(1) Natural gas and distillate oil, except (4):		
(i) Low heat release rate	43	0.10
(ii) High heat release rate	86	0.20
(2) Residual oil:		
(i) Low heat release rate	130	0.30
(ii) High heat release rate	170	0.40
(3) Coal:		
(i) Mass-feed stoker	210	0.50
(ii) Spreader stoker and fluidized bed combustion	260	0.60
(iii) Pulverized coal	300	0.70
(iv) Lignite, except (v)	260	0.60
(v) Lignite mined in North Dakota, South Dakota, or Montana and combusted in a slag tap furnace	340	0.80
(vi) Coal-derived synthetic fuels	210	0.50
(4) Duct burner used in a combined cycle system:		

(i) Natural gas and distillate oil	86	0.20
(ii) Residual oil	170	0.40

(b) Except as provided under paragraphs (k) and (l) of this section, on and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that simultaneously combusts mixtures of coal, oil, or natural gas shall cause to be discharged into the atmosphere from that affected facility any gases that contain NO_Xin excess of a limit determined by the use of the following formula:

$$E_n = \frac{(EL_{go}H_{go}) + (EL_{ro}H_{ro}) + (EL_cH_c)}{(H_{go} + H_{ro} + H_c)}$$

Where:

E_n= NO_Xemission limit (expressed as NO_2), ng/J (lb/MMBtu);

EL_{go}= Appropriate emission limit from paragraph (a)(1) for combustion of natural gas or distillate oil, ng/J (lb/MMBtu);

H_{go}= Heat input from combustion of natural gas or distillate oil, J (MMBtu);

EL_{ro}= Appropriate emission limit from paragraph (a)(2) for combustion of residual oil, ng/J (lb/MMBtu);

H_{ro}= Heat input from combustion of residual oil, J (MMBtu);

EL_c= Appropriate emission limit from paragraph (a)(3) for combustion of coal, ng/J (lb/MMBtu); and

H_c= Heat input from combustion of coal, J (MMBtu).

(c) Except as provided under paragraph (l) of this section, on and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that simultaneously combusts coal or oil, or a mixture of these fuels with natural gas, and wood, municipal-type solid waste, or any other fuel shall cause to be discharged into the atmosphere any gases that contain NO_Xin excess of the emission limit for the coal or oil, or mixtures of these fuels with natural gas combusted in the affected facility, as determined pursuant to paragraph (a) or (b) of this section, unless the affected facility has an annual capacity factor for coal or oil, or mixture of these fuels with natural gas of 10 percent (0.10) or less and is subject to a federally enforceable requirement that limits operation of the affected facility to an annual capacity factor of 10 percent (0.10) or less for coal, oil, or a mixture of these fuels with natural gas.

(d) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that simultaneously combusts natural gas with wood, municipal-type solid waste, or other solid fuel, except coal, shall cause to be discharged into the atmosphere from that affected facility any gases that contain NO_Xin excess of 130 ng/J (0.30 lb/MMBtu) heat input unless the affected facility has an annual capacity factor for natural gas of 10 percent (0.10) or less and is subject to a federally enforceable requirement that limits operation of the affected facility to an annual capacity factor of 10 percent (0.10) or less for natural gas.

(e) Except as provided under paragraph (l) of this section, on and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no

owner or operator of an affected facility that simultaneously combusts coal, oil, or natural gas with byproduct/waste shall cause to be discharged into the atmosphere any gases that contain NO_Xin excess of the emission limit determined by the following formula unless the affected facility has an annual capacity factor for coal, oil, and natural gas of 10 percent (0.10) or less and is subject to a federally enforceable requirement that limits operation of the affected facility to an annual capacity factor of 10 percent (0.10) or less:

$$E_n = \frac{(EL_{go}H_{go}) + (EL_{ro}H_{ro}) + (EL_cH_c)}{(H_{go} + H_{ro} + H_c)}$$

Where:

E_n= NO_Xemission limit (expressed as NO_2), ng/J (lb/MMBtu);

EL_{go}= Appropriate emission limit from paragraph (a)(1) for combustion of natural gas or distillate oil, ng/J (lb/MMBtu);

H_{go}= Heat input from combustion of natural gas, distillate oil and gaseous byproduct/waste, J (MMBtu);

EL_{ro}= Appropriate emission limit from paragraph (a)(2) for combustion of residual oil and/or byproduct/waste, ng/J (lb/MMBtu);

H_{ro}= Heat input from combustion of residual oil, J (MMBtu);

EL_c= Appropriate emission limit from paragraph (a)(3) for combustion of coal, ng/J (lb/MMBtu); and

H_c= Heat input from combustion of coal, J (MMBtu).

(f) Any owner or operator of an affected facility that combusts byproduct/waste with either natural gas or oil may petition the Administrator within 180 days of the initial startup of the affected facility to establish a NO_Xemission limit that shall apply specifically to that affected facility when the byproduct/waste is combusted. The petition shall include sufficient and appropriate data, as determined by the Administrator, such as NO_Xemissions from the affected facility, waste composition (including nitrogen content), and combustion conditions to allow the Administrator to confirm that the affected facility is unable to comply with the emission limits in paragraph (e) of this section and to determine the appropriate emission limit for the affected facility.

(1) Any owner or operator of an affected facility petitioning for a facility-specific NO_Xemission limit under this section shall:

(i) Demonstrate compliance with the emission limits for natural gas and distillate oil in paragraph (a)(1) of this section or for residual oil in paragraph (a)(2) or (l)(1) of this section, as appropriate, by conducting a 30-day performance test as provided in §60.46b(e). During the performance test only natural gas, distillate oil, or residual oil shall be combusted in the affected facility; and

(ii) Demonstrate that the affected facility is unable to comply with the emission limits for natural gas and distillate oil in paragraph (a)(1) of this section or for residual oil in paragraph (a)(2) or (l)(1) of this section, as appropriate, when gaseous or liquid byproduct/waste is combusted in the affected facility under the same conditions and using the same technological system of emission reduction applied when demonstrating compliance under paragraph (f)(1)(i) of this section.

(2) The NO_Xemission limits for natural gas or distillate oil in paragraph (a)(1) of this section or for residual oil in paragraph (a)(2) or (l)(1) of this section, as appropriate, shall be applicable to the affected facility until and unless the petition is approved by the Administrator. If the petition is approved by the Administrator, a facility-specific NO_Xemission limit will be established at the NO_Xemission level achievable when the affected facility is combusting oil or natural gas and byproduct/waste in a manner that the Administrator determines to be consistent with minimizing NO_Xemissions. In lieu of amending this subpart, a letter will be sent to the facility describing the facility-specific NO_Xlimit. The facility shall use the compliance procedures detailed in the letter and make the letter available to the public. If the Administrator determines it is appropriate, the conditions and requirements of the letter can be reviewed and changed at any point.

(g) Any owner or operator of an affected facility that combusts hazardous waste (as defined by 40 CFR part 261 or 40 CFR part 761) with natural gas or oil may petition the Administrator within 180 days of the initial startup of the affected facility for a waiver from compliance with the NO_Xemission limit that applies specifically to that affected facility. The petition must include sufficient and appropriate data, as determined by the Administrator, on NO_Xemissions from the affected facility, waste destruction efficiencies, waste composition (including nitrogen content), the quantity of specific wastes to be combusted and combustion conditions to allow the Administrator to determine if the affected facility is able to comply with the NO_Xemission limits required by this section. The owner or operator of the affected facility shall demonstrate that when hazardous waste is combusted in the affected facility, thermal destruction efficiency requirements for hazardous waste specified in an applicable federally enforceable requirement preclude compliance with the NO_Xemission limits of this section. The NO_Xemission limits for natural gas or distillate oil in paragraph (a)(1) of this section or for residual oil in paragraph (a)(2) or (l)(1) of this section, as appropriate, are applicable to the affected facility until and unless the petition is approved by the Administrator. (See 40 CFR 761.70 for regulations applicable to the incineration of materials containing polychlorinated biphenyls (PCB's).) In lieu of amending this subpart, a letter will be sent to the facility describing the facility-specific NO_Xlimit. The facility shall use the compliance procedures detailed in the letter and make the letter available to the public. If the Administrator determines it is appropriate, the conditions and requirements of the letter can be reviewed and changed at any point.

(h) For purposes of paragraph (i) of this section, the NO_Xstandards under this section apply at all times including periods of startup, shutdown, or malfunction.

(i) Except as provided under paragraph (j) of this section, compliance with the emission limits under this section is determined on a 30-day rolling average basis.

(j) Compliance with the emission limits under this section is determined on a 24-hour average basis for the initial performance test and on a 3-hour average basis for subsequent performance tests for any affected facilities that:

(1) Combust, alone or in combination, only natural gas, distillate oil, or residual oil with a nitrogen content of 0.30 weight percent or less;

(2) Have a combined annual capacity factor of 10 percent or less for natural gas, distillate oil, and residual oil with a nitrogen content of 0.30 weight percent or less; and

(3) Are subject to a federally enforceable requirement limiting operation of the affected facility to the firing of natural gas, distillate oil, and/or residual oil with a nitrogen content of 0.30 weight percent or less and limiting operation of the affected facility to a combined annual capacity factor of 10 percent or less for natural gas, distillate oil, and residual oil with a nitrogen content of 0.30 weight percent or less.

(k) Affected facilities that meet the criteria described in paragraphs (j)(1), (2), and (3) of this section, and that have a heat input capacity of 73 MW (250 MMBtu/hr) or less, are not subject to the NO_Xemission limits under this section.

(l) On and after the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, no owner or operator of an affected facility that commenced construction or reconstruction after July 9, 1997 shall cause to be discharged into the atmosphere from that affected facility any gases that contain NO_X(expressed as NO_2) in excess of the following limits:

(1) If the affected facility combusts coal, oil, or natural gas, or a mixture of these fuels, or with any other fuels: A limit of 86 ng/J (0.20 lb/MMBtu) heat input unless the affected facility has an annual capacity factor for coal, oil, and natural gas of 10 percent (0.10) or less and is subject to a federally enforceable requirement that limits operation of the facility to an annual capacity factor of 10 percent (0.10) or less for coal, oil, and natural gas; or

(2) If the affected facility has a low heat release rate and combusts natural gas or distillate oil in excess of 30 percent of the heat input on a 30-day rolling average from the combustion of all fuels, a limit determined by use of the following formula:

$$E_n = \frac{(0.10 \times H_{go}) + (0.20 \times H_r)}{(H_{go} + H_r)}$$

Where:

E_n= NO_Xemission limit, (lb/MMBtu);

H_{go}= 30-day heat input from combustion of natural gas or distillate oil; and

H_r= 30-day heat input from combustion of any other fuel.

(3) After February 27, 2006, units where more than 10 percent of total annual output is electrical or mechanical may comply with an optional limit of 270 ng/J (2.1 lb/MWh) gross energy output, based on a 30-day rolling average. Units complying with this output-based limit must demonstrate compliance according to the procedures of §60.48Da(i) of subpart Da of this part, and must monitor emissions according to §60.49Da(c), (k), through (n) of subpart Da of this part.

§ 60.45b Compliance and performance test methods and procedures for sulfur dioxide.

(a) The SO_2emission standards under §60.42b apply at all times. Facilities burning coke oven gas alone or in combination with any other gaseous fuels or distillate oil and complying with the fuel based limit under §60.42b(d) or §60.42b(k)(2) are allowed to exceed the limit 30 operating days per calendar year for by-product plant maintenance.

(b) In conducting the performance tests required under §60.8, the owner or operator shall use the methods and procedures in appendix A (including fuel certification and sampling) of this part or the methods and procedures as specified in this section, except as provided in §60.8(b). Section 60.8(f) does not apply to this section. The 30-day notice required in §60.8(d) applies only to the initial performance test unless otherwise specified by the Administrator.

(c) The owner or operator of an affected facility shall conduct performance tests to determine compliance with the percent of potential SO_2emission rate (% P_s) and the SO_2emission rate (E_s) pursuant to §60.42b following the procedures listed below, except as provided under paragraph (d) and (k) of this section.

(1) The initial performance test shall be conducted over 30 consecutive operating days of the steam generating unit. Compliance with the SO_2standards shall be determined using a 30-day average. The first operating day included in the initial performance test shall be scheduled within 30 days after achieving the

maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup of the facility.

(2) If only coal, only oil, or a mixture of coal and oil is combusted, the following procedures are used:

(i) The procedures in Method 19 of appendix A of this part are used to determine the hourly SO_2emission rate (E_{ho}) and the 30-day average emission rate (E_{ao}). The hourly averages used to compute the 30-day averages are obtained from the continuous emission monitoring system (CEMS) of §60.47b (a) or (b).

(ii) The percent of potential SO_2emission rate ($\%P_s$) emitted to the atmosphere is computed using the following formula:

$$\%P_s = 100\left(1 - \frac{\%R_g}{100}\right)\left(1 - \frac{\%R_f}{100}\right)$$

Where:

$\%P_s$= Potential SO_2emission rate, percent;

$\%R_g$= SO_2removal efficiency of the control device as determined by Method 19 of appendix A of this part, in percent; and

$\%R_f$= SO_2removal efficiency of fuel pretreatment as determined by Method 19 of appendix A of this part, in percent.

(3) If coal or oil is combusted with other fuels, the same procedures required in paragraph (c)(2) of this section are used, except as provided in the following:

(i) An adjusted hourly SO_2emission rate (E_{ho}^{o}) is used in Equation 19–19 of Method 19 of appendix A of this part to compute an adjusted 30-day average emission rate (E_{ao}^{o}). The Eho° is computed using the following formula:

$$E_{ho}^{o} = \frac{E_{ho} - E_w(1 - X_k)}{X_k}$$

Where:

E_{ho}^{o} = Adjusted hourly SO_2emission rate, ng/J (lb/MMBtu);

E_{ho}= Hourly SO_2emission rate, ng/J (lb/MMBtu);

E_w= SO_2concentration in fuels other than coal and oil combusted in the affected facility, as determined by the fuel sampling and analysis procedures in Method 19 of appendix A of this part, ng/J (lb/MMBtu). The value $E_w$for each fuel lot is used for each hourly average during the time that the lot is being combusted; and

X_k= Fraction of total heat input from fuel combustion derived from coal, oil, or coal and oil, as determined by applicable procedures in Method 19 of appendix A of this part.

(ii) To compute the percent of potential SO_2emission rate ($\%P_s$), an adjusted $\%R_g$($\%R_g^o$) is computed from the adjusted E_{ao}^o from paragraph (b)(3)(i) of this section and an adjusted average SO_2inlet rate (E_{ai}^o) using the following formula:

$$\%R_g^o = 100\left(1.0 - \frac{E_{ao}^o}{E_{ai}^o}\right)$$

To compute E_{ai}^o , an adjusted hourly SO_2inlet rate (E_{hi}^o) is used. The E_{hi}^o is computed using the following formula:

$$E_{hi}^o = \frac{E_{hi} - E_w(1 - X_k)}{X_k}$$

Where:

E_{hi}^o = Adjusted hourly SO_2inlet rate, ng/J (lb/MMBtu); and

E_{hi}= Hourly SO_2inlet rate, ng/J (lb/MMBtu).

(4) The owner or operator of an affected facility subject to paragraph (b)(3) of this section does not have to measure parameters $E_w$or $X_k$if the owner or operator elects to assume that X_k= 1.0. Owners or operators of affected facilities who assume X_k= 1.0 shall:

(i) Determine $\%P_s$following the procedures in paragraph (c)(2) of this section; and

(ii) Sulfur dioxide emissions (E_s) are considered to be in compliance with SO_2emission limits under §60.42b.

(5) The owner or operator of an affected facility that qualifies under the provisions of §60.42b(d) does not have to measure parameters $E_w$or $X_k$under paragraph (b)(3) of this section if the owner or operator of the affected facility elects to measure SO_2emission rates of the coal or oil following the fuel sampling and analysis procedures under Method 19 of appendix A of this part.

(d) Except as provided in paragraph (j) of this section, the owner or operator of an affected facility that combusts only very low sulfur oil, has an annual capacity factor for oil of 10 percent (0.10) or less, and is subject to a federally enforceable requirement limiting operation of the affected facility to an annual capacity factor for oil of 10 percent (0.10) or less shall:

(1) Conduct the initial performance test over 24 consecutive steam generating unit operating hours at full load;

(2) Determine compliance with the standards after the initial performance test based on the arithmetic average of the hourly emissions data during each steam generating unit operating day if a CEMS is used, or based on a daily average if Method 6B of appendix A of this part or fuel sampling and analysis procedures under Method 19 of appendix A of this part are used.

(e) The owner or operator of an affected facility subject to §60.42b(d)(1) shall demonstrate the maximum design capacity of the steam generating unit by operating the facility at maximum capacity for 24 hours. This demonstration will be made during the initial performance test and a subsequent demonstration may be requested at any other time. If the 24-hour average firing rate for the affected facility is less than the maximum design capacity provided by the manufacturer of the affected facility, the 24-hour average firing

rate shall be used to determine the capacity utilization rate for the affected facility, otherwise the maximum design capacity provided by the manufacturer is used.

(f) For the initial performance test required under §60.8, compliance with the SO_2emission limits and percent reduction requirements under §60.42b is based on the average emission rates and the average percent reduction for $SO_2$for the first 30 consecutive steam generating unit operating days, except as provided under paragraph (d) of this section. The initial performance test is the only test for which at least 30 days prior notice is required unless otherwise specified by the Administrator. The initial performance test is to be scheduled so that the first steam generating unit operating day of the 30 successive steam generating unit operating days is completed within 30 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial startup of the facility. The boiler load during the 30-day period does not have to be the maximum design load, but must be representative of future operating conditions and include at least one 24-hour period at full load.

(g) After the initial performance test required under §60.8, compliance with the SO_2emission limits and percent reduction requirements under §60.42b is based on the average emission rates and the average percent reduction for $SO_2$for 30 successive steam generating unit operating days, except as provided under paragraph (d). A separate performance test is completed at the end of each steam generating unit operating day after the initial performance test, and a new 30-day average emission rate and percent reduction for $SO_2$are calculated to show compliance with the standard.

(h) Except as provided under paragraph (i) of this section, the owner or operator of an affected facility shall use all valid SO_2emissions data in calculating $\%P_s$and E_{ho}under paragraph (c), of this section whether or not the minimum emissions data requirements under §60.46b are achieved. All valid emissions data, including valid SO_2emission data collected during periods of startup, shutdown and malfunction, shall be used in calculating $\%P_s$and E_{ho}pursuant to paragraph (c) of this section.

(i) During periods of malfunction or maintenance of the SO_2control systems when oil is combusted as provided under §60.42b(i), emission data are not used to calculate $\%P_s$or $E_s$under §60.42b(a), (b) or (c), however, the emissions data are used to determine compliance with the emission limit under §60.42b(i).

(j) The owner or operator of an affected facility that combusts very low sulfur oil is not subject to the compliance and performance testing requirements of this section if the owner or operator obtains fuel receipts as described in §60.49b(r).

(k) The owner or operator of an affected facility seeking to demonstrate compliance under §§60.42b(d)(4), 60.42b(j), and 60.42b(k)(2) shall follow the applicable procedures under §60.49b(r).

§ 60.46b Compliance and performance test methods and procedures for particulate matter and nitrogen oxides.

(a) The PM emission standards and opacity limits under §60.43b apply at all times except during periods of startup, shutdown, or malfunction. The NO_Xemission standards under §60.44b apply at all times.

(b) Compliance with the PM emission standards under §60.43b shall be determined through performance testing as described in paragraph (d) of this section, except as provided in paragraph (i) of this section.

(c) Compliance with the NO_Xemission standards under §60.44b shall be determined through performance testing under paragraph (e) or (f), or under paragraphs (g) and (h) of this section, as applicable.

(d) To determine compliance with the PM emission limits and opacity limits under §60.43b, the owner or operator of an affected facility shall conduct an initial performance test as required under §60.8, and shall

conduct subsequent performance tests as requested by the Administrator, using the following procedures and reference methods:

(1) Method 3B of appendix A of this part is used for gas analysis when applying Method 5 or 17 of appendix A of this part.

(2) Method 5, 5B, or 17 of appendix A of this part shall be used to measure the concentration of PM as follows:

(i) Method 5 of appendix A of this part shall be used at affected facilities without wet flue gas desulfurization (FGD) systems; and

(ii) Method 17 of appendix A of this part may be used at facilities with or without wet scrubber systems provided the stack gas temperature does not exceed a temperature of 160 °C (32 °F). The procedures of sections 2.1 and 2.3 of Method 5B of appendix A of this part may be used in Method 17 of appendix A of this part only if it is used after a wet FGD system. Do not use Method 17 of appendix A of this part after wet FGD systems if the effluent is saturated or laden with water droplets.

(iii) Method 5B of appendix A of this part is to be used only after wet FGD systems.

(3) Method 1 of appendix A of this part is used to select the sampling site and the number of traverse sampling points. The sampling time for each run is at least 120 minutes and the minimum sampling volume is 1.7 dscm (60 dscf) except that smaller sampling times or volumes may be approved by the Administrator when necessitated by process variables or other factors.

(4) For Method 5 of appendix A of this part, the temperature of the sample gas in the probe and filter holder is monitored and is maintained at 160±14 °C (320±25 °F).

(5) For determination of PM emissions, the oxygen (O_2) or CO_2sample is obtained simultaneously with each run of Method 5, 5B, or 17 of appendix A of this part by traversing the duct at the same sampling location.

(6) For each run using Method 5, 5B, or 17 of appendix A of this part, the emission rate expressed in ng/J heat input is determined using:

(i) The O_2or CO_2measurements and PM measurements obtained under this section;

(ii) The dry basis F factor; and

(iii) The dry basis emission rate calculation procedure contained in Method 19 of appendix A of this part.

(7) Method 9 of appendix A of this part is used for determining the opacity of stack emissions.

(e) To determine compliance with the emission limits for NO_Xrequired under §60.44b, the owner or operator of an affected facility shall conduct the performance test as required under §60.8 using the continuous system for monitoring NO_Xunder §60.48(b).

(1) For the initial compliance test, $NO_X$from the steam generating unit are monitored for 30 successive steam generating unit operating days and the 30-day average emission rate is used to determine compliance with the NO_Xemission standards under §60.44b. The 30-day average emission rate is calculated as the average of all hourly emissions data recorded by the monitoring system during the 30-day test period.

(2) Following the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, the owner or operator of an affected facility which combusts coal or which combusts residual oil having a nitrogen content greater than 0.30 weight percent shall determine compliance with the NO_Xemission standards under §60.44b on a continuous basis through the use of a 30-day rolling average emission rate. A new 30-day rolling average emission rate is calculated each steam generating unit operating day as the average of all of the hourly NO_Xemission data for the preceding 30 steam generating unit operating days.

(3) Following the date on which the initial performance test is completed or is required to be completed under §60.8, whichever date comes first, the owner or operator of an affected facility that has a heat input capacity greater than 73 MW (250 MMBtu/hr) and that combusts natural gas, distillate oil, or residual oil having a nitrogen content of 0.30 weight percent or less shall determine compliance with the NO_Xstandards under §60.44b on a continuous basis through the use of a 30-day rolling average emission rate. A new 30-day rolling average emission rate is calculated each steam generating unit operating day as the average of all of the hourly NO_Xemission data for the preceding 30 steam generating unit operating days.

(4) Following the date on which the initial performance test is completed or required to be completed under §60.8, whichever date comes first, the owner or operator of an affected facility that has a heat input capacity of 73 MW (250 MMBtu/hr) or less and that combusts natural gas, distillate oil, or residual oil having a nitrogen content of 0.30 weight percent or less shall upon request determine compliance with the NO_Xstandards under §60.44b through the use of a 30-day performance test. During periods when performance tests are not requested, NO_Xemissions data collected pursuant to §60.48b(g)(1) or §60.48b(g)(2) are used to calculate a 30-day rolling average emission rate on a daily basis and used to prepare excess emission reports, but will not be used to determine compliance with the NO_Xemission standards. A new 30-day rolling average emission rate is calculated each steam generating unit operating day as the average of all of the hourly NO_Xemission data for the preceding 30 steam generating unit operating days.

(5) If the owner or operator of an affected facility that combusts residual oil does not sample and analyze the residual oil for nitrogen content, as specified in §60.49b(e), the requirements of §60.48b(g)(1) apply and the provisions of §60.48b(g)(2) are inapplicable.

(f) To determine compliance with the emissions limits for NO_Xrequired by §60.44b(a)(4) or §60.44b(l) for duct burners used in combined cycle systems, either of the procedures described in paragraph (f)(1) or (2) of this section may be used:

(1) The owner or operator of an affected facility shall conduct the performance test required under §60.8 as follows:

(i) The emissions rate (E) of NO_Xshall be computed using Equation 1 in this section:

$$E = E_{sg} + \left(\frac{H_g}{H_b}\right)\left(E_{sg} - E_g\right) \qquad \text{(Eq.1)}$$

Where:

E = Emissions rate of $NO_X$from the duct burner, ng/J (lb/MMBtu) heat input;

E_{sg}= Combined effluent emissions rate, in ng/J (lb/MMBtu) heat input using appropriate F factor as described in Method 19 of appendix A of this part;

H_g= Heat input rate to the combustion turbine, in J/hr (MMBtu/hr);

H_b= Heat input rate to the duct burner, in J/hr (MMBtu/hr); and

E_g= Emissions rate from the combustion turbine, in ng/J (lb/MMBtu) heat input calculated using appropriate F factor as described in Method 19 of appendix A of this part.

(ii) Method 7E of appendix A of this part shall be used to determine the NO_Xconcentrations. Method 3A or 3B of appendix A of this part shall be used to determine O_2concentration.

(iii) The owner or operator shall identify and demonstrate to the Administrator's satisfaction suitable methods to determine the average hourly heat input rate to the combustion turbine and the average hourly heat input rate to the affected duct burner.

(iv) Compliance with the emissions limits under §60.44b(a)(4) or §60.44b(l) is determined by the three-run average (nominal 1-hour runs) for the initial and subsequent performance tests; or

(2) The owner or operator of an affected facility may elect to determine compliance on a 30-day rolling average basis by using the CEMS specified under §60.48b for measuring $NO_X$and $O_2$and meet the requirements of §60.48b. The sampling site shall be located at the outlet from the steam generating unit. The NO_Xemissions rate at the outlet from the steam generating unit shall constitute the NO_Xemissions rate from the duct burner of the combined cycle system.

(g) The owner or operator of an affected facility described in §60.44b(j) or §60.44b(k) shall demonstrate the maximum heat input capacity of the steam generating unit by operating the facility at maximum capacity for 24 hours. The owner or operator of an affected facility shall determine the maximum heat input capacity using the heat loss method described in sections 5 and 7.3 of the ASME *Power Test Codes* 4.1 (incorporated by reference, see §60.17). This demonstration of maximum heat input capacity shall be made during the initial performance test for affected facilities that meet the criteria of §60.44b(j). It shall be made within 60 days after achieving the maximum production rate at which the affected facility will be operated, but not later than 180 days after initial start-up of each facility, for affected facilities meeting the criteria of §60.44b(k). Subsequent demonstrations may be required by the Administrator at any other time. If this demonstration indicates that the maximum heat input capacity of the affected facility is less than that stated by the manufacturer of the affected facility, the maximum heat input capacity determined during this demonstration shall be used to determine the capacity utilization rate for the affected facility. Otherwise, the maximum heat input capacity provided by the manufacturer is used.

(h) The owner or operator of an affected facility described in §60.44b(j) that has a heat input capacity greater than 73 MW (250 MMBtu/hr) shall:

(1) Conduct an initial performance test as required under §60.8 over a minimum of 24 consecutive steam generating unit operating hours at maximum heat input capacity to demonstrate compliance with the NO_Xemission standards under §60.44b using Method 7, 7A, 7E of appendix A of this part, or other approved reference methods; and

(2) Conduct subsequent performance tests once per calendar year or every 400 hours of operation (whichever comes first) to demonstrate compliance with the NO_Xemission standards under §60.44b over a minimum of 3 consecutive steam generating unit operating hours at maximum heat input capacity using Method 7, 7A, 7E of appendix A of this part, or other approved reference methods.

(i) The owner or operator of an affected facility seeking to demonstrate compliance under paragraph §60.43b(h)(5) shall follow the applicable procedures under §60.49b(r).

(j) In place of PM testing with EPA Reference Method 5, 5B, or 17 of appendix A of this part, an owner or operator may elect to install, calibrate, maintain, and operate a CEMS for monitoring PM emissions discharged to the atmosphere and record the output of the system. The owner or operator of an affected facility who elects to continuously monitor PM emissions instead of conducting performance testing using EPA Method 5, 5B, or 17 of appendix A of this part shall comply with the requirements specified in paragraphs (j)(1) through (j)(13) of this section.

(1) Notify the Administrator one month before starting use of the system.

(2) Notify the Administrator one month before stopping use of the system.

(3) The monitor shall be installed, evaluated, and operated in accordance with §60.13 of subpart A of this part.

(4) The initial performance evaluation shall be completed no later than 180 days after the date of initial startup of the affected facility, as specified under §60.8 of subpart A of this part or within 180 days of notification to the Administrator of use of the CEMS if the owner or operator was previously determining compliance by Method 5, 5B, or 17 of appendix A of this part performance tests, whichever is later.

(5) The owner or operator of an affected facility shall conduct an initial performance test for PM emissions as required under §60.8 of subpart A of this part. Compliance with the PM emission limit shall be determined by using the CEMS specified in paragraph (j) of this section to measure PM and calculating a 24-hour block arithmetic average emission concentration using EPA Reference Method 19 of appendix A of this part, section 4.1.

(6) Compliance with the PM emission limit shall be determined based on the 24-hour daily (block) average of the hourly arithmetic average emission concentrations using CEMS outlet data.

(7) At a minimum, valid CEMS hourly averages shall be obtained as specified in paragraphs (j)(7)(i) of this section for 75 percent of the total operating hours per 30-day rolling average.

(i) At least two data points per hour shall be used to calculate each 1-hour arithmetic average.

(ii) [Reserved]

(8) The 1-hour arithmetic averages required under paragraph (j)(7) of this section shall be expressed in ng/J or lb/MMBtu heat input and shall be used to calculate the boiler operating day daily arithmetic average emission concentrations. The 1-hour arithmetic averages shall be calculated using the data points required under §60.13(e)(2) of subpart A of this part.

(9) All valid CEMS data shall be used in calculating average emission concentrations even if the minimum CEMS data requirements of paragraph (j)(7) of this section are not met.

(10) The CEMS shall be operated according to Performance Specification 11 in appendix B of this part.

(11) During the correlation testing runs of the CEMS required by Performance Specification 11 in appendix B of this part, PM and O_2(or CO_2) data shall be collected concurrently (or within a 30-to 60-minute period) by both the continuous emission monitors and the test methods specified in paragraphs (j)(7)(i) of this section.

(i) For PM, EPA Reference Method 5, 5B, or 17 of appendix A of this part shall be used.

(ii) For O_2(or CO_2), EPA reference Method 3, 3A, or 3B of appendix A of this part, as applicable shall be used.

(12) Quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with procedure 2 in appendix F of this part. Relative Response Audit's must be performed annually and Response Correlation Audits must be performed every 3 years.

(13) When PM emissions data are not obtained because of CEMS breakdowns, repairs, calibration checks, and zero and span adjustments, emissions data shall be obtained by using other monitoring systems as approved by the Administrator or EPA Reference Method 19 of appendix A of this part to provide, as necessary, valid emissions data for a minimum of 75 percent of total operating hours per 30-day rolling average.

§ 60.47b Emission monitoring for sulfur dioxide.

(a) Except as provided in paragraphs (b), (f), and (h) of this section, the owner or operator of an affected facility subject to the SO_2standards under §60.42b shall install, calibrate, maintain, and operate CEMS for measuring SO_2concentrations and either O_2or CO_2concentrations and shall record the output of the systems. For units complying with the percent reduction standard, the $SO_2$and either O_2or CO_2concentrations shall both be monitored at the inlet and outlet of the SO_2control device. If the owner or operator has installed and certified $SO_2$and O_2or CO_2CEMS according to the requirements of §75.20(c)(1) of this chapter and appendix A to part 75 of this chapter, and is continuing to meet the ongoing quality assurance requirements of §75.21 of this chapter and appendix B to part 75 of this chapter, those CEMS may be used to meet the requirements of this section, provided that:

(1) When relative accuracy testing is conducted, SO_2concentration data and CO_2(or O_2) data are collected simultaneously; and

(2) In addition to meeting the applicable $SO_2$and CO_2(or O_2) relative accuracy specifications in Figure 2 of appendix B to part 75 of this chapter, the relative accuracy (RA) standard in section 13.2 of Performance Specification 2 in appendix B to this part is met when the RA is calculated on a lb/MMBtu basis; and

(3) The reporting requirements of §60.49b are met. $SO_2$and CO_2(or O_2) data used to meet the requirements of §60.49b shall not include substitute data values derived from the missing data procedures in subpart D of part 75 of this chapter, nor shall the SO_2data have been bias adjusted according to the procedures of part 75 of this chapter.

(b) As an alternative to operating CEMS as required under paragraph (a) of this section, an owner or operator may elect to determine the average SO_2emissions and percent reduction by:

(1) Collecting coal or oil samples in an as-fired condition at the inlet to the steam generating unit and analyzing them for sulfur and heat content according to Method 19 of appendix A of this part. Method 19 of appendix A of this part provides procedures for converting these measurements into the format to be used in calculating the average SO_2input rate, or

(2) Measuring SO_2according to Method 6B of appendix A of this part at the inlet or outlet to the SO_2control system. An initial stratification test is required to verify the adequacy of the Method 6B of appendix A of this part sampling location. The stratification test shall consist of three paired runs of a suitable $SO_2$and CO_2measurement train operated at the candidate location and a second similar train operated according to the procedures in section 3.2 and the applicable procedures in section 7 of Performance Specification 2. Method 6B of appendix A of this part, Method 6A of appendix A of this part, or a combination of Methods 6 and 3 or 3B of appendix A of this part or Methods 6C and 3A of appendix A of this part are suitable measurement techniques. If Method 6B of appendix A of this part is used for the

second train, sampling time and timer operation may be adjusted for the stratification test as long as an adequate sample volume is collected; however, both sampling trains are to be operated similarly. For the location to be adequate for Method 6B of appendix A of this part 24-hour tests, the mean of the absolute difference between the three paired runs must be less than 10 percent.

(3) A daily SO_2emission rate, E_D, shall be determined using the procedure described in Method 6A of appendix A of this part, section 7.6.2 (Equation 6A–8) and stated in ng/J (lb/MMBtu) heat input.

(4) The mean 30-day emission rate is calculated using the daily measured values in ng/J (lb/MMBtu) for 30 successive steam generating unit operating days using equation 19–20 of Method 19 of appendix A of this part.

(c) The owner or operator of an affected facility shall obtain emission data for at least 75 percent of the operating hours in at least 22 out of 30 successive boiler operating days. If this minimum data requirement is not met with a single monitoring system, the owner or operator of the affected facility shall supplement the emission data with data collected with other monitoring systems as approved by the Administrator or the reference methods and procedures as described in paragraph (b) of this section.

(d) The 1-hour average SO_2emission rates measured by the CEMS required by paragraph (a) of this section and required under §60.13(h) is expressed in ng/J or lb/MMBtu heat input and is used to calculate the average emission rates under §60.42(b). Each 1-hour average SO_2emission rate must be based on 30 or more minutes of steam generating unit operation. The hourly averages shall be calculated according to §60.13(h)(2). Hourly SO_2emission rates are not calculated if the affected facility is operated less than 30 minutes in a given clock hour and are not counted toward determination of a steam generating unit operating day.

(e) The procedures under §60.13 shall be followed for installation, evaluation, and operation of the CEMS.

(1) Except as provided for in paragraph (e)(4) of this section, all CEMS shall be operated in accordance with the applicable procedures under Performance Specifications 1, 2, and 3 of appendix B of this part.

(2) Except as provided for in paragraph (e)(4) of this section, quarterly accuracy determinations and daily calibration drift tests shall be performed in accordance with Procedure 1 of appendix F of this part.

(3) For affected facilities combusting coal or oil, alone or in combination with other fuels, the span value of the SO_2CEMS at the inlet to the SO_2control device is 125 percent of the maximum estimated hourly potential SO_2emissions of the fuel combusted, and the span value of the CEMS at the outlet to the SO_2control device is 50 percent of the maximum estimated hourly potential SO_2emissions of the fuel combusted. Alternatively, SO_2span values determined according to section 2.1.1 in appendix A to part 75 of this chapter may be used.

(4) As an alternative to meeting the requirements of requirements of paragraphs (e)(1) and (e)(2) of this section, the owner or operator may elect to implement the following alternative data accuracy assessment procedures:

(i) For all required $CO_2$and O_2monitors and for $SO_2$and NO_Xmonitors with span values less than 100 ppm, the daily calibration error test and calibration adjustment procedures described in sections 2.1.1 and 2.1.3 of appendix B to part 75 of this chapter may be followed instead of the CD assessment procedures in Procedure 1, section 4.1 of appendix F to this part. If this option is selected, the data validation and out-of-control provisions in sections 2.1.4 and 2.1.5 of appendix B to part 75 of this chapter shall be followed instead of the excessive CD and out-of-control criteria in Procedure 1, section 4.3 of appendix F to this part. For the purposes of data validation under this subpart, the excessive CD and out-of-control criteria in

Procedure 1, section 4.3 of appendix F to this part shall apply to $SO_2$and NO_Xspan values less than 100 ppm;

(ii) For all required $CO_2$and O_2monitors and for $SO_2$and NO_Xmonitors with span values greater than 30 ppm, quarterly linearity checks may be performed in accordance with section 2.2.1 of appendix B to part 75 of this chapter, instead of performing the cylinder gas audits (CGAs) described in Procedure 1, section 5.1.2 of appendix F to this part. If this option is selected: The frequency of the linearity checks shall be as specified in section 2.2.1 of appendix B to part 75 of this chapter; the applicable linearity specifications in section 3.2 of appendix A to part 75 of this chapter shall be met; the data validation and out-of-control criteria in section 2.2.3 of appendix B to part 75 of this chapter shall be followed instead of the excessive audit inaccuracy and out-of-control criteria in Procedure 1, section 5.2 of appendix F to this part; and the grace period provisions in section 2.2.4 of appendix B to part 75 of this chapter shall apply. For the purposes of data validation under this subpart, the cylinder gas audits described in Procedure 1, section 5.1.2 of appendix F to this part shall be performed for $SO_2$and NO_Xspan values less than or equal to 30 ppm; and

(iii) For SO_2, CO_2, and O_2monitoring systems and for NO_Xemission rate monitoring systems, RATAs may be performed in accordance with section 2.3 of appendix B to part 75 of this chapter instead of following the procedures described in Procedure 1, section 5.1.1 of appendix F to this part. If this option is selected: The frequency of each RATA shall be as specified in section 2.3.1 of appendix B to part 75 of this chapter; the applicable relative accuracy specifications shown in Figure 2 in appendix B to part 75 of this chapter shall be met; the data validation and out-of-control criteria in section 2.3.2 of appendix B to part 75 of this chapter shall be followed instead of the excessive audit inaccuracy and out-of-control criteria in Procedure 1, section 5.2 of appendix F to this part; and the grace period provisions in section 2.3.3 of appendix B to part 75 of this chapter shall apply. For the purposes of data validation under this subpart, the relative accuracy specification in section 13.2 of Performance Specification 2 in appendix B to this part shall be met on a lb/MMBtu basis for SO_2(regardless of the SO_2emission level during the RATA), and for $NO_X$when the average NO_Xemission rate measured by the reference method during the RATA is less than 0.100 lb/MMBtu.

(f) The owner or operator of an affected facility that combusts very low sulfur oil or is demonstrating compliance under §60.45b(k) is not subject to the emission monitoring requirements under paragraph (a) of this section if the owner or operator maintains fuel records as described in §60.49b(r).

§ 60.48b Emission monitoring for particulate matter and nitrogen oxides.

(a) Except as provided in paragraph (j) of this section, the owner or operator of an affected facility subject to the opacity standard under §60.43b shall install, calibrate, maintain, and operate a CEMS for measuring the opacity of emissions discharged to the atmosphere and record the output of the system.

(b) Except as provided under paragraphs (g), (h), and (i) of this section, the owner or operator of an affected facility subject to a NO_Xstandard under §60.44b shall comply with either paragraphs (b)(1) or (b)(2) of this section.

(1) Install, calibrate, maintain, and operate CEMS for measuring $NO_X$and O_2(or CO_2) emissions discharged to the atmosphere, and shall record the output of the system; or

(2) If the owner or operator has installed a NO_Xemission rate CEMS to meet the requirements of part 75 of this chapter and is continuing to meet the ongoing requirements of part 75 of this chapter, that CEMS may be used to meet the requirements of this section, except that the owner or operator shall also meet the requirements of §60.49b. Data reported to meet the requirements of §60.49b shall not include data substituted using the missing data procedures in subpart D of part 75 of this chapter, nor shall the data have been bias adjusted according to the procedures of part 75 of this chapter.

(c) The CEMS required under paragraph (b) of this section shall be operated and data recorded during all periods of operation of the affected facility except for CEMS breakdowns and repairs. Data is recorded during calibration checks, and zero and span adjustments.

(d) The 1-hour average NO_Xemission rates measured by the continuous NO_Xmonitor required by paragraph (b) of this section and required under §60.13(h) shall be expressed in ng/J or lb/MMBtu heat input and shall be used to calculate the average emission rates under §60.44b. The 1-hour averages shall be calculated using the data points required under §60.13(h)(2).

(e) The procedures under §60.13 shall be followed for installation, evaluation, and operation of the continuous monitoring systems.

(1) For affected facilities combusting coal, wood or municipal-type solid waste, the span value for a continuous monitoring system for measuring opacity shall be between 60 and 80 percent.

(2) For affected facilities combusting coal, oil, or natural gas, the span value for $NO_X$is determined using one of the following procedures:

(i) Except as provided under paragraph (e)(2)(ii) of this section, NO_Xspan values shall be determined as follows:

Fuel	**Span values for NO_X (ppm)**
Natural gas	500.
Oil	500.
Coal	1,000.
Mixtures	500 (x + y) + 1,000z.

Where:

x = Fraction of total heat input derived from natural gas;

y = Fraction of total heat input derived from oil; and

z = Fraction of total heat input derived from coal.

(ii) As an alternative to meeting the requirements of paragraph (e)(2)(i) of this section, the owner or operator of an affected facility may elect to use the NO_Xspan values determined according to section 2.1.2 in appendix A to part 75 of this chapter.

(3) All span values computed under paragraph (e)(2)(i) of this section for combusting mixtures of regulated fuels are rounded to the nearest 500 ppm. Span values computed under paragraph (e)(2)(ii) of this section shall be rounded off according to section 2.1.2 in appendix A to part 75 of this chapter.

(f) When NO_Xemission data are not obtained because of CEMS breakdowns, repairs, calibration checks and zero and span adjustments, emission data will be obtained by using standby monitoring systems, Method 7 of appendix A of this part, Method 7A of appendix A of this part, or other approved reference methods to provide emission data for a minimum of 75 percent of the operating hours in each steam generating unit operating day, in at least 22 out of 30 successive steam generating unit operating days.

(g) The owner or operator of an affected facility that has a heat input capacity of 73 MW (250 MMBtu/hr) or less, and that has an annual capacity factor for residual oil having a nitrogen content of 0.30 weight percent or less, natural gas, distillate oil, or any mixture of these fuels, greater than 10 percent (0.10) shall:

(1) Comply with the provisions of paragraphs (b), (c), (d), (e)(2), (e)(3), and (f) of this section; or

(2) Monitor steam generating unit operating conditions and predict NO_Xemission rates as specified in a plan submitted pursuant to §60.49b(c).

(h) The owner or operator of a duct burner, as described in §60.41b, that is subject to the NO_Xstandards of §60.44b(a)(4) or §60.44b(l) is not required to install or operate a continuous emissions monitoring system to measure NO_Xemissions.

(i) The owner or operator of an affected facility described in §60.44b(j) or §60.44b(k) is not required to install or operate a CEMS for measuring NO_Xemissions.

(j) The owner or operator of an affected facility that meets the conditions in either paragraph (j)(1), (2), (3), (4), or (5) of this section is not required to install or operate a COMS for measuring opacity if:

(1) The affected facility uses a PM CEMS to monitor PM emissions; or

(2) The affected facility burns only liquid (excluding residual oil) or gaseous fuels with potential SO_2emissions rates of 26 ng/J (0.060 lb/MMBtu) or less and does not use a post-combustion technology to reduce SO_2or PM emissions. The owner or operator must maintain fuel records of the sulfur content of the fuels burned, as described under §60.49b(r); or

(3) The affected facility burns coke oven gas alone or in combination with fuels meeting the criteria in paragraph (j)(2) of this section and does not use a post-combustion technology to reduce SO_2or PM emissions; or

(4) The affected facility does not use post-combustion technology (except a wet scrubber) for reducing PM, SO_2, or carbon monoxide (CO) emissions, burns only gaseous fuels or fuel oils that contain less than or equal to 0.30 weight percent sulfur, and is operated such that emissions of CO to the atmosphere from the affected facility are maintained at levels less than or equal to 0.15 lb/MMBtu on a steam generating unit operating day average basis. Owners and operators of affected facilities electing to comply with this paragraph must demonstrate compliance according to the procedures specified in paragraphs (j)(4)(i) through (iv) of this section.

(i) You must monitor CO emissions using a CEMS according to the procedures specified in paragraphs (j)(4)(i)(A) through (D) of this section.

(A) The CO CEMS must be installed, certified, maintained, and operated according to the provisions in §60.58b(i)(3) of subpart Eb of this part.

(B) Each 1-hour CO emissions average is calculated using the data points generated by the CO CEMS expressed in parts per million by volume corrected to 3 percent oxygen (dry basis).

(C) At a minimum, valid 1-hour CO emissions averages must be obtained for at least 90 percent of the operating hours on a 30-day rolling average basis. At least two data points per hour must be used to calculate each 1-hour average.

(D) Quarterly accuracy determinations and daily calibration drift tests for the CO CEMS must be performed in accordance with procedure 1 in appendix F of this part.

(ii) You must calculate the 1-hour average CO emissions levels for each steam generating unit operating day by multiplying the average hourly CO output concentration measured by the CO CEMS times the corresponding average hourly flue gas flow rate and divided by the corresponding average hourly heat input to the affected source. The 24-hour average CO emission level is determined by calculating the arithmetic average of the hourly CO emission levels computed for each steam generating unit operating day.

(iii) You must evaluate the preceding 24-hour average CO emission level each steam generating unit operating day excluding periods of affected source startup, shutdown, or malfunction. If the 24-hour average CO emission level is greater than 0.15 lb/MMBtu, you must initiate investigation of the relevant equipment and control systems within 24 hours of the first discovery of the high emission incident and, take the appropriate corrective action as soon as practicable to adjust control settings or repair equipment to reduce the 24-hour average CO emission level to 0.15 lb/MMBtu or less.

(iv) You must record the CO measurements and calculations performed according to paragraph (j)(4) of this section and any corrective actions taken. The record of corrective action taken must include the date and time during which the 24-hour average CO emission level was greater than 0.15 lb/MMBtu, and the date, time, and description of the corrective action.

(5) The affected facility burns only gaseous fuels or fuel oils that contain less than or equal to 0.30 weight percent sulfur and operates according to a written site-specific monitoring plan approved by the appropriate delegated permitting authority. This monitoring plan must include procedures and criteria for establishing and monitoring specific parameters for the affected facility indicative of compliance with the opacity standard.

(k) Owners or operators complying with the PM emission limit by using a PM CEMS monitor instead of monitoring opacity must calibrate, maintain, and operate a CEMS, and record the output of the system, for PM emissions discharged to the atmosphere as specified in §60.46b(j). The CEMS specified in paragraph §60.46b(j) shall be operated and data recorded during all periods of operation of the affected facility except for CEMS breakdowns and repairs. Data is recorded during calibration checks, and zero and span adjustments.

§ 60.49b Reporting and recordkeeping requirements.

(a) The owner or operator of each affected facility shall submit notification of the date of initial startup, as provided by §60.7. This notification shall include:

(1) The design heat input capacity of the affected facility and identification of the fuels to be combusted in the affected facility;

(2) If applicable, a copy of any federally enforceable requirement that limits the annual capacity factor for any fuel or mixture of fuels under §§60.42b(d)(1), 60.43b(a)(2), (a)(3)(iii), (c)(2)(ii), (d)(2)(iii), 60.44b(c), (d), (e), (i), (j), (k), 60.45b(d), (g), 60.46b(h), or 60.48b(i);

(3) The annual capacity factor at which the owner or operator anticipates operating the facility based on all fuels fired and based on each individual fuel fired; and

(4) Notification that an emerging technology will be used for controlling emissions of SO_2. The Administrator will examine the description of the emerging technology and will determine whether the technology qualifies as an emerging technology. In making this determination, the Administrator may

require the owner or operator of the affected facility to submit additional information concerning the control device. The affected facility is subject to the provisions of §60.42b(a) unless and until this determination is made by the Administrator.

(b) The owner or operator of each affected facility subject to the SO_2, PM, and/or NO_Xemission limits under §§60.42b, 60.43b, and 60.44b shall submit to the Administrator the performance test data from the initial performance test and the performance evaluation of the CEMS using the applicable performance specifications in appendix B of this part. The owner or operator of each affected facility described in §60.44b(j) or §60.44b(k) shall submit to the Administrator the maximum heat input capacity data from the demonstration of the maximum heat input capacity of the affected facility.

(c) The owner or operator of each affected facility subject to the NO_Xstandard of §60.44b who seeks to demonstrate compliance with those standards through the monitoring of steam generating unit operating conditions under the provisions of §60.48b(g)(2) shall submit to the Administrator for approval a plan that identifies the operating conditions to be monitored under §60.48b(g)(2) and the records to be maintained under §60.49b(j). This plan shall be submitted to the Administrator for approval within 360 days of the initial startup of the affected facility. If the plan is approved, the owner or operator shall maintain records of predicted nitrogen oxide emission rates and the monitored operating conditions, including steam generating unit load, identified in the plan. The plan shall:

(1) Identify the specific operating conditions to be monitored and the relationship between these operating conditions and NO_Xemission rates (*i.e.* , ng/J or lbs/MMBtu heat input). Steam generating unit operating conditions include, but are not limited to, the degree of staged combustion (*i.e.* , the ratio of primary air to secondary and/or tertiary air) and the level of excess air (*i.e.* , flue gas O_2level);

(2) Include the data and information that the owner or operator used to identify the relationship between NO_Xemission rates and these operating conditions; and

(3) Identify how these operating conditions, including steam generating unit load, will be monitored under §60.48b(g) on an hourly basis by the owner or operator during the period of operation of the affected facility; the quality assurance procedures or practices that will be employed to ensure that the data generated by monitoring these operating conditions will be representative and accurate; and the type and format of the records of these operating conditions, including steam generating unit load, that will be maintained by the owner or operator under §60.49b(j).

(d) The owner or operator of an affected facility shall record and maintain records of the amounts of each fuel combusted during each day and calculate the annual capacity factor individually for coal, distillate oil, residual oil, natural gas, wood, and municipal-type solid waste for the reporting period. The annual capacity factor is determined on a 12-month rolling average basis with a new annual capacity factor calculated at the end of each calendar month.

(e) For an affected facility that combusts residual oil and meets the criteria under §§60.46b(e)(4), 60.44b(j), or (k), the owner or operator shall maintain records of the nitrogen content of the residual oil combusted in the affected facility and calculate the average fuel nitrogen content for the reporting period. The nitrogen content shall be determined using ASTM Method D4629 (incorporated by reference, see §60.17), or fuel suppliers. If residual oil blends are being combusted, fuel nitrogen specifications may be prorated based on the ratio of residual oils of different nitrogen content in the fuel blend.

(f) For facilities subject to the opacity standard under §60.43b, the owner or operator shall maintain records of opacity.

(g) Except as provided under paragraph (p) of this section, the owner or operator of an affected facility subject to the NO_Xstandards under §60.44b shall maintain records of the following information for each steam generating unit operating day:

(1) Calendar date;

(2) The average hourly NO_Xemission rates (expressed as NO_2) (ng/J or lb/MMBtu heat input) measured or predicted;

(3) The 30-day average NO_Xemission rates (ng/J or lb/MMBtu heat input) calculated at the end of each steam generating unit operating day from the measured or predicted hourly nitrogen oxide emission rates for the preceding 30 steam generating unit operating days;

(4) Identification of the steam generating unit operating days when the calculated 30-day average NO_Xemission rates are in excess of the NO_Xemissions standards under §60.44b, with the reasons for such excess emissions as well as a description of corrective actions taken;

(5) Identification of the steam generating unit operating days for which pollutant data have not been obtained, including reasons for not obtaining sufficient data and a description of corrective actions taken;

(6) Identification of the times when emission data have been excluded from the calculation of average emission rates and the reasons for excluding data;

(7) Identification of “F” factor used for calculations, method of determination, and type of fuel combusted;

(8) Identification of the times when the pollutant concentration exceeded full span of the CEMS;

(9) Description of any modifications to the CEMS that could affect the ability of the CEMS to comply with Performance Specification 2 or 3; and

(10) Results of daily CEMS drift tests and quarterly accuracy assessments as required under appendix F, Procedure 1 of this part.

(h) The owner or operator of any affected facility in any category listed in paragraphs (h)(1) or (2) of this section is required to submit excess emission reports for any excess emissions that occurred during the reporting period.

(1) Any affected facility subject to the opacity standards under §60.43b(e) or to the operating parameter monitoring requirements under §60.13(i)(1).

(2) Any affected facility that is subject to the NO_Xstandard of §60.44b, and that:

(i) Combusts natural gas, distillate oil, or residual oil with a nitrogen content of 0.3 weight percent or less; or

(ii) Has a heat input capacity of 73 MW (250 MMBtu/hr) or less and is required to monitor NO_Xemissions on a continuous basis under §60.48b(g)(1) or steam generating unit operating conditions under §60.48b(g)(2).

(3) For the purpose of §60.43b, excess emissions are defined as all 6-minute periods during which the average opacity exceeds the opacity standards under §60.43b(f).

(4) For purposes of §60.48b(g)(1), excess emissions are defined as any calculated 30-day rolling average NO_Xemission rate, as determined under §60.46b(e), that exceeds the applicable emission limits in §60.44b.

(i) The owner or operator of any affected facility subject to the continuous monitoring requirements for NO_Xunder §60.48(b) shall submit reports containing the information recorded under paragraph (g) of this section.

(j) The owner or operator of any affected facility subject to the SO_2standards under §60.42b shall submit reports.

(k) For each affected facility subject to the compliance and performance testing requirements of §60.45b and the reporting requirement in paragraph (j) of this section, the following information shall be reported to the Administrator:

(1) Calendar dates covered in the reporting period;

(2) Each 30-day average SO_2emission rate (ng/J or lb/MMBtu heat input) measured during the reporting period, ending with the last 30-day period; reasons for noncompliance with the emission standards; and a description of corrective actions taken;

(3) Each 30-day average percent reduction in SO_2emissions calculated during the reporting period, ending with the last 30-day period; reasons for noncompliance with the emission standards; and a description of corrective actions taken;

(4) Identification of the steam generating unit operating days that coal or oil was combusted and for which SO_2or diluent (O_2or CO_2) data have not been obtained by an approved method for at least 75 percent of the operating hours in the steam generating unit operating day; justification for not obtaining sufficient data; and description of corrective action taken;

(5) Identification of the times when emissions data have been excluded from the calculation of average emission rates; justification for excluding data; and description of corrective action taken if data have been excluded for periods other than those during which coal or oil were not combusted in the steam generating unit;

(6) Identification of “F” factor used for calculations, method of determination, and type of fuel combusted;

(7) Identification of times when hourly averages have been obtained based on manual sampling methods;

(8) Identification of the times when the pollutant concentration exceeded full span of the CEMS;

(9) Description of any modifications to the CEMS that could affect the ability of the CEMS to comply with Performance Specification 2 or 3;

(10) Results of daily CEMS drift tests and quarterly accuracy assessments as required under appendix F, Procedure 1 of this part; and

(11) The annual capacity factor of each fired as provided under paragraph (d) of this section.

(l) For each affected facility subject to the compliance and performance testing requirements of §60.45b(d) and the reporting requirements of paragraph (j) of this section, the following information shall be reported to the Administrator:

(1) Calendar dates when the facility was in operation during the reporting period;

(2) The 24-hour average SO_2emission rate measured for each steam generating unit operating day during the reporting period that coal or oil was combusted, ending in the last 24-hour period in the quarter; reasons for noncompliance with the emission standards; and a description of corrective actions taken;

(3) Identification of the steam generating unit operating days that coal or oil was combusted for which $S0_2$or diluent (O_2or CO_2) data have not been obtained by an approved method for at least 75 percent of the operating hours; justification for not obtaining sufficient data; and description of corrective action taken;

(4) Identification of the times when emissions data have been excluded from the calculation of average emission rates; justification for excluding data; and description of corrective action taken if data have been excluded for periods other than those during which coal or oil were not combusted in the steam generating unit;

(5) Identification of “F” factor used for calculations, method of determination, and type of fuel combusted;

(6) Identification of times when hourly averages have been obtained based on manual sampling methods;

(7) Identification of the times when the pollutant concentration exceeded full span of the CEMS;

(8) Description of any modifications to the CEMS that could affect the ability of the CEMS to comply with Performance Specification 2 or 3; and

(9) Results of daily CEMS drift tests and quarterly accuracy assessments as required under Procedure 1 of appendix F 1 of this part. If the owner or operator elects to implement the alternative data assessment procedures described in §§60.47b(e)(4)(i) through (e)(4)(iii), each data assessment report shall include a summary of the results of all of the RATAs, linearity checks, CGAs, and calibration error or drift assessments required by §§60.47b(e)(4)(i) through (e)(4)(iii).

(m) For each affected facility subject to the SO_2standards under §60.42(b) for which the minimum amount of data required under §60.47b(f) were not obtained during the reporting period, the following information is reported to the Administrator in addition to that required under paragraph (k) of this section:

(1) The number of hourly averages available for outlet emission rates and inlet emission rates;

(2) The standard deviation of hourly averages for outlet emission rates and inlet emission rates, as determined in Method 19 of appendix A of this part, section 7;

(3) The lower confidence limit for the mean outlet emission rate and the upper confidence limit for the mean inlet emission rate, as calculated in Method 19 of appendix A of this part, section 7; and

(4) The ratio of the lower confidence limit for the mean outlet emission rate and the allowable emission rate, as determined in Method 19 of appendix A of this part, section 7.

(n) If a percent removal efficiency by fuel pretreatment (*i.e.* , $\%R_f$) is used to determine the overall percent reduction (*i.e.* , $\%R_o$) under §60.45b, the owner or operator of the affected facility shall submit a signed statement with the report.

(1) Indicating what removal efficiency by fuel pretreatment (*i.e.* , $\%R_f$) was credited during the reporting period;

(2) Listing the quantity, heat content, and date each pre-treated fuel shipment was received during the reporting period, the name and location of the fuel pretreatment facility; and the total quantity and total heat content of all fuels received at the affected facility during the reporting period;

(3) Documenting the transport of the fuel from the fuel pretreatment facility to the steam generating unit; and

(4) Including a signed statement from the owner or operator of the fuel pretreatment facility certifying that the percent removal efficiency achieved by fuel pretreatment was determined in accordance with the provisions of Method 19 of appendix A of this part and listing the heat content and sulfur content of each fuel before and after fuel pretreatment.

(o) All records required under this section shall be maintained by the owner or operator of the affected facility for a period of 2 years following the date of such record.

(p) The owner or operator of an affected facility described in §60.44b(j) or (k) shall maintain records of the following information for each steam generating unit operating day:

(1) Calendar date;

(2) The number of hours of operation; and

(3) A record of the hourly steam load.

(q) The owner or operator of an affected facility described in §60.44b(j) or §60.44b(k) shall submit to the Administrator a report containing:

(1) The annual capacity factor over the previous 12 months;

(2) The average fuel nitrogen content during the reporting period, if residual oil was fired; and

(3) If the affected facility meets the criteria described in §60.44b(j), the results of any NO_Xemission tests required during the reporting period, the hours of operation during the reporting period, and the hours of operation since the last NO_Xemission test.

(r) The owner or operator of an affected facility who elects to use the fuel based compliance alternatives in §60.42b or §60.43b shall either:

(1) The owner or operator of an affected facility who elects to demonstrate that the affected facility combusts only very low sulfur oil under §60.42b(j)(2) or §60.42b(k)(2) shall obtain and maintain at the affected facility fuel receipts from the fuel supplier that certify that the oil meets the definition of distillate oil as defined in §60.41b and the applicable sulfur limit. For the purposes of this section, the distillate oil need not meet the fuel nitrogen content specification in the definition of distillate oil. Reports shall be submitted to the Administrator certifying that only very low sulfur oil meeting this definition and/or pipeline quality natural gas was combusted in the affected facility during the reporting period; or

(2) The owner or operator of an affected facility who elects to demonstrate compliance based on fuel analysis in §60.42b or §60.43b shall develop and submit a site-specific fuel analysis plan to the Administrator for review and approval no later than 60 days before the date you intend to demonstrate compliance. Each fuel analysis plan shall include a minimum initial requirement of weekly testing and each analysis report shall contain, at a minimum, the following information:

(i) The potential sulfur emissions rate of the representative fuel mixture in ng/J heat input;

(ii) The method used to determine the potential sulfur emissions rate of each constituent of the mixture. For distillate oil and natural gas a fuel receipt or tariff sheet is acceptable;

(iii) The ratio of different fuels in the mixture; and

(iv) The owner or operator can petition the Administrator to approve monthly or quarterly sampling in place of weekly sampling.

(s) Facility specific NO_Xstandard for Cytec Industries Fortier Plant's C.AOG incinerator located in Westwego, Louisiana:

(1) *Definitions* .

Oxidation zone is defined as the portion of the C.AOG incinerator that extends from the inlet of the oxidizing zone combustion air to the outlet gas stack.

Reducing zone is defined as the portion of the C.AOG incinerator that extends from the burner section to the inlet of the oxidizing zone combustion air.

Total inlet air is defined as the total amount of air introduced into the C.AOG incinerator for combustion of natural gas and chemical by-product waste and is equal to the sum of the air flow into the reducing zone and the air flow into the oxidation zone.

(2) *Standard for nitrogen oxides* . (i) When fossil fuel alone is combusted, the NO_Xemission limit for fossil fuel in §60.44b(a) applies.

(ii) When natural gas and chemical by-product waste are simultaneously combusted, the NO_Xemission limit is 289 ng/J (0.67 lb/MMBtu) and a maximum of 81 percent of the total inlet air provided for combustion shall be provided to the reducing zone of the C.AOG incinerator.

(3) *Emission monitoring* . (i) The percent of total inlet air provided to the reducing zone shall be determined at least every 15 minutes by measuring the air flow of all the air entering the reducing zone and the air flow of all the air entering the oxidation zone, and compliance with the percentage of total inlet air that is provided to the reducing zone shall be determined on a 3-hour average basis.

(ii) The NO_Xemission limit shall be determined by the compliance and performance test methods and procedures for NO_Xin §60.46b(i).

(iii) The monitoring of the NO_Xemission limit shall be performed in accordance with §60.48b.

(4) *Reporting and recordkeeping requirements* . (i) The owner or operator of the C.AOG incinerator shall submit a report on any excursions from the limits required by paragraph (a)(2) of this section to the Administrator with the quarterly report required by paragraph (i) of this section.

(ii) The owner or operator of the C.AOG incinerator shall keep records of the monitoring required by paragraph (a)(3) of this section for a period of 2 years following the date of such record.

(iii) The owner of operator of the C.AOG incinerator shall perform all the applicable reporting and recordkeeping requirements of this section.

(t) Facility-specific NO_Xstandard for Rohm and Haas Kentucky Incorporated's Boiler No. 100 located in Louisville, Kentucky:

(1) *Definitions* .

Air ratio control damper is defined as the part of the low NO_Xburner that is adjusted to control the split of total combustion air delivered to the reducing and oxidation portions of the combustion flame.

Flue gas recirculation line is defined as the part of Boiler No. 100 that recirculates a portion of the boiler flue gas back into the combustion air.

(2) *Standard for nitrogen oxides* . (i) When fossil fuel alone is combusted, the NO_Xemission limit for fossil fuel in §60.44b(a) applies.

(ii) When fossil fuel and chemical by-product waste are simultaneously combusted, the NO_Xemission limit is 473 ng/J (1.1 lb/MMBtu), and the air ratio control damper tee handle shall be at a minimum of 5 inches (12.7 centimeters) out of the boiler, and the flue gas recirculation line shall be operated at a minimum of 10 percent open as indicated by its valve opening position indicator.

(3) *Emission monitoring for nitrogen oxides* . (i) The air ratio control damper tee handle setting and the flue gas recirculation line valve opening position indicator setting shall be recorded during each 8-hour operating shift.

(ii) The NO_Xemission limit shall be determined by the compliance and performance test methods and procedures for NO_Xin §60.46b.

(iii) The monitoring of the NO_Xemission limit shall be performed in accordance with §60.48b.

(4) *Reporting and recordkeeping requirements* . (i) The owner or operator of Boiler No. 100 shall submit a report on any excursions from the limits required by paragraph (b)(2) of this section to the Administrator with the quarterly report required by §60.49b(i).

(ii) The owner or operator of Boiler No. 100 shall keep records of the monitoring required by paragraph (b)(3) of this section for a period of 2 years following the date of such record.

(iii) The owner of operator of Boiler No. 100 shall perform all the applicable reporting and recordkeeping requirements of §60.49b.

(u) *Site-specific standard for Merck & Co., Inc.'s Stonewall Plant in Elkton, Virginia* . (1) This paragraph (u) applies only to the pharmaceutical manufacturing facility, commonly referred to as the Stonewall Plant, located at Route 340 South, in Elkton, Virginia (“site”) and only to the natural gas-fired boilers installed as part of the powerhouse conversion required pursuant to 40 CFR 52.2454(g). The requirements of this paragraph shall apply, and the requirements of §§60.40b through 60.49b(t) shall not apply, to the natural gas-fired boilers installed pursuant to 40 CFR 52.2454(g).

(i) The site shall equip the natural gas-fired boilers with low NO_Xtechnology.

(ii) The site shall install, calibrate, maintain, and operate a continuous monitoring and recording system for measuring NO_Xemissions discharged to the atmosphere and opacity using a continuous emissions monitoring system or a predictive emissions monitoring system.

(iii) Within 180 days of the completion of the powerhouse conversion, as required by 40 CFR 52.2454, the site shall perform a performance test to quantify criteria pollutant emissions.

(2) [Reserved]

(v) The owner or operator of an affected facility may submit electronic quarterly reports for $SO_2$and/or $NO_X$and/or opacity in lieu of submitting the written reports required under paragraphs (h), (i), (j), (k) or (l) of this section. The format of each quarterly electronic report shall be coordinated with the permitting authority. The electronic report(s) shall be submitted no later than 30 days after the end of the calendar quarter and shall be accompanied by a certification statement from the owner or operator, indicating whether compliance with the applicable emission standards and minimum data requirements of this subpart was achieved during the reporting period. Before submitting reports in the electronic format, the owner or operator shall coordinate with the permitting authority to obtain their agreement to submit reports in this alternative format.

(w) The reporting period for the reports required under this subpart is each 6 month period. All reports shall be submitted to the Administrator and shall be postmarked by the 30th day following the end of the reporting period.

(x) Facility-specific NO_Xstandard for Weyerhaeuser Company's No. 2 Power Boiler located in New Bern, North Carolina:

(1) *Standard for nitrogen oxides* . (i) When fossil fuel alone is combusted, the NO_Xemission limit for fossil fuel in §60.44b(a) applies.

(ii) When fossil fuel and chemical by-product waste are simultaneously combusted, the NO_Xemission limit is 215 ng/J (0.5 lb/MMBtu).

(2) *Emission monitoring for nitrogen oxides* . (i) The NO_Xemissions shall be determined by the compliance and performance test methods and procedures for NO_Xin §60.46b.

(ii) The monitoring of the NO_Xemissions shall be performed in accordance with §60.48b.

(3) *Reporting and recordkeeping requirements* . (i) The owner or operator of the No. 2 Power Boiler shall submit a report on any excursions from the limits required by paragraph (x)(2) of this section to the Administrator with the quarterly report required by §60.49b(i).

(ii) The owner or operator of the No. 2 Power Boiler shall keep records of the monitoring required by paragraph (x)(3) of this section for a period of 2 years following the date of such record.

(iii) The owner or operator of the No. 2 Power Boiler shall perform all the applicable reporting and recordkeeping requirements of §60.49b.

(y) Facility-specific NO_Xstandard for INEOS USA's AOGI located in Lima, Ohio:

(1) *Standard for* NO_X. (i) When fossil fuel alone is combusted, the NO_Xemission limit for fossil fuel in §60.44b(a) applies.

(ii) When fossil fuel and chemical byproduct/waste are simultaneously combusted, the NO_Xemission limit is 645 ng/J (1.5 lb/MMBtu).

(2) *Emission monitoring for* NO_X. (i) The NO_X emissions shall be determined by the compliance and performance test methods and procedures for NO_X in §60.46b.

(ii) The monitoring of the NO_X emissions shall be performed in accordance with §60.48b.

(3) *Reporting and recordkeeping requirements* . (i) The owner or operator of the AOGI shall submit a report on any excursions from the limits required by paragraph (y)(2) of this section to the Administrator with the quarterly report required by paragraph (i) of this section.

(ii) The owner or operator of the AOGI shall keep records of the monitoring required by paragraph (y)(3) of this section for a period of 2 years following the date of such record.

(iii) The owner or operator of the AOGI shall perform all the applicable reporting and recordkeeping requirements of this section.

Attachment B

NSPS, Subpart Kb

Iroquois Bio-Energy Company, LLC
751 West State Road 114, Rensselaer, Indiana 47978

Permit Renewal No.:F073-26405-00037

Subpart Kb—Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced After July 23, 1984

Source: 52 FR 11429, Apr. 8, 1987, unless otherwise noted.

§ 60.110b Applicability and designation of affected facility.

(a) Except as provided in paragraph (b) of this section, the affected facility to which this subpart applies is each storage vessel with a capacity greater than or equal to 75 cubic meters (m^3) that is used to store volatile organic liquids (VOL) for which construction, reconstruction, or modification is commenced after July 23, 1984.

(b) This subpart does not apply to storage vessels with a capacity greater than or equal to 151 m^3 storing a liquid with a maximum true vapor pressure less than 3.5 kilopascals (kPa) or with a capacity greater than or equal to 75 m^3 but less than 151 m^3 storing a liquid with a maximum true vapor pressure less than 15.0 kPa.

(c) [Reserved]

(d) This subpart does not apply to the following:

(1) Vessels at coke oven by-product plants.

(2) Pressure vessels designed to operate in excess of 204.9 kPa and without emissions to the atmosphere.

(3) Vessels permanently attached to mobile vehicles such as trucks, railcars, barges, or ships.

(4) Vessels with a design capacity less than or equal to 1,589.874 m^3 used for petroleum or condensate stored, processed, or treated prior to custody transfer.

(5) Vessels located at bulk gasoline plants.

(6) Storage vessels located at gasoline service stations.

(7) Vessels used to store beverage alcohol.

(8) Vessels subject to subpart GGGG of 40 CFR part 63.

(e) *Alternative means of compliance* —(1) *Option to comply with part 65.* Owners or operators may choose to comply with 40 CFR part 65, subpart C, to satisfy the requirements of §§60.112b through 60.117b for storage vessels that are subject to this subpart that meet the specifications in paragraphs (e)(1)(i) and (ii) of this section. When choosing to comply with 40 CFR part 65, subpart C, the monitoring requirements of §60.116b(c), (e), (f)(1), and (g) still apply. Other provisions applying to owners or operators who choose to comply with 40 CFR part 65 are provided in 40 CFR 65.1.

(i) A storage vessel with a design capacity greater than or equal to 151 m^3 containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 5.2 kPa; or

(ii) A storage vessel with a design capacity greater than 75 m^3 but less than 151 m^3 containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 27.6 kPa.

(2) *Part 60, subpart A.* Owners or operators who choose to comply with 40 CFR part 65, subpart C, must also comply with §§60.1, 60.2, 60.5, 60.6, 60.7(a)(1) and (4), 60.14, 60.15, and 60.16 for those storage vessels. All sections and paragraphs of subpart A of this part that are not mentioned in this paragraph (e)(2) do not apply to owners or operators of storage vessels complying with 40 CFR part 65, subpart C, except that provisions required to be met

prior to implementing 40 CFR part 65 still apply. Owners and operators who choose to comply with 40 CFR part 65, subpart C, must comply with 40 CFR part 65, subpart A.

(3) *Internal floating roof report.* If an owner or operator installs an internal floating roof and, at initial startup, chooses to comply with 40 CFR part 65, subpart C, a report shall be furnished to the Administrator stating that the control equipment meets the specifications of 40 CFR 65.43. This report shall be an attachment to the notification required by 40 CFR 65.5(b).

(4) *External floating roof report.* If an owner or operator installs an external floating roof and, at initial startup, chooses to comply with 40 CFR part 65, subpart C, a report shall be furnished to the Administrator stating that the control equipment meets the specifications of 40 CFR 65.44. This report shall be an attachment to the notification required by 40 CFR 65.5(b).

[52 FR 11429, Apr. 8, 1987, as amended at 54 FR 32973, Aug. 11, 1989; 65 FR 78275, Dec. 14, 2000; 68 FR 59332, Oct. 15, 2003]

§ 60.111b Definitions.

Terms used in this subpart are defined in the Act, in subpart A of this part, or in this subpart as follows:

Bulk gasoline plant means any gasoline distribution facility that has a gasoline throughput less than or equal to 75,700 liters per day. Gasoline throughput shall be the maximum calculated design throughput as may be limited by compliance with an enforceable condition under Federal requirement or Federal, State or local law, and discoverable by the Administrator and any other person.

Condensate means hydrocarbon liquid separated from natural gas that condenses due to changes in the temperature or pressure, or both, and remains liquid at standard conditions.

Custody transfer means the transfer of produced petroleum and/or condensate, after processing and/or treatment in the producing operations, from storage vessels or automatic transfer facilities to pipelines or any other forms of transportation.

Fill means the introduction of VOL into a storage vessel but not necessarily to complete capacity.

Gasoline service station means any site where gasoline is dispensed to motor vehicle fuel tanks from stationary storage tanks.

Maximum true vapor pressure means the equilibrium partial pressure exerted by the volatile organic compounds (as defined in 40 CFR 51.100) in the stored VOL at the temperature equal to the highest calendar-month average of the VOL storage temperature for VOL's stored above or below the ambient temperature or at the local maximum monthly average temperature as reported by the National Weather Service for VOL's stored at the ambient temperature, as determined:

(1) In accordance with methods described in American Petroleum institute Bulletin 2517, Evaporation Loss From External Floating Roof Tanks, (incorporated by reference—see §60.17); or

(2) As obtained from standard reference texts; or

(3) As determined by ASTM D2879–83, 96, or 97 (incorporated by reference—see §60.17);

(4) Any other method approved by the Administrator.

Petroleum means the crude oil removed from the earth and the oils derived from tar sands, shale, and coal.

Petroleum liquids means petroleum, condensate, and any finished or intermediate products manufactured in a petroleum refinery.

Process tank means a tank that is used within a process (including a solvent or raw material recovery process) to collect material discharged from a feedstock storage vessel or equipment within the process before the material is transferred to other equipment within the process, to a product or by-product storage vessel, or to a vessel used to store recovered solvent or raw material. In many process tanks, unit operations such as reactions and blending are conducted. Other process tanks, such as surge control vessels and bottoms receivers, however, may not involve unit operations.

Reid vapor pressure means the absolute vapor pressure of volatile crude oil and volatile nonviscous petroleum liquids except liquified petroleum gases, as determined by ASTM D323–82 or 94 (incorporated by reference—see §60.17).

Storage vessel means each tank, reservoir, or container used for the storage of volatile organic liquids but does not include:

(1) Frames, housing, auxiliary supports, or other components that are not directly involved in the containment of liquids or vapors;

(2) Subsurface caverns or porous rock reservoirs; or

(3) Process tanks.

Volatile organic liquid (VOL) means any organic liquid which can emit volatile organic compounds (as defined in 40 CFR 51.100) into the atmosphere.

Waste means any liquid resulting from industrial, commercial, mining or agricultural operations, or from community activities that is discarded or is being accumulated, stored, or physically, chemically, or biologically treated prior to being discarded or recycled.

[52 FR 11429, Apr. 8, 1987, as amended at 54 FR 32973, Aug. 11, 1989; 65 FR 61756, Oct. 17, 2000; 68 FR 59333, Oct. 15, 2003]

§ 60.112b Standard for volatile organic compounds (VOC).

(a) The owner or operator of each storage vessel either with a design capacity greater than or equal to 151 m^3 containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 5.2 kPa but less than 76.6 kPa or with a design capacity greater than or equal to 75 m^3 but less than 151 m^3 containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 27.6 kPa but less than 76.6 kPa, shall equip each storage vessel with one of the following:

(1) A fixed roof in combination with an internal floating roof meeting the following specifications:

(i) The internal floating roof shall rest or float on the liquid surface (but not necessarily in complete contact with it) inside a storage vessel that has a fixed roof. The internal floating roof shall be floating on the liquid surface at all times, except during initial fill and during those intervals when the storage vessel is completely emptied or subsequently emptied and refilled. When the roof is resting on the leg supports, the process of filling, emptying, or refilling shall be continuous and shall be accomplished as rapidly as possible.

(ii) Each internal floating roof shall be equipped with one of the following closure devices between the wall of the storage vessel and the edge of the internal floating roof:

(A) A foam- or liquid-filled seal mounted in contact with the liquid (liquid-mounted seal). A liquid-mounted seal means a foam- or liquid-filled seal mounted in contact with the liquid between the wall of the storage vessel and the floating roof continuously around the circumference of the tank.

(B) Two seals mounted one above the other so that each forms a continuous closure that completely covers the space between the wall of the storage vessel and the edge of the internal floating roof. The lower seal may be vapor-mounted, but both must be continuous.

(C) A mechanical shoe seal. A mechanical shoe seal is a metal sheet held vertically against the wall of the storage vessel by springs or weighted levers and is connected by braces to the floating roof. A flexible coated fabric (envelope) spans the annular space between the metal sheet and the floating roof.

(iii) Each opening in a noncontact internal floating roof except for automatic bleeder vents (vacuum breaker vents) and the rim space vents is to provide a projection below the liquid surface.

(iv) Each opening in the internal floating roof except for leg sleeves, automatic bleeder vents, rim space vents, column wells, ladder wells, sample wells, and stub drains is to be equipped with a cover or lid which is to be maintained in a closed position at all times (i.e., no visible gap) except when the device is in actual use. The cover or lid shall be equipped with a gasket. Covers on each access hatch and automatic gauge float well shall be bolted except when they are in use.

(v) Automatic bleeder vents shall be equipped with a gasket and are to be closed at all times when the roof is floating except when the roof is being floated off or is being landed on the roof leg supports.

(vi) Rim space vents shall be equipped with a gasket and are to be set to open only when the internal floating roof is not floating or at the manufacturer's recommended setting.

(vii) Each penetration of the internal floating roof for the purpose of sampling shall be a sample well. The sample well shall have a slit fabric cover that covers at least 90 percent of the opening.

(viii) Each penetration of the internal floating roof that allows for passage of a column supporting the fixed roof shall have a flexible fabric sleeve seal or a gasketed sliding cover.

(ix) Each penetration of the internal floating roof that allows for passage of a ladder shall have a gasketed sliding cover.

(2) An external floating roof. An external floating roof means a pontoon-type or double-deck type cover that rests on the liquid surface in a vessel with no fixed roof. Each external floating roof must meet the following specifications:

(i) Each external floating roof shall be equipped with a closure device between the wall of the storage vessel and the roof edge. The closure device is to consist of two seals, one above the other. The lower seal is referred to as the primary seal, and the upper seal is referred to as the secondary seal.

(A) The primary seal shall be either a mechanical shoe seal or a liquid-mounted seal. Except as provided in §60.113b(b)(4), the seal shall completely cover the annular space between the edge of the floating roof and tank wall.

(B) The secondary seal shall completely cover the annular space between the external floating roof and the wall of the storage vessel in a continuous fashion except as allowed in §60.113b(b)(4).

(ii) Except for automatic bleeder vents and rim space vents, each opening in a noncontact external floating roof shall provide a projection below the liquid surface. Except for automatic bleeder vents, rim space vents, roof drains, and leg sleeves, each opening in the roof is to be equipped with a gasketed cover, seal, or lid that is to be maintained in a closed position at all times (i.e., no visible gap) except when the device is in actual use. Automatic bleeder vents are to be closed at all times when the roof is floating except when the roof is being floated off or is being landed on the roof leg supports. Rim vents are to be set to open when the roof is being floated off the roof legs supports or at the manufacturer's recommended setting. Automatic bleeder vents and rim space vents are to be gasketed. Each emergency roof drain is to be provided with a slotted membrane fabric cover that covers at least 90 percent of the area of the opening.

(iii) The roof shall be floating on the liquid at all times (i.e., off the roof leg supports) except during initial fill until the roof is lifted off leg supports and when the tank is completely emptied and subsequently refilled. The process of filling, emptying, or refilling when the roof is resting on the leg supports shall be continuous and shall be accomplished as rapidly as possible.

(3) A closed vent system and control device meeting the following specifications:

(i) The closed vent system shall be designed to collect all VOC vapors and gases discharged from the storage vessel and operated with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background and visual inspections, as determined in part 60, subpart VV, §60.485(b).

(ii) The control device shall be designed and operated to reduce inlet VOC emissions by 95 percent or greater. If a flare is used as the control device, it shall meet the specifications described in the general control device requirements (§60.18) of the General Provisions.

(4) A system equivalent to those described in paragraphs (a)(1), (a)(2), or (a)(3) of this section as provided in §60.114b of this subpart.

(b) The owner or operator of each storage vessel with a design capacity greater than or equal to 75 m^3 which contains a VOL that, as stored, has a maximum true vapor pressure greater than or equal to 76.6 kPa shall equip each storage vessel with one of the following:

(1) A closed vent system and control device as specified in §60.112b(a)(3).

(2) A system equivalent to that described in paragraph (b)(1) as provided in §60.114b of this subpart.

(c) *Site-specific standard for Merck & Co., Inc.'s Stonewall Plant in Elkton, Virginia.* This paragraph applies only to the pharmaceutical manufacturing facility, commonly referred to as the Stonewall Plant, located at Route 340 South, in Elkton, Virginia ("site").

(1) For any storage vessel that otherwise would be subject to the control technology requirements of paragraphs (a) or (b) of this section, the site shall have the option of either complying directly with the requirements of this subpart, or reducing the site-wide total criteria pollutant emissions cap (total emissions cap) in accordance with the procedures set forth in a permit issued pursuant to 40 CFR 52.2454. If the site chooses the option of reducing the total emissions cap in accordance with the procedures set forth in such permit, the requirements of such permit shall apply in lieu of the otherwise applicable requirements of this subpart for such storage vessel.

(2) For any storage vessel at the site not subject to the requirements of 40 CFR 60.112b (a) or (b), the requirements of 40 CFR 60.116b (b) and (c) and the General Provisions (subpart A of this part) shall not apply.

[52 FR 11429, Apr. 8, 1987, as amended at 62 FR 52641, Oct. 8, 1997]

§ 60.113b Testing and procedures.

The owner or operator of each storage vessel as specified in §60.112b(a) shall meet the requirements of paragraph (a), (b), or (c) of this section. The applicable paragraph for a particular storage vessel depends on the control equipment installed to meet the requirements of §60.112b.

(a) After installing the control equipment required to meet §60.112b(a)(1) (permanently affixed roof and internal floating roof), each owner or operator shall:

(1) Visually inspect the internal floating roof, the primary seal, and the secondary seal (if one is in service), prior to filling the storage vessel with VOL. If there are holes, tears, or other openings in the primary seal, the secondary seal, or the seal fabric or defects in the internal floating roof, or both, the owner or operator shall repair the items before filling the storage vessel.

(2) For Vessels equipped with a liquid-mounted or mechanical shoe primary seal, visually inspect the internal floating roof and the primary seal or the secondary seal (if one is in service) through manholes and roof hatches on the fixed roof at least once every 12 months after initial fill. If the internal floating roof is not resting on the surface of the VOL inside the storage vessel, or there is liquid accumulated on the roof, or the seal is detached, or there are holes or tears in the seal fabric, the owner or operator shall repair the items or empty and remove the storage vessel from service within 45 days. If a failure that is detected during inspections required in this paragraph cannot be repaired within 45 days and if the vessel cannot be emptied within 45 days, a 30-day extension may be requested from the Administrator in the inspection report required in §60.115b(a)(3). Such a request for an extension must document that

alternate storage capacity is unavailable and specify a schedule of actions the company will take that will assure that the control equipment will be repaired or the vessel will be emptied as soon as possible.

(3) For vessels equipped with a double-seal system as specified in §60.112b(a)(1)(ii)(B):

(i) Visually inspect the vessel as specified in paragraph (a)(4) of this section at least every 5 years; or

(ii) Visually inspect the vessel as specified in paragraph (a)(2) of this section.

(4) Visually inspect the internal floating roof, the primary seal, the secondary seal (if one is in service), gaskets, slotted membranes and sleeve seals (if any) each time the storage vessel is emptied and degassed. If the internal floating roof has defects, the primary seal has holes, tears, or other openings in the seal or the seal fabric, or the secondary seal has holes, tears, or other openings in the seal or the seal fabric, or the gaskets no longer close off the liquid surfaces from the atmosphere, or the slotted membrane has more than 10 percent open area, the owner or operator shall repair the items as necessary so that none of the conditions specified in this paragraph exist before refilling the storage vessel with VOL. In no event shall inspections conducted in accordance with this provision occur at intervals greater than 10 years in the case of vessels conducting the annual visual inspection as specified in paragraphs (a)(2) and (a)(3)(ii) of this section and at intervals no greater than 5 years in the case of vessels specified in paragraph (a)(3)(i) of this section.

(5) Notify the Administrator in writing at least 30 days prior to the filling or refilling of each storage vessel for which an inspection is required by paragraphs (a)(1) and (a)(4) of this section to afford the Administrator the opportunity to have an observer present. If the inspection required by paragraph (a)(4) of this section is not planned and the owner or operator could not have known about the inspection 30 days in advance or refilling the tank, the owner or operator shall notify the Administrator at least 7 days prior to the refilling of the storage vessel. Notification shall be made by telephone immediately followed by written documentation demonstrating why the inspection was unplanned. Alternatively, this notification including the written documentation may be made in writing and sent by express mail so that it is received by the Administrator at least 7 days prior to the refilling.

(b) After installing the control equipment required to meet §60.112b(a)(2) (external floating roof), the owner or operator shall:

(1) Determine the gap areas and maximum gap widths, between the primary seal and the wall of the storage vessel and between the secondary seal and the wall of the storage vessel according to the following frequency.

(i) Measurements of gaps between the tank wall and the primary seal (seal gaps) shall be performed during the hydrostatic testing of the vessel or within 60 days of the initial fill with VOL and at least once every 5 years thereafter.

(ii) Measurements of gaps between the tank wall and the secondary seal shall be performed within 60 days of the initial fill with VOL and at least once per year thereafter.

(iii) If any source ceases to store VOL for a period of 1 year or more, subsequent introduction of VOL into the vessel shall be considered an initial fill for the purposes of paragraphs (b)(1)(i) and (b)(1)(ii) of this section.

(2) Determine gap widths and areas in the primary and secondary seals individually by the following procedures:

(i) Measure seal gaps, if any, at one or more floating roof levels when the roof is floating off the roof leg supports.

(ii) Measure seal gaps around the entire circumference of the tank in each place where a 0.32-cm diameter uniform probe passes freely (without forcing or binding against seal) between the seal and the wall of the storage vessel and measure the circumferential distance of each such location.

(iii) The total surface area of each gap described in paragraph (b)(2)(ii) of this section shall be determined by using probes of various widths to measure accurately the actual distance from the tank wall to the seal and multiplying each such width by its respective circumferential distance.

(3) Add the gap surface area of each gap location for the primary seal and the secondary seal individually and divide the sum for each seal by the nominal diameter of the tank and compare each ratio to the respective standards in paragraph (b)(4) of this section.

(4) Make necessary repairs or empty the storage vessel within 45 days of identification in any inspection for seals not meeting the requirements listed in (b)(4) (i) and (ii) of this section:

(i) The accumulated area of gaps between the tank wall and the mechanical shoe or liquid-mounted primary seal shall not exceed 212 Cm^2 per meter of tank diameter, and the width of any portion of any gap shall not exceed 3.81 cm.

(A) One end of the mechanical shoe is to extend into the stored liquid, and the other end is to extend a minimum vertical distance of 61 cm above the stored liquid surface.

(B) There are to be no holes, tears, or other openings in the shoe, seal fabric, or seal envelope.

(ii) The secondary seal is to meet the following requirements:

(A) The secondary seal is to be installed above the primary seal so that it completely covers the space between the roof edge and the tank wall except as provided in paragraph (b)(2)(iii) of this section.

(B) The accumulated area of gaps between the tank wall and the secondary seal shall not exceed 21.2 cm^2 per meter of tank diameter, and the width of any portion of any gap shall not exceed 1.27 cm.

(C) There are to be no holes, tears, or other openings in the seal or seal fabric.

(iii) If a failure that is detected during inspections required in paragraph (b)(1) of §60.113b(b) cannot be repaired within 45 days and if the vessel cannot be emptied within 45 days, a 30-day extension may be requested from the Administrator in the inspection report required in §60.115b(b)(4). Such extension request must include a demonstration of unavailability of alternate storage capacity and a specification of a schedule that will assure that the control equipment will be repaired or the vessel will be emptied as soon as possible.

(5) Notify the Administrator 30 days in advance of any gap measurements required by paragraph (b)(1) of this section to afford the Administrator the opportunity to have an observer present.

(6) Visually inspect the external floating roof, the primary seal, secondary seal, and fittings each time the vessel is emptied and degassed.

(i) If the external floating roof has defects, the primary seal has holes, tears, or other openings in the seal or the seal fabric, or the secondary seal has holes, tears, or other openings in the seal or the seal fabric, the owner or operator shall repair the items as necessary so that none of the conditions specified in this paragraph exist before filling or refilling the storage vessel with VOL.

(ii) For all the inspections required by paragraph (b)(6) of this section, the owner or operator shall notify the Administrator in writing at least 30 days prior to the filling or refilling of each storage vessel to afford the Administrator the opportunity to inspect the storage vessel prior to refilling. If the inspection required by paragraph (b)(6) of this section is not planned and the owner or operator could not have known about the inspection 30 days in advance of refilling the tank, the owner or operator shall notify the Administrator at least 7 days prior to the refilling of the storage vessel. Notification shall be made by telephone immediately followed by written documentation demonstrating why the inspection was unplanned. Alternatively, this notification including the written documentation may be made in writing and sent by express mail so that it is received by the Administrator at least 7 days prior to the refilling.

(c) The owner or operator of each source that is equipped with a closed vent system and control device as required in §60.112b (a)(3) or (b)(2) (other than a flare) is exempt from §60.8 of the General Provisions and shall meet the following requirements.

(1) Submit for approval by the Administrator as an attachment to the notification required by §60.7(a)(1) or, if the facility is exempt from §60.7(a)(1), as an attachment to the notification required by §60.7(a)(2), an operating plan containing the information listed below.

(i) Documentation demonstrating that the control device will achieve the required control efficiency during maximum loading conditions. This documentation is to include a description of the gas stream which enters the control device, including flow and VOC content under varying liquid level conditions (dynamic and static) and manufacturer's design specifications for the control device. If the control device or the closed vent capture system receives vapors, gases, or liquids other than fuels from sources that are not designated sources under this subpart, the efficiency demonstration is to include consideration of all vapors, gases, and liquids received by the closed vent capture system and control device. If an enclosed combustion device with a minimum residence time of 0.75 seconds and a minimum temperature of 816 °C is used to meet the 95 percent requirement, documentation that those conditions will exist is sufficient to meet the requirements of this paragraph.

(ii) A description of the parameter or parameters to be monitored to ensure that the control device will be operated in conformance with its design and an explanation of the criteria used for selection of that parameter (or parameters).

(2) Operate the closed vent system and control device and monitor the parameters of the closed vent system and control device in accordance with the operating plan submitted to the Administrator in accordance with paragraph (c)(1) of this section, unless the plan was modified by the Administrator during the review process. In this case, the modified plan applies.

(d) The owner or operator of each source that is equipped with a closed vent system and a flare to meet the requirements in §60.112b (a)(3) or (b)(2) shall meet the requirements as specified in the general control device requirements, §60.18 (e) and (f).

[52 FR 11429, Apr. 8, 1987, as amended at 54 FR 32973, Aug. 11, 1989]

§ 60.114b Alternative means of emission limitation.

(a) If, in the Administrator's judgment, an alternative means of emission limitation will achieve a reduction in emissions at least equivalent to the reduction in emissions achieved by any requirement in §60.112b, the Administrator will publish in theFederal Registera notice permitting the use of the alternative means for purposes of compliance with that requirement.

(b) Any notice under paragraph (a) of this section will be published only after notice and an opportunity for a hearing.

(c) Any person seeking permission under this section shall submit to the Administrator a written application including:

(1) An actual emissions test that uses a full-sized or scale-model storage vessel that accurately collects and measures all VOC emissions from a given control device and that accurately simulates wind and accounts for other emission variables such as temperature and barometric pressure.

(2) An engineering evaluation that the Administrator determines is an accurate method of determining equivalence.

(d) The Administrator may condition the permission on requirements that may be necessary to ensure operation and maintenance to achieve the same emissions reduction as specified in §60.112b.

§ 60.115b Reporting and recordkeeping requirements.

The owner or operator of each storage vessel as specified in §60.112b(a) shall keep records and furnish reports as required by paragraphs (a), (b), or (c) of this section depending upon the control equipment installed to meet the requirements of §60.112b. The owner or operator shall keep copies of all reports and records required by this section, except for the record required by (c)(1), for at least 2 years. The record required by (c)(1) will be kept for the life of the control equipment.

(a) After installing control equipment in accordance with §60.112b(a)(1) (fixed roof and internal floating roof), the owner or operator shall meet the following requirements.

(1) Furnish the Administrator with a report that describes the control equipment and certifies that the control equipment meets the specifications of §60.112b(a)(1) and §60.113b(a)(1). This report shall be an attachment to the notification required by §60.7(a)(3).

(2) Keep a record of each inspection performed as required by §60.113b (a)(1), (a)(2), (a)(3), and (a)(4). Each record shall identify the storage vessel on which the inspection was performed and shall contain the date the vessel was inspected and the observed condition of each component of the control equipment (seals, internal floating roof, and fittings).

(3) If any of the conditions described in §60.113b(a)(2) are detected during the annual visual inspection required by §60.113b(a)(2), a report shall be furnished to the Administrator within 30 days of the inspection. Each report shall identify the storage vessel, the nature of the defects, and the date the storage vessel was emptied or the nature of and date the repair was made.

(4) After each inspection required by §60.113b(a)(3) that finds holes or tears in the seal or seal fabric, or defects in the internal floating roof, or other control equipment defects listed in §60.113b(a)(3)(ii), a report shall be furnished to the Administrator within 30 days of the inspection. The report shall identify the storage vessel and the reason it did not meet the specifications of §61.112b(a)(1) or §60.113b(a)(3) and list each repair made.

(b) After installing control equipment in accordance with §61.112b(a)(2) (external floating roof), the owner or operator shall meet the following requirements.

(1) Furnish the Administrator with a report that describes the control equipment and certifies that the control equipment meets the specifications of §60.112b(a)(2) and §60.113b(b)(2), (b)(3), and (b)(4). This report shall be an attachment to the notification required by §60.7(a)(3).

(2) Within 60 days of performing the seal gap measurements required by §60.113b(b)(1), furnish the Administrator with a report that contains:

(i) The date of measurement.

(ii) The raw data obtained in the measurement.

(iii) The calculations described in §60.113b (b)(2) and (b)(3).

(3) Keep a record of each gap measurement performed as required by §60.113b(b). Each record shall identify the storage vessel in which the measurement was performed and shall contain:

(i) The date of measurement.

(ii) The raw data obtained in the measurement.

(iii) The calculations described in §60.113b (b)(2) and (b)(3).

(4) After each seal gap measurement that detects gaps exceeding the limitations specified by §60.113b(b)(4), submit a report to the Administrator within 30 days of the inspection. The report will identify the vessel and contain the information specified in paragraph (b)(2) of this section and the date the vessel was emptied or the repairs made and date of repair.

(c) After installing control equipment in accordance with §60.112b (a)(3) or (b)(1) (closed vent system and control device other than a flare), the owner or operator shall keep the following records.

(1) A copy of the operating plan.

(2) A record of the measured values of the parameters monitored in accordance with §60.113b(c)(2).

(d) After installing a closed vent system and flare to comply with §60.112b, the owner or operator shall meet the following requirements.

(1) A report containing the measurements required by §60.18(f) (1), (2), (3), (4), (5), and (6) shall be furnished to the Administrator as required by §60.8 of the General Provisions. This report shall be submitted within 6 months of the initial start-up date.

(2) Records shall be kept of all periods of operation during which the flare pilot flame is absent.

(3) Semiannual reports of all periods recorded under §60.115b(d)(2) in which the pilot flame was absent shall be furnished to the Administrator.

§ 60.116b Monitoring of operations.

(a) The owner or operator shall keep copies of all records required by this section, except for the record required by paragraph (b) of this section, for at least 2 years. The record required by paragraph (b) of this section will be kept for the life of the source.

(b) The owner or operator of each storage vessel as specified in §60.110b(a) shall keep readily accessible records showing the dimension of the storage vessel and an analysis showing the capacity of the storage vessel.

(c) Except as provided in paragraphs (f) and (g) of this section, the owner or operator of each storage vessel either with a design capacity greater than or equal to 151 m^3 storing a liquid with a maximum true vapor pressure greater than or equal to 3.5 kPa or with a design capacity greater than or equal to 75 m^3 but less than 151 m^3 storing a liquid with a maximum true vapor pressure greater than or equal to 15.0 kPa shall maintain a record of the VOL stored, the period of storage, and the maximum true vapor pressure of that VOL during the respective storage period.

(d) Except as provided in paragraph (g) of this section, the owner or operator of each storage vessel either with a design capacity greater than or equal to 151 m^3 storing a liquid with a maximum true vapor pressure that is normally less than 5.2 kPa or with a design capacity greater than or equal to 75 m^3 but less than 151 m^3 storing a liquid with a maximum true vapor pressure that is normally less than 27.6 kPa shall notify the Administrator within 30 days when the maximum true vapor pressure of the liquid exceeds the respective maximum true vapor vapor pressure values for each volume range.

(e) Available data on the storage temperature may be used to determine the maximum true vapor pressure as determined below.

(1) For vessels operated above or below ambient temperatures, the maximum true vapor pressure is calculated based upon the highest expected calendar-month average of the storage temperature. For vessels operated at ambient temperatures, the maximum true vapor pressure is calculated based upon the maximum local monthly average ambient temperature as reported by the National Weather Service.

(2) For crude oil or refined petroleum products the vapor pressure may be obtained by the following:

(i) Available data on the Reid vapor pressure and the maximum expected storage temperature based on the highest expected calendar-month average temperature of the stored product may be used to determine the maximum true vapor pressure from nomographs contained in API Bulletin 2517 (incorporated by reference—see §60.17), unless the Administrator specifically requests that the liquid be sampled, the actual storage temperature determined, and the Reid vapor pressure determined from the sample(s).

(ii) The true vapor pressure of each type of crude oil with a Reid vapor pressure less than 13.8 kPa or with physical properties that preclude determination by the recommended method is to be determined from available data and recorded if the estimated maximum true vapor pressure is greater than 3.5 kPa.

(3) For other liquids, the vapor pressure:

(i) May be obtained from standard reference texts, or

(ii) Determined by ASTM D2879–83, 96, or 97 (incorporated by reference—see §60.17); or

(iii) Measured by an appropriate method approved by the Administrator; or

(iv) Calculated by an appropriate method approved by the Administrator.

(f) The owner or operator of each vessel storing a waste mixture of indeterminate or variable composition shall be subject to the following requirements.

(1) Prior to the initial filling of the vessel, the highest maximum true vapor pressure for the range of anticipated liquid compositions to be stored will be determined using the methods described in paragraph (e) of this section.

(2) For vessels in which the vapor pressure of the anticipated liquid composition is above the cutoff for monitoring but below the cutoff for controls as defined in §60.112b(a), an initial physical test of the vapor pressure is required; and a physical test at least once every 6 months thereafter is required as determined by the following methods:

(i) ASTM D2879–83, 96, or 97 (incorporated by reference—see §60.17); or

(ii) ASTM D323–82 or 94 (incorporated by reference—see §60.17); or

(iii) As measured by an appropriate method as approved by the Administrator.

(g) The owner or operator of each vessel equipped with a closed vent system and control device meeting the specification of §60.112b or with emissions reductions equipment as specified in 40 CFR 65.42(b)(4), (b)(5), (b)(6), or (c) is exempt from the requirements of paragraphs (c) and (d) of this section.

[52 FR 11429, Apr. 8, 1987, as amended at 65 FR 61756, Oct. 17, 2000; 65 FR 78276, Dec. 14, 2000; 68 FR 59333, Oct. 15, 2003]

§ 60.117b Delegation of authority.

(a) In delegating implementation and enforcement authority to a State under section 111(c) of the Act, the authorities contained in paragraph (b) of this section shall be retained by the Administrator and not transferred to a State.

(b) Authorities which will not be delegated to States: §§60.111b(f)(4), 60.114b, 60.116b(e)(3)(iii), 60.116b(e)(3)(iv), and 60.116b(f)(2)(iii).

[52 FR 11429, Apr. 8, 1987, as amended at 52 FR 22780, June 16, 1987]

Attachment C

NSPS, Subpart VV

Iroquois Bio-Energy Company, LLC
751 West State Road 114, Rensselaer, Indiana 47978

Permit Renewal No.:F073-26405-00037

Subpart VV—Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for which Construction, Reconstruction, or Modification Commenced After January 5, 1981, and on or Before November 7, 2006

Source: 48 FR 48335, Oct. 18, 1983, unless otherwise noted.

§ 60.480 Applicability and designation of affected facility.

(a)(1) The provisions of this subpart apply to affected facilities in the synthetic organic chemicals manufacturing industry.

(2) The group of all equipment (defined in §60.481) within a process unit is an affected facility.

(b) Any affected facility under paragraph (a) of this section that commences construction, reconstruction, or modification after January 5, 1981, and on or before November 7, 2006, shall be subject to the requirements of this subpart.

(c) Addition or replacement of equipment for the purpose of process improvement which is accomplished without a capital expenditure shall not by itself be considered a modification under this subpart.

(d)(1) If an owner or operator applies for one or more of the exemptions in this paragraph, then the owner or operator shall maintain records as required in §60.486(i).

(2) Any affected facility that has the design capacity to produce less than 1,000 Mg/yr (1,102 ton/yr) of a chemical listed in §60.489 is exempt from §§60.482–1 through 60.482–10.

(3) If an affected facility produces heavy liquid chemicals only from heavy liquid feed or raw materials, then it is exempt from §§60.482–1 through 60.482–10.

(4) Any affected facility that produces beverage alcohol is exempt from §§60.482–1 through 60.482–10.

(5) Any affected facility that has no equipment in volatile organic compounds (VOC) service is exempt from §§60.482–1 through 60.482–10.

(e) *Alternative means of compliance* — (1) *Option to comply with part 65.* (i) Owners or operators may choose to comply with the provisions of 40 CFR part 65, subpart F, to satisfy the requirements of §§60.482 through 60.487 for an affected facility. When choosing to comply with 40 CFR part 65, subpart F, the requirements of §60.485(d), (e), and (f) and §60.486(i) and (j) still apply. Other provisions applying to an owner or operator who chooses to comply with 40 CFR part 65 are provided in 40 CFR 65.1.

(ii) *Part 60, subpart A* . Owners or operators who choose to comply with 40 CFR part 65, subpart F must also comply with §§60.1, 60.2, 60.5, 60.6, 60.7(a)(1) and (4), 60.14, 60.15, and 60.16 for that equipment. All sections and paragraphs of subpart A of this part that are not mentioned in this paragraph (e)(1)(ii) do not apply to owners and operators of equipment subject to this subpart complying with 40 CFR part 65, subpart F, except that provisions required to be met prior to implementing 40 CFR part 65 still apply. Owners and operators who choose to comply with 40 CFR part 65, subpart F, must comply with 40 CFR part 65, subpart A.

(2) *Subpart VVa* . Owners or operators may choose to comply with the provisions of subpart VVa of this part 60 to satisfy the requirements of this subpart VV for an affected facility.

(f) *Stay of standards* . Owners or operators are not required to comply with the definition of "process unit" in §60.481 and the requirements in §60.482–1(g) of this subpart until the EPA takes final action to require compliance and publishes a document in theFederal Register.While the definition of "process unit" is stayed, owners or operators should use the following definition:

Process unit means components assembled to produce, as intermediate or final products, one or more of the chemicals listed in §60.489 of this part. A process unit can operate independently if supplied with sufficient feed or raw materials and sufficient storage facilities for the product.

[48 FR 48335, Oct. 18, 1983, as amended at 49 FR 22607, May 30, 1984; 65 FR 61762, Oct. 17, 2000; 65 FR 78276, Dec. 14, 2000; 72 FR 64879, Nov. 16, 2007, 73 FR 31379, June 2, 2008; 73 FR 31375, June 2, 2008]

§ 60.481 Definitions.

As used in this subpart, all terms not defined herein shall have the meaning given them in the Act or in subpart A of part 60, and the following terms shall have the specific meanings given them.

Capital expenditure means, in addition to the definition in 40 CFR 60.2, an expenditure for a physical or operational change to an existing facility that:

(a) Exceeds P, the product of the facility's replacement cost, R, and an adjusted annual asset guideline repair allowance, A, as reflected by the following equation: $P = R \times A$, where

(1) The adjusted annual asset guideline repair allowance, A, is the product of the percent of the replacement cost, Y, and the applicable basic annual asset guideline repair allowance, B, divided by 100 as reflected by the following equation:

$A = Y \times (B \div 100)$;

(2) The percent Y is determined from the following equation: $Y = 1.0 - 0.575 \log X$, where X is 1982 minus the year of construction; and

(3) The applicable basic annual asset guideline repair allowance, B, is selected from the following table consistent with the applicable subpart:

Table for Determining Applicable Value for B

Subpart applicable to facility	Value of B to be used in equation
VV	12.5
DDD	12.5
GGG	7.0
KKK	4.5

Closed-loop system means an enclosed system that returns process fluid to the process.

Closed-purge system means a system or combination of systems and portable containers to capture purged liquids. Containers for purged liquids must be covered or closed when not being filled or emptied.

Closed vent system means a system that is not open to the atmosphere and that is composed of hard-piping, ductwork, connections, and, if necessary, flow-inducing devices that transport gas or vapor from a piece or pieces of equipment to a control device or back to a process.

Connector means flanged, screwed, or other joined fittings used to connect two pipe lines or a pipe line and a piece of process equipment or that close an opening in a pipe that could be connected to another pipe. Joined fittings welded completely around the circumference of the interface are not considered connectors for the purpose of this subpart.

Control device means an enclosed combustion device, vapor recovery system, or flare.

Distance piece means an open or enclosed casing through which the piston rod travels, separating the compressor cylinder from the crankcase.

Double block and bleed system means two block valves connected in series with a bleed valve or line that can vent the line between the two block valves.

Duct work means a conveyance system such as those commonly used for heating and ventilation systems. It is often made of sheet metal and often has sections connected by screws or crimping. Hard-piping is not ductwork.

Equipment means each pump, compressor, pressure relief device, sampling connection system, open-ended valve or line, valve, and flange or other connector in VOC service and any devices or systems required by this subpart.

First attempt at repair means to take action for the purpose of stopping or reducing leakage of organic material to the atmosphere using best practices.

Fuel gas means gases that are combusted to derive useful work or heat.

Fuel gas system means the offsite and onsite piping and flow and pressure control system that gathers gaseous stream(s) generated by onsite operations, may blend them with other sources of gas, and transports the gaseous stream for use as fuel gas in combustion devices or in-process combustion equipment, such as furnaces and gas turbines, either singly or in combination.

Hard-piping means pipe or tubing that is manufactured and properly installed using good engineering judgment and standards such as ASME B31.3, Process Piping (available from the American Society of Mechanical Engineers, PO Box 2300, Fairfield, NJ 07007–2300).

In gas/vapor service means that the piece of equipment contains process fluid that is in the gaseous state at operating conditions.

In heavy liquid service means that the piece of equipment is not in gas/vapor service or in light liquid service.

In light liquid service means that the piece of equipment contains a liquid that meets the conditions specified in §60.485(e).

In-situ sampling systems means nonextractive samplers or in-line samplers.

In vacuum service means that equipment is operating at an internal pressure which is at least 5 kilopascals (kPa)(0.7 psia) below ambient pressure.

In VOC service means that the piece of equipment contains or contacts a process fluid that is at least 10 percent VOC by weight. (The provisions of §60.485(d) specify how to determine that a piece of equipment is not in VOC service.)

Liquids dripping means any visible leakage from the seal including spraying, misting, clouding, and ice formation.

Open-ended valve or line means any valve, except safety relief valves, having one side of the valve seat in contact with process fluid and one side open to the atmosphere, either directly or through open piping.

Pressure release means the emission of materials resulting from system pressure being greater than set pressure of the pressure relief device.

Process improvement means routine changes made for safety and occupational health requirements, for energy savings, for better utility, for ease of maintenance and operation, for correction of design deficiencies, for bottleneck removal, for changing product requirements, or for environmental control.

Process unit means the components assembled and connected by pipes or ducts to process raw materials and to produce, as intermediate or final products, one or more of the chemicals listed in §60.489. A process unit can operate independently if supplied with sufficient feed or raw materials and sufficient storage facilities for the product. For the purpose of this subpart, process unit includes any feed, intermediate and final product storage vessels (except as specified in §60.482–1(g)), product transfer racks, and connected ducts and piping. A process unit includes all equipment as defined in this subpart.

Process unit shutdown means a work practice or operational procedure that stops production from a process unit or part of a process unit during which it is technically feasible to clear process material from a process unit or part of a process unit consistent with safety constraints and during which repairs can be accomplished. The following are not considered process unit shutdowns:

(1) An unscheduled work practice or operational procedure that stops production from a process unit or part of a process unit for less than 24 hours.

(2) An unscheduled work practice or operational procedure that would stop production from a process unit or part of a process unit for a shorter period of time than would be required to clear the process unit or part of the process unit of materials and start up the unit, and would result in greater emissions than delay of repair of leaking components until the next scheduled process unit shutdown.

(3) The use of spare equipment and technically feasible bypassing of equipment without stopping production.

Quarter means a 3-month period; the first quarter concludes on the last day of the last full month during the 180 days following initial startup.

Repaired means that equipment is adjusted, or otherwise altered, in order to eliminate a leak as defined in the applicable sections of this subpart and, except for leaks identified in accordance with §§60.482–2(b)(2)(ii) and (d)(6)(ii) and (iii), 60.482–3(f), and 60.482–10(f)(1)(ii), is re-monitored as specified in §60.485(b) to verify that emissions from the equipment are below the applicable leak definition.

Replacement cost means the capital needed to purchase all the depreciable components in a facility.

Sampling connection system means an assembly of equipment within a process unit used during periods of representative operation to take samples of the process fluid. Equipment used to take nonroutine grab samples is not considered a sampling connection system.

Sensor means a device that measures a physical quantity or the change in a physical quantity such as temperature, pressure, flow rate, pH, or liquid level.

Storage vessel means a tank or other vessel that is used to store organic liquids that are used in the process as raw material feedstocks, produced as intermediates or final products, or generated as wastes. Storage vessel does not include vessels permanently attached to motor vehicles, such as trucks, railcars, barges, or ships.

Synthetic organic chemicals manufacturing industry means the industry that produces, as intermediates or final products, one or more of the chemicals listed in §60.489.

Transfer rack means the collection of loading arms and loading hoses, at a single loading rack, that are used to fill tank trucks and/or railcars with organic liquids.

Volatile organic compounds or VOC means, for the purposes of this subpart, any reactive organic compounds as defined in §60.2 Definitions.

[48 FR 48335, Oct. 18, 1983, as amended at 49 FR 22607, May 30, 1984; 49 FR 26738, June 29, 1984; 60 FR 43258, Aug. 18, 1995; 65 FR 61762, Oct. 17, 2000; 65 FR 78276, Dec. 14, 2000; 72 FR 64879, Nov. 16, 2007]

Effective Date Note: At 73 FR 31375, June 2, 2008, in §60.481, the definition of “process unit” was stayed until further notice.

§ 60.482-1 Standards: General.

(a) Each owner or operator subject to the provisions of this subpart shall demonstrate compliance with the requirements of §§60.482–1 through 60.482–10 or §60.480(e) for all equipment within 180 days of initial startup.

(b) Compliance with §§60.482–1 to 60.482–10 will be determined by review of records and reports, review of performance test results, and inspection using the methods and procedures specified in §60.485.

(c)(1) An owner or operator may request a determination of equivalence of a means of emission limitation to the requirements of §§60.482–2, 60.482–3, 60.482–5, 60.482–6, 60.482–7, 60.482–8, and 60.482–10 as provided in §60.484.

(2) If the Administrator makes a determination that a means of emission limitation is at least equivalent to the requirements of §§60.482–2, 60.482–3, 60.482–5, 60.482–6, 60.482–7,

60.482–8, or 60.482–10, an owner or operator shall comply with the requirements of that determination.

(d) Equipment that is in vacuum service is excluded from the requirements of §§60.482–2 to 60.482–10 if it is identified as required in §60.486(e)(5).

(e) Equipment that an owner or operator designates as being in VOC service less than 300 hours (hr)/yr is excluded from the requirements of §§60.482–2 through 60.482–10 if it is identified as required in §60.486(e)(6) and it meets any of the conditions specified in paragraphs (e)(1) through (3) of this section.

(1) The equipment is in VOC service only during startup and shutdown, excluding startup and shutdown between batches of the same campaign for a batch process.

(2) The equipment is in VOC service only during process malfunctions or other emergencies.

(3) The equipment is backup equipment that is in VOC service only when the primary equipment is out of service.

(f)(1) If a dedicated batch process unit operates less than 365 days during a year, an owner or operator may monitor to detect leaks from pumps and valves at the frequency specified in the following table instead of monitoring as specified in §§60.482–2, 60.482–7, and 60.483–2:

Operating time (percent of hours during year)	**Equivalent monitoring frequency time in use**		
	Monthly	**Quarterly**	**Semiannually**
0 to <25	Quarterly	Annually	Annually.
25 to <50	Quarterly	Semiannually	Annually.
50 to <75	Bimonthly	Three quarters	Semiannually.
75 to 100	Monthly	Quarterly	Semiannually.

(2) Pumps and valves that are shared among two or more batch process units that are subject to this subpart may be monitored at the frequencies specified in paragraph (f)(1) of this section, provided the operating time of all such process units is considered.

(3) The monitoring frequencies specified in paragraph (f)(1) of this section are not requirements for monitoring at specific intervals and can be adjusted to accommodate process operations. An owner or operator may monitor at any time during the specified monitoring period (e.g., month, quarter, year), provided the monitoring is conducted at a reasonable interval after completion of the last monitoring campaign. Reasonable intervals are defined in paragraphs (f)(3)(i) through (iv) of this section.

(i) When monitoring is conducted quarterly, monitoring events must be separated by at least 30 calendar days.

(ii) When monitoring is conducted semiannually (*i.e.* , once every 2 quarters), monitoring events must be separated by at least 60 calendar days.

(iii) When monitoring is conducted in 3 quarters per year, monitoring events must be separated by at least 90 calendar days.

(iv) When monitoring is conducted annually, monitoring events must be separated by at least 120 calendar days.

(g) If the storage vessel is shared with multiple process units, the process unit with the greatest annual amount of stored materials (predominant use) is the process unit the storage vessel is assigned to. If the storage vessel is shared equally among process units, and one of the process units has equipment subject to subpart VVa of this part, the storage vessel is assigned to that process unit. If the storage vessel is shared equally among process units, none of which have equipment subject to subpart VVa of this part, the storage vessel is assigned to any process unit subject to this subpart. If the predominant use of the storage vessel varies from year to year, then the owner or operator must estimate the predominant use initially and reassess every 3 years. The owner or operator must keep records of the information and supporting calculations that show how predominant use is determined. All equipment on the storage vessel must be monitored when in VOC service.

[48 FR 48335, Oct. 18, 1983, as amended at 49 FR 22608, May 30, 1984; 65 FR 78276, Dec. 14, 2000; 72 FR 64880, Nov. 16, 2007]

Effective Date Note: At 73 FR 31375, June 2, 2008, in §60.482–1, paragraph (g) was stayed until further notice.

§ 60.482-2 Standards: Pumps in light liquid service.

(a)(1) Each pump in light liquid service shall be monitored monthly to detect leaks by the methods specified in §60.485(b), except as provided in §60.482–1(c) and (f) and paragraphs (d), (e), and (f) of this section. A pump that begins operation in light liquid service after the initial startup date for the process unit must be monitored for the first time within 30 days after the end of its startup period, except for a pump that replaces a leaking pump and except as provided in §60.482–1(c) and (f) and paragraphs (d), (e), and (f) of this section.

(2) Each pump in light liquid service shall be checked by visual inspection each calendar week for indications of liquids dripping from the pump seal, except as provided in §60.482–1(f).

(b)(1) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(2) If there are indications of liquids dripping from the pump seal, the owner or operator shall follow the procedure specified in either paragraph (b)(2)(i) or (ii) of this section. This requirement does not apply to a pump that was monitored after a previous weekly inspection if the instrument reading for that monitoring event was less than 10,000 ppm and the pump was not repaired since that monitoring event.

(i) Monitor the pump within 5 days as specified in §60.485(b). If an instrument reading of 10,000 ppm or greater is measured, a leak is detected. The leak shall be repaired using the procedures in paragraph (c) of this section.

(ii) Designate the visual indications of liquids dripping as a leak, and repair the leak within 15 days of detection by eliminating the visual indications of liquids dripping.

(c)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in §60.482–9.

(2) A first attempt at repair shall be made no later than 5 calendar days after each leak is detected. First attempts at repair include, but are not limited to, the practices described in paragraphs (c)(2)(i) and (ii) of this section, where practicable.

(i) Tightening the packing gland nuts;

(ii) Ensuring that the seal flush is operating at design pressure and temperature.

(d) Each pump equipped with a dual mechanical seal system that includes a barrier fluid system is exempt from the requirements of paragraph (a) of this section, provided the requirements specified in paragraphs (d)(1) through (6) of this section are met.

(1) Each dual mechanical seal system is—

(i) Operated with the barrier fluid at a pressure that is at all times greater than the pump stuffing box pressure; or

(ii) Equipped with a barrier fluid degassing reservoir that is routed to a process or fuel gas system or connected by a closed vent system to a control device that complies with the requirements of §60.482–10; or

(iii) Equipped with a system that purges the barrier fluid into a process stream with zero VOC emissions to the atmosphere.

(2) The barrier fluid system is in heavy liquid service or is not in VOC service.

(3) Each barrier fluid system is equipped with a sensor that will detect failure of the seal system, the barrier fluid system, or both.

(4)(i) Each pump is checked by visual inspection, each calendar week, for indications of liquids dripping from the pump seals.

(ii) If there are indications of liquids dripping from the pump seal at the time of the weekly inspection, the owner or operator shall follow the procedure specified in either paragraph (d)(4)(ii)(A) or (B) of this section.

(A) Monitor the pump within 5 days as specified in §60.485(b) to determine if there is a leak of VOC in the barrier fluid. If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(B) Designate the visual indications of liquids dripping as a leak.

(5)(i) Each sensor as described in paragraph (d)(3) of this section is checked daily or is equipped with an audible alarm.

(ii) The owner or operator determines, based on design considerations and operating experience, a criterion that indicates failure of the seal system, the barrier fluid system, or both.

(iii) If the sensor indicates failure of the seal system, the barrier fluid system, or both, based on the criterion established in paragraph (d)(5)(ii) of this section, a leak is detected.

(6)(i) When a leak is detected pursuant to paragraph (d)(4)(ii)(A) of this section, it shall be repaired as specified in paragraph (c) of this section.

(ii) A leak detected pursuant to paragraph (d)(5)(iii) of this section shall be repaired within 15 days of detection by eliminating the conditions that activated the sensor.

(iii) A designated leak pursuant to paragraph (d)(4)(ii)(B) of this section shall be repaired within 15 days of detection by eliminating visual indications of liquids dripping.

(e) Any pump that is designated, as described in §60.486(e)(1) and (2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of paragraphs (a), (c), and (d) of this section if the pump:

(1) Has no externally actuated shaft penetrating the pump housing,

(2) Is demonstrated to be operating with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background as measured by the methods specified in §60.485(c), and

(3) Is tested for compliance with paragraph (e)(2) of this section initially upon designation, annually, and at other times requested by the Administrator.

(f) If any pump is equipped with a closed vent system capable of capturing and transporting any leakage from the seal or seals to a process or to a fuel gas system or to a control device that complies with the requirements of §60.482–10, it is exempt from paragraphs (a) through (e) of this section.

(g) Any pump that is designated, as described in §60.486(f)(1), as an unsafe-to-monitor pump is exempt from the monitoring and inspection requirements of paragraphs (a) and (d)(4) through (6) of this section if:

(1) The owner or operator of the pump demonstrates that the pump is unsafe-to-monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with paragraph (a) of this section; and

(2) The owner or operator of the pump has a written plan that requires monitoring of the pump as frequently as practicable during safe-to-monitor times but not more frequently than the periodic monitoring schedule otherwise applicable, and repair of the equipment according to the procedures in paragraph (c) of this section if a leak is detected.

(h) Any pump that is located within the boundary of an unmanned plant site is exempt from the weekly visual inspection requirement of paragraphs (a)(2) and (d)(4) of this section, and the daily requirements of paragraph (d)(5) of this section, provided that each pump is visually inspected as often as practicable and at least monthly.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61762, Oct. 17, 2000; 65 FR 78276, Dec. 14, 2000; 72 FR 64880, Nov. 16, 2007]

§ 60.482-3 Standards: Compressors.

(a) Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of VOC to the atmosphere, except as provided in §60.482–1(c) and paragraphs (h), (i), and (j) of this section.

(b) Each compressor seal system as required in paragraph (a) shall be:

(1) Operated with the barrier fluid at a pressure that is greater than the compressor stuffing box pressure; or

(2) Equipped with a barrier fluid system degassing reservoir that is routed to a process or fuel gas system or connected by a closed vent system to a control device that complies with the requirements of §60.482–10; or

(3) Equipped with a system that purges the barrier fluid into a process stream with zero VOC emissions to the atmosphere.

(c) The barrier fluid system shall be in heavy liquid service or shall not be in VOC service.

(d) Each barrier fluid system as described in paragraph (a) shall be equipped with a sensor that will detect failure of the seal system, barrier fluid system, or both.

(e)(1) Each sensor as required in paragraph (d) shall be checked daily or shall be equipped with an audible alarm.

(2) The owner or operator shall determine, based on design considerations and operating experience, a criterion that indicates failure of the seal system, the barrier fluid system, or both.

(f) If the sensor indicates failure of the seal system, the barrier system, or both based on the criterion determined under paragraph (e)(2), a leak is detected.

(g)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in §60.482–9.

(2) A first attempt at repair shall be made no later than 5 calendar days after each leak is detected.

(h) A compressor is exempt from the requirements of paragraphs (a) and (b) of this section, if it is equipped with a closed vent system to capture and transport leakage from the compressor drive shaft back to a process or fuel gas system or to a control device that complies with the requirements of §60.482–10, except as provided in paragraph (i) of this section.

(i) Any compressor that is designated, as described in §60.486(e) (1) and (2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of paragraphs (a)–(h) if the compressor:

(1) Is demonstrated to be operating with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the methods specified in §60.485(c); and

(2) Is tested for compliance with paragraph (i)(1) of this section initially upon designation, annually, and at other times requested by the Administrator.

(j) Any existing reciprocating compressor in a process unit which becomes an affected facility under provisions of §60.14 or §60.15 is exempt from paragraphs (a) through (e) and (h) of this section, provided the owner or operator demonstrates that recasting the distance piece or

replacing the compressor are the only options available to bring the compressor into compliance with the provisions of paragraphs (a) through (e) and (h) of this section.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61762, Oct. 17, 2000; 65 FR 78277, Dec. 14, 2000; 72 FR 64881, Nov. 16, 2007]

§ 60.482-4 Standards: Pressure relief devices in gas/vapor service.

(a) Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in §60.485(c).

(b)(1) After each pressure release, the pressure relief device shall be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after the pressure release, except as provided in §60.482–9.

(2) No later than 5 calendar days after the pressure release, the pressure relief device shall be monitored to confirm the conditions of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, by the methods specified in §60.485(c).

(c) Any pressure relief device that is routed to a process or fuel gas system or equipped with a closed vent system capable of capturing and transporting leakage through the pressure relief device to a control device as described in §60.482–10 is exempted from the requirements of paragraphs (a) and (b) of this section.

(d)(1) Any pressure relief device that is equipped with a rupture disk upstream of the pressure relief device is exempt from the requirements of paragraphs (a) and (b) of this section, provided the owner or operator complies with the requirements in paragraph (d)(2) of this section.

(2) After each pressure release, a new rupture disk shall be installed upstream of the pressure relief device as soon as practicable, but no later than 5 calendar days after each pressure release, except as provided in §60.482–9.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61762, Oct. 17, 2000; 65 FR 78277, Dec. 14, 2000]

§ 60.482-5 Standards: Sampling connection systems.

(a) Each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in §60.482–1(c) and paragraph (c) of this section.

(b) Each closed-purge, closed-loop, or closed-vent system as required in paragraph (a) of this section shall comply with the requirements specified in paragraphs (b)(1) through (4) of this section.

(1) Gases displaced during filling of the sample container are not required to be collected or captured.

(2) Containers that are part of a closed-purge system must be covered or closed when not being filled or emptied.

(3) Gases remaining in the tubing or piping between the closed-purge system valve(s) and sample container valve(s) after the valves are closed and the sample container is disconnected are not required to be collected or captured.

(4) Each closed-purge, closed-loop, or closed-vent system shall be designed and operated to meet requirements in either paragraph (b)(4)(i), (ii), (iii), or (iv) of this section.

(i) Return the purged process fluid directly to the process line.

(ii) Collect and recycle the purged process fluid to a process.

(iii) Capture and transport all the purged process fluid to a control device that complies with the requirements of §60.482–10.

(iv) Collect, store, and transport the purged process fluid to any of the following systems or facilities:

(A) A waste management unit as defined in §63.111, if the waste management unit is subject to and operated in compliance with the provisions of 40 CFR part 63, subpart G, applicable to Group 1 wastewater streams;

(B) A treatment, storage, or disposal facility subject to regulation under 40 CFR part 262, 264, 265, or 266;

(C) A facility permitted, licensed, or registered by a state to manage municipal or industrial solid waste, if the process fluids are not hazardous waste as defined in 40 CFR part 261;

(D) A waste management unit subject to and operated in compliance with the treatment requirements of §61.348(a), provided all waste management units that collect, store, or transport the purged process fluid to the treatment unit are subject to and operated in compliance with the management requirements of §§61.343 through 61.347; or

(E) A device used to burn off-specification used oil for energy recovery in accordance with 40 CFR part 279, subpart G, provided the purged process fluid is not hazardous waste as defined in 40 CFR part 261.

(c) In situ sampling systems and sampling systems without purges are exempt from the requirements of paragraphs (a) and (b) of this section.

[60 FR 43258, Aug. 18, 1995, as amended at 65 FR 61762, Oct. 17, 2000; 65 FR 78277, Dec. 14, 2000; 72 FR 64881, Nov. 16, 2007]

§ 60.482-6 Standards: Open-ended valves or lines.

(a)(1) Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in §60.482–1(c) and paragraphs (d) and (e) of this section.

(2) The cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring process fluid flow through the open-ended valve or line.

(b) Each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the process fluid end is closed before the second valve is closed.

(c) When a double block-and-bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with paragraph (a) at all other times.

(d) Open-ended valves or lines in an emergency shutdown system which are designed to open automatically in the event of a process upset are exempt from the requirements of paragraphs (a), (b) and (c) of this section.

(e) Open-ended valves or lines containing materials which would autocatalytically polymerize or would present an explosion, serious overpressure, or other safety hazard if capped or equipped with a double block and bleed system as specified in paragraphs (a) through (c) of this section are exempt from the requirements of paragraphs (a) through (c) of this section.

[48 FR 48335, Oct. 18, 1983, as amended at 49 FR 22607, May 30, 1984; 65 FR 78277, Dec. 14, 2000; 72 FR 64881, Nov. 16, 2007]

§ 60.482-7 Standards: Valves in gas/vapor service and in light liquid service.

(a)(1) Each valve shall be monitored monthly to detect leaks by the methods specified in §60.485(b) and shall comply with paragraphs (b) through (e) of this section, except as provided in paragraphs (f), (g), and (h) of this section, §60.482–1(c) and (f), and §§60.483–1 and 60.483–2.

(2) A valve that begins operation in gas/vapor service or light liquid service after the initial startup date for the process unit must be monitored according to paragraphs (a)(2)(i) or (ii), except for a valve that replaces a leaking valve and except as provided in paragraphs (f), (g), and (h) of this section, §60.482–1(c), and §§60.483–1 and 60.483–2.

(i) Monitor the valve as in paragraph (a)(1) of this section. The valve must be monitored for the first time within 30 days after the end of its startup period to ensure proper installation.

(ii) If the valves on the process unit are monitored in accordance with §60.483–1 or §60.483–2, count the new valve as leaking when calculating the percentage of valves leaking as described in §60.483–2(b)(5). If less than 2.0 percent of the valves are leaking for that process unit, the valve must be monitored for the first time during the next scheduled monitoring event for existing valves in the process unit or within 90 days, whichever comes first.

(b) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(c)(1)(i) Any valve for which a leak is not detected for 2 successive months may be monitored the first month of every quarter, beginning with the next quarter, until a leak is detected.

(ii) As an alternative to monitoring all of the valves in the first month of a quarter, an owner or operator may elect to subdivide the process unit into 2 or 3 subgroups of valves and monitor each subgroup in a different month during the quarter, provided each subgroup is monitored every 3 months. The owner or operator must keep records of the valves assigned to each subgroup.

(2) If a leak is detected, the valve shall be monitored monthly until a leak is not detected for 2 successive months.

(d)(1) When a leak is detected, it shall be repaired as soon as practicable, but no later than 15 calendar days after the leak is detected, except as provided in §60.482–9.

(2) A first attempt at repair shall be made no later than 5 calendar days after each leak is detected.

(e) First attempts at repair include, but are not limited to, the following best practices where practicable:

(1) Tightening of bonnet bolts;

(2) Replacement of bonnet bolts;

(3) Tightening of packing gland nuts;

(4) Injection of lubricant into lubricated packing.

(f) Any valve that is designated, as described in §60.486(e)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of paragraph (a) if the valve:

(1) Has no external actuating mechanism in contact with the process fluid,

(2) Is operated with emissions less than 500 ppm above background as determined by the method specified in §60.485(c), and

(3) Is tested for compliance with paragraph (f)(2) of this section initially upon designation, annually, and at other times requested by the Administrator.

(g) Any valve that is designated, as described in §60.486(f)(1), as an unsafe-to-monitor valve is exempt from the requirements of paragraph (a) if:

(1) The owner or operator of the valve demonstrates that the valve is unsafe to monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with paragraph (a), and

(2) The owner or operator of the valve adheres to a written plan that requires monitoring of the valve as frequently as practicable during safe-to-monitor times.

(h) Any valve that is designated, as described in §60.486(f)(2), as a difficult-to-monitor valve is exempt from the requirements of paragraph (a) if:

(1) The owner or operator of the valve demonstrates that the valve cannot be monitored without elevating the monitoring personnel more than 2 meters above a support surface.

(2) The process unit within which the valve is located either becomes an affected facility through §60.14 or §60.15 or the owner or operator designates less than 3.0 percent of the total number of valves as difficult-to-monitor, and

(3) The owner or operator of the valve follows a written plan that requires monitoring of the valve at least once per calendar year.

[48 FR 48335, Oct. 18, 1983, as amended at 49 FR 22608, May 30, 1984; 65 FR 61762, Oct. 17, 2000; 72 FR 64881, Nov. 16, 2007]

§ 60.482-8 Standards: Pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors.

(a) If evidence of a potential leak is found by visual, audible, olfactory, or any other detection method at pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors, the owner or operator shall follow either one of the following procedures:

(1) The owner or operator shall monitor the equipment within 5 days by the method specified in §60.485(b) and shall comply with the requirements of paragraphs (b) through (d) of this section.

(2) The owner or operator shall eliminate the visual, audible, olfactory, or other indication of a potential leak within 5 calendar days of detection.

(b) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(c)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in §60.482–9.

(2) The first attempt at repair shall be made no later than 5 calendar days after each leak is detected.

(d) First attempts at repair include, but are not limited to, the best practices described under §§60.482–2(c)(2) and 60.482–7(e).

[48 CFR 48335, Oct. 18, 1983, as amended at 65 FR 78277, Dec. 14, 2000; 72 FR 64882, Nov. 16, 2007]

§ 60.482-9 Standards: Delay of repair.

(a) Delay of repair of equipment for which leaks have been detected will be allowed if repair within 15 days is technically infeasible without a process unit shutdown. Repair of this equipment shall occur before the end of the next process unit shutdown. Monitoring to verify repair must occur within 15 days after startup of the process unit.

(b) Delay of repair of equipment will be allowed for equipment which is isolated from the process and which does not remain in VOC service.

(c) Delay of repair for valves will be allowed if:

(1) The owner or operator demonstrates that emissions of purged material resulting from immediate repair are greater than the fugitive emissions likely to result from delay of repair, and

(2) When repair procedures are effected, the purged material is collected and destroyed or recovered in a control device complying with §60.482–10.

(d) Delay of repair for pumps will be allowed if:

(1) Repair requires the use of a dual mechanical seal system that includes a barrier fluid system, and

(2) Repair is completed as soon as practicable, but not later than 6 months after the leak was detected.

(e) Delay of repair beyond a process unit shutdown will be allowed for a valve, if valve assembly replacement is necessary during the process unit shutdown, valve assembly supplies have been depleted, and valve assembly supplies had been sufficiently stocked before the supplies were depleted. Delay of repair beyond the next process unit shutdown will not be allowed unless the next process unit shutdown occurs sooner than 6 months after the first process unit shutdown.

(f) When delay of repair is allowed for a leaking pump or valve that remains in service, the pump or valve may be considered to be repaired and no longer subject to delay of repair requirements if two consecutive monthly monitoring instrument readings are below the leak definition.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 78277, Dec. 14, 2000; 72 FR 64882, Nov. 16, 2007]

§ 60.482-10 Standards: Closed vent systems and control devices.

(a) Owners or operators of closed vent systems and control devices used to comply with provisions of this subpart shall comply with the provisions of this section.

(b) Vapor recovery systems (for example, condensers and absorbers) shall be designed and operated to recover the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, whichever is less stringent.

(c) Enclosed combustion devices shall be designed and operated to reduce the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, on a dry basis, corrected to 3 percent oxygen, whichever is less stringent or to provide a minimum residence time of 0.75 seconds at a minimum temperature of 816 °C.

(d) Flares used to comply with this subpart shall comply with the requirements of §60.18.

(e) Owners or operators of control devices used to comply with the provisions of this subpart shall monitor these control devices to ensure that they are operated and maintained in conformance with their designs.

(f) Except as provided in paragraphs (i) through (k) of this section, each closed vent system shall be inspected according to the procedures and schedule specified in paragraphs (f)(1) and (f)(2) of this section.

(1) If the vapor collection system or closed vent system is constructed of hard-piping, the owner or operator shall comply with the requirements specified in paragraphs (f)(1)(i) and (f)(1)(ii) of this section:

(i) Conduct an initial inspection according to the procedures in §60.485(b); and

(ii) Conduct annual visual inspections for visible, audible, or olfactory indications of leaks.

(2) If the vapor collection system or closed vent system is constructed of ductwork, the owner or operator shall:

(i) Conduct an initial inspection according to the procedures in §60.485(b); and

(ii) Conduct annual inspections according to the procedures in §60.485(b).

(g) Leaks, as indicated by an instrument reading greater than 500 parts per million by volume above background or by visual inspections, shall be repaired as soon as practicable except as provided in paragraph (h) of this section.

(1) A first attempt at repair shall be made no later than 5 calendar days after the leak is detected.

(2) Repair shall be completed no later than 15 calendar days after the leak is detected.

(h) Delay of repair of a closed vent system for which leaks have been detected is allowed if the repair is technically infeasible without a process unit shutdown or if the owner or operator determines that emissions resulting from immediate repair would be greater than the fugitive emissions likely to result from delay of repair. Repair of such equipment shall be complete by the end of the next process unit shutdown.

(i) If a vapor collection system or closed vent system is operated under a vacuum, it is exempt from the inspection requirements of paragraphs (f)(1)(i) and (f)(2) of this section.

(j) Any parts of the closed vent system that are designated, as described in paragraph (l)(1) of this section, as unsafe to inspect are exempt from the inspection requirements of paragraphs (f)(1)(i) and (f)(2) of this section if they comply with the requirements specified in paragraphs (j)(1) and (j)(2) of this section:

(1) The owner or operator determines that the equipment is unsafe to inspect because inspecting personnel would be exposed to an imminent or potential danger as a consequence of complying with paragraphs (f)(1)(i) or (f)(2) of this section; and

(2) The owner or operator has a written plan that requires inspection of the equipment as frequently as practicable during safe-to-inspect times.

(k) Any parts of the closed vent system that are designated, as described in paragraph (l)(2) of this section, as difficult to inspect are exempt from the inspection requirements of paragraphs (f)(1)(i) and (f)(2) of this section if they comply with the requirements specified in paragraphs (k)(1) through (k)(3) of this section:

(1) The owner or operator determines that the equipment cannot be inspected without elevating the inspecting personnel more than 2 meters above a support surface; and

(2) The process unit within which the closed vent system is located becomes an affected facility through §§60.14 or 60.15, or the owner or operator designates less than 3.0 percent of the total number of closed vent system equipment as difficult to inspect; and

(3) The owner or operator has a written plan that requires inspection of the equipment at least once every 5 years. A closed vent system is exempt from inspection if it is operated under a vacuum.

(l) The owner or operator shall record the information specified in paragraphs (l)(1) through (l)(5) of this section.

(1) Identification of all parts of the closed vent system that are designated as unsafe to inspect, an explanation of why the equipment is unsafe to inspect, and the plan for inspecting the equipment.

(2) Identification of all parts of the closed vent system that are designated as difficult to inspect, an explanation of why the equipment is difficult to inspect, and the plan for inspecting the equipment.

(3) For each inspection during which a leak is detected, a record of the information specified in §60.486(c).

(4) For each inspection conducted in accordance with §60.485(b) during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected.

(5) For each visual inspection conducted in accordance with paragraph (f)(1)(ii) of this section during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected.

(m) Closed vent systems and control devices used to comply with provisions of this subpart shall be operated at all times when emissions may be vented to them.

[48 FR 48335, Oct. 18, 1983, as amended at 51 FR 2702, Jan. 21, 1986; 60 FR 43258, Aug. 18, 1995; 61 FR 29878, June 12, 1996; 65 FR 78277, Dec. 14, 2000]

§ 60.483-1 Alternative standards for valves—allowable percentage of valves leaking.

(a) An owner or operator may elect to comply with an allowable percentage of valves leaking of equal to or less than 2.0 percent.

(b) The following requirements shall be met if an owner or operator wishes to comply with an allowable percentage of valves leaking:

(1) An owner or operator must notify the Administrator that the owner or operator has elected to comply with the allowable percentage of valves leaking before implementing this alternative standard, as specified in §60.487(d).

(2) A performance test as specified in paragraph (c) of this section shall be conducted initially upon designation, annually, and at other times requested by the Administrator.

(3) If a valve leak is detected, it shall be repaired in accordance with §60.482–7(d) and (e).

(c) Performance tests shall be conducted in the following manner:

(1) All valves in gas/vapor and light liquid service within the affected facility shall be monitored within 1 week by the methods specified in §60.485(b).

(2) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(3) The leak percentage shall be determined by dividing the number of valves for which leaks are detected by the number of valves in gas/vapor and light liquid service within the affected facility.

(d) Owners and operators who elect to comply with this alternative standard shall not have an affected facility with a leak percentage greater than 2.0 percent, determined as described in §60.485(h).

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61762, Oct. 17, 2000; 65 FR 78278, Dec. 14, 2000; 72 FR 64882, Nov. 16, 2007]

§ 60.483-2 Alternative standards for valves—skip period leak detection and repair.

(a)(1) An owner or operator may elect to comply with one of the alternative work practices specified in paragraphs (b)(2) and (3) of this section.

(2) An owner or operator must notify the Administrator before implementing one of the alternative work practices, as specified in §60.487(d).

(b)(1) An owner or operator shall comply initially with the requirements for valves in gas/vapor service and valves in light liquid service, as described in §60.482–7.

(2) After 2 consecutive quarterly leak detection periods with the percent of valves leaking equal to or less than 2.0, an owner or operator may begin to skip 1 of the quarterly leak detection periods for the valves in gas/vapor and light liquid service.

(3) After 5 consecutive quarterly leak detection periods with the percent of valves leaking equal to or less than 2.0, an owner or operator may begin to skip 3 of the quarterly leak detection periods for the valves in gas/vapor and light liquid service.

(4) If the percent of valves leaking is greater than 2.0, the owner or operator shall comply with the requirements as described in §60.482–7 but can again elect to use this section.

(5) The percent of valves leaking shall be determined as described in §60.485(h).

(6) An owner or operator must keep a record of the percent of valves found leaking during each leak detection period.

(7) A valve that begins operation in gas/vapor service or light liquid service after the initial startup date for a process unit following one of the alternative standards in this section must be monitored in accordance with §60.482–7(a)(2)(i) or (ii) before the provisions of this section can be applied to that valve.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61762, Oct. 17, 2000; 65 FR 78278, Dec. 14, 2000; 72 FR 64882, Nov. 16, 2007]

§ 60.484 Equivalence of means of emission limitation.

(a) Each owner or operator subject to the provisions of this subpart may apply to the Administrator for determination of equivalence for any means of emission limitation that achieves a reduction in emissions of VOC at least equivalent to the reduction in emissions of VOC achieved by the controls required in this subpart.

(b) Determination of equivalence to the equipment, design, and operational requirements of this subpart will be evaluated by the following guidelines:

(1) Each owner or operator applying for an equivalence determination shall be responsible for collecting and verifying test data to demonstrate equivalence of means of emission limitation.

(2) The Administrator will compare test data for demonstrating equivalence of the means of emission limitation to test data for the equipment, design, and operational requirements.

(3) The Administrator may condition the approval of equivalence on requirements that may be necessary to assure operation and maintenance to achieve the same emission reduction as the equipment, design, and operational requirements.

(c) Determination of equivalence to the required work practices in this subpart will be evaluated by the following guidelines:

(1) Each owner or operator applying for a determination of equivalence shall be responsible for collecting and verifying test data to demonstrate equivalence of an equivalent means of emission limitation.

(2) For each affected facility for which a determination of equivalence is requested, the emission reduction achieved by the required work practice shall be demonstrated.

(3) For each affected facility, for which a determination of equivalence is requested, the emission reduction achieved by the equivalent means of emission limitation shall be demonstrated.

(4) Each owner or operator applying for a determination of equivalence shall commit in writing to work practice(s) that provide for emission reductions equal to or greater than the emission reductions achieved by the required work practice.

(5) The Administrator will compare the demonstrated emission reduction for the equivalent means of emission limitation to the demonstrated emission reduction for the required work practices and will consider the commitment in paragraph (c)(4).

(6) The Administrator may condition the approval of equivalence on requirements that may be necessary to assure operation and maintenance to achieve the same emission reduction as the required work practice.

(d) An owner or operator may offer a unique approach to demonstrate the equivalence of any equivalent means of emission limitation.

(e)(1) After a request for determination of equivalence is received, the Administrator will publish a notice in theFederal Registerand provide the opportunity for public hearing if the Administrator judges that the request may be approved.

(2) After notice and opportunity for public hearing, the Administrator will determine the equivalence of a means of emission limitation and will publish the determination in theFederal Register.

(3) Any equivalent means of emission limitations approved under this section shall constitute a required work practice, equipment, design, or operational standard within the meaning of section 111(h)(1) of the Clean Air Act.

(f)(1) Manufacturers of equipment used to control equipment leaks of VOC may apply to the Administrator for determination of equivalence for any equivalent means of emission limitation that achieves a reduction in emissions of VOC achieved by the equipment, design, and operational requirements of this subpart.

(2) The Administrator will make an equivalence determination according to the provisions of paragraphs (b), (c), (d), and (e) of this section.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61762, Oct. 17, 2000; 72 FR 64882, Nov. 16, 2007]

§ 60.485 Test methods and procedures.

(a) In conducting the performance tests required in §60.8, the owner or operator shall use as reference methods and procedures the test methods in appendix A of this part or other methods and procedures as specified in this section, except as provided in §60.8(b).

(b) The owner or operator shall determine compliance with the standards in §§60.482–1 through 60.482–10, 60.483, and 60.484 as follows:

(1) Method 21 shall be used to determine the presence of leaking sources. The instrument shall be calibrated before use each day of its use by the procedures specified in Method 21. The following calibration gases shall be used:

(i) Zero air (less than 10 ppm of hydrocarbon in air); and

(ii) A mixture of methane or n-hexane and air at a concentration of about, but less than, 10,000 ppm methane or n-hexane.

(c) The owner or operator shall determine compliance with the no detectable emission standards in §§60.482–2(e), 60.482–3(i), 60.482–4, 60.482–7(f), and 60.482–10(e) as follows:

(1) The requirements of paragraph (b) shall apply.

(2) Method 21 shall be used to determine the background level. All potential leak interfaces shall be traversed as close to the interface as possible. The arithmetic difference between the maximum concentration indicated by the instrument and the background level is compared with 500 ppm for determining compliance.

(d) The owner or operator shall test each piece of equipment unless he demonstrates that a process unit is not in VOC service, i.e., that the VOC content would never be reasonably expected to exceed 10 percent by weight. For purposes of this demonstration, the following methods and procedures shall be used:

(1) Procedures that conform to the general methods in ASTM E260–73, 91, or 96, E168–67, 77, or 92, E169–63, 77, or 93 (incorporated by reference—see §60.17) shall be used to determine the percent VOC content in the process fluid that is contained in or contacts a piece of equipment.

(2) Organic compounds that are considered by the Administrator to have negligible photochemical reactivity may be excluded from the total quantity of organic compounds in determining the VOC content of the process fluid.

(3) Engineering judgment may be used to estimate the VOC content, if a piece of equipment had not been shown previously to be in service. If the Administrator disagrees with the judgment, paragraphs (d) (1) and (2) of this section shall be used to resolve the disagreement.

(e) The owner or operator shall demonstrate that a piece of equipment is in light liquid service by showing that all the following conditions apply:

(1) The vapor pressure of one or more of the organic components is greater than 0.3 kPa at 20 °C (1.2 in. H_2O at 68 °F). Standard reference texts or ASTM D2879–83, 96, or 97 (incorporated by reference—see §60.17) shall be used to determine the vapor pressures.

(2) The total concentration of the pure organic components having a vapor pressure greater than 0.3 kPa at 20 °C (1.2 in. H_2O at 68 °F) is equal to or greater than 20 percent by weight.

(3) The fluid is a liquid at operating conditions.

(f) Samples used in conjunction with paragraphs (d), (e), and (g) of this section shall be representative of the process fluid that is contained in or contacts the equipment or the gas being combusted in the flare.

(g) The owner or operator shall determine compliance with the standards of flares as follows:

(1) Method 22 shall be used to determine visible emissions.

(2) A thermocouple or any other equivalent device shall be used to monitor the presence of a pilot flame in the flare.

(3) The maximum permitted velocity for air assisted flares shall be computed using the following equation:

$$V_{max} = K_1 + K_2 H_T$$

Where:

V_{max}= Maximum permitted velocity, m/sec (ft/sec)

H_T= Net heating value of the gas being combusted, MJ/scm (Btu/scf).

K_1= 8.706 m/sec (metric units)

= 28.56 ft/sec (English units)

K_2= 0.7084 m^4 /(MJ-sec) (metric units)

= 0.087 ft^4 /(Btu-sec) (English units)

(4) The net heating value (H_T) of the gas being combusted in a flare shall be computed using the following equation:

$$H_T = K\sum_{i=1}^{n} C_i H_i$$

Where:

K = Conversion constant, 1.740×10^{-7} (g-mole)(MJ)/(ppm-scm-kcal) (metric units) = 4.674×10^{-6} [(g-mole)(Btu)/(ppm-scf-kcal)] (English units)

C_i= Concentration of sample component "i," ppm

H_i= Net heat of combustion of sample component "i" at 25 °C and 760 mm Hg (77 °F and 14.7 psi), kcal/g-mole

(5) Method 18 or ASTM D6420–99 (2004) (where the target compound(s) are those listed in Section 1.1 of ASTM D6420–99, and the target concentration is between 150 parts per billion by volume and 100 parts per million by volume) and ASTM D2504–67, 77 or 88 (Reapproved 1993) (incorporated by reference—see §60.17) shall be used to determine the concentration of sample component "i."

(6) ASTM D2382–76 or 88 or D4809–95 (incorporated by reference—see §60.17) shall be used to determine the net heat of combustion of component "i" if published values are not available or cannot be calculated.

(7) Method 2, 2A, 2C, or 2D, as appropriate, shall be used to determine the actual exit velocity of a flare. If needed, the unobstructed (free) cross-sectional area of the flare tip shall be used.

(h) The owner or operator shall determine compliance with §60.483–1 or §60.483–2 as follows:

(1) The percent of valves leaking shall be determined using the following equation:

$\%V_L = (V_L/V_T) * 100$

Where:

$\%V_L$= Percent leaking valves

V_L= Number of valves found leaking

V_T= The sum of the total number of valves monitored

(2) The total number of valves monitored shall include difficult-to-monitor and unsafe-to-monitor valves only during the monitoring period in which those valves are monitored.

(3) The number of valves leaking shall include valves for which repair has been delayed.

(4) Any new valve that is not monitored within 30 days of being placed in service shall be included in the number of valves leaking and the total number of valves monitored for the monitoring period in which the valve is placed in service.

(5) If the process unit has been subdivided in accordance with §60.482–7(c)(1)(ii), the sum of valves found leaking during a monitoring period includes all subgroups.

(6) The total number of valves monitored does not include a valve monitored to verify repair.

[54 FR 6678, Feb. 14, 1989, as amended at 54 FR 27016, June 27, 1989; 65 FR 61763, Oct. 17, 2000; 72 FR 64882, Nov. 16, 2007]

§ 60.486 Recordkeeping requirements.

(a)(1) Each owner or operator subject to the provisions of this subpart shall comply with the recordkeeping requirements of this section.

(2) An owner or operator of more than one affected facility subject to the provisions of this subpart may comply with the recordkeeping requirements for these facilities in one recordkeeping system if the system identifies each record by each facility.

(b) When each leak is detected as specified in §§60.482–2, 60.482–3, 60.482–7, 60.482–8, and 60.483–2, the following requirements apply:

(1) A weatherproof and readily visible identification, marked with the equipment identification number, shall be attached to the leaking equipment.

(2) The identification on a valve may be removed after it has been monitored for 2 successive months as specified in §60.482–7(c) and no leak has been detected during those 2 months.

(3) The identification on equipment except on a valve, may be removed after it has been repaired.

(c) When each leak is detected as specified in §§60.482–2, 60.482–3, 60.482–7, 60.482–8, and 60.483–2, the following information shall be recorded in a log and shall be kept for 2 years in a readily accessible location:

(1) The instrument and operator identification numbers and the equipment identification number.

(2) The date the leak was detected and the dates of each attempt to repair the leak.

(3) Repair methods applied in each attempt to repair the leak.

(4) “Above 10,000” if the maximum instrument reading measured by the methods specified in §60.485(a) after each repair attempt is equal to or greater than 10,000 ppm.

(5) “Repair delayed” and the reason for the delay if a leak is not repaired within 15 calendar days after discovery of the leak.

(6) The signature of the owner or operator (or designate) whose decision it was that repair could not be effected without a process shutdown.

(7) The expected date of successful repair of the leak if a leak is not repaired within 15 days.

(8) Dates of process unit shutdowns that occur while the equipment is unrepaired.

(9) The date of successful repair of the leak.

(d) The following information pertaining to the design requirements for closed vent systems and control devices described in §60.482–10 shall be recorded and kept in a readily accessible location:

(1) Detailed schematics, design specifications, and piping and instrumentation diagrams.

(2) The dates and descriptions of any changes in the design specifications.

(3) A description of the parameter or parameters monitored, as required in §60.482–10(e), to ensure that control devices are operated and maintained in conformance with their design and an explanation of why that parameter (or parameters) was selected for the monitoring.

(4) Periods when the closed vent systems and control devices required in §§60.482–2, 60.482–3, 60.482–4, and 60.482–5 are not operated as designed, including periods when a flare pilot light does not have a flame.

(5) Dates of startups and shutdowns of the closed vent systems and control devices required in §§60.482–2, 60.482–3, 60.482–4, and 60.482–5.

(e) The following information pertaining to all equipment subject to the requirements in §§60.482–1 to 60.482–10 shall be recorded in a log that is kept in a readily accessible location:

(1) A list of identification numbers for equipment subject to the requirements of this subpart.

(2)(i) A list of identification numbers for equipment that are designated for no detectable emissions under the provisions of §§60.482–2(e), 60.482–3(i) and 60.482–7(f).

(ii) The designation of equipment as subject to the requirements of §60.482–2(e), §60.482–3(i), or §60.482–7(f) shall be signed by the owner or operator. Alternatively, the owner or operator may establish a mechanism with their permitting authority that satisfies this requirement.

(3) A list of equipment identification numbers for pressure relief devices required to comply with §60.482–4.

(4)(i) The dates of each compliance test as required in §§60.482–2(e), 60.482–3(i), 60.482–4, and 60.482–7(f).

(ii) The background level measured during each compliance test.

(iii) The maximum instrument reading measured at the equipment during each compliance test.

(5) A list of identification numbers for equipment in vacuum service.

(6) A list of identification numbers for equipment that the owner or operator designates as operating in VOC service less than 300 hr/yr in accordance with §60.482–1(e), a description of the conditions under which the equipment is in VOC service, and rationale supporting the designation that it is in VOC service less than 300 hr/yr.

(f) The following information pertaining to all valves subject to the requirements of §60.482–7(g) and (h) and to all pumps subject to the requirements of §60.482–2(g) shall be recorded in a log that is kept in a readily accessible location:

(1) A list of identification numbers for valves and pumps that are designated as unsafe-to-monitor, an explanation for each valve or pump stating why the valve or pump is unsafe-to-monitor, and the plan for monitoring each valve or pump.

(2) A list of identification numbers for valves that are designated as difficult-to-monitor, an explanation for each valve stating why the valve is difficult-to-monitor, and the schedule for monitoring each valve.

(g) The following information shall be recorded for valves complying with §60.483–2:

(1) A schedule of monitoring.

(2) The percent of valves found leaking during each monitoring period.

(h) The following information shall be recorded in a log that is kept in a readily accessible location:

(1) Design criterion required in §§60.482–2(d)(5) and 60.482–3(e)(2) and explanation of the design criterion; and

(2) Any changes to this criterion and the reasons for the changes.

(i) The following information shall be recorded in a log that is kept in a readily accessible location for use in determining exemptions as provided in §60.480(d):

(1) An analysis demonstrating the design capacity of the affected facility,

(2) A statement listing the feed or raw materials and products from the affected facilities and an analysis demonstrating whether these chemicals are heavy liquids or beverage alcohol, and

(3) An analysis demonstrating that equipment is not in VOC service.

(j) Information and data used to demonstrate that a piece of equipment is not in VOC service shall be recorded in a log that is kept in a readily accessible location.

(k) The provisions of §60.7 (b) and (d) do not apply to affected facilities subject to this subpart.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61763, Oct. 17, 2000; 65 FR 78278, Dec. 14, 2000; 72 FR 64883, Nov. 16, 2007]

§ 60.487 Reporting requirements.

(a) Each owner or operator subject to the provisions of this subpart shall submit semiannual reports to the Administrator beginning six months after the initial startup date.

(b) The initial semiannual report to the Administrator shall include the following information:

(1) Process unit identification.

(2) Number of valves subject to the requirements of §60.482–7, excluding those valves designated for no detectable emissions under the provisions of §60.482–7(f).

(3) Number of pumps subject to the requirements of §60.482–2, excluding those pumps designated for no detectable emissions under the provisions of §60.482–2(e) and those pumps complying with §60.482–2(f).

(4) Number of compressors subject to the requirements of §60.482–3, excluding those compressors designated for no detectable emissions under the provisions of §60.482–3(i) and those compressors complying with §60.482–3(h).

(c) All semiannual reports to the Administrator shall include the following information, summarized from the information in §60.486:

(1) Process unit identification.

(2) For each month during the semiannual reporting period,

(i) Number of valves for which leaks were detected as described in §60.482–7(b) or §60.483–2,

(ii) Number of valves for which leaks were not repaired as required in §60.482–7(d)(1),

(iii) Number of pumps for which leaks were detected as described in §60.482–2(b), (d)(4)(ii)(A) or (B), or (d)(5)(iii),

(iv) Number of pumps for which leaks were not repaired as required in §60.482–2(c)(1) and (d)(6),

(v) Number of compressors for which leaks were detected as described in §60.482–3(f),

(vi) Number of compressors for which leaks were not repaired as required in §60.482–3(g)(1), and

(vii) The facts that explain each delay of repair and, where appropriate, why a process unit shutdown was technically infeasible.

(3) Dates of process unit shutdowns which occurred within the semiannual reporting period.

(4) Revisions to items reported according to paragraph (b) if changes have occurred since the initial report or subsequent revisions to the initial report.

(d) An owner or operator electing to comply with the provisions of §§60.483–1 or 60.483–2 shall notify the Administrator of the alternative standard selected 90 days before implementing either of the provisions.

(e) An owner or operator shall report the results of all performance tests in accordance with §60.8 of the General Provisions. The provisions of §60.8(d) do not apply to affected facilities subject to the provisions of this subpart except that an owner or operator must notify the Administrator of the schedule for the initial performance tests at least 30 days before the initial performance tests.

(f) The requirements of paragraphs (a) through (c) of this section remain in force until and unless EPA, in delegating enforcement authority to a State under section 111(c) of the Act, approves reporting requirements or an alternative means of compliance surveillance adopted by such State. In that event, affected sources within the State will be relieved of the obligation to comply with the requirements of paragraphs (a) through (c) of this section, provided that they comply with the requirements established by the State.

[48 FR 48335, Oct. 18, 1983, as amended at 49 FR 22608, May 30, 1984; 65 FR 61763, Oct. 17, 2000; 72 FR 64883, Nov. 16, 2007]

§ 60.488 Reconstruction.

For the purposes of this subpart:

(a) The cost of the following frequently replaced components of the facility shall not be considered in calculating either the "fixed capital cost of the new components" or the "fixed capital costs that would be required to construct a comparable new facility" under §60.15: pump seals, nuts and bolts, rupture disks, and packings.

(b) Under §60.15, the "fixed capital cost of new components" includes the fixed capital cost of all depreciable components (except components specified in §60.488 (a)) which are or will be replaced pursuant to all continuous programs of component replacement which are commenced within any 2-year period following the applicability date for the appropriate subpart. (See the "Applicability and designation of affected facility" section of the appropriate subpart.) For purposes of this paragraph, "commenced" means that an owner or operator has undertaken a continuous program of component replacement or that an owner or operator has entered into a contractual obligation to undertake and complete, within a reasonable time, a continuous program of component replacement.

[49 FR 22608, May 30, 1984]

§ 60.489 List of chemicals produced by affected facilities.

The following chemicals are produced, as intermediates or final products, by process units covered under this subpart. The applicability date for process units producing one or more of these chemicals is January 5, 1981.

CAS No.[a]	Chemical
105–57–7	Acetal.
75–07–0	Acetaldehyde.
107–89–1	Acetaldol.
60–35–5	Acetamide.
103–84–4	Acetanilide.
64–19–7	Acetic acid.
108–24–7	Acetic anhydride.
67–64–1	Acetone.
75–86–5	Acetone cyanohydrin.
75–05–8	Acetonitrile.
98–86–2	Acetophenone.
75–36–5	Acetyl chloride.
74–86–2	Acetylene.
107–02–8	Acrolein.
79–06–1	Acrylamide.

79–10–7	Acrylic acid.
107–13–1	Acrylonitrile.
124–04–9	Adipic acid.
111–69–3	Adiponitrile.
([b])	Alkyl naphthalenes.
107–18–6	Allyl alcohol.
107–05–1	Allyl chloride.
1321–11–5	Aminobenzoic acid.
111–41–1	Aminoethylethanolamine.
123–30–8	p-Aminophenol.
628–63–7, 123–92–2	Amyl acetates.
71–41–0[c]	Amyl alcohols.
110–58–7	Amyl amine.
543–59–9	Amyl chloride.
110–66–7[c]	Amyl mercaptans.
1322–06–1	Amyl phenol.
62–53–3	Aniline.
142–04–1	Aniline hydrochloride.
29191–52–4	Anisidine.
100–66–3	Anisole.
118–92–3	Anthranilic acid.
84–65–1	Anthraquinone.
100–52–7	Benzaldehyde.
55–21–0	Benzamide.
71–43–2	Benzene.
98–48–6	Benzenedisulfonic acid.
98–11–3	Benzenesulfonic acid.
134–81–6	Benzil.
76–93–7	Benzilic acid.
65–85–0	Benzoic acid.
119–53–9	Benzoin.
100–47–0	Benzonitrile.
119–61–9	Benzophenone.

98–07–7	Benzotrichloride.
98–88–4	Benzoyl chloride.
100–51–6	Benzyl alcohol.
100–46–9	Benzylamine.
120–51–4	Benzyl benzoate.
100–44–7	Benzyl chloride.
98–87–3	Benzyl dichloride.
92–52–4	Biphenyl.
80–05–7	Bisphenol A.
10–86–1	Bromobenzene.
27497–51–4	Bromonaphthalene.
106–99–0	Butadiene.
106–98–9	1-butene.
123–86–4	n-butyl acetate.
141–32–2	n-butyl acrylate.
71–36–3	n-butyl alcohol.
78–92–2	s-butyl alcohol.
75–65–0	t-butyl alcohol.
109–73–9	n-butylamine.
13952–84–6	s-butylamine.
75–64–9	t-butylamine.
98–73–7	p-tert-butyl benzoic acid.
107–88–0	1,3-butylene glycol.
123–72–8	n-butyraldehyde.
107–92–6	Butyric acid.
106–31–0	Butyric anhydride.
109–74–0	Butyronitrile.
105–60–2	Caprolactam.
75–1–50	Carbon disulfide.
558–13–4	Carbon tetrabromide.
56–23–5	Carbon tetrachloride.
9004–35–7	Cellulose acetate.
79–11–8	Chloroacetic acid.

108–42–9	m-chloroaniline.
95–51–2	o-chloroaniline.
106–47–8	p-chloroaniline.
35913–09–8	Chlorobenzaldehyde.
108–90–7	Chlorobenzene.
118–91–2, 535–80–8, 74–11–3[c]	Chlorobenzoic acid.
2136–81–4, 2136–89–2, 5216–25–1[c]	Chlorobenzotrichloride.
1321–03–5	Chlorobenzoyl chloride.
25497–29–4	Chlorodifluoromethane.
75–45–6	Chlorodifluoroethane.
67–66–3	Chloroform.
25586–43–0	Chloronaphthalene.
88–73–3	o-chloronitrobenzene.
100–00–5	p-chloronitrobenzene.
25167–80–0	Chlorophenols.
126–99–8	Chloroprene.
7790–94–5	Chlorosulfonic acid.
108–41–8	m-chlorotoluene.
95–49–8	o-chlorotoluene.
106–43–4	p-chlorotoluene.
75–72–9	Chlorotrifluoromethane.
108–39–4	m-cresol.
95–48–7	o-cresol.
106–44–5	p-cresol.
1319–77–3	Mixed cresols.
1319–77–3	Cresylic acid.
4170–30–0	Crotonaldehyde.
3724–65–0	Crotonic acid.
98–82–8	Cumene.
80–15–9	Cumene hydroperoxide.
372–09–8	Cyanoacetic acid.
506–77–4	Cyanogen chloride.
108–80–5	Cyanuric acid.

108–77–0	Cyanuric chloride.
110–82–7	Cyclohexane.
108–93–0	Cyclohexanol.
108–94–1	Cyclohexanone.
110–83–8	Cyclohexene.
108–91–8	Cyclohexylamine.
111–78–4	Cyclooctadiene.
112–30–1	Decanol.
123–42–2	Diacetone alcohol.
27576–04–1	Diaminobenzoic acid.
95–76–1, 95–82–9, 554–00–7, 608–27–5, 608–31–1, 626–43–7, 27134–27–6, 57311–92–9[c]	Dichloroaniline.
541–73–1	m-dichlorobenzene.
95–50–1	o-dichlorobenzene.
106–46–7	p-dichlorobenzene.
75–71–8	Dichlorodifluoromethane.
111–44–4	Dichloroethyl ether.
107–06–2	1,2-dichloroethane (EDC).
96–23–1	Dichlorohydrin.
26952–23–8	Dichloropropene.
101–83–7	Dicyclohexylamine.
109–89–7	Diethylamine.
111–46–6	Diethylene glycol.
112–36–7	Diethylene glycol diethyl ether.
111–96–6	Diethylene glycol dimethyl ether.
112–34–5	Diethylene glycol monobutyl ether.
124–17–4	Diethylene glycol monobutyl ether acetate.
111–90–0	Diethylene glycol monoethyl ether.
112–15–2	Diethylene glycol monoethyl ether acetate.
111–77–3	Diethylene glycol monomethyl ether.
64–67–5	Diethyl sulfate.
75–37–6	Difluoroethane.
25167–70–8	Diisobutylene.

26761–40–0	Diisodecyl phthalate.
27554–26–3	Diisooctyl phthalate.
674–82–8	Diketene.
124–40–3	Dimethylamine.
121–69–7	N,N-dimethylaniline.
115–10–6	N,N-dimethyl ether.
68–12–2	N,N-dimethylformamide.
57–14–7	Dimethylhydrazine.
77–78–1	Dimethyl sulfate.
75–18–3	Dimethyl sulfide.
67–68–5	Dimethyl sulfoxide.
120–61–6	Dimethyl terephthalate.
99–34–3	3,5-dinitrobenzoic acid.
51–28–5	Dinitrophenol.
25321–14–6	Dinitrotoluene.
123–91–1	Dioxane.
646–06–0	Dioxilane.
122–39–4	Diphenylamine.
101–84–8	Diphenyl oxide.
102–08–9	Diphenyl thiourea.
25265–71–8	Dipropylene glycol.
25378–22–7	Dodecene.
28675–17–4	Dodecylaniline.
27193–86–8	Dodecylphenol.
106–89–8	Epichlorohydrin.
64–17–5	Ethanol.
141–43–5[c]	Ethanolamines.
141–78–6	Ethyl acetate.
141–97–9	Ethyl acetoacetate.
140–88–5	Ethyl acrylate.
75–04–7	Ethylamine.
100–41–4	Ethylbenzene.
74–96–4	Ethyl bromide.

9004–57–3	Ethylcellulose.
75–00–3	Ethyl chloride.
105–39–5	Ethyl chloroacetate.
105–56–6	Ethylcyanoacetate.
74–85–1	Ethylene.
96–49–1	Ethylene carbonate.
107–07–3	Ethylene chlorohydrin.
107–15–3	Ethylenediamine.
106–93–4	Ethylene dibromide.
107–21–1	Ethylene glycol.
111–55–7	Ethylene glycol diacetate.
110–71–4	Ethylene glycol dimethyl ether.
111–76–2	Ethylene glycol monobutyl ether.
112–07–2	Ethylene glycol monobutyl ether acetate.
110–80–5	Ethylene glycol monoethyl ether.
111–15–9	Ethylene glycol monethyl ether acetate.
109–86–4	Ethylene glycol monomethyl ether.
110–49–6	Ethylene glycol monomethyl ether acetate.
122–99–6	Ethylene glycol monophenyl ether.
2807–30–9	Ethylene glycol monopropyl ether.
75–21–8	Ethylene oxide.
60–29–7	Ethyl ether
104–76–7	2-ethylhexanol.
122–51–0	Ethyl orthoformate.
95–92–1	Ethyl oxalate.
41892–71–1	Ethyl sodium oxalacetate.
50–00–0	Formaldehyde.
75–12–7	Formamide.
64–18–6	Formic acid.
110–17–8	Fumaric acid.
98–01–1	Furfural.
56–81–5	Glycerol.

26545–73–7	Glycerol dichlorohydrin.
25791–96–2	Glycerol triether.
56–40–6	Glycine.
107–22–2	Glyoxal.
118–74–1	Hexachlorobenzene.
67–72–1	Hexachloroethane.
36653–82–4	Hexadecyl alcohol.
124–09–4	Hexamethylenediamine.
629–11–8	Hexamethylene glycol.
100–97–0	Hexamethylenetetramine.
74–90–8	Hydrogen cyanide.
123–31–9	Hydroquinone.
99–96–7	p-hydroxybenzoic acid.
26760–64–5	Isoamylene.
78–83–1	Isobutanol.
110–19–0	Isobutyl acetate.
115–11–7	Isobutylene.
78–84–2	Isobutyraldehyde.
79–31–2	Isobutyric acid.
25339–17–7	Isodecanol.
26952–21–6	Isooctyl alcohol.
78–78–4	Isopentane.
78–59–1	Isophorone.
121–91–5	Isophthalic acid.
78–79–5	Isoprene.
67–63–0	Isopropanol.
108–21–4	Isopropyl acetate.
75–31–0	Isopropylamine.
75–29–6	Isopropyl chloride.
25168–06–3	Isopropylphenol.
463–51–4	Ketene.
([b])	Linear alkyl sulfonate.
123–01–3	Linear alkylbenzene (linear dodecylbenzene).

110–16–7	Maleic acid.
108–31–6	Maleic anhydride.
6915–15–7	Malic acid.
141–79–7	Mesityl oxide.
121–47–1	Metanilic acid.
79–41–4	Methacrylic acid.
563–47–3	Methallyl chloride.
67–56–1	Methanol.
79–20–9	Methyl acetate.
105–45–3	Methyl acetoacetate.
74–89–5	Methylamine.
100–61–8	n-methylaniline.
74–83–9	Methyl bromide.
37365–71–2	Methyl butynol.
74–87–3	Methyl chloride.
108–87–2	Methylcyclohexane.
1331–22–2	Methylcyclohexanone.
75–09–2	Methylene chloride.
101–77–9	Methylene dianiline.
101–68–8	Methylene diphenyl diisocyanate.
78–93–3	Methyl ethyl ketone.
107–31–3	Methyl formate.
108–11–2	Methyl isobutyl carbinol.
108–10–1	Methyl isobutyl ketone.
80–62–6	Methyl methacrylate.
77–75–8	Methylpentynol.
98–83–9	a-methylstyrene.
110–91–8	Morpholine.
85–47–2	a-naphthalene sulfonic acid.
120–18–3	b-naphthalene sulfonic acid.
90–15–3	a-naphthol.
135–19–3	b-naphthol.
75–98–9	Neopentanoic acid.

88–74–4	o-nitroaniline.
100–01–6	p-nitroaniline.
91–23–6	o-nitroanisole.
100–17–4	p-nitroanisole.
98–95–3	Nitrobenzene.
27178–83–2[c]	Nitrobenzoic acid (o,m, and p).
79–24–3	Nitroethane.
75–52–5	Nitromethane.
88–75–5	2-Nitrophenol.
25322–01–4	Nitropropane.
1321–12–6	Nitrotoluene.
27215–95–8	Nonene.
25154–52–3	Nonylphenol.
27193–28–8	Octylphenol.
123–63–7	Paraldehyde.
115–77–5	Pentaerythritol.
109–66–0	n-pentane.
109–67–1	1-pentene
127–18–4	Perchloroethylene.
594–42–3	Perchloromethyl mercaptan.
94–70–2	o-phenetidine.
156–43–4	p-phenetidine.
108–95–2	Phenol.
98–67–9, 585–38–6, 609–46–1, 1333–39–7[c]	Phenolsulfonic acids.
91–40–7	Phenyl anthranilic acid.
([b])	Phenylenediamine.
75–44–5	Phosgene.
85–44–9	Phthalic anhydride.
85–41–6	Phthalimide.
108–99–6	b-picoline.
110–85–0	Piperazine.
9003–29–6, 25036–29–7[c]	Polybutenes.
25322–68–3	Polyethylene glycol.

25322–69–4	Polypropylene glycol.
123–38–6	Propionaldehyde.
79–09–4	Propionic acid.
71–23–8	n-propyl alcohol.
107–10–8	Propylamine.
540–54–5	Propyl chloride.
115–07–1	Propylene.
127–00–4	Propylene chlorohydrin.
78–87–5	Propylene dichloride.
57–55–6	Propylene glycol.
75–56–9	Propylene oxide.
110–86–1	Pyridine.
106–51–4	Quinone.
108–46–3	Resorcinol.
27138–57–4	Resorcylic acid.
69–72–7	Salicylic acid.
127–09–3	Sodium acetate.
532–32–1	Sodium benzoate.
9004–32–4	Sodium carboxymethyl cellulose.
3926–62–3	Sodium chloroacetate.
141–53–7	Sodium formate.
139–02–6	Sodium phenate.
110–44–1	Sorbic acid.
100–42–5	Styrene.
110–15–6	Succinic acid.
110–61–2	Succinonitrile.
121–57–3	Sulfanilic acid.
126–33–0	Sulfolane.
1401–55–4	Tannic acid.
100–21–0	Terephthalic acid.
79–34–5[c]	Tetrachloroethanes.
117–08–8	Tetrachlorophthalic anhydride.
78–00–2	Tetraethyl lead.

119–64–2	Tetrahydronaphthalene.
85–43–8	Tetrahydrophthalic anhydride.
75–74–1	Tetramethyl lead.
110–60–1	Tetramethylenediamine.
110–18–9	Tetramethylethylenediamine.
108–88–3	Toluene.
95–80–7	Toluene-2,4-diamine.
584–84–9	Toluene-2,4-diisocyanate.
26471–62–5	Toluene diisocyanates (mixture).
1333–07–9	Toluenesulfonamide.
104–15–4[c]	Toluenesulfonic acids.
98–59–9	Toluenesulfonyl chloride.
26915–12–8	Toluidines.
87–61–6, 108–70–3, 120–82–1[c]	Trichlorobenzenes.
71–55–6	1,1,1-trichloroethane.
79–00–5	1,1,2-trichloroethane.
79–01–6	Trichloroethylene.
75–69–4	Trichlorofluoromethane.
96–18–4	1,2,3-trichloropropane.
76–13–1	1,1,2-trichloro-1,2,2-trifluoroethane.
121–44–8	Triethylamine.
112–27–6	Triethylene glycol.
112–49–2	Triethylene glycol dimethyl ether.
7756–94–7	Triisobutylene.
75–50–3	Trimethylamine.
57–13–6	Urea.
108–05–4	Vinyl acetate.
75–01–4	Vinyl chloride.
75–35–4	Vinylidene chloride.
25013–15–4	Vinyl toluene.
1330–20–7	Xylenes (mixed).
95–47–6	o-xylene.
106–42–3	p-xylene.

1300–71–6	Xylenol.
1300–73–8	Xylidine.

[a]CAS numbers refer to the Chemical Abstracts Registry numbers assigned to specific chemicals, isomers, or mixtures of chemicals. Some isomers or mixtures that are covered by the standards do not have CAS numbers assigned to them. The standards apply to all of the chemicals listed, whether CAS numbers have been assigned or not.

[b]No CAS number(s) have been assigned to this chemical, its isomers, or mixtures containing these chemicals.

[c]CAS numbers for some of the isomers are listed; the standards apply to all of the isomers and mixtures, even if CAS numbers have not been assigned.

[48 FR 48335, Oct. 18, 1983, as amended at 65 FR 61763, Oct. 17, 2000]

Indiana Department of Environmental Management
Office of Air Quality

Technical Support Document (TSD) for a
Federally Enforceable State Operating Permit Renewal

Source Background and Description

Source Name:	**Iroquois Bio-Energy Company, LLC**
Source Location:	**751 West State Road 114, Rensselaer, Indiana 47978**
County:	**Jasper**
SIC Code:	**2869**
Permit Renewal No.:	**F073-26405-00037**
Permit Reviewer:	**Mehul Sura**

The Office of Air Quality (OAQ) has reviewed the operating permit renewal application from Iroquois Bio-Energy Company, LLC relating to the operation of an ethanol manufacturing plant.

History

On April 10, 2008, Iroquois Bio-Energy Company, LLC submitted an application to the OAQ requesting to renew its operating permit. Iroquois Bio-Energy Company, LLC was issued a FESOP (073-16720-00037) on January 8, 2004.

Permitted Emission Units and Pollution Control Equipment

The source consists of the following emission units and pollution control:

(a) One (1) grain receiving and storage operation, identified as P20, constructed in 2005, with a maximum capacity of 420 tons of grain per hour, controlled by baghouse C20, exhausting through stack S20, and consisting of the following:

(1) One (1) grain unloading operation.

(2) One (1) elevator leg.

(3) One (1) storage bin fill conveyor.

(4) Four (4) grain storage silos, with a total storage capacity of less than 1,000,000 bushels.

(5) One (1) storage bin emptying conveyor.

(6) One (1) day storage bin, with a maximum capacity of 5,000 bushels.

(b) Two (2) hammermills, identified as P30, constructed in 2005, each with a maximum capacity of 100 tons of grain per hour, controlled by baghouse C30, and exhausting through stack S30.

(c) One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system, identified as P70, constructed in 2005, with a maximum throughput rate of 20 tons of DDGS per hour, equipped with an integral cyclone and controlled by baghouse C70, and exhausting through stack S70.

(d) One (1) DDGS loadout operation, identified as P90, constructed in 2005, with a maximum throughput rate of 400 tons/hr, controlled by baghouse C90, and exhausting through stack S90.

(e) One (1) fermentation process, identified as P40, constructed in 2005, with a maximum throughput rate of 6,500 gallons per hour, consisting of four (4) fermenters and one (1) beer well system, controlled by a CO_2 scrubber C40, and exhausting through stack S40.

(f) One (1) recuperative thermal oxidizer/heat recovery steam generator, identified as C10, constructed in 2005, using natural gas and process waste gases from the dryers as fuels, with a maximum heat input capacity of 125 MMBtu/hr, and exhausting through stack S10.

Under the New Source Performance Standard for Industrial-Commercial-Institutional Steam Generating Units (40 CFR 60, Subpart Db) (326 IAC 12), this emission unit is considered to be an affected source.

(g) One (1) mashing, cooking and liquefication operation, identified as P10, constructed in 2005, with a maximum wet dryer feed rate of 48 tons of wet cake (with 65% water) per hour, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, exhausting through stack S10, consisting of the following:

(1) Meal conveying operations.

(2) One (1) mash mixer, where process water and/or hot water is added to meal to form mash.

(3) Two (2) slurry tanks, where ammonia is added to mash as needed to adjust pH levels, each with a maximum capacity of 16,000 gallons.

(4) One (1) cook tube, where steam is injected to sterilize mash and gelatinize starch, with a maximum capacity of 5,000 gallons.

(5) One (1) flash tank, with a maximum capacity of 2,000 gallons.

(6) One (1) receiver tank.

(7) One (1) yeast tank, with a maximum capacity of 21,000 gallons.

(h) One (1) distillation and dehydration operation, constructed in 2005, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, exhausting through stack S10, and consisting of the following:

(1) One (1) beer column.

(2) One (1) side stripper.

(3) One (1) rectifier column.

(4) One (1) 190 proof condenser.

(5) Three (3) molecular sieves.

(6) One (1) 200 proof condenser.

(7) Four (4) centrifuges.

Note: The number of centrifuges in the previous approval (FESOP No. 073-16720-00037) were erroneously specified as 3. The actual numbers of centrifuges are 4.

(8) One (1) centrate storage tank, with a maximum capacity of 990 gallons.

(9) Eight (8) evaporators.

(i) Two (2) natural gas fired DDGS dryers in series, identified as Dryers A and B, constructed in 2005, each with a maximum heat input capacity of 42 MMBtu/hr and a maximum throughput rate of 20 tons of DDGS per hour, controlled by recuperative thermal oxidizer/heat recovery steam generator C10, and exhausting through stack S10.

(j) One (1) ethanol loading terminal for both trucks and railcars, identified as P50, constructed in 2005, with a maximum loading rate of 36,000 gallons per hour for truck loading and a maximum loading rate of 72,000 gallons per hour for railcar loading. The truck loading process is controlled by an open flare C50, which is fueled by natural gas and has a maximum heat input capacity of 6.4 MMBtu/hr, and exhausting through stack S50.

Insignificant Activities

The source also consists of the following Insignificant Activities:

(a) Combustion source flame safety purging on startup.

(b) A gasoline fuel transfer dispensing operation handling less than or equal to 1,300 gallons per day and filling storage tanks having a capacity equal to or less than 10,500 gallons.

(c) A petroleum fuel other than gasoline dispensing facility, having a storage tank capacity less than or equal to 10,500 gallons, and dispensing 3,500 gallons per day or less.

(d) Cleaners and solvents characterized as:

(1) having a vapor pressure equal to or less than two (2.0) kilo Pascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pound per square inch) measured at thirty-eight (38) degrees Centigrade (one hundred (100) degrees Fahrenheit); or

(2) having a vapor pressure equal to or less than seven-tenths (0.7) kilo Pascal (five (5) millimeters of mercury or one-tenth (0.1) pound per square inch) measured at twenty (20) degrees Centigrade (sixty-eight (68) degrees Fahrenheit);

the use of which, for all cleaners and solvents combined, does not exceed one hundred forty-five (145) gallons per twelve (12) months.

(e) One (1) process cooling tower, identified as P80, with a maximum water circulation rate of 1,200,00 gallons per hour, consisting of four (4) cells.

(f) Blowdown for any of the following:

(1) Sight glass.

(2) Boilers.

(3) Cooling tower.

(4) Compressors.

(5) Pumps.

(g) Replacement or repair of bags in baghouses, and filters in other air filtration equipment.

(h) Heat exchanger cleaning and repair.

(i) Paved roads and parking lots with public access.

(j) Diesel fired emergency generators not exceeding 1,600 horsepower, including one (1) emergency diesel fired water pump, identified as EP-16, with a maximum power output of 190 hp.

(k) Filter or coalescer media changeout.

(l) Other emission units, not regulated by a NESHAP, with PM10, NO_x, and SO_2 emissions less than five (5) pounds per hour or twenty-five (25) pounds per day, CO emissions less than twenty-five (25) pounds per day, VOC emissions less than three (3) pounds per hour or fifteen (15) pounds per day, lead emissions less than six-tenths (0.6) tons per year or three and twenty-nine hundredths (3.29) pounds per day, and emitting greater than one (1) pound per day but less than five (5) pounds per day or one (1) ton per year of a single HAP, or emitting greater than one (1) pound per day but less than twelve and five tenths (12.5) pounds per day or two and five tenths (2.5) ton per year of any combination of HAPs:

(1) Two (2) final product storage tanks, identified as TK61 and TK62, constructed in 2005, which store denatured ethanol, each with a maximum capacity of 500,000 gallons, and equipped with internal floating roofs.

(2) Two (2) shift tanks, identified as TK63 and TK65, constructed in 2005, which store 190 and 200 proof ethanol, each with a maximum capacity of 100,000 gallons, and equipped with internal floating roofs.

(3) One (1) denaturant (gasoline) storage tank, identified as TK64, constructed in 2005, which stores gasoline, with a maximum capacity of 100,000 gallons, and equipped with an internal floating roof.

Under the New Source Performance Standard for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced After July 23, 1984 (40 CFR 60, Subpart Kb) (326 IAC 12), each of the final product storage tanks (TK61 and TK62), shift tanks (TK63 and TK65) and denaturant storage tank (TK64) is considered to be an affected source.

(4) One (1) additive tank, identified as Additive TK, constructed in 2005, which stores corrosion inhibitor, with a maximum capacity of 2,301 gallons.

(5) One (1) thin stillage tank, constructed in 2005, with a maximum capacity of 146,000 gallons.

(6) One (1) syrup tank, constructed in 2005, with a maximum capacity of 51,000 gallons.

(7) One (1) cook water tank, constructed in 2005, with a maximum capacity of 146,000 gallons.

(8) Two (2) liquefaction tanks, constructed in 2005, each with a maximum capacity of 51,000 gallons.

(9) One (1) whole stillage tank, constructed in 2005, with a maximum capacity of 51,000 gallons.

(10) Two (2) methanators, used to clean up the contact waste water that will be recirculated back into the cook tank, exhausting to the DDGS dryers as supplement fuel. When the dryers are down, methane emissions from the methanators are controlled by flare C60, which has a maximum heat input capacity of 3.2 MMBtu/hr and exhausts through stack S60.

(11) Heat exchangers, identified as mash coolers, which are part of the mashing, cooking and liquefaction operations.

(j) The group of all equipment at the source (pump, compressor, pressure relief device, sampling connection system, open-ended valve or line, valve, and flange or other connector) which meets all of the following criteria:

1) Contacts ethanol, and

2) Part of the process which involves processing, producing or storing ethanol at intermediate or final stage.

Under the NSPS for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for which Construction, Reconstruction, or Modification Commenced After January 5, 1981, and on or Before November 7, 2006 ,(40 CFR 60, Subpart Db) (326 IAC 12), Subpart VV, this equipment is considered to be affected facilities

Note: The above insignificant activity was listed in Section D of the previous approval (FESOP No. 073-16720-00037), however, it was inadvertently omitted from the Section A of the previous approval.

Emission Units and Pollution Control Equipment Removed From the Source

The following emission unit has been removed from the source:

One (1) natural gas-fired combustion turbine, identified as CT, constructed in 2006 and taken out of service on March 7, 2007, with a maximum heat input capacity of 59.8 MMBtu/hr and a maximum power output of 5.2 Megawatts, and exhausting through stack S-T.

Existing Approvals

Since the issuance of the FESOP (073-16720-00037) on January 8, 2004, the source has constructed or has been operating under the following approvals as well:

(a) Significant Permit Revision No. 073-24367-00037 issued on May 31, 2007;

(b) Significant Permit Revision No. 073-23591-00037 issued on December 12, 2006; and

(c) Significant Permit Revision No. 073-20945-00037 issued on July 22, 2005.

All terms and conditions of previous permits issued pursuant to permitting programs approved into the state implementation plan have been either incorporated as originally stated, revised, or deleted by this permit. All previous registrations and permits are superseded by this permit.

Enforcement Issue

There are no enforcement actions pending.

Emission Calculations

See Appendix A of this document for detailed emission calculations.

County Attainment Status

The source is located in Jasper County

Pollutant	Designation
SO_2	Better than national standards.
CO	Unclassifiable or attainment effective November 15, 1990.
O_3	Unclassifiable or attainment effective June 15, 2004, for the 8-hour ozone standard.[1]
PM_{10}	Unclassifiable effective November 15, 1990.
NO_2	Cannot be classified or better than national standards.
Pb	Not designated.
[1]Unclassifiable or attainment effective October 18, 2000, for the 1-hour ozone standard which was revoked effective June 15, 2005. Unclassifiable or attainment effective April 5, 2005, for PM2.5.	

(a) Ozone Standards

(1) On October 25, 2006, the Indiana Air Pollution Control Board finalized a rule revision to 326 IAC 1-4-1 revoking the one-hour ozone standard in Indiana.

(2) Volatile organic compounds (VOC) and Nitrogen Oxides (NOx) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone. Therefore, VOC and NOx emissions are considered when evaluating the rule applicability relating to ozone. Jasper County has been designated as attainment or unclassifiable for ozone. Therefore, VOC and NOx emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

(b) PM2.5
Jasper County has been classified as attainment for PM2.5. On May 8, 2008 U.S. EPA promulgated the requirements for Prevention of Significant Deterioration (PSD) for PM2.5 emissions, and the effective date of these rules was July 15th, 2008. Indiana has three years from the publication of these rules to revise its PSD rules, 326 IAC 2-2, to include those requirements. The May 8, 2008 rule revisions require IDEM to regulate PM10 emissions as a surrogate for PM2.5 emissions until 326 IAC 2-2 is revised.

(c) Other Criteria Pollutants
Jasper County has been classified as attainment or unclassifiable in Indiana for all other pollutants. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

(d) Fugitive Emissions
Since this type of operation is not one of the twenty-eight (28) listed source categories under 326 IAC 2-2 or 326 IAC 2-3, fugitive emissions are not counted toward the determination of PSD and Emission Offset applicability.

Unrestricted Potential Emissions

Appendix A of this TSD reflects the unrestricted potential emissions of the source.

(a) The potential to emit (as defined in 326 IAC 2-7-1(29)) of PM, PM10, VOC and CO is still equal to or greater than 100 tons per year, each. The source is subject to the provisions of 326 IAC 2-7. However, the source has agreed to continue to limit their PM, PM10, VOC and CO emissions to less than Title V levels, therefore the source will be issued a FESOP Renewal.

(b) The potential emissions of NOx is less than 100 tons per year.

(c) The potential emissions of SO2 is less than 100 tons per year.

(d) The potential to emit (as defined in 326 IAC 2-7-1(29)) of any single HAP is equal to or greater than ten (10) tons per year and/or the potential to emit (as defined in 326 IAC 2-7-1(29)) of a combination of HAPs is equal to or greater than twenty-five (25) tons per year. However, the source has agreed to continue to limit their single HAP emissions and total HAP emissions below Title V limits. Therefore, the source will be issued a FESOP Renewal.

Since this type of operation is not one of the twenty-eight (28) listed source categories under 326 IAC 2-7, fugitive emissions are not counted toward the determination of Part 70 applicability.

Potential to Emit After Issuance

Table A Description
The source has opted to remain a FESOP source. The 'Table A' below summarizes the potential to emit, reflecting all limits of the emission units. Any control equipment is considered enforceable only after issuance of this FESOP and only to the extent that the effect of the control equipment is made practically enforceable in the permit.

Table B Description
The 'Table B' below summarizes the basis upon which each PTE in the 'Table A' is determined. If the PTE in 'Table A' is based upon emission rate limit and/or production limit (DDGS and/or ethanol production limits), then it is indicated followed by the PTE values in the 'Table B'. The asterisk '*' in 'Table B' indicates the PTE is equal to either uncontrolled or unlimited potential emissions. The 'negl.' in 'Table B' indicates the emissions are negligible.

For the details of the emission rate limits for PM, please refer PSD applicability in 'State Rule Applicability - Entire Source' section of this TSD. For the details of the emission rate limits for the pollutants other than PM, and production limits of DDGS and ethanol, please refer FESOP applicability in 'State Rule Applicability - Entire Source' section of this TSD.

Table A

Unit ID/Operation	Unit ID	PM	PM10	PM2.5	SO2	VOC	CO	NOx	worst case single HAP (Acetaldehyde)	total HAPs
One (1) grain receiving and storage operation	P20	5.86	5.86	5.86	-	-	-	-	-	-
Two (2) hammermills	P30	2.63	2.63	2.63	-	-	-	-	-	-
One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system	P70	1.65	1.65	1.65	-	8.11	-	-	0.24	0.46
One (1) DDGS loadout operation	P90	0.70	0.70	0.70	-	-	-	-	-	-
One (1) fermentation process	P40	-	-	-	-	45.00	-	-	6.13	6.77
Two (2) natural gas fired DDGS dryers in series	Dryers A and B	16.22 (total)	16.22 (total)	16.22 (total)	37.31 (total)	24.33 (total)	97.33 (total)	91.54 (total)	1.7 (total)	1.70 (total)
One (1) mashing, cooking and liquefication operation	P10									
One (1) distillation and dehydration operation	--									
Thermal Oxidizer	C10									
One (1) ethanol loading terminal for both trucks and railcars	P50	-	-	-	-	9.29	-	-	--	0.01
Flare	C50	0.05	0.21	0.21	0.02	0.15	2.35	1.75	--	0.05
Paved Road	-	7.19	1.40	1.40	-	-	-	-	-	-
Fugitive Leaks	-	-	-	-	-	4.43	-	-	-	-
Storage Tanks	-	-	-	-	-	2.59	-	-	-	-
Cooling Tower	-	5.48	5.48	5.48	-	-	-	-	-	-
Diesel Fired Emergency Water Pump	-	0.10	0.10	0.10	0.10	0.12	0.32	0.12	-	-
Biomethanator Flare	-	negl.	negle.	negle.	negle.	0.04	0.30	0.05	negle.	negle.
other insignificant activities	-	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.
Total	**-**	**39.89**	**34.26**	**32.61**	**37.42**	**94.07**	**99.95**	**93.46**	**8.19**	**8.99**
Title V Major Source Thresholds	**-**	**NA**	**100**	**100**	**100**	**100**	**100**	**100**	**25**	**10**
PSD Major Source Thresholds	**-**	**250**	**250**	**250**	**250**	**250**	**250**	**250**	**NA**	**NA**

Table B

Unit ID/Operation	Unit ID	PM	PM10	PM2.5	SO2	VOC	CO	NOx	worst case single HAP (Acetaldehyde)	total HAPs
One (1) grain receiving and storage operation	P20	5.86 Emission Rate limit	5.86 Emission Rate limit	5.86 Emission Rate limit	-	-	-	-	-	-
Two (2) hammermills	P30	2.63 Emission Rate limit	2.63 Emission Rate limit	2.63 Emission Rate limit	-	-	-	-	-	-
One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system	P70	1.65 Emission Rate limit	1.65 Emission Rate limit	1.65 Emission Rate limit	-	8.11 Emission Rate and DDGS production limit	-	-	0.24 Emission Rate and DDGS production limit	0.46 Emission Rate and DDGS production limit
One (1) DDGS loadout operation	P90	0.70 Emission Rate limit	0.70 Emission Rate limit	0.70 Emission Rate limit	-	-	-	-	-	-
One (1) fermentation process	P40	-	-	-	-	45.00 Emission Rate and ethanol production limit	-	-	6.13 Emission Rate and ethanol production limit	6.77 Emission Rate and ethanol production limit
Two (2) natural gas fired DDGS dryers in series	Dryers A and B	16.22 (total) Emission Rate and DDGS production limits	16.22 (total) Emission Rate and DDGS production limit	16.22 (total) Emission Rate and DDGS production limit	37.31 (total)	24.33 (total) Emission Rate and DDGS production limit	97.33 (total) Emission Rate and DDGS production limit	91.54 (total)	1.7 (total) Emission Rate and ethanol production limit	1.70 (total) Emission Rate and ethanol production limit
One (1) mashing, cooking and liquefication operation	P10									
One (1) distillation and dehydration operation	--									
Thermal Oxidizer	C10									
One (1) ethanol loading terminal for both trucks and railcars	P50	-	-	-	-	9.29 Emission Rate and DDGS production limit	-	-	--	0.01 Emission Rate and loadout rate limits
Flare	C50	0.05*	0.21*	0.21*	0.02*	0.15*	2.35*	1.75*	--	0.05*
Paved Road	-	7.19*	1.40*	1.40*	-	-	-	-	-	-
Fugitive Leaks	-	-	-	-	-	4.43*	-	-	-	-
Storage Tanks	-	-	-	-	-	2.59*	-	-	-	-
Cooling Tower	-	5.48*	5.48*	5.48*	-	-	-	-	-	-
Diesel Fired Emergency Water Pump	-	0.10*	0.10*	0.10*	0.10*	0.12*	0.32*	0.12*	-	-
Biomethanator Flare	-	negl.	negle.	negle.	negle.	0.04*	0.30*	0.05*	negle.	negle.
other insignificant activities	-	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.

Following conclusions are made from the above table:

(a) This existing stationary source is not major for PSD because the emissions of each criteria pollutant is less than two hundred fifty (<250) tons per year, and it is not one of the twenty-eight (28) listed source categories.

(b) Fugitive Emissions
Since this type of operation is not one of the twenty-eight (28) listed source categories under 326 IAC 2-2, fugitive emissions are not counted toward the determination of PSD applicability.

Federal Rule Applicability

New Source Performance Standards (NSPS)

(a) **Subpart DD—Standards of Performance for Grain Elevators**

The requirements of this NSPS are still not included in the permit because the source has permanent grain storage capacity of less than 1 million bushels.

(b) **Subpart VV—Standards of Performance for Equipment Leaks of VOC in the Synthetic Organic Chemicals Manufacturing Industry for which Construction, Reconstruction, or Modification Commenced After January 5, 1981, and on or Before November 7, 2006**

Ethanol is one of the chemicals listed in 40 CFR 60.489. Therefore, this ethanol production plant is still subject to the requirements of this NSPS which is incorporated by reference as 326 IAC 12.

Affected facilities under this NSPS include the group of all equipment at the source (pump, compressor, pressure relief device, sampling connection system, open-ended valve or line, valve, and flange or other connector) which meets all of the following criteria:

1) Contacts ethanol, and

2) Part of the process which involves processing, producing or storing ethanol at intermediate or final stage.

Non applicable portions of this NSPS will not be included in the permit. The following portions of 40 CFR 60, Subpart VV have been included in the permit:

(1) 40 CFR 60.480 (a), (b) and (f)
(2) 40 CFR 60.481
(3) 40 CFR 60.482-1 through 40 CFR 60.482-10
(4) 40 CFR 60.482-4
(5) 40 CFR 60.485
(6) 40 CFR 60.486
(7) 40 CFR 60.487
(8) 40 CFR 60.488
(9) 40 CFR 60.489

(c) **Subpart Db—Standards of Performance for Industrial-Commercial-Institutional Steam Generating Units**

The recuperative thermal oxidizer/heat recovery steam generator, identified as C10, is still subject to requirements of this NSPS (which is incorporated by reference as 326 IAC 12)

because it is a steam generating unit that commenced construction, after June 19, 1984, and has a heat input capacity from fuels combusted in the steam generating unit of greater than 100 MMBtu/hr.

Non applicable portions of this NSPS will not be included in the permit. The following portions of 40 CFR 60, Subpart Db have been included in the permit:

(1) 40 CFR 60.40b(a), (b), (g), (j)
(2) 40 CFR 60.41b
(3) 40 CFR 60.44b(a), (h), (i), (l)(2)
(4) 40 CFR 60.46b(c), (e)(1), (e)(3)
(5) 40 CFR 60.48b(b)(1), (c), (d), (e)(2)(i), (e)(3), (f)
(6) 40 CFR 60.49b(a)(1), (a)(2), (a)(3), (b), (h)(2)(ii), (h)(3), (h)(4), (i), (k)(1), (k)(5) through (k)(11), (o), (p), (v), (w)

(d) **Subpart Kb—Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced After July 23, 1984**

Each of the final product storage tanks (TK61 and TK62), shift tanks (TK63 and TK65), and denaturant storage tank (TK64) has a capacity greater than 75 cubic meters (19,813 gallons) and is used to store liquids with maximum vapor pressures greater than 3.5 kPa. (0.51 psi). Therefore, these tanks are still subject to this NSPS which is incorporated by reference as 326 IAC 12.

Non applicable portions of this NSPS will not be included in the permit. The following portions of 40 CFR 60, Subpart Kb have been included in the permit:

(1) 40 CFR 60.110b(a)
(2) 40 CFR 60.111b
(3) 40 CFR 60.112b(a)(1)
(4) 40 CFR 60.113b(a)
(5) 40 CFR 60.115b(a)(1), (a)(3), (a)(4)
(6) 40 CFR 60.116b(a), (b), (e)(1), (e)(3)
(7) 40 CFR 60.117b

(e) **Subpart NNN—Standards of Performance for Volatile Organic Compound (VOC) Emissions From Synthetic Organic Chemical Manufacturing Industry (SOCMI) Distillation Operations**

Ethanol is one of the chemicals listed in 40 CFR 60.667. However, according to the EPA memo from Mr. George T. Czerniak dated December 6, 2002, creation of ethanol by fermentation process (biological synthesis) was excluded from the scope of NSPS, Subpart NNN. Therefore, the distillation unit at this new ethanol production plant is still not subject to the requirements of this NSPS.

National Emission Standards for Hazardous Air Pollutants (NESHAP)

(a) **Subpart CCCCCC—National Emission Standards for Hazardous Air Pollutants for Source Category: Gasoline Dispensing Facilities**

The following insignificant activity at the source is still not subject to the requirements of this NESHAP because the gasoline from the storage tank is not dispensed into the motor vehicle (the gasoline from this storage tank is used to mix the gasoline with ethanol to make ethanol not suitable for human consumption):

A gasoline fuel transfer dispensing operation handling less than or equal to 1,300 gallons per day and filling storage tanks having a capacity equal to or less than 10,500 gallons.

(b) There are no NESHAP (326 IAC 14, 326 IAC 20 and 40 CFR Part 63) included in this permit renewal.

State Rule Applicability – Entire Source

326 IAC 2-2 (PSD)

The uncontrolled PM emissions from the source is greater than 250 tons per year. The Permittee shall continue to comply with the existing PM emission limitations (specified in FESOP No. 073-16720-00037), which are as follows:

Unit ID/ Stack ID	Unit Description	PM Limit (lbs/hr)
P20	Grain Receiving and Storage	1.34
P30	Hammermills	0.60
P70	DDGS Cooling System	0.38
P90	DDGS Loadout	0.16
S10	recuperative thermal oxidizer/heat recovery steam generator	0.2 pounds per ton of DDGS produced

Compliance with the above limits in conjunction with the PM PTE of other emission units at this source will limit source-wide PM PTE to less than 250 tons per 12 consecutive month period and therefore, render 326 IAC 2-2 (PSD) not applicable.

326 IAC 2-4.1-1 (New Source Toxics Control)

This source is not subject to the requirements of 326 IAC 2-4.1-1 because the PTE of each single HAP and combined HAPs is less than 10 and 25 tons per year, respectively.

326 IAC 2-6 (Emission Reporting)

This source is not subject to the requirements of 326 IAC 2-6 because it does not require to have an operating permit under 326 IAC 2-7, Part 70 Permit Program.

326 IAC 5-1 (Opacity Limitations)

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-3 (Temporary Exemptions), opacity shall meet the following, unless otherwise stated in the permit:

(a) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.

(b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A,

Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

326 IAC 2-8 (FESOP)

PM10
The uncontrolled PM10 emissions from the source is greater than 100 tons per year. The Permittee shall continue to comply with the existing FESOP and DDGS production limitations for PM10 (specified in FESOP No. 073-16720-00037), which are as follows:

Unit/Stack ID	Unit Description/ Production Rate	Limit
P20	Grain Receiving and Storage	1.34 lbs/hr
P30	Hammermills	0.60 lbs/hr
P70	DDGS Cooling System	0.38 lbs/hr
P90	DDGS Loadout	0.16 lbs/hr
S10	Stack	3.70 lbs/hr or 0.2 pounds per ton of DDGS produced.
--	DDGS Production Rate	162,218 tons per twelve (12) consecutive month period

Compliance with the above limits in conjunction with the PM10 PTE of other emission units at this source will limit source-wide PM10 PTE to less than 100 tons per 12 consecutive month period and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2 2 (PSD) not applicable.

PM2.5
The uncontrolled PM2.5 emissions from the source is greater than 100 tons per year. The Permittee shall comply with the following limitations:

Unit ID/ Stack ID	Unit Description	PM2.5 Limit (lbs/hr)
P20	Grain Receiving and Storage	1.34
P30	Hammermills	0.60
P70	DDGS Cooling System	0.38
P90	DDGS Loadout	0.16
S10	Stack	3.70 lbs/hr or 0.2 pounds per ton of DDGS produced.

Compliance with the above limits in conjunction with the PM2.5 PTE of other emission units at this source will limit source-wide PM2.5 PTE to less than 100 tons per 12 consecutive month period and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) and 326 IAC 2 2 (PSD) not applicable.

VOC
The uncontrolled VOC emissions from the source is greater than 100 tons per year. The Permittee shall continue to comply with the existing emission rate, ethanol and DDGS production limitations for VOC (specified in FESOP No. 073-16720-00037), which are as follows:

(a) The DDGS production rate shall not exceed 162,218 tons per twelve (12) consecutive month period with compliance determined at the end of each month.

(b) VOC emissions from the DDGS cooling system (P70) shall not exceed 0.1 pounds per ton of DDGS produced.

(c) The ethanol production rate shall not exceed 50 million gallons (MMgal) per twelve (12) consecutive month period with compliance determined at the end of each month.

(d) VOC emissions from the fermentation process (P40) shall not exceed 1.8 pounds per 1,000 gallons of ethanol produced.

(e) VOC emissions from stack S10 shall not exceed 5.55 lbs/hr or 0.3 pounds per ton of DDGS produced.

(f) The total ethanol loadout rate (including trucks and railcars) shall not exceed 50 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

(g) The truck loadout process shall not exceed 35 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

(h) The VOC emissions from the flare C50 shall not exceed 0.69 lbs/hr.

Compliance with the above limits in conjunction with the VOC PTE of other emission units shall limit the source-wide VOC PTE to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

Single HAP (Acetaldehyde)
The uncontrolled single HAP emissions from the source is greater than 10 tons per year. The Permittee shall continue comply with the existing emission rate, ethanol and DDGS production limitations for the single HAP (Acetaldehyde) (specified in FESOP No. 073-16720-00037), which are as follows:

(a) Acetaldehyde emissions from the DDGS cooling system (P70) shall not exceed 0.008 pounds per ton of DDGS produced.

(b) The ethanol production rate shall not exceed 50 million gallons (MMgal) per twelve (12) consecutive month period with compliance determined at the end of each month.

(c) Acetaldehyde emissions from the fermentation process (P40) shall not exceed 0.245 pounds per 1,000 gallons of ethanol produced.

(d) The DDGS production rate shall not exceed 162,218 tons per twelve (12) consecutive month period with compliance determined at the end of each month.

(e) Acetaldehyde emissions from stack S10 shall not exceed 0.39 lbs/hr or 0.021 pounds per ton of DDGS produced.

Compliance with the above limits in conjunction with the Acetaldehyde PTE of other emission units shall limit the source-wide single HAP (Acetaldehyde) PTE to less than 10 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable

Combined HAPs
The uncontrolled combined HAP emissions from the source is greater than 25 tons per year. The Permittee shall continue to comply with the existing emission rate, ethanol and DDGS production limitations for combined HAP (specified in FESOP No. 073-16720-00037), which are as follows:

(a) The DDGS production rate shall not exceed 162,218 tons per twelve (12) consecutive month period with compliance determined at the end of each month.

(b) Total HAP emissions from the DDGS cooling system (P70) shall not exceed 0.01 pounds per ton of DDGS produced.

(c) The ethanol production rate shall not exceed 50 million gallons (MMgal) per twelve (12) consecutive month period with compliance determined at the end of each month.

(d) Total HAP emissions from the fermentation process (P40) shall not exceed 0.271 pounds per 1,000 gallons of ethanol produced.

(e) The total ethanol loadout rate (including trucks and railcars) shall not exceed 50 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

(f) The truck loadout process shall not exceed 35 million gallons per twelve (12) consecutive month period with compliance determined at the end of each month.

(g) The HAP emissions from the flare C50 shall not exceed 0.69 lbs/hr.

Compliance with the above limits in conjunction with HAPs PTE of other emission units shall limit the source-wide combined HAPs PTE to less than 25 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

CO
The uncontrolled CO emissions from the source is greater than 100 tons per year. The Permittee shall continue to comply with the existing ethanol and DDGS production limitations and biomethanator flare (EP-15) operating hour limitation (specified in FESOP No. 073-16720-00037). In addition, the permittee shall also comply with stack 10 emission limit of CO (which is revised from the CO emission limit specified in the previous approval (FESOP No. 073-16720-00037) for the stack 10).

(a) CO emissions from the stack 10 shall not exceed 22.2 pound per hour.

(b) CO emissions from flare C50 during the truck loadout process shall not exceed 0.13 pounds per thousand gallons of ethanol loaded out to trucks.

(c) The operating hours of the biomethanator flare EP-15 shall be less than 500 hours per twelve (12) consecutive month period with compliance determined at the end of each month.

Compliance with the above limits in conjunction with CO PTE of other emission units shall limit the source-wide CO PTE to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

Since the above limitations in conjunction with CO PTE of other emission units ensures that source-wide CO PTE to less than 100 tons per year, the Condition D.3.2(h) (in previous approval (FESOP No. 073-16720-00037)) which required permittee to determine the total CO emissions from the stack 10 has been removed in this renewal. In addition, the associated record keeping requirement (Condition D.3.16(b) in previous approval (FESOP No. 073-16720-00037)) has also been removed in this renewal.

NOX
The uncontrolled NOX emissions from the source is greater than 100 tons per year. The Permittee shall continue to comply with the existing ethanol and DDGS production limitations and biomethanator flare (EP-15) operating hour limitation (specified in FESOP No. 073-16720-00037). In addition, the permittee shall also comply with stack 10 emission limit of NOX (which is revised from the NOX emission limit specified in the previous approval (FESOP No. 073-16720-00037) for the stack 10).

(a) NOx emissions from the stack 10 shall not exceed 20.9 pound per hour.

(b) NOx emissions from flare C50 during the truck loadout process shall not exceed 0.10 pounds per thousand gallons of ethanol loaded out to trucks.

(c) The operating hours of the biomethanator flare EP-15 shall be less than 500 hours per twelve (12) consecutive month period with compliance determined at the end of each month.

Compliance with the above NOx limit in conjunction with NOX PTE of other emission units shall limit the source-wide NOx PTE to less than 100 tons per year and therefore, render the requirements of 326 IAC 2-7 (Part 70 Program) not applicable.

Since the above limitations in conjunction with NOX PTE of other emission units ensures that source-wide NOX PTE to less than 100 tons per year, the Condition D.3.2(h) (in previous approval (FESOP No. 073-16720-00037)) which required permittee to determine the total NOX emissions from the stack 10 has been removed in this renewal. In addition, the associated record keeping requirement (Condition D.3.16(b)) has also been removed in this renewal.

326 IAC 6-4 (Fugitive Dust Emissions)

The requirements of 326 IAC 6-4 apply to all fugitive dust sources. Pursuant to 326 IAC 6-4-2(4), the Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located.

326 IAC 6-5 (Fugitive Particulate Matter Emission Limitations)

This source is not subject to the requirements of 326 IAC 6-5 because the potential fugitive particulate emissions (after the effect of any controls) from the source is less than 25 tons per year.

State Rule Applicability - Grain and DDGS Handling Operations

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)

Pursuant to 326 IAC 6-3-2, particulate emissions from each of the following operations shall not exceed the pound per hour limits listed in the table below:

Unit ID	Process Description	Max. Throughput Rate (tons/hr)	Particulate Emission Limit (lbs/hr)
P20	Grain Receiving and Storage Operation	420	66.9
P30	Each of the Hammermills	100	51.3
P70	DDGS Cooling System	20	30.5
P90	DDGS Loadout Operation	400	66.3

The pounds per hour limitations were calculated using one of the following equations:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 4.10\ P^{0.67}$ where E = rate of emission in pounds per hour and
P = process weight rate in tons per hour

Interpolation and extrapolation of the data for the process weight rate in excess of sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 55.0\ P^{0.11} - 40$ where E = rate of emission in pounds per hour; and
P = process weight rate in tons per hour

According to the emission calculations (see Appendix A), the potential to emit PM after control from the grain receiving and storage operation (P20), hammermills (P30), DDGS cooling system (P70), and DDGS loadout operation (P90) is less than the emission limits above. Therefore, these operations can comply with 326 IAC 6-3-2.

326 IAC 8-1-6 (General Reduction Requirements for VOC Emissions)

The DDGS cooling system (P70) has potential VOC emissions less than 25 tons per year. Therefore, the requirements of 326 IAC 8-1-6 (BACT) are not applicable.

State Rule Applicability - Fermentation Process (P40)

326 IAC 8-1-6 (General Reduction Requirements for VOC Emissions)

The fermentation process is constructed after January 1, 1980 and has potential VOC emissions greater than 25 tons per year. There are no other rules in 326 IAC 8 applicable to this process. Therefore, this fermentation process is subject to 326 IAC 8-1-6 and the Permitteee shall continue to control VOC emissions with the Best Available Control Technologies (BACT), (specified in FESOP No. 073-16720-00037), which is as follows:.

(a) The VOC emissions from the fermentation process shall be controlled by wet scrubber C40.

(b) The control efficiency for the wet scrubber C40 shall be at least 98%, or the outlet VOC concentration shall not exceed 20 ppmv when the inlet VOC concentration is lower than 200 ppmv.

(c) The VOC capture efficiency of the wet scrubber C40 shall be 100% as defined in EPA Method 204.

(d) The VOC emissions from wet scrubber C40 shall not exceed 1.8 pound per 1,000 gallons of ethanol produced.

State Rule Applicability - Recuperative Thermal Oxidizer/Heat Recovery Steam Generator (C10)

326 IAC 6-2-4 (PM Emissions for Sources of Indirect Heating)

Pursuant to 326 IAC 6-2-4(a), indirect heating facilities constructed after September 12, 1983, shall be limited by the following equation:

$$Pt = \frac{1.09}{Q^{0.26}}$$

Where Pt = emission rate limit (lbs/MMBtu)
Q = total source heat input capacity (MMBtu/hr)

The total source heat input capacity for the recuperative thermal oxidizer/heat recovery steam generator (C10) is 125 MMBtu/hr. Therefore, the PM emission limit for this unit is:

$$Pt = \frac{1.09}{125^{0.26}} = 0.31 \text{ lbs/MMBtu.}$$

This unit has a maximum heat input capacity of 125 MMBtu/hr. The PM emission limit of 0.31 lbs/MMBtu is equivalent to 129 lbs/hr (0.31 lbs/MMBtu x 125 MMBtu/hr = 38.8 lbs/hr). According to the emission calculations in Appendix A, PM emissions from this unit is 4.0 lbs/hr. Therefore, this unit can comply with the requirements of 326 IAC 6-2-4.

State Rule Applicability - Mashing, Cooking, and Liquefaction Operation (P10)

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)

Pursuant to 326 IAC 6-3-2, particulate emissions from mashing, cooking, and liquefaction operation (P10) shall not exceed 44.2 pounds per hour when operating at a maximum throughput rate of 42 tons/hr.

The pounds per hour limitations were calculated using the following equation:

Interpolation and extrapolation of the data for the process weight rate in excess of sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 55.0\ P^{0.11} - 40$ where E = rate of emission in pounds per hour; and
P = process weight rate in tons per hour

This operation is a wet process and the use of the recuperative thermal oxidizer/heat recovery steam generator (C10) ensures compliance with this limit.

326 IAC 8-1-6 (General Reduction Requirements for VOC Emissions)

The potential VOC emissions from this operation is less than 25 tons/yr, therefore, the requirements of 326 IAC 8-1-6 (BACT) are not applicable.

There are no other rules in 326 IAC 8 applicable to this operation.

State Rule Applicability - Distillation and Dehydration Operation

326 IAC 8-1-6 (General Reduction Requirements for VOC Emissions)

The distillation and dehydration process at this source is constructed after January 1, 1980 and has potential VOC emissions greater than 25 tons per year. There are no other rules in 326 IAC 8 applicable to this operation. Therefore, this operation is subject to 326 IAC 8-1-6 and the Permittee shall continue to control VOC emissions using the Best Available Control Technologies (BACT), (specified in FESOP No. 073-16720-00037), which is as follows:.

(a) The VOC emissions from the distillation and dehydration process shall be controlled by recuperative thermal oxidizer/heat recovery steam generator C10.

(b) The destruction efficiency for recuperative thermal oxidizer/heat recovery steam generator C10 shall be at least 98%.

(c) The VOC capture efficiency shall be 100% as defined in EPA Method 204.

(d) The VOC emissions from the recuperative thermal oxidizer/heat recovery steam generator (C10) shall not exceed 5.55 lbs/hr or 0.3 pounds per ton of DDGS produced.

State Rule Applicability - Two (2) DDGS Dryers (Dryers A and B)

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)

Pursuant to 326 IAC 6-3-2, particulate emissions from each of the DDGS dryers shall not exceed 30.5 pounds per hour when operating at a maximum process weight rate of 20 tons/hr.

The pounds per hour limitations were calculated with the following equation:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$E = 4.10\ P^{0.67}$ where E = rate of emission in pounds per hour and
P = process weight rate in tons per hour

The controlled emissions from the DDGS dryers is less than the 30.5 pound per hour, therefore the dryers can comply with the requirements of 326 IAC 6-3-2.

326 IAC 8-1-6 (General Reduction Requirements for VOC Emissions)

The DDGS dryers at this source is constructed after January 1, 1980 and each has potential VOC emissions greater than 25 tons per year. There are no other rules in 326 IAC 8 applicable to these dryers. There are no other rules in 326 IAC 8 applicable to this operation. Therefore, this operation is subject to 326 IAC 8-1-6 and the Permittee shall continue to control VOC emissions using the Best Available Control Technologies (BACT), (specified in FESOP No. 073-16720-00037), which is as follows:.

(a) The VOC emissions from the DDGS dryers shall be controlled by recuperative thermal oxidizer/heat recovery steam generator C10.

(b) The destruction efficiency for recuperative thermal oxidizer/heat recovery steam generator C10 shall be at least 98%.

(c) The capture efficiency shall be 100% as defined in EPA Method 204.

(d) The VOC emissions from the recuperative thermal oxidizer/heat recovery steam generator (C10) shall not exceed 5.55 lbs/hr or 0.3 pounds per ton of DDGS produced.

State Rule Applicability - Ethanol Loading Terminal (P50)

326 IAC 8-1-6 (General Reduction Requirements for VOC Emissions)

The ethanol loading terminal (P50) at this source is constructed after January 1, 1980 and has potential VOC emissions greater than 25 tons per year when loading ethanol to trucks. There are no other rules in 326 IAC 8 applicable to this loading operation. Therefore, this operation is subject to 326 IAC 8-1-6 and the Permittee shall continue to control VOC emissions using the Best Available Control Technologies (BACT), (specified in FESOP No. 073-16720-00037), which is as follows:

(a) The VOC emissions from the ethanol loading terminal shall be collected and controlled by open flare C50 when loading denatured ethanol to trucks.

(b) The overall control efficiency (including destruction efficiency and capture efficiency) for flare C50 shall be at least 98%.

(c) The VOC emissions from the flare C50 shall not exceed 0.69 lbs/hr.

State Rule Applicability - Cooling Tower

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)

Pursuant to 326 IAC 6-3-1(b)(11), particulate emissions from the noncontact cooling tower systems are exempt from the requirements of 326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes).

State Rule Applicability - Storage Tanks (TK61 and TK62), shift tanks (TK63 and TK65), and denaturant storage tank (TK64)

326 8-4-3 (Petroleum Liquid Storage Facilities)

These storage tanks are not used to store petroleum. Therefore, the requirements of 326 IAC 8-4-3 are not applicable to these tanks.

Compliance Determination and Monitoring Requirements

Permits issued under 326 IAC 2-8 are required to ensure that sources can demonstrate compliance with all applicable state and federal rules on a continuous basis. All state and federal rules contain compliance provisions, however, these provisions do not always fulfill the requirement for a continuous demonstration. When this occurs, IDEM, OAQ, in conjunction with the source, must develop specific conditions to satisfy 326 IAC 2-8-4. As a result, Compliance Determination Requirements are included in the permit. The Compliance Determination Requirements in Section D of the permit are those conditions that are found directly within state and federal rules and the violation of which serves as grounds for enforcement action.

If the Compliance Determination Requirements are not sufficient to demonstrate continuous compliance, they will be supplemented with Compliance Monitoring Requirements, also in Section D of the permit. Unlike Compliance Determination Requirements, failure to meet Compliance Monitoring conditions would serve as a trigger for corrective actions and not grounds for enforcement action. However, a violation in relation to a compliance monitoring condition will arise through a source's failure to take the appropriate corrective actions within a specific time period. The compliance monitoring requirements applicable to this source are as follows:

Emission Unit	Control	Parameter	Frequency	Reason for compliance monitoring
grain receiving and storage operation (P20)	baghouses C20	Visible Emissions	Daily	To ensure that bahouses operate properly in order to comply with 326 IAC 2-2 (PSD), 326 IAC 2-8 (FESOP), and 326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes).
		Pressure Drop		
hammermills (P30)	baghouses C30	Visible Emissions		
		Pressure Drop		
DDGS loadout operation (P90)	baghouses C90	Visible Emissions		
		Pressure Drop		
DDGS cooling system (P70)	baghouse C70	Visible Emissions		
		Pressure Drop		
fermentation process (P40)	wet scrubber C40	flow rate	Daily	To ensure that wet scrubber C40 operates properly in order to comply with with 326 IAC 2-2 (PSD), 326 IAC 2-8-4 (FESOP), and 326 IAC 8-1-6 (BACT).
DDGS dryers and the distillation and dehydration process	thermal oxidizer/heat recovery steam generator C10	Visible Emissions	Daily	To ensure that the recuperative thermal oxidizer/heat recovery steam generator (C10) must operate properly in order to comply with 40 CFR 60, Subpart Db, 326 IAC 2-2 (PSD), 326 IAC 2-8-4 (FESOP), 326 IAC 6-2-4 (PM Emissions for Sources of Indirect Heating), and 326 IAC 8-1-6 (BACT).
		duct pressure or fan amperage		
The ethanol loading terminal (P50)	flare C50	presence of a flare flame	Continuously	To ensure that flare C50 must operate properly at all times that the ethanol loading terminal (P50) is loading denatured ethanol to trucks in order to comply with 326 IAC 2-2, 326 IAC 2-8-4, and 326 IAC 8-1-6.

Testing Requirements

Emission Unit/Stack	Units that must be operated simultaneously during the testing period	Control Device	Timeframe for Testing	Pollutant	Frequency of Testing	Most Recent Testing date	Most Recent testing result	Limit	Unit for testing result and limit	Type of limit
DDGS cooling system (P70)	DDGS cooling system (P70)	None	within five years of the most recent testing	VOC	every 5 years	7/11/2007	0.082	0.1	pounds per ton of DDGS produced	FESOP
				Acetaldehyde	every 5 years	7/11/2007	0.0014	0.008	pounds per ton of DDGS produced	FESOP
fermentation process (P40)	fermentation process (P40)	wet scrubber C40	within five years of the most recent testing	VOC	every 5 years	7/10/2007	0.82	1.8	pounds per 1,000 gallons of ethanol produced	FESOP
				VOC	every 5 years	7/10/2007	Control Efficiency 98.6%	Control Efficiency (98%)	--	BACT

Emission Unit/Stack	Units that must be operated simultaneously during the testing period	Control Device	Timeframe for Testing	Pollutant	Frequency of Testing	Most Recent Testing date	Most Recent testing result	Limit	Unit for testing result and limit	Type of limit
fermentation process (P40)	fermentation process (P40)	wet scrubber C40	within five years of the most recent testing	Acetaldehyde	every 5 years	1/29/2008	0.034	0.245	pounds per 1,000 gallons of ethanol produced	FESOP
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	NOx	every 5 years	7/12/2007	11	20.9	lbs/hr	FESOP
Stack 10	All emission units (except DDGS dryers) venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	NOx	every 5 years	not performed	less than or equal to 11***	12.5	lbs/hr	FESOP
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	CO	every 5 years	7/12/2007	20.7	22.2	lbs/hr	FESOP
Stack 10	All emission units (except DDGS dryers) venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	CO	every 5 years	not performed	--	10.5	lbs/hr	FESOP

Emission Unit/Stack	Units that must be operated simultaneously during the testing period	Control Device	Timeframe for Testing	Pollutant	Frequency of Testing	Most Recent Testing date	Most Recent testing result	Limit	Unit for testing result and limit	Type of limit
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	* see the notes below the table	PM	every 5 years	7/12/2007	0.01	0.2	pounds per ton of DDGS produced	326 IAC 2-2
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	* see the notes below the table	PM10/PM2.5	every 5 years	7/12/2007	2.06	3.7	lbs/hr	FESOP
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	* see the notes below the table	PM10/PM2.5	every 5 years	7/12/2007	0.1	0.2	lbs/ton of DDGS produced	FESOP
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	SO2	every 5 years	7/12/2007	0.545	8.52	lbs/hr	FESOP
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	SO2	every 5 years	7/12/2007	0.02	0.46	pounds per ton of DDGS produced	FESOP

Emission Unit/Stack	Units that must be operated simultaneously during the testing period	Control Device	Timeframe for Testing	Pollutant	Frequency of Testing	Most Recent Testing date	Most Recent testing result	Limit	Unit for testing result and limit	Type of limit
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	Acetaldehyde	every 5 years	7/12/2007	0.055	0.39	lbs/hr	FESOP
Stack 10	All emission units venting to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	Acetaldehyde	every 5 years	7/12/2007	0.003	0.021	pounds per ton of DDGS produced	FESOP
Stack 10	DDGS dryers (A and B), and distillation and dehydration operation	Thermal Oxidizer (C10)	within five years of the most recent testing	VOC	every 5 years	7/12/2007	99.7% Destruction Efficiency and 100% Capture Efficiency	98% Destruction Efficiency and 100% Capture Efficiency	--	BACT
Stack 10	All emission units vented to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	VOC	every 5 years	7/12/2007	0.213	5.55	lbs/hr	FESOP
Stack 10	All emission units vented to Stack 10	Thermal Oxidizer (C10)	within five years of the most recent testing	VOC	every 5 years	7/12/2007	0.01	0.3	lbs/ton of DDGS produced	FESOP

Emission Unit/Stack	Units that must be operated simultaneously during the testing period	Control Device	Timeframe for Testing	Pollutant	Frequency of Testing	Most Recent Testing date	Most Recent testing result	Limit	Unit for testing result and limit	Type of limit
Thermal Oxidizer (C10)	Thermal Oxidizer (C10)	--	within five years of the most recent testing	PM	every 5 years	7/12/2007	0.0024	0.31	lb/mmBtu of heat input	326 IAC 6-2-4
Each natural gas fired DDGS dryers (Dryers A and B)	Each natural gas fired DDGS dryers (Dryers A and B)	Thermal Oxidizer (C10)	within five years of the most recent testing	PM	every 5 years	7/12/2007	0.25	30.5	lbs/hr	326 IAC 6-3-2
One (1) mashing, cooking and liquefication operation	One (1) mashing, cooking and liquefication operation -	Thermal Oxidizer (C10)	within five years of the most recent testing	PM	every 5 years	7/12/2007	0.25	44.2	lbs/hour	326 IAC 6-3-2
Thermal Oxidizer (C10)	Thermal Oxidizer (C10)	--	within five years of the most recent testing	NOx	every 5 years	7/12/2007	**	0.1	lb/mmBtu of heat input	40 CFR 60, Subpart Db

* The Permittee shall perform PM, PM10 and PM2.5 testing on whichever later date from the time period specified in (a) and (b) below.

(a) Within 180 days of publication of the new or revised condensable PM test method(s) referenced in the U. S. EPA's Final Rule for Implementation of the New Source Review (NSR) Program for Particulate Matter Less Than 2.5 Micrometers (PM2.5), signed on May 8th, 2008.

(b) Within 5 years after the most recent PM/PM10 test performed for the 'Dryer Baghouse'.

PM10 and PM2.5 includes filterable and condensable PM.

** The test data is currently being reviewed by IDEM.

*** The source has demonstrated the compliance as follows:

The NOX emissions with all the emission units (which are vented to stack 10) operating simultaneously is 11 pound per hour. This value is less than the NOX emissions limit for the stack 10 when dryers are not in operation. Emission rate with dryers not in operation will always be less than the emission rate with dryers in operation.

Compliance Determination Requirements

The Compliance Determination Requirement applicable to the source is as follows:

(a) Emission Controls Operation
The control devices listed in the following table shall be in operation and control emissions when one or more of their associated emission units listed in the same table are in operation.

Control Device	**Associated Emission Unit/Units**	**Pollutant**
Baghouse (C20)	grain receiving and storage operation (P20)	PM, PM10, and PM2.5
Baghouse (C30)	Two (2) hammermills (P30)	PM, PM10, and PM2.5
Baghouse (C70)	DDGS cooling system (P70)	PM, PM10, and PM2.5
Baghouse (C90)	DDGS loadout operation (P90)	PM, PM10, and PM2.5
Scrubber C40	Fermentation process (P40)	VOC and HAPs
Thermal Oxidizer (C10)	Mashing, cooking and liquefication operation (P10)	PM, PM10, PM2.5, VOC, and HAPs
	DDGS dryers (A and B)	
	distillation and dehydration operation	
Flare (C50)	ethanol loading terminal for both trucks and railcars (P50)	VOC and HAPs

This compliance determination condition is necessary because the above listed control devices must operate properly to ensure compliance with 326 IAC 6-3 (Process Operations) and 326 IAC 2-8 (FESOP), 326 IAC 8-1-6 and to render 326 IAC 2-2 (PSD) not applicable.

Recommendation

The staff recommends to the Commissioner that the FESOP Renewal be approved. This recommendation is based on the following facts and conditions:

Unless otherwise stated, information used in this review was derived from the application and additional information submitted by the applicant.

An application for the purposes of this review was received on April 10, 2008.

Conclusion

The operation of this ethanol manufacturing plant shall be subject to the conditions of the attached FESOP Renewal No. 073-26405-00037.

Appendix A: Emission Calculations
Emission Summary

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

Uncontrolled Potential Emissions

Operation	ID	Control	Stack	PM	PM10	PM2.5	SO2	VOC	CO	NOx	worst case single HAP	total HAPs
One (1) grain receiving and storage operation	P20	baghouse (C20)	S20	331.13	108.54	18.40	-	-	-	-	-	-
Two (2) hammermills	P30	baghouse (C30)	S30	263	263	263	-	-	-	-	-	-
One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system	P70	baghouse (C70)	S70	165	165	165	-	8.76	-	-	0.26	0.50
One (1) DDGS loadout operation	P90	baghouse (C90)	S90	70	70	70	-	-	-	-	-	-
One (1) fermentation process	P40	Scrubber C40	S40	-	-	-	-	2,562	-	-	13.95	14.69
Two (2) natural gas fired DDGS dryers in series	Dryers A and B	Thermal Oxidizer (C10)	S10	175	175	175	40.296	1,314	572	91.542	49.056	91.6296
One (1) mashing, cooking and liquefication operation	P10											
One (1) distillation and dehydration operation	-											
Thermal Oxidizer	C10											
One (1) ethanol loading terminal for both trucks and railcars	P50	Flare C50	S50	-	-	-	-	150.79	-	-	7.54	8.77
Flare	C50	-	-	0.02	0.02	0.02	-	1.36	2.10	1.75	0.05	0.05
Paved Road	-	-	-	14.37	2.80	0.42	-	-	-	-	-	-
Fugitive Leaks*	-	-	-	-	-	-	-	4.43	-	-	-	-
Storage Tanks*	-	-	-	-	-	-	-	2.59	-	-	-	-
Cooling Tower	-	-	-	5.48	5.48	5.48	-	-	-	-	-	-
Diesel Fired Emergency Water Pump	EP-16	-	-	0.10	0.10	0.10	0.10	0.12	0.32	0.12	-	-
Biomethanator Flare	EP-15	-	-	negl.	negle.	negle.	negle.	0.04	0.30	0.05	negle.	negle.
other insignificant activities	-	-	-	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.
Total	-	-	-	**1024.69**	**790.52**	**698.01**	**40.39**	**4044.39**	**574.69**	**93.46**	**70.86**	**115.64**

19.98

Limited/Controlled PTE

Operation	ID	Control	Stack	PM	PM10	PM2.5	SO2	VOC	CO	NOx	worst case single HAP	total HAPs
One (1) grain receiving and storage operation	P20	baghouse (C20)	S20	5.86	5.86	5.86	-	-	-	-	-	-
Two (2) hammermills	P30	baghouse (C30)	S30	2.63	2.63	2.63						
One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system	P70	baghouse (C70)	S70	1.65	1.65	1.65	-	8.11	-	-	0.24	0.46
One (1) DDGS loadout operation	P90	baghouse (C90)	S90	0.70	0.70	0.70	-	-	-	-	-	
One (1) fermentation process	P40	Scrubber C40	S40					45.00			6.13	6.77
Two (2) natural gas fired DDGS dryers in series	Dryers A and B	Thermal Oxidizer (C10)	S10	16.22	16.22	16.22	37.31	24.33	97.24	91.54	0.91	1.70
One (1) mashing, cooking and liquefication operation	P10											
One (1) distillation and dehydration operation	-											
Thermal Oxidizer	C10											
One (1) ethanol loading terminal for both trucks and railcars	P50	Flare C50	S50	-	-	-	-	10.56	-	-	0.07	0.08
Flare	C50	-		0.02	0.02	0.02	-	1.36	2.10	1.75	0.05	0.05
Paved Road	-	-	-	14.37	2.80	0.42	-	-	-	-	-	-
Fugitive Leaks*	-	-	-	-	-	-	-	4.43	-	-	-	-
Storage Tanks*	-	-	-	-	-	-	-	2.59	-	-	-	
Cooling Tower	-	-	-	5.48	5.48	5.48	-	-	-	-	-	-
Diesel Fired Emergency Water Pump	EP-16	-	-	0.10	0.10	0.10	0.10	0.12	0.32	0.12	-	-
Biomethanator Flare	EP-15	-	-	negl.	negle.	negle.	negle.	0.04	0.30	0.05	negle.	negle.
other insignificant activities	-	-	-	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.	negle.
Total	**-**	-	-	**47.04**	**35.47**	**33.09**	**37.41**	**96.55**	**99.95**	**93.46**	**7.40**	**9.07**

* Storage tanks and fugitive VOC emissions calculations were provided by the source. These calculations were determined to be complete.
negl. = negligible

Appendix A: Emission Calculations
Two (2) hammermills (P30)
One (1) Distiller's Dried Grains and Solubles (DDGS) cooling system (P70)
One (1) DDGS loadout operation (P90)

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

Process	Control Device ID	Control Device	Outlet Grain Loading (gr/dscf)	Maximum Air Flow Rate (scfm)	PTE of PM/PM10/PM2.5 after Control (lbs/hr)	PTE of PM/PM10/PM2.5 after Control (tons/yr)	PTE of PM/PM10/PM2.5 before Control (tons/yr)
Hammermills	C30	Baghouse	0.004	17,500	0.60	2.63	263
DDGS Cooling	C70	Baghouse	0.002	22,000	0.38	1.65	165
DDGS Loadout	C90	Baghouse	0.005	3,750	0.16	0.70	70

Methodology
PM=PM10=PM2.5
The baghouses have control efficiencies greater than 99%.
PTE of PM/PM10/PM2.5 after Control (lbs/hr) = Grain Loading (gr/dscf) x Max. Air Flow Rate (scfm) x 60 mins/hr x 1/7000 lb/gr
PTE of PM/PM10/PM2.5 after Control (tons/yr) = Grain Loading (gr/dscf) x Max. Air Flow Rate (scfm) x 60 mins/hr x 1/7000 lb/gr x 8760 hr/yr x 1 ton/2000 lbs
PTE of PM/PM10/PM2.5 before Control=PTE of PM/PM10/PM2.5 after Control (tons/yr) x (1/(1-control efficiency))

VOC and HAP Emissions from the DDGS Cooling System (P70)

Maximum DDGS Production Rate: 20 tons/hr
Annual DDGS Production Limit: 162,218 tons/yr

	Emission Factor* (lbs/ton)	Unlimited PTE (lbs/hr)	Unlimited PTE (tons/yr)	Limited PTE (tons/yr)
VOC	0.1	2.00	8.76	8.11
HAP				
Acetaldehyde	0.003	0.06	0.26	0.24
Acrolein	0.0013	0.03	0.11	0.11
Formaldehyde	0.0007	0.01	0.06	0.06
Methanol	0.0007	0.01	0.06	0.06
		Total HAPs	**0.50**	**0.46**

Methodology
* Emission Factors were provided by the source based on the test results at a similar source (Glacial Lakes).
Unlimited PTE (lbs/hr) = Maximum DDGS Production Rate (tons/hr) x Emission Factor (lbs/ton)
Unlimited PTE (tons/yr) = Maximum DDGS Production Rate (tons/hr) x Emission Factor (lbs/ton) x 8760 hr/yr x 1 ton/2000 lbs
Limited PTE (tons/yr) =Annual DDGS Production Limit (tons/yr) x Emission Factor (lbs/ton) x 1 ton/2000 lbs

Appendix A: Emission Calculations
One (1) grain receiving and storage operation (P20)

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

					Uncontrolled Emissions		
Unit Description	Maximum Throughput (tons/yr)	PM Emission Factor (lbs/ton)	PM10 Emission Factor (lbs/ton)	PM2.5 Emission Factor (lbs/ton)	Uncontrolled PM Emissions (tons/yr)	Uncontrolled PM10 Emissions (tons/yr)	Uncontrolled PM2.5 Emissions (tons/yr)
Grain Receiving	3,679,200	0.180	0.059	0.010	331.13	108.54	18.40
Grain Storage	3,679,200	0.025	0.006	0.001	45.99	11.59	2.02

					Controlled Emissions	
Process	Control Device ID	Control Device	Outlet Grain Loading (gr/dscf)	Maximum Air Flow Rate (scfm)	PTE of PM/PM10/PM2.5 after Control (lbs/hr)	PTE of PM/PM10/PM2.5 after Control (tons/yr)
Grain Receiving and Storage	C20	Baghouse	0.004	39,000	1.34	5.86

Methodology
The baghouse have control efficiencies greater than 99%
Uncontrolled Emission factors are from AP-42, Chapter 9.9.1 - Grain Elevators, Table 9.9.1-1 (04/03).
Uncontrolled emissions (tons/yr) = Annual Throughput (tons/yr) x Uncontrolled Emission Factor (lbs/ton) x 1 ton/2000 lbs
For controlled emissions it is assumed that PM=PM10=PM2.5
PTE after Control (lbs/hr) = Grain Loading (gr/dscf) x Max. Air Flow Rate (scfm) x 60 mins/hr x 1/7000 lb/gr
PTE after Control (tons/yr) = Grain Loading (gr/dscf) x Max. Air Flow Rate (scfm) x 60 mins/hr x 1/7000 lb/gr x 8760 hr/yr x 1 ton/2000 lbs

Appendix A: Emission Calculations
One (1) fermentation process (P40)

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

Max. Production Rate:	6,500	gal/hr
Control Equipment:	Wet Scrubber	--
Annual Production Limit:	50	MMgal/yr

	Emission Rate after Control* (lbs/MMgal)	PTE after Control (lbs/hr)	Unlimited PTE after Control (tons/yr)	Limited PTE after Control (tons/yr)	Control Efficiency** (%)	PTE before Control (tons/yr)
VOC	1,800	11.7	51.2	45.0	98%	2,562
HAP						
Acetaldehyde	245	1.59	6.98	6.13	50%	14.0
Acrolein	5.88	0.04	0.17	0.15	0%	0.17
Formaldehyde	0.22	1.43E-03	0.01	0.01	0%	0.01
Methanol	19.9	0.13	0.57	0.50	0%	0.57
Total	**271**	**1.76**	**7.71**	**6.77**		**14.7**

Methodology

* These emission factors were provided by the source based on the test results for other similar sources ((Russell Plant and Badger State) plus a moderate margin of safety.

** The control efficiency for VOC is provided by the source. The control efficiencies for HAPs are based on the testing results for other similar plants.

PTE after Control (lbs/hr) = Emission Rate after Control (lbs/MMgal) x Max. Production Rate (gal/hr) x 1 MMgal/1,000,000 gal

Unlimited PTE of after Control (tons/yr) = PTE of after Control (lbs/hr) x 8760 hr/yr x 1 ton/2000 lbs

Limited PTE of after Control (tons/yr) = Annual Production limit (MMgal/yr) x Emission Rate after Control (lbs/MMgal) x 1 ton/2000 lbs

PTE of before Control (tons/yr) = Unlimited PTE after Control (tons/yr) / (1-Control Efficiency)

Appendix A: Emission Calculations
Stack 10 Emissions

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

As shown in the diagram below, Stack 10 emissions include the total emissions from all the emission units (including thermal oxidizer (C10) vented to stack 10.

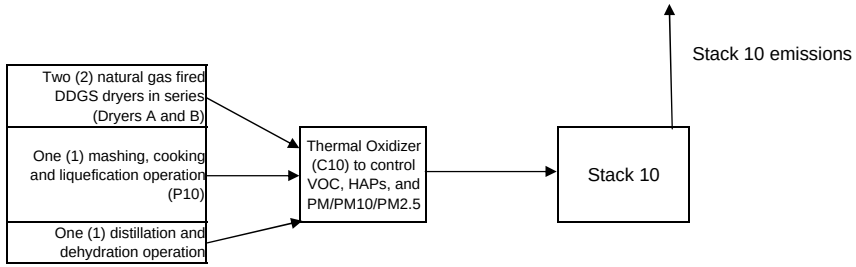

	Heat Input Capacity MMBtu/hr	Max. Throughput Rate (tons/hr)		Annual DDGS Production Limit (tons/yr)
Heat input of Thermal Oxidizer	125			
Total heat input of Dryers	84			
Total Heat Input Capacity	209	20.0	(for the dryers)	162,218

	PM*	PM10/PM2.5*	SO_2*	NOx**	VOC*	CO*
Controlled Emission Rate (lbs/ton)*	0.20	0.20	0.46	-	0.30	1.20
Emission Factor (lbs/MMCF)**	-	-	-	100	-	-
Controlled Emission Rate (lbs/hr)	4.00	4.00	9.20	20.9	6.00	22.2
Control Efficiency of thermal oxidizer***	90%	90%	NA	NA	98%	83%
Uncontrolled Emission Rate (tons/yr)****	175	175	40.3	91.5	1,314	572
Limited PTE (tons/yr)*****	16.2	16.2	37.3	91.5	24.3	97.2

	HAP				
	Formaldehyde	Acetaldehyde	Acrolein	Methanol	
Controlled Emission Rate in lbs/ton*	0.31	0.56	0.066	0.11	**Total**
Uncontrolled Emission Rate (tons/yr)****	**27.2**	**49.1**	**5.78**	**9.64**	**91.6**
Limited PTE (tons/yr)*****	**0.50**	**0.91**	**0.11**	**0.18**	**1.70**

Methodology

*Controlled Emission Rate represents the Stack 10 emission Rate when thermal oxidizer is in operation. These emission rates were provided by the source which is based on emission test results from a similar source.(Glacial Lake Energy Ethanol, Watertown, South Dakota; February 11-13, 2003).

**Emission factor for NOx from AP-42, Chapter 1.4, Tables 1.4-1 (AP-42 Supplement D 3/98) for controlled boiler with flue gas recirculation.
*** Control efficiencies of thermal oxidizer were provided by the source.
****Uncontrolled Emission Rate (except Nox) represents the Stack 10 emission Rate when thermal oxidizer is not in operation.
*****Limited PTE represents Stack 10 emission Rate when thermal oxidizer is in operation and with limited Annual DDGS Production Limit.
PM10=PM2.5

Controlled Emission Rate of PM/PM10, SO_2, VOC, CO and HAPs (lbs/hr) = Max. Throughput Rate (tons/hr) x Controlled Emission Rate (lbs/ton)
Uncontrolled Emission Rate of NOx (tons/yr) = Total Heat Input Capacity (MMBtu/hr) x 1 MMCF/1,000 MMBtu x Emission Factor (lbs/MMCF)
Uncontrolled Emission Rate of PM/PM10, SO2, VOC, CO and HAPs (tons/yr) = Controlled Emission Rate (lbs/hr) (lbs/hr) x 8760 hr/yr x 1 ton/2000 lbs / (1-Control Efficiency)
Limited PTE of PM/PM10, SO_2, VOC, CO and HAPs (tons/yr) = Annual DDGS Production Limit (tons/yr) x Controlled Emission Rate (lbs/ton) x 1 ton/2000 lb
Limited PTE of NOx (tons/yr) = Heat Input Capacity (MMBtu/hr) x 8,760 hrs/yr x 1 MMCF/1,000 MMBtu x Emission Factor (lbs/MMCF) x 1 ton/2000 lbs

Appendix A: Emission Calculations
One (1) ethanol loading terminal for both trucks and railcars

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

1. Emission Factors: AP-42

Ethanol is shipped by truck and by rail. Railcars are dedicated fleets, but the trucks may be used to carry gasoline prior to filling with ethanol. Railcars and trucks are filled by submerged loading process and the truck loading process is controlled by a flare, which has a control efficiency of 98% for VOC and HAPs.

According to AP-42, Chapter 5.2 - Transportation and Marketing of Petroleum Liquids (01/95), the VOC emission factors for the truck and rail loading rack can be estimated from the following equation:

$$L = 12.46 \times (SPM)/T$$

where:

L = loading loss (lbs/kgal)
S = a saturation factor (see AP-42, Table 5.2-1)
P = true vapor pressure of the liquid loaded (psia)
M = molecular weight of vapors
T = temperature of the bulk liquid loaded (degree R)

Previous Stored Liquid	S	P (psia)	M (lbs/mole lbs)	T (degree R)	L (lbs/kgal)
Gasoline (normal)	0.6	3.99	66	505	3.90
Gasoline (clean cargo)	0.5	3.99	66	505	3.25
Denatured Ethanol (normal)	0.6	0.50	49.7	505	0.37
Denatured Ethanol (clean cargo)	0.5	0.50	49.7	505	0.31

Therefore, the emission factor for loading denatured ethanol to the trucks which stored gasoline previously
= L (gasoline, normal) - L (gasoline, clean cargo) + L (denatured ethanol, clean cargo) = 0.96 (lbs/kgal)

2. Unlimited Potential to Emit VOC Before Control:

The worst case scenario is assuming that all the trucks are used to ship gasoline before filling with denatured ethanol and all the denatured ethanol is shipped by trucks.

Max. Loading Rate for Trucks = 36.0 kgal/hr

PTE of VOC before Control (tons/yr) = 36.0 kgal/hr x 0.96 lbs/kgal x 8760 hr/yr x 1 ton/2000 lbs = **150.8 tons/yr**

3. Limited Potential to Emit VOC after Control:

Annual Production Limit: 50,000 kgal/yr
Annual Truck Loadout Limit: 35,000 kgal/yr
Flare Control Efficiency: 98% (for truck loading only)

Limited PTE of VOC by Trucks (tons/yr) = 0.96 lbs/kgal x 2,500 kgal/yr x (1-98%) x 1 tons/2000 lbs = **1.36 tons/yr**
Limited PTE of VOC by Railcars (tons/yr) = 0.37 lbs/kgal x 50,000 kgal/yr x 1 tons/2000 lbs = **9.20 tons/yr**

4. Potential to Emit HAPs:

HAP emissions are mainly from the unloading process for trucks, which may used to ship gasoline before.

HAP	HAP Fraction*	PTE of HAP before Control (tons/yr)	Limited PTE of HAP (tons/yr)
Benzene	2.50E-03	0.38	3.41E-03
Carbon Disulfide	2.00E-05	0.00	2.73E-05
Cumene	1.00E-04	0.02	1.36E-04
Ethyl benzene	5.00E-05	0.01	6.82E-05
n-Hexane	5.00E-02	7.54	6.82E-02
Toluene	5.00E-03	0.75	6.82E-03
Xylene	5.00E-04	0.08	6.82E-04
Total	**0.06**	**8.77**	**0.08**

* This is the HAP fraction for gasoline vapors.

Methodology

PTE of HAP before Control (Tons/yr) = PTE of VOC before Control (tons/yr) x HAP %
Limited PTE of HAP (Tons/yr) = Limited PTE of VOC by Railcars - Worst Case Scenario (tons/yr) x HAP %

The VOC and HAPs emissions include emission due to natural gas combustion in flare and ethanol loading.

Appendix A: Emission Calculations
Stack 50 emissions
From the Ethanol Loadout Flare C50

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 West State Road 114, Rensselaer, IN 47978
SPR: 073-24367-00037
Reviewer: ERG/BL
Date: March 26, 2007

Heat Input Capacity MMBtu/hr	Max. Loadout Rate for Trucks kgal/hr	Annual Truck Loadout Limit kgal/yr
6.40	36.0	35,000

	Pollutant					
	*PM	*PM10/PM2.5	*SO_2	**NO_x	***VOC	**CO
Emission Factor	7.6 (lbs/MMCF)	7.6 (lbs/MMCF)	0.6 (lbs/MMCF)	0.1 (lbs/kgal)	- -	0.129 (lbs/kgal)
Unlimited Potential to Emit in tons/yr	0.21	0.21	0.02	15.8	-	20.3
Limited Potential to Emit in tons/yr	2.36E-02	2.36E-02	1.87E-03	1.75	-	2.10

HAPs - Organics

	Benzene	Dichlorobenzene	Formaldehyde	Hexane	Toluene
Emission Factor in lb/MMcf	2.1E-03	1.2E-03	7.5E-02	1.8E+00	3.4E-03
Potential Emission in tons/yr	6.72E-06	3.36E-05	2.10E-03	5.05E-02	9.53E-05

HAPs - Metals

	Lead	Cadmium	Chromium	Manganese	Nickel	Total
Emission Factor in lb/MMcf	5.0E-04	1.1E-03	1.4E-03	3.8E-04	2.1E-03	HAPs
Potential Emission in tons/yr	1.40E-05	3.08E-05	3.92E-05	1.07E-05	5.89E-05	0.0528

*PM, PM10, and SO_2 emission factors are from AP-42, Chapter 1.4, Tables 1.4-1, 1.4-2, and 1.4-3 (AP-42, 03/98).
PM and PM10 emission factors are condensable and filterable PM10 combined. PM10=PM2.5
**Emission factors for NO_x and CO are provided by the source based on the test results for similar sources.
*** VOC emissions can be found in page 6 of this appendix.
Note: Flare C50 is only used to control the emissions from the truck loading process.
The emissions factors include emission due to natural gas combustion in flare and ethanol loading.

Appendix A: Emission Calculations
Paved Road

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

1. Emission Factors: AP-42

According to AP-42, Chapter 13.2.1 - Paved Roads (12/03), the PM/PM10 emission factors for paved roads can be estimated from the following equation:

$$E = (k \times (sL/2)^a \times (w/3)^b - C) \times (1 - p/(4 \times 365))$$

where:

E =	emission factor (lb/vehicle mile traveled)	
sL =	road surface silt loading (g/m^2) =	0.6 (g/m^2) (AP-42, Table 13.2.1-3)
w =	mean vehicle weight (tons) =	27.5 tons
k =	empirical constant =	0.082 for PM, 0.016 for PM10, and 0.0024 for PM2.5
a =	empirical constant =	0.65
b =	empirical constant =	1.5
C =	emission factor for exhaust, brake and tire wear	0.00047 for PM and PM10, AMD 0.00036 for PM2.5
p =	number of days per year with 0.01 inches precipitation	120

PM Emission Factor = $(0.082 \times (0.6/2)^{0.65} \times (27.5/3)^{1.5} - 0.00047) \times (1 - 120/1460)$ = **0.95** lbs/mile

PM10 Emission Factor = $(0.016 \times (0.6/2)^{0.65} \times (27.5/3)^{1.5} - 0.00047) \times (1 - 120/1460)$ = **0.19** lbs/mile

PM10 Emission Factor = $(0.0024 \times (0.6/2)^{0.65} \times (27.5/3)^{1.5} - 0.00036) \times (1 - 120/1460)$ = **0.03** lbs/mile

2. Potential to Emit (PTE) of PM/PM10 Before Control from Paved Roads:

Vehicle Type	Ave Weight of Vehicles* (tons)	Trip Number* (trips/day)	Round Trip Distance* (mile/trip)	Vehicle Mile Traveled (VMT) (miles/yr)	Traffic Component (%)	Component Vehicle Weight (tons)	PTE of PM before Control (tons/yr)	PTE of PM10 before Control (tons/yr)	PTE of PM2.5 before Control (tons/yr)
Grain Receiving	27.5	100	0.50	18,250	60.6%	16.7	8.7	1.70	0.25
DDGS	27.5	33	0.50	6,023	20.0%	5.50	2.87	0.56	0.08
Ethanol Load Out	27.5	30	0.50	5,475	18.2%	5.00	2.61	0.51	0.08
Denaturant Delivery	27.5	2	0.50	365	1.21%	0.33	0.17	0.03	0.01
Total				**30,113**	**100%**	**27.5**	**14.4**	**2.80**	**0.42**

* This information is provided by the source.

Methodology

Vehicle Mile Traveled (miles/yr) = Trip Number (trips/hr) x Round-Trip Distance (mile/trip) x 8760 hrs/yr
Traffic Component (%) = VMT / Total VMT
Component Vehicle Weight = Ave. Weight of Vehicles (ton) x Traffic Component (%)
PTE of PM/PM10 before Control (tons/yr) = VMT (miles/yr) x PM/PM10 Emission Factors x 1 ton/2000 lbs

3. Potential to Emit (PTE) of PM/PM10 after Control from Paved Roads:

The source proposed to use periodic sweeping to control the fugitive dust emissions.
The control efficiency from sweeping is assumed to be 50%.

PTE of PM after Control =	14.4 tons/yr x (1-50%) =	**7.19 tons/yr**
PTE of PM10 after Control =	2.80 tons/yr x (1-50%) =	**1.40 tons/yr**
PTE of PM2.5 after Control =	0.4 tons/yr x (1-50%) =	**0.21 tons/yr**

Appendix A: Emission Calculations
Cooling Tower

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

1. Process Description:

Control Devices:	Drift Eliminator
Flow Rate:	1,200,000 gallons/hour
Total Dissolved Solids (TDS):	2,500 ppmv
Drift Losses (% of cooling water):	0.005% (provided by the source)

2. Potential to Emit PM/PM10 of the Cooling Tower:

Assume all the PM emissions are equal to PM10/PM2.5 emissions.

Hourly PM/PM10/PM2.5 Emissions = 1,200,000 gal/hr x 8.34 lbs/gal x 2,500 ppmv /1,000,000 x 0.005% = **1.25 lbs/hr**

Annual PM/PM10/PM2.5 emissions = 1.25 lbs/hr x 8760 hr/yr x 1 ton/2000 lbs = **5.48 tons/yr**

Appendix A: Emission Calculations
Diesel Fired Emergency Water Pump

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008
0 0

Power Output Horse Power (HP)	Operation Limit hr/yr
190	500

		Pollutant					
		PM*	PM10*	SO_2	NO_x	**VOC	CO
Emission Factor in lb/HP-hr	(<600 hp)	2.20E-03	2.20E-03	2.05E-03	3.10E-02	2.47E-03	6.68E-03
Potential to Emit in tons/yr		**0.10**	**0.10**	**0.10**	**1.47**	**0.12**	**0.32**

*PM=PM10=PM2.5
** Assume TOC (total organic compounds) emissions are equal to VOC emissions.
Emission factors are from AP-42, Chapter 3.3, Table 3.3-1, SCC #2-02-001-02 and 2-03-001-01 (AP-42 Supplement B, 10/96).

Note: As defined in the September 6, 1995 memorandum from John S. Seitz of US EPA on the subject of "Calculating Potential to Emit for Emergency Generators", an emergency generator's sole function is to provide back-up power when power from the local utility is interrupted. The only circumstances under which an emergency generator would operate when utility power is available are during operator training or brief maintenance checks. The generator's potential to emit is based on an operating time of 500 hours per year as set forth in the EPA memo.

Methodology

PTE (tons/yr) = Power Output (HP) x Emission Factor (lb/HP-hr) x Operation Limit (hr/yr) x 1 ton/2000 lbs

Appendix A: Emission Calculations
Biomethanator Flare

Company Name: Iroquois Bio-Energy Company, LLC
Address: 751 W. State Road 114, Rensselaer, IN 47978
FESOP Renewal: 073-26405-00037
Reviewer: Mehul Sura
Date: 10/20/2008

Max. Heat Input MMBtu/hr	Operating Hour Limit (hours/yr)	
3.2	500	(This unit only operates when the dryers are down)

Pollutant

	PM[b]	PM10/PM2.5[b]	SO_2[b]	NOx[a]	CO[a]	VOC[a]	HAP[b]
Emission Factor in lb/MMBtu	-	-	-	0.068	0.37	0.052	-
Potential to Emit in tons/yr	Negligible	Negligible	Negligible	**0.05**	**0.30**	**0.04**	Negligible

[a] Emission factors are from AP-42, Tables 13.5-1 and 13.5-2 (AP-42, 01/95).

[b] The Permittee stated that PM/PM10 emissions from this flare is negligible due to the smokeless design. The PTE of SO_2 and HAP are negligible due to negligible sulfur and HAP presence in the gas stream.

Methodology

PTE (tons/yr) = Max. Heat Input (MMBtu/hr) x Emission Factor (lbs/MMBtu) x Operating Hour Limit (hour/yr) x 1 ton/2000 lbs