



# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
Governor

*Thomas W. Easterly*  
Commissioner

100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

TO: Interested Parties / Applicant

DATE: April 20, 2011

RE: Samtec, Inc. / 043-30128-00059

FROM: Matthew Stuckey, Branch Chief  
Permits Branch  
Office of Air Quality

## Notice of Decision: Approval - Registration

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the enclosed matter. Pursuant to IC 4-21.5-3-4(d) this order is effective when it is served. When served by U.S. mail, the order is effective three (3) calendar days from the mailing of this notice pursuant to IC 4-21.5-3-2(e).

If you wish to challenge this decision, IC 4-21.5-3-7 requires that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Office of Environmental Adjudication, 100 North Senate Avenue, Government Center North, Suite N 501E, Indianapolis, IN 46204, **within eighteen (18) calendar days of the mailing of this notice**. The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

- (1) the date the document is delivered to the Office of Environmental Adjudication (OEA);
- (2) the date of the postmark on the envelope containing the document, if the document is mailed to OEA by U.S. mail; or
- (3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OEA by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

- (1) the name and address of the person making the request;
- (2) the interest of the person making the request;
- (3) identification of any persons represented by the person making the request;
- (4) the reasons, with particularity, for the request;
- (5) the issues, with particularity, proposed for considerations at any hearing; and
- (6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.

Enclosures  
FN-REGIS.dot 1/2/08



# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
Governor

*Thomas W. Easterly*  
Commissioner

100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

Mr. Nick Knable  
Samtec, Inc.  
520 Park Eas Blvd.  
New Albany, IN 47150

April 20, 2011

Re: R043-30128-00059  
First Registration Revision to  
R043-20264-00059

Dear Mr. Knable:

Samtec, Inc. was issued a Registration No.: R043-20264-00059 on February 25, 2005 for a stationary electronic components electroplating and assembly source located at 520 Park Eas Blvd., New Albany, IN 47150. On January 18, 2011, the Office of Air Quality (OAQ) received an application relating to construction and operation of ten (10 new non-chromium plating lines, one (1) plating on plastic line and updating current emission units. The new plating lines potential to emit is as discussed in the attached Technical Support Document (TSD). The addition of these plating lines to the registration is considered a Registration Revision pursuant to 326 IAC 2-5.5.6(g), because the revision involves the addition of a new type of process (plastic on plastic line), which is not described in 326 IAC 2-5.5.6(d) (Registration Notice-Only Changes).


The uncontrolled/unlimited potential to emit of the entire source will continue to be within the threshold levels specified in 326 IAC 2-5.5-1(b)(1).

Pursuant to 326 IAC 2-5.5-6, the registration is hereby revised as described in the attached Technical Support Document (TSD).

The source shall continue to operate according to 326 IAC 2-5.5. Please find enclosed the revised registration. A copy of the registration is available on the Internet at: <http://www.in.gov/ai/appfiles/idem-caats/>. For additional information about air permits and how the public and interested parties can participate, refer to the IDEM's Guide for Citizen Participation and Permit Guide on the Internet at: [www.idem.in.gov](http://www.idem.in.gov)

This decision is subject to the Indiana Administrative Orders and Procedures Act - IC 4-21.5-3-5. If you have any questions on this matter, please contact Bruce Farrar, at (800) 451-6027, press 0 and ask for Bruce Farrar or extension 4-5401, or dial (317) 234-5401.

Sincerely,

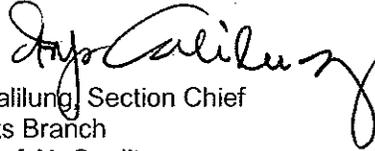

Iryn Calilung, Section Chief  
Permits Branch  
Office of Air Quality

IC/bf

Attachment: Revised Registration and TSD

cc: File - Floyd County  
Floyd County Health Department  
Compliance and Enforcement Branch  
Billing, Licensing and Training Section



# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
Governor

*Thomas W. Easterly*  
Commissioner


100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

## REGISTRATION OFFICE OF AIR QUALITY

**Samtec, Inc.**  
**520 Park East Blvd**  
**New Albany, Indiana 47150**

Pursuant to 326 IAC 2-5.1 (Construction of New Sources: Registrations) and 326 IAC 2-5.5 (Registrations), (herein known as the Registrant) is hereby authorized to construct and operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this registration.

Registration No. 043-20264-00059	
Original Signed by:  Paul Dubenetzky, Chief Permits Branch Office of Air Quality	Issuance Date: February 25, 2005

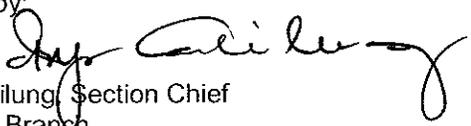1st Registration Revision No. 043-30128-00059	
Issued by:  Iryn Calilung, Section Chief Permits Branch Office of Air Quality	Issuance Date: April 20, 2011

## SECTION A

## SOURCE SUMMARY

This registration is based on information requested by the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ). The information describing the source contained in conditions A.1 and A.2 is descriptive information and does not constitute enforceable conditions. However, the Registrant should be aware that a physical change or a change in the method of operation that may render this descriptive information obsolete or inaccurate may trigger requirements for the Registrant to obtain additional permits pursuant to 326 IAC 2.

### A.1 General Information

---

The Registrant owns and operates a stationary electronic components electroplating and assembly source.

Source Address:	520 Park East Blvd, New Albany, Indiana 47150
General Source Phone Number:	(812) 944-6733
SIC Code:	3679
County Location:	Floyd County
Source Location Status:	Nonattainment for PM 2.5 standard Attainment for all other criteria pollutants
Source Status:	Registration

### A.2 Emission Units and Pollution Control Equipment Summary

---

This stationary source consists of the following emission units and pollution control devices:

- (a) Two (2) Barrel Plating Lines, identified as PE1 and PE2, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with a single scrubber (CE9), exhausting to stack EU21, capacity: 5.00 pounds per hour, each.
- (b) Four (4) Strip Plating Lines, identified as PE3 - PE6, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with a single scrubber (CE10), exhausting to stack EU22, capacity: 31.5 pounds per hour, each.
- (c) Four (4) Strip Plating Lines, identified as PE7 - PE10, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with a single scrubber (CE9), exhausting to stack EU21, capacity: 31.5 pounds per hour, each.
- (d) Two (2) Strip Plating Lines, identified as PE11 and PE13, used to plate nickel, tin, copper, or gold, installed in 1998 and 2000, respectively, equipped with a single scrubber (CE7), exhausting to stack EU16, capacity: 31.5 pounds per hour, each.
- (e) Two (2) Strip Plating Lines, identified as PE14 and PE15, used to plate nickel, tin, copper, or gold, installed in 2000, equipped with a single scrubber (CE8), exhausting to stack EU17, capacity: 31.5 pounds per hour, each.
- (f) One (1) Strip Plating Line, identified as PE12, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with scrubbers (CE8 and CE9), exhausting to stacks EU17 and EU21, capacity: 31.5 pounds per hour.
- (g) Three (3) Strip Plating Lines, identified as PE16, PE17, and PE18, used to plate nickel, tin, copper, or gold, installed in 2000, equipped with scrubbers (CE3 and CE4), exhausting to stacks EU5 and EU6, capacity: 31.5 pounds per hour, each.

- (h) One (1) Direct Metal Metalization Line, identified as PE19, used to chemically bond Palladium to flex circuit, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 15 panels per hour or 3.36 pounds per hour.
- (i) One (1) Flex Plating Line, identified as PE20, used to plate nickel, tin, copper, or gold, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 12 panels or 2.69 pounds per hour.
- (j) One (1) Chem Clean Line, identified as PE21, using potassium per sulfate microetch and sulfuric acid for cleaning parts, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 100 panels per hour or 224 pounds per hour.
- (k) One (1) Develop/Etch/Strip Line, identified as PE22, using a cupric chloride chemistry, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 100 panels per hour or 224 pounds per hour.
- (l) One (1) Plating on Plastic Line, identified as PE69, used to plate nickel, tin, copper, or gold onto plastic, installed in 2008, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 31.5 pounds per hour.
- (m) One (1) Strip Plating Line, identified as PE80, used to plate nickel, tin, copper, or gold, installed in 2008, equipped with a scrubber (CE10), exhausting to stack EU22, capacity: 31.5 pounds per hour.
- (n) Ten (10) Strip Plating Lines, identified as PE81 - PE90, used to plate nickel, tin, copper, or gold, approved for construction in 2011, equipped with scrubbers (CE15 through CE17), with PE81, PE82 and PE83 to scrubber CE15 and exhausting to stack EU51; PE84, PE85 and PE86 to scrubber CE16, exhausting to stack EU52; PE87, PE88, PE 89 and PE90 to scrubber CE17, exhausting to stack EU53 with a capacity of 31.5 pounds per hour, each.
- (o) Two (2) woodworking operations, identified as PE26 and PE27, installed in 2002, equipped with a baghouse (CE5), exhausting to stack EU7, capacity: 11.1 pounds of wood per hour, total.
- (p) One (1) propane fired internal combustion engine, identified as PE61, installed in 1998, exhausting to stack EU45, rated at 60.4 horsepower. Under 40 CFR 60, Subpart ZZZZ, this unit is considered an affected source.
- (q) Eight (8) natural gas fired heaters, identified as A1 - A8, installed in 1998, exhausting to stacks A1 - A8, respectively, rated at 0.470 million British thermal units per hour, each
- (r) One (1) natural gas fired heater, identified as A9, installed in 2005, exhausting to stack A9, rated at 0.470 million British thermal units per hour.
- (s) One (1) natural gas fired heater, identified as B1, installed in 1998, exhausting to stack B1, rated at 0.400 million British thermal units per hour.
- (t) Twenty-seven (27) natural gas fired heaters, identified as C1 - C27, installed in 1998, exhausting to stacks C1 - C27, respectively, rated at 0.260 million British thermal units per hour, each.
- (u) One (1) natural gas fired heater, identified as D1, installed in 1998, exhausting to stack D1, rated at 0.235 million British thermal units per hour.

- (v) One (1) natural gas fired heater, identified as G1, installed in 1998, exhausting to stack G1, rated at 0.180 million British thermal units per hour.
- (w) Three (3) natural gas fired heaters, identified as H1, H2, installed in 1998, and H3, installed in 2008, exhausting to stacks H1 and H2, respectively, rated at 0.130 million British thermal units per hour, each.
- (x) Four (4) natural gas fired heaters, identified as I1 - I4, installed in 1998, exhausting to stacks I1 - I4, respectively, rated at 0.125 million British thermal units per hour, each.
- (y) Four (4) natural gas fired heaters, identified as J1 - J4, installed in 1998, exhausting to stacks J1 - J4, respectively, rated at 0.120 million British thermal units per hour, each.
- (z) One (1) natural gas fired heater, identified K1, installed in 1998, exhausting to stack K1, rated at 0.090 million British thermal units per hour.
- (aa) Four (4) natural gas fired heaters, identified as L1 - L4, installed in 1998, exhausting to stacks L1 - L4, respectively, rated at 0.078 million British thermal units per hour, each.
- (bb) One (1) natural gas fired space heater, identified as M1, installed in 1998, exhausting to stack M1, rated at 0.075 million British thermal units per hour.
- (cc) Four (4) natural gas fired air rotation/heaters, identified as N1 - N4, installed in 2008, exhausting to stacks N1 - N4, respectively, rated at 0.48 million British thermal units per hour, each.
- (dd) One (1) natural gas fired air rotation/heater, identified as O1, installed in 2008, rated at 0.50 million British thermal units per hour, exhausting internally.
- (ee) Two (2) natural gas fired space heaters, identified as P1 and P2, installed in 2008, rated at 0.75 million British thermal units per hour, each, and exhausting internally.
- (ff) One (1) natural gas fired space heater, identified as Q1, installed in 2008, rated at 0.10 million British thermal units per hour, and exhausting internally.
- (gg) Four (4) natural gas fired space heaters, identified as R1 - R4, installed in 2008, rated at 0.25 million British thermal units per hour, each, and exhausting internally.
- (hh) One (1) natural gas fired furnace, identified as S1, installed in 2008, rated at 0.05 million British thermal units per hour, and exhausting internally.
- (ii) One (1) natural gas fired furnace, identified as T1, installed in 2008, rated at 0.10 million British thermal units per hour, and exhausting internally.
- (jj) One (1) natural gas fired space heater, identified as U1, installed in 2008, rated at 0.25 million British thermal units per hour, and exhausting internally.
- (kk) One (1) natural gas fired space heater, identified as V1, installed in 2008, rated at 0.50 million British thermal units per hour, and exhausting internally.
- (ll) One (1) natural gas fired furnace, identified as W1, installed in 2008, rated at 0.10 million British thermal units per hour, and exhausting internally.
- (mm) One (1) natural gas fired furnace, identified as X1, installed in 2008, rated at 0.12 million British thermal units per hour, and exhausting internally.

- (nn) Eight (8) natural gas fired space heaters, identified as Y1 - Y8, installed in 2008, rated at 0.12 million British thermal units per hour, each, and exhausting internally.
- (oo) Two (2) natural gas fired space heaters, identified as Z1 and Z2, installed in 2008, rated at 0.15 million British thermal units per hour, each, and exhausting internally.

## SECTION B

## GENERAL CONDITIONS

### B.1 Definitions [326 IAC 2-1.1-1]

---

Terms in this registration shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-1.1-1) shall prevail.

### B.2 Effective Date of Registration [IC 13-15-5-3]

---

Pursuant to IC 13-15-5-3, this registration is effective immediately, unless a petition for stay of effectiveness is filed and granted according to IC 13-15-6-3, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

### B.3 Registration Revocation [326 IAC 2-1.1-9]

---

Pursuant to 326 IAC 2-1.1-9 (Revocation), this registration to operate may be revoked for any of the following causes:

- (a) Violation of any conditions of this registration.
- (b) Failure to disclose all the relevant facts, or misrepresentation in obtaining this registration.
- (c) Changes in regulatory requirements that mandate either a temporary or permanent reduction of discharge of contaminants. However, the amendment of appropriate sections of this registration shall not require revocation of this registration.
- (d) For any cause which establishes in the judgment of IDEM the fact that continuance of this registration is not consistent with purposes of this article.

### B.4 Prior Permits Superseded [326 IAC 2-1.1-9.5]

---

- (a) All terms and conditions of permits established prior to Registration No. 043-20264-00059 and issued pursuant to permitting programs approved into the state implementation plan have been either:
  - (1) incorporated as originally stated,
  - (2) revised, or
  - (3) deleted.
- (b) All previous registrations and permits are superseded by this registration.

### B.5 Annual Notification [326 IAC 2-5.1-2(f)(3)] [326 IAC 2-5.5-4(a)(3)]

---

Pursuant to 326 IAC 2-5.1-2(f)(3) and 326 IAC 2-5.5-4(a)(3):

- (a) An annual notification shall be submitted by an authorized individual to the Office of Air Quality stating whether or not the source is in operation and in compliance with the terms and conditions contained in this registration.
- (b) The annual notice shall be submitted in the format attached no later than March 1 of each year to:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, IN 46204-2251

- (c) The notification shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

**B.6 Source Modification Requirement [326 IAC 2-5.5-6(a)]**

---

Pursuant to 326 IAC 2-5.5-6(a), an application or notification shall be submitted in accordance with 326 IAC 2 to the Office of Air Quality (OAQ) if the source proposes to construct new emission units, modify existing emission units, or otherwise modify the source.

**B.7 Registrations [326 IAC 2-5.1-2(i)]**

---

Pursuant to 326 IAC 2-5.1-2(i), this registration does not limit the source's potential to emit.

**B.8 Preventive Maintenance Plan [326 IAC 1-6-3]**

---

- (a) If required by specific condition(s) in Section D of this registration, the Registrant shall prepare and maintain Preventive Maintenance Plans (PMPs) no later than ninety (90) days after issuance of this registration or ninety (90) days after initial start-up, whichever is later, including the following information on each facility:
- (1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;
  - (2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and
  - (3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

If, due to circumstances beyond the Registrant's control, the PMPs cannot be prepared and maintained within the above time frame, the Registrant may extend the date an additional ninety (90) days provided the Registrant notifies:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

The Registrant shall implement the PMPs.

- (b) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Registrant to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions.
- (c) To the extent the Registrant is required by 40 CFR Part 60 or 40 CFR Part 63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such OMM Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

## SECTION C

## SOURCE OPERATION CONDITIONS

Entire Source

### Emission Limitations and Standards [326 IAC 2-5.1-2(g)] [326 IAC 2-5.5-4(b)]

#### C.1 Opacity [326 IAC 5-1]

---

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this registration:

- (a) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.
- (b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

#### C.2 Fugitive Dust Emissions [326 IAC 6-4]

---

The Registrant shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions).

## SECTION D.1

## OPERATION CONDITIONS

Facility Description [326 IAC 2-5.1-2(f)(2)] [326 IAC 2-5.5-4(a)(2)]:

- (a) Two (2) Barrel Plating Lines, identified as PE1 and PE2, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with a single scrubber (CE9), exhausting to stack EU21, capacity: 5.00 pounds per hour, each.
- (b) Four (4) Strip Plating Lines, identified as PE3 - PE6, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with a single scrubber (CE10), exhausting to stack EU22, capacity: 31.5 pounds per hour, each.
- (c) Four (4) Strip Plating Lines, identified as PE7 - PE10, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with a single scrubber (CE9), exhausting to stack EU21, capacity: 31.5 pounds per hour, each.
- (d) Two (2) Strip Plating Lines, identified as PE11 and PE13, used to plate nickel, tin, copper, or gold, installed in 1998 and 2000, respectively, equipped with a single scrubber (CE7), exhausting to stack EU16, capacity: 31.5 pounds per hour, each.
- (e) Two (2) Strip Plating Lines, identified as PE14 and PE15, used to plate nickel, tin, copper, or gold, installed in 2000, equipped with a single scrubber (CE8), exhausting to stack EU17, capacity: 31.5 pounds per hour, each.
- (f) One (1) Strip Plating Line, identified as PE12, used to plate nickel, tin, copper, or gold, installed in 1998, equipped with scrubbers (CE8 and CE9), exhausting to stacks EU17 and EU21, capacity: 31.5 pounds per hour.
- (g) Three (3) Strip Plating Lines, identified as PE16, PE17, and PE18, used to plate nickel, tin, copper, or gold, installed in 2000, equipped with scrubbers (CE3 and CE4), exhausting to stacks EU5 and EU6, capacity: 31.5 pounds per hour, each.
- (h) One (1) Direct Metal Metalization Line, identified as PE19, used to chemically bond Palladium to flex circuit, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 15 panels per hour or 3.36 pounds per hour.
- (i) One (1) Flex Plating Line, identified as PE20, used to plate nickel, tin, copper, or gold, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 12 panels or 2.69 pounds per hour.
- (j) One (1) Chem Clean Line, identified as PE21, using potassium per sulfate microetch and sulfuric acid for cleaning parts, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 100 panels per hour or 224 pounds per hour.
- (k) One (1) Develop/Etch/Strip Line, identified as PE22, using a cupric chloride chemistry, installed in 2002, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 100 panels per hour or 224 pounds per hour.
- (l) One (1) Plating on Plastic Line, identified as PE69, used to plate nickel, tin, copper, or gold onto plastic, installed in 2008, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 31.5 pounds per hour.

- (m) One (1) Strip Plating Line, identified as PE80, used to plate nickel, tin, copper, or gold, installed in 2008, equipped with a scrubber (CE10), exhausting to stack EU22, capacity: 31.5 pounds per hour.
  - (n) Ten (10) Strip Plating Lines, identified as PE81 - PE90, used to plate nickel, tin, copper, or gold, approved for construction in 2011, equipped with scrubbers (CE15 through CE17), with PE81, PE82 and PE83 to scrubber CE15 and exhausting to stack EU51; PE84, PE85 and PE86 to scrubber CE16, exhausting to stack EU52; PE87, PE88, PE 89 and PE90 to scrubber CE17, exhausting to stack EU53 with a capacity of 31.5 pounds per hour, each.
  - (o) Two (2) woodworking operations, identified as PE26 and PE27, installed in 2002, equipped with a baghouse (CE5), exhausting to stack EU7, capacity: 11.1 pounds of wood per hour, total.
- (The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

**Emission Limitations and Standards [326 IAC 2-5.1-2(f)(1)] [326 IAC 2-5.5-4(a)(1)]**

**D.1.1 Particulate [326 IAC 6-3-2]**

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)  
 Pursuant to 326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes) the particulate from the processes listed in the table below shall be limited by the following:

<b>Emission Unit</b>	<b>Process Weight Rate (lbs/hr)</b>	<b>Allowable PM Limit (lbs/hr)</b>
PE1	5.00	0.551
PE2	5.00	0.551
PE3	31.5	0.551
PE4	31.5	0.551
PE5	31.5	0.551
PE6	31.5	0.551
PE7	31.5	0.551
PE8	31.5	0.551
PE9	31.5	0.551
PE10	31.5	0.551
PE11	31.5	0.551
PE12	31.5	0.551
PE13	31.5	0.551
PE14	31.5	0.551
PE15	31.5	0.551
PE16	31.5	0.551
PE17	31.5	0.551
PE18	31.5	0.551
PE19	3.36	0.551
PE20	2.69	0.551
PE21	224	0.946

Emission Unit	Process Weight Rate (lbs/hr)	Allowable PM Limit (lbs/hr)
PE22	224	0.946
PE69	31.5	0.551
PE80	31.5	0.551
PE81	31.5	0.551
PE82	31.5	0.551
PE83	31.5	0.551
PE84	31.5	0.551
PE85	31.5	0.551
PE86	31.5	0.551
PE87	31.5	0.551
PE88	31.5	0.551
PE89	31.5	0.551
PE90	31.5	0.551

The pound per hour limitation was calculated with the following equation:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$$E = 4.10 P^{0.67} \quad \text{where } E = \text{rate of emission in pounds per hour and} \\ P = \text{process weight rate in tons per hour}$$

#### D.1.2 Particulate [326 IAC 6-3-2]

---

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)

Pursuant to 326 IAC 6-3-2, the particulate matter (PM) from the woodworking operation, PE26 and PE27 shall not exceed 0.551 pounds per hour when operating at a process weight rate of 0.0055 tons per hour. The pound per hour limitation was calculated with the following equation:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$$E = 4.10 P^{0.67} \quad \text{where } E = \text{rate of emission in pounds per hour and} \\ P = \text{process weight rate in tons per hour}$$

#### D.1.3 Preventive Maintenance Plan [326 IAC 1-6-3]

---

A Preventive Maintenance Plan is required for the woodworking operation PE26 and PE27 and its control device. Section B - Preventive Maintenance Plan contains the Registrant's obligation with regard to the preventive maintenance plan required by this condition.

## SECTION E.1

## OPERATION CONDITIONS

Facility Description [326 IAC 2-5.1-2(f)(2)] [326 IAC 2-5.5-4(a)(2)]:

- (o) One (1) propane fired internal combustion engine, identified as PE61, installed in 1998, exhausting to stack EU45, rated at 60.4 horsepower.

Under 40 CFR 60, Subpart ZZZZ, this unit is considered an affected source.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

### E.1.1 General Provisions Relating to National Emissions Standards for Hazardous Air Pollutants under 40 CFR Part 63 [326 IAC 20-1] [40 CFR Part 63, Subpart A]

Pursuant to 40 CFR 63.6590(b)(3), the propane fired internal combustion engine, emergency generator, identified as PE61 does not have to meet the requirements of 40 CFR 63, Subpart A (General Provisions), since it is considered an existing commercial emergency stationary RICE at an area source of HAP emissions

### E.1.2 National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines [40 CFR Part 63, Subpart ZZZZ]

The Permittee shall comply with the following provisions of 40 CFR Part 63, Subpart ZZZZ (included as Attachment A) which are incorporated by reference as 326 IAC 20-82 for the reciprocating internal combustion engine, emergency generator, identified as PE61, was manufactured prior to February 2005.

- (1) 40 CFR 63.6580
- (2) 40 CFR 63.6585
- (3) 40 CFR 63.6590(a)(1)(iii), (b)(3)
- (4) 40 CFR 63.6670
- (5) 40 CFR 63.6675

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
OFFICE OF AIR QUALITY  
COMPLIANCE AND ENFORCEMENT BRANCH**

**REGISTRATION  
ANNUAL NOTIFICATION**

This form should be used to comply with the notification requirements under 326 IAC 2-5.1-2(f)(3) and 326 IAC 2-5.5-4(a)(3).

<b>Company Name:</b>	Samtec, Inc
<b>Address:</b>	520 Park East Blvd
<b>City:</b>	New Albany, Indiana 47150
<b>Phone Number:</b>	(812) 944-6733
<b>Registration No.:</b>	R043-20246-00059

I hereby certify that Samtec, Inc. is :

- still in operation.
- no longer in operation.
- in compliance with the requirements of Registration No. R043-20246-00059.
- not in compliance with the requirements of Registration No. R043-20246-00059.

I hereby certify that Samtec, Inc. is :

<b>Authorized Individual (typed):</b>
<b>Title:</b>
<b>Signature:</b>
<b>Phone Number:</b>
<b>Date:</b>

If there are any conditions or requirements for which the source is not in compliance, provide a narrative description of how the source did or will achieve compliance and the date compliance was, or will be achieved.

<b>Noncompliance:</b>

**Indiana Department of Environmental Management  
Office of Air Quality**

Attachment A

National Emissions Standards for Hazardous Air  
Pollutants for Stationary Reciprocating Internal  
Combustion Engines - Subpart ZZZZ

For

Samtec, Inc.

## **Title 40: Protection of Environment**

PART 63—NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES (CONTINUED)

### **Subpart ZZZZ—National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines**

**Source:** 69 FR 33506, June 15, 2004, unless otherwise noted.

#### **What This Subpart Covers**

##### **§ 63.6580 What is the purpose of subpart ZZZZ?**

Subpart **ZZZZ** establishes national emission limitations and operating limitations for hazardous air pollutants (HAP) emitted from stationary reciprocating internal combustion engines (RICE) located at major and area sources of HAP emissions. This subpart also establishes requirements to demonstrate initial and continuous compliance with the emission limitations and operating limitations.

[73 FR 3603, Jan. 18, 2008]

##### **§ 63.6585 Am I subject to this subpart?**

You are subject to this subpart if you own or operate a stationary RICE at a major or area source of HAP emissions, except if the stationary RICE is being tested at a stationary RICE test cell/stand.

(a) A stationary RICE is any internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

(b) A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site.

(c) An area source of HAP emissions is a source that is not a major source.

(d) If you are an owner or operator of an area source subject to this subpart, your status as an entity subject to a standard or other requirements under this subpart does not subject you to the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

(e) If you are an owner or operator of a stationary RICE used for national security purposes, you may be eligible to request an exemption from the requirements of this subpart as described in 40 CFR part 1068, subpart C.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3603, Jan. 18, 2008]

##### **§ 63.6590 What parts of my plant does this subpart cover?**

This subpart applies to each affected source.

(a) *Affected source.* An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.

(1) *Existing stationary RICE.*

(i) For stationary RICE with a site rating of more than 500 brake horsepower (HP) located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before December 19, 2002.

(ii) For stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.

(2) *New stationary RICE.* (i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(3) *Reconstructed stationary RICE.* (i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after June 12, 2006.

(b) *Stationary RICE subject to limited requirements.* (1) An affected source which meets either of the criteria in paragraphs (b)(1)(i) through (ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).

(i) The stationary RICE is a new or reconstructed emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(ii) The stationary RICE is a new or reconstructed limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(2) A new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis must meet the initial notification requirements of §63.6645(f) and the requirements of §§63.6625(c), 63.6650(g), and 63.6655(c). These stationary RICE do not have to meet the emission limitations and operating limitations of this subpart.

(3) The following stationary RICE do not have to meet the requirements of this subpart and of subpart A of this part, including initial notification requirements:

- (i) Existing spark ignition 2 stroke lean burn (2SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;
  - (ii) Existing spark ignition 4 stroke lean burn (4SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;
  - (iii) Existing emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;
  - (iv) Existing limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;
  - (v) Existing stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;
  - (vi) Existing residential emergency stationary RICE located at an area source of HAP emissions;
  - (vii) Existing commercial emergency stationary RICE located at an area source of HAP emissions; or
  - (viii) Existing institutional emergency stationary RICE located at an area source of HAP emissions.
- (c) *Stationary RICE subject to Regulations under 40 CFR Part 60.* An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines. No further requirements apply for such engines under this part.

- (1) A new or reconstructed stationary RICE located at an area source;
- (2) A new or reconstructed 2SLB stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;
- (3) A new or reconstructed 4SLB stationary RICE with a site rating of less than 250 brake HP located at a major source of HAP emissions;
- (4) A new or reconstructed spark ignition 4 stroke rich burn (4SRB) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;
- (5) A new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;
- (6) A new or reconstructed emergency or limited use stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;
- (7) A new or reconstructed compression ignition (CI) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9674, Mar. 3, 2010; 75 FR 37733, June 30, 2010; 75 FR 51588, Aug. 20, 2010]

### **§ 63.6595 When do I have to comply with this subpart?**

- (a) *Affected sources.* (1) If you have an existing stationary RICE, excluding existing non-emergency CI stationary RICE, with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the applicable emission limitations and operating limitations no later than June 15, 2007. If you have an existing non-emergency CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP

emissions, an existing stationary CI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary CI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations and operating limitations no later than May 3, 2013. If you have an existing stationary SI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary SI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations and operating limitations no later than October 19, 2013.

(2) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart no later than August 16, 2004.

(3) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions after August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(4) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(5) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(6) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(7) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(b) *Area sources that become major sources.* If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, the compliance dates in paragraphs (b)(1) and (2) of this section apply to you.

(1) Any stationary RICE for which construction or reconstruction is commenced after the date when your area source becomes a major source of HAP must be in compliance with this subpart upon startup of your affected source.

(2) Any stationary RICE for which construction or reconstruction is commenced before your area source becomes a major source of HAP must be in compliance with the provisions of this subpart that are applicable to RICE located at major sources within 3 years after your area source becomes a major source of HAP.

(c) If you own or operate an affected source, you must meet the applicable notification requirements in §63.6645 and in 40 CFR part 63, subpart A.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010]

## **Emission and Operating Limitations**

### **§ 63.6600 What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?**

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing, new, or reconstructed spark ignition 4SRB stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 1a to this subpart and the operating limitations in Table 1b to this subpart which apply to you.

(b) If you own or operate a new or reconstructed 2SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, a new or reconstructed 4SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, or a new or reconstructed CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

(c) If you own or operate any of the following stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the emission limitations in Tables 1a, 2a, 2c, and 2d to this subpart or operating limitations in Tables 1b and 2b to this subpart: an existing 2SLB stationary RICE; an existing 4SLB stationary RICE; a stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis; an emergency stationary RICE; or a limited use stationary RICE.

(d) If you own or operate an existing non-emergency stationary CI RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2c to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010]

**§ 63.6601 What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?**

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart. If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at major source of HAP emissions manufactured on or after January 1, 2008, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010]

**§ 63.6602 What emission limitations must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?**

If you own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2c to this subpart which apply to you. Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

[75 FR 51589, Aug. 20, 2010]

**§ 63.6603 What emission limitations and operating limitations must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?**

[Link to an amendment published at 76 FR 12866, March 9, 2011.](#)

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, you must comply with the requirements in Table 2d to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

(b) If you own or operate an existing stationary non-emergency CI RICE greater than 300 HP located at area sources in areas of Alaska not accessible by the Federal Aid Highway System (FAHS) you do not have to meet the numerical CO emission limitations specified in Table 2d to this subpart. Existing stationary non-emergency CI RICE greater than 300 HP located at area sources in areas of Alaska not accessible by the FAHS must meet the management practices that are shown for stationary non-emergency CI RICE less than or equal to 300 HP in Table 2d to this subpart.

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010]

#### **§ 63.6604 What fuel requirements must I meet if I own or operate an existing stationary CI RICE?**

If you own or operate an existing non-emergency, non-black start CI stationary RICE with a site rating of more than 300 brake HP with a displacement of less than 30 liters per cylinder that uses diesel fuel, you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel. Existing non-emergency CI stationary RICE located in Guam, American Samoa, the Commonwealth of the Northern Mariana Islands, or at area sources in areas of Alaska not accessible by the FAHS are exempt from the requirements of this section.

[75 FR 51589, Aug. 20, 2010]

### **General Compliance Requirements**

#### **§ 63.6605 What are my general requirements for complying with this subpart?**

(a) You must be in compliance with the emission limitations and operating limitations in this subpart that apply to you at all times.

(b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010]

### **Testing and Initial Compliance Requirements**

#### **§ 63.6610 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?**

If you own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions you are subject to the requirements of this section.

(a) You must conduct the initial performance test or other initial compliance demonstrations in Table 4 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions in §63.7(a)(2).

(b) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must demonstrate initial compliance with either the proposed emission limitations or the promulgated emission

limitations no later than February 10, 2005 or no later than 180 days after startup of the source, whichever is later, according to §63.7(a)(2)(ix).

(c) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, and you chose to comply with the proposed emission limitations when demonstrating initial compliance, you must conduct a second performance test to demonstrate compliance with the promulgated emission limitations by December 13, 2007 or after startup of the source, whichever is later, according to §63.7(a)(2)(ix).

(d) An owner or operator is not required to conduct an initial performance test on units for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (d)(1) through (5) of this section.

(1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.

(2) The test must not be older than 2 years.

(3) The test must be reviewed and accepted by the Administrator.

(4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.

(5) The test must be conducted at any load condition within plus or minus 10 percent of 100 percent load.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3605, Jan. 18, 2008]

**§ 63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?**

If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must conduct an initial performance test within 240 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions specified in Table 4 to this subpart, as appropriate.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 51589, Aug. 20, 2010]

**§ 63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?**

If you own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions you are subject to the requirements of this section.

(a) You must conduct any initial performance test or other initial compliance demonstration according to Tables 4 and 5 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions in §63.7(a)(2).

(b) An owner or operator is not required to conduct an initial performance test on a unit for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (b)(1) through (4) of this section.

- (1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.
- (2) The test must not be older than 2 years.
- (3) The test must be reviewed and accepted by the Administrator.
- (4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.

[75 FR 9676, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010]

### **§ 63.6615 When must I conduct subsequent performance tests?**

If you must comply with the emission limitations and operating limitations, you must conduct subsequent performance tests as specified in Table 3 of this subpart.

### **§ 63.6620 What performance tests and other procedures must I use?**

- (a) You must conduct each performance test in Tables 3 and 4 of this subpart that applies to you.
- (b) Each performance test must be conducted according to the requirements that this subpart specifies in Table 4 to this subpart. If you own or operate a non-operational stationary RICE that is subject to performance testing, you do not need to start up the engine solely to conduct the performance test. Owners and operators of a non-operational engine can conduct the performance test when the engine is started up again.
- (c) [Reserved]
- (d) You must conduct three separate test runs for each performance test required in this section, as specified in §63.7(e)(3). Each test run must last at least 1 hour.
- (e)(1) You must use Equation 1 of this section to determine compliance with the percent reduction requirement:

$$\frac{C_i - C_o}{C_i} \times 100 = R \quad (\text{Eq. 1})$$

Where:

$C_i$  = concentration of CO or formaldehyde at the control device inlet,

$C_o$  = concentration of CO or formaldehyde at the control device outlet, and

R = percent reduction of CO or formaldehyde emissions.

(2) You must normalize the carbon monoxide (CO) or formaldehyde concentrations at the inlet and outlet of the control device to a dry basis and to 15 percent oxygen, or an equivalent percent carbon dioxide (CO<sub>2</sub>). If pollutant concentrations are to be corrected to 15 percent oxygen and CO<sub>2</sub> concentration is measured in lieu of oxygen concentration measurement, a CO<sub>2</sub> correction factor is needed. Calculate the CO<sub>2</sub> correction factor as described in paragraphs (e)(2)(i) through (iii) of this section.

(i) Calculate the fuel-specific  $F_o$  value for the fuel burned during the test using values obtained from Method 19, section 5.2, and the following equation:

$$F_o = \frac{0.209 F_d}{F_c} \quad (\text{Eq. 2})$$

Where:

$F_o$  = Fuel factor based on the ratio of oxygen volume to the ultimate  $\text{CO}_2$  volume produced by the fuel at zero percent excess air.

0.209 = Fraction of air that is oxygen, percent/100.

$F_d$  = Ratio of the volume of dry effluent gas to the gross calorific value of the fuel from Method 19,  $\text{dsm}^3/\text{J}$  ( $\text{dscf}/10^6 \text{ Btu}$ ).

$F_c$  = Ratio of the volume of  $\text{CO}_2$  produced to the gross calorific value of the fuel from Method 19,  $\text{dsm}^3/\text{J}$  ( $\text{dscf}/10^6 \text{ Btu}$ ).

(ii) Calculate the  $\text{CO}_2$  correction factor for correcting measurement data to 15 percent oxygen, as follows:

$$X_{\text{co}_2} = \frac{5.9}{F_o} \quad (\text{Eq. 3})$$

Where:

$X_{\text{co}_2}$  =  $\text{CO}_2$  correction factor, percent.

5.9 = 20.9 percent  $\text{O}_2$  - 15 percent  $\text{O}_2$ , the defined  $\text{O}_2$  correction value, percent.

(iii) Calculate the  $\text{NO}_x$  and  $\text{SO}_2$  gas concentrations adjusted to 15 percent  $\text{O}_2$  using  $\text{CO}_2$  as follows:

$$C_{\text{adj}} = C_d \frac{X_{\text{co}_2}}{\% \text{CO}_2} \quad (\text{Eq. 4})$$

Where:

$\% \text{CO}_2$  = Measured  $\text{CO}_2$  concentration measured, dry basis, percent.

(f) If you comply with the emission limitation to reduce CO and you are not using an oxidation catalyst, if you comply with the emission limitation to reduce formaldehyde and you are not using NSCR, or if you comply with the emission limitation to limit the concentration of formaldehyde in the stationary RICE exhaust and you are not using an oxidation catalyst or NSCR, you must petition the Administrator for operating limitations to be established during the initial performance test and continuously monitored thereafter; or for approval of no operating limitations. You must not conduct the initial performance test until after the petition has been approved by the Administrator.

(g) If you petition the Administrator for approval of operating limitations, your petition must include the information described in paragraphs (g)(1) through (5) of this section.

(1) Identification of the specific parameters you propose to use as operating limitations;

(2) A discussion of the relationship between these parameters and HAP emissions, identifying how HAP emissions change with changes in these parameters, and how limitations on these parameters will serve to limit HAP emissions;

(3) A discussion of how you will establish the upper and/or lower values for these parameters which will establish the limits on these parameters in the operating limitations;

(4) A discussion identifying the methods you will use to measure and the instruments you will use to monitor these parameters, as well as the relative accuracy and precision of these methods and instruments; and

(5) A discussion identifying the frequency and methods for recalibrating the instruments you will use for monitoring these parameters.

(h) If you petition the Administrator for approval of no operating limitations, your petition must include the information described in paragraphs (h)(1) through (7) of this section.

(1) Identification of the parameters associated with operation of the stationary RICE and any emission control device which could change intentionally ( e.g., operator adjustment, automatic controller adjustment, etc.) or unintentionally ( e.g., wear and tear, error, etc.) on a routine basis or over time;

(2) A discussion of the relationship, if any, between changes in the parameters and changes in HAP emissions;

(3) For the parameters which could change in such a way as to increase HAP emissions, a discussion of whether establishing limitations on the parameters would serve to limit HAP emissions;

(4) For the parameters which could change in such a way as to increase HAP emissions, a discussion of how you could establish upper and/or lower values for the parameters which would establish limits on the parameters in operating limitations;

(5) For the parameters, a discussion identifying the methods you could use to measure them and the instruments you could use to monitor them, as well as the relative accuracy and precision of the methods and instruments;

(6) For the parameters, a discussion identifying the frequency and methods for recalibrating the instruments you could use to monitor them; and

(7) A discussion of why, from your point of view, it is infeasible or unreasonable to adopt the parameters as operating limitations.

(i) The engine percent load during a performance test must be determined by documenting the calculations, assumptions, and measurement devices used to measure or estimate the percent load in a specific application. A written report of the average percent load determination must be included in the notification of compliance status. The following information must be included in the written report: the engine model number, the engine manufacturer, the year of purchase, the manufacturer's site-rated brake horsepower, the ambient temperature, pressure, and humidity during the performance test, and all assumptions that were made to estimate or calculate percent load during the performance test must be clearly explained. If measurement devices such as flow meters, kilowatt meters, beta analyzers, stain gauges, etc. are used, the model number of the measurement device, and an estimate of its accurate in percentage of true value must be provided.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9676, Mar. 3, 2010]

### **§ 63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?**

[Link to an amendment published at 76 FR 12866, March 9, 2011.](#)

(a) If you elect to install a CEMS as specified in Table 5 of this subpart, you must install, operate, and maintain a CEMS to monitor CO and either oxygen or CO<sub>2</sub> at both the inlet and the outlet of the control device according to the requirements in paragraphs (a)(1) through (4) of this section.

(1) Each CEMS must be installed, operated, and maintained according to the applicable performance specifications of 40 CFR part 60, appendix B.

(2) You must conduct an initial performance evaluation and an annual relative accuracy test audit (RATA) of each CEMS according to the requirements in §63.8 and according to the applicable performance specifications of 40 CFR part 60, appendix B as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.

(3) As specified in §63.8(c)(4)(ii), each CEMS must complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period. You must have at least two data points, with each representing a different 15-minute period, to have a valid hour of data.

(4) The CEMS data must be reduced as specified in §63.8(g)(2) and recorded in parts per million or parts per billion (as appropriate for the applicable limitation) at 15 percent oxygen or the equivalent CO<sub>2</sub> concentration.

(b) If you are required to install a continuous parameter monitoring system (CPMS) as specified in Table 5 of this subpart, you must install, operate, and maintain each CPMS according to the requirements in paragraphs (b)(1) through (8) of this section.

(1) The CPMS must complete a minimum of one cycle of operation for each successive 15-minute period. You must have a minimum of four successive cycles of operation to have a valid hour of data.

(2) Except for monitoring malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), you must conduct all monitoring in continuous operation at all times that the unit is operating. A monitoring malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring to provide valid data. Monitoring failures that are caused in part by poor maintenance or careless operation are not malfunctions.

(3) For purposes of calculating data averages, you must not use data recorded during monitoring malfunctions, associated repairs, out of control periods, or required quality assurance or control activities. You must use all the data collected during all other periods in assessing compliance. Any 15-minute period for which the monitoring system is out-of-control and data are not available for required calculations constitutes a deviation from the monitoring requirements.

(4) Determine the 3-hour block average of all recorded readings, except as provided in paragraph (b)(3) of this section.

(5) Record the results of each inspection, calibration, and validation check.

(6) You must develop a site-specific monitoring plan that addresses paragraphs (b)(6)(i) through (vi) of this section.

(i) Installation of the CPMS sampling probe or other interface at the appropriate location to obtain representative measurements;

(ii) Performance and equipment specifications for the sample interface, parametric signal analyzer, and the data collection and reduction systems;

(iii) Performance evaluation procedures and acceptance criteria ( e.g., calibrations);

(iv) Ongoing operation and maintenance procedures in accordance with the general requirements of §63.8(c)(1), (c)(3), and (c)(4)(ii);

(v) Ongoing data quality assurance procedures in accordance with the general requirements of §63.8(d); and

(vi) Ongoing recordkeeping and reporting procedures in accordance with the general requirements of §63.10(c), (e)(1), and (e)(2)(i).

(7) You must conduct a performance evaluation of each CPMS in accordance with your site-specific monitoring plan.

(8) You must operate and maintain the CPMS in continuous operation according to the site-specific monitoring plan.

(c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must monitor and record your fuel usage daily with separate fuel meters to measure the volumetric flow rate of each fuel. In addition, you must operate your stationary RICE in a manner which reasonably minimizes HAP emissions.

(d) If you are operating a new or reconstructed emergency 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must install a non-resettable hour meter prior to the startup of the engine.

(e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

(1) An existing stationary RICE with a site rating of less than 100 HP located at a major source of HAP emissions;

(2) An existing emergency or black start stationary RICE with a site rating of less than or equal to 500 HP located at a major source of HAP emissions;

(3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;

(4) An existing non-emergency, non-black start stationary CI RICE with a site rating less than or equal to 300 HP located at an area source of HAP emissions;

(5) An existing non-emergency, non-black start 2SLB stationary RICE located at an area source of HAP emissions;

(6) An existing non-emergency, non-black start landfill or digester gas stationary RICE located at an area source of HAP emissions;

(7) An existing non-emergency, non-black start 4SLB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;

(8) An existing non-emergency, non-black start 4SRB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;

(9) An existing, non-emergency, non-black start 4SLB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year; and

(10) An existing, non-emergency, non-black start 4SRB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year.

(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.

(g) If you own or operate an existing non-emergency, non-black start CI engine greater than or equal to 300 HP that is not equipped with a closed crankcase ventilation system, you must comply with either paragraph (g)(1) or paragraph (g)(2) of this section. Owners and operators must follow the manufacturer's specified maintenance requirements for operating and maintaining the open or closed crankcase ventilation systems and replacing the crankcase filters, or can request the Administrator to approve different maintenance requirements that are as protective as manufacturer requirements. Existing CI engines located at area sources in areas of Alaska not accessible by the FAHS do not have to meet the requirements of paragraph (g) of this section.

(1) Install a closed crankcase ventilation system that prevents crankcase emissions from being emitted to the atmosphere, or

(2) Install an open crankcase filtration emission control system that reduces emissions from the crankcase by filtering the exhaust stream to remove oil mist, particulates, and metals.

(h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply.

(i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of Table 2c to this subpart or in items 1 or 4 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.

(j) If you own or operate a stationary SI engine that is subject to the work, operation or management practices in items 6, 7, or 8 of Table 2c to this subpart or in items 5, 6, 7, 9, or 11 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Acid Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Acid Number increases by more than 3.0 milligrams of potassium hydroxide (KOH) per gram from Total Acid Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.

(k) If you have an operating limitation that requires the use of a temperature measurement device, you must meet the requirements in paragraphs (k)(1) through (4) of this section.

(1) Locate the temperature sensor and other necessary equipment in a position that provides a representative temperature.

(2) Use a temperature sensor with a minimum tolerance of 2.8 degrees Celsius (5 degrees Fahrenheit), or 1.0 percent of the temperature value, whichever is larger, for a noncryogenic temperature range.

(3) Use a temperature sensor with a minimum tolerance of 2.8 degrees Celsius (5 degrees Fahrenheit), or 2.5 percent of the temperature value, whichever is larger, for a cryogenic temperature range.

(4) Conduct a temperature measurement device calibration check at least every 3 months.

### **§ 63.6630 How do I demonstrate initial compliance with the emission limitations and operating limitations?**

- (a) You must demonstrate initial compliance with each emission and operating limitation that applies to you according to Table 5 of this subpart.
- (b) During the initial performance test, you must establish each operating limitation in Tables 1b and 2b of this subpart that applies to you.
- (c) You must submit the Notification of Compliance Status containing the results of the initial compliance demonstration according to the requirements in §63.6645.

### **Continuous Compliance Requirements**

### **§ 63.6635 How do I monitor and collect data to demonstrate continuous compliance?**

[Link to an amendment published at 76 FR 12867, March 9, 2011.](#)

- (a) If you must comply with emission and operating limitations, you must monitor and collect data according to this section.
- (b) Except for monitor malfunctions, associated repairs, and required quality assurance or control activities (including, as applicable, calibration checks and required zero and span adjustments), you must monitor continuously at all times that the stationary RICE is operating.
- (c) You may not use data recorded during monitoring malfunctions, associated repairs, and required quality assurance or control activities in data averages and calculations used to report emission or operating levels. You must, however, use all the valid data collected during all other periods.

### **§ 63.6640 How do I demonstrate continuous compliance with the emission limitations and operating limitations?**

- (a) You must demonstrate continuous compliance with each emission limitation and operating limitation in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart.
- (b) You must report each instance in which you did not meet each emission limitation or operating limitation in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you. These instances are deviations from the emission and operating limitations in this subpart. These deviations must be reported according to the requirements in §63.6650. If you change your catalyst, you must reestablish the values of the operating parameters measured during the initial performance test. When you reestablish the values of your operating parameters, you must also conduct a performance test to demonstrate that you are meeting the required emission limitation applicable to your stationary RICE.
- (c) [Reserved]
- (d) For new, reconstructed, and rebuilt stationary RICE, deviations from the emission or operating limitations that occur during the first 200 hours of operation from engine startup (engine burn-in period) are not violations. Rebuilt stationary RICE means a stationary RICE that has been rebuilt as that term is defined in 40 CFR 94.11(a).
- (e) You must also report each instance in which you did not meet the requirements in Table 8 to this subpart that apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart: An

existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing emergency stationary RICE, an existing limited use stationary RICE, or an existing stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart, except for the initial notification requirements: a new or reconstructed stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new or reconstructed emergency stationary RICE, or a new or reconstructed limited use stationary RICE.

(f) *Requirements for emergency stationary RICE.* (1) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, a new or reconstructed emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that was installed on or after June 12, 2006, or an existing emergency stationary RICE located at an area source of HAP emissions, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1)(i) through (iii) of this section. Any operation other than emergency operation, maintenance and testing, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1)(i) through (iii) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1)(i) through (iii) of this section, the engine will not be considered an emergency engine under this subpart and will need to meet all requirements for non-emergency engines.

(i) There is no time limit on the use of emergency stationary RICE in emergency situations.

(ii) You may operate your emergency stationary RICE for the purpose of maintenance checks and readiness testing, provided that the tests are recommended by Federal, State or local government, the manufacturer, the vendor, or the insurance company associated with the engine. Maintenance checks and readiness testing of such units is limited to 100 hours per year. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that Federal, State, or local standards require maintenance and testing of emergency RICE beyond 100 hours per year.

(iii) You may operate your emergency stationary RICE up to 50 hours per year in non-emergency situations, but those 50 hours are counted towards the 100 hours per year provided for maintenance and testing. The 50 hours per year for non-emergency situations cannot be used for peak shaving or to generate income for a facility to supply power to an electric grid or otherwise supply power as part of a financial arrangement with another entity; except that owners and operators may operate the emergency engine for a maximum of 15 hours per year as part of a demand response program if the regional transmission organization or equivalent balancing authority and transmission operator has determined there are emergency conditions that could lead to a potential electrical blackout, such as unusually low frequency, equipment overload, capacity or energy deficiency, or unacceptable voltage level. The engine may not be operated for more than 30 minutes prior to the time when the emergency condition is expected to occur, and the engine operation must be terminated immediately after the facility is notified that the emergency condition is no longer imminent. The 15 hours per year of demand response operation are counted as part of the 50 hours of operation per year provided for non-emergency situations. The supply of emergency power to another entity or entities pursuant to financial arrangement is not limited by this paragraph (f)(1)(iii), as long as the power provided by the financial arrangement is limited to emergency power.

(2) If you own or operate an emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that was installed prior to June 12, 2006, you must operate the engine according to the conditions described in paragraphs (f)(2)(i) through (iii) of this section. If you do not operate the engine according to the requirements in paragraphs (f)(2)(i) through (iii) of this section, the engine will not be considered an emergency engine under this subpart and will need to meet all requirements for non-emergency engines.

(i) There is no time limit on the use of emergency stationary RICE in emergency situations.

(ii) You may operate your emergency stationary RICE for the purpose of maintenance checks and readiness testing, provided that the tests are recommended by the manufacturer, the vendor, or the insurance company associated with the engine. Required testing of such units should be minimized, but there is no time limit on the use of emergency stationary RICE in emergency situations and for routine testing and maintenance.

(iii) You may operate your emergency stationary RICE for an additional 50 hours per year in non-emergency situations. The 50 hours per year for non-emergency situations cannot be used for peak shaving or to generate income for a facility to supply power to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010]

## Notifications, Reports, and Records

### § 63.6645 What notifications must I submit and when?

(a) You must submit all of the notifications in §§63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), and (g) and (h) that apply to you by the dates specified if you own or operate any of the following;

(1) An existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

(2) An existing stationary RICE located at an area source of HAP emissions.

(3) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(4) A new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 HP located at a major source of HAP emissions.

(5) This requirement does not apply if you own or operate an existing stationary RICE less than 100 HP, an existing stationary emergency RICE, or an existing stationary RICE that is not subject to any numerical emission standards.

(b) As specified in §63.9(b)(2), if you start up your stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart, you must submit an Initial Notification not later than December 13, 2004.

(c) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions on or after August 16, 2004, you must submit an Initial Notification not later than 120 days after you become subject to this subpart.

(d) As specified in §63.9(b)(2), if you start up your stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart and you are required to submit an initial notification, you must submit an Initial Notification not later than July 16, 2008.

(e) If you start up your new or reconstructed stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions on or after March 18, 2008 and you are required to submit an initial notification, you must submit an Initial Notification not later than 120 days after you become subject to this subpart.

(f) If you are required to submit an Initial Notification but are otherwise not affected by the requirements of this subpart, in accordance with §63.6590(b), your notification should include the information in §63.9(b)(2)(i) through (v), and a statement that your stationary RICE has no additional requirements and explain the basis of the exclusion (for example, that it operates exclusively as an emergency stationary RICE if it has a site rating of more than 500 brake HP located at a major source of HAP emissions).

(g) If you are required to conduct a performance test, you must submit a Notification of Intent to conduct a performance test at least 60 days before the performance test is scheduled to begin as required in §63.7(b)(1).

(h) If you are required to conduct a performance test or other initial compliance demonstration as specified in Tables 4 and 5 to this subpart, you must submit a Notification of Compliance Status according to §63.9(h)(2)(ii).

(1) For each initial compliance demonstration required in Table 5 to this subpart that does not include a performance test, you must submit the Notification of Compliance Status before the close of business on the 30th day following the completion of the initial compliance demonstration.

(2) For each initial compliance demonstration required in Table 5 to this subpart that includes a performance test conducted according to the requirements in Table 3 to this subpart, you must submit the Notification of Compliance Status, including the performance test results, before the close of business on the 60th day following the completion of the performance test according to §63.10(d)(2).

[73 FR 3606, Jan. 18, 2008, as amended at 75 FR 9677, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010]

### **§ 63.6650 What reports must I submit and when?**

(a) You must submit each report in Table 7 of this subpart that applies to you.

(b) Unless the Administrator has approved a different schedule for submission of reports under §63.10(a), you must submit each report by the date in Table 7 of this subpart and according to the requirements in paragraphs (b)(1) through (b)(9) of this section.

(1) For semiannual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in §63.6595 and ending on June 30 or December 31, whichever date is the first date following the end of the first calendar half after the compliance date that is specified for your source in §63.6595.

(2) For semiannual Compliance reports, the first Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date follows the end of the first calendar half after the compliance date that is specified for your affected source in §63.6595.

(3) For semiannual Compliance reports, each subsequent Compliance report must cover the semiannual reporting period from January 1 through June 30 or the semiannual reporting period from July 1 through December 31.

(4) For semiannual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date is the first date following the end of the semiannual reporting period.

(5) For each stationary RICE that is subject to permitting regulations pursuant to 40 CFR part 70 or 71, and if the permitting authority has established dates for submitting semiannual reports pursuant to 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6 (a)(3)(iii)(A), you may submit the first and subsequent Compliance reports according to the dates the permitting authority has established instead of according to the dates in paragraphs (b)(1) through (b)(4) of this section.

(6) For annual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in §63.6595 and ending on December 31.

(7) For annual Compliance reports, the first Compliance report must be postmarked or delivered no later than January 31 following the end of the first calendar year after the compliance date that is specified for your affected source in §63.6595.

(8) For annual Compliance reports, each subsequent Compliance report must cover the annual reporting period from January 1 through December 31.

(9) For annual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than January 31.

(c) The Compliance report must contain the information in paragraphs (c)(1) through (6) of this section.

(1) Company name and address.

(2) Statement by a responsible official, with that official's name, title, and signature, certifying the accuracy of the content of the report.

(3) Date of report and beginning and ending dates of the reporting period.

(4) If you had a malfunction during the reporting period, the compliance report must include the number, duration, and a brief description for each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report must also include a description of actions taken by an owner or operator during a malfunction of an affected source to minimize emissions in accordance with §63.6605(b), including actions taken to correct a malfunction.

(5) If there are no deviations from any emission or operating limitations that apply to you, a statement that there were no deviations from the emission or operating limitations during the reporting period.

(6) If there were no periods during which the continuous monitoring system (CMS), including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), a statement that there were no periods during which the CMS was out-of-control during the reporting period.

(d) For each deviation from an emission or operating limitation that occurs for a stationary RICE where you are not using a CMS to comply with the emission or operating limitations in this subpart, the Compliance report must contain the information in paragraphs (c)(1) through (4) of this section and the information in paragraphs (d)(1) and (2) of this section.

(1) The total operating time of the stationary RICE at which the deviation occurred during the reporting period.

(2) Information on the number, duration, and cause of deviations (including unknown cause, if applicable), as applicable, and the corrective action taken.

(e) For each deviation from an emission or operating limitation occurring for a stationary RICE where you are using a CMS to comply with the emission and operating limitations in this subpart, you must include information in paragraphs (c)(1) through (4) and (e)(1) through (12) of this section.

(1) The date and time that each malfunction started and stopped.

(2) The date, time, and duration that each CMS was inoperative, except for zero (low-level) and high-level checks.

(3) The date, time, and duration that each CMS was out-of-control, including the information in §63.8(c)(8).

(4) The date and time that each deviation started and stopped, and whether each deviation occurred during a period of malfunction or during another period.

(5) A summary of the total duration of the deviation during the reporting period, and the total duration as a percent of the total source operating time during that reporting period.

(6) A breakdown of the total duration of the deviations during the reporting period into those that are due to control equipment problems, process problems, other known causes, and other unknown causes.

(7) A summary of the total duration of CMS downtime during the reporting period, and the total duration of CMS downtime as a percent of the total operating time of the stationary RICE at which the CMS downtime occurred during that reporting period.

(8) An identification of each parameter and pollutant (CO or formaldehyde) that was monitored at the stationary RICE.

(9) A brief description of the stationary RICE.

(10) A brief description of the CMS.

(11) The date of the latest CMS certification or audit.

(12) A description of any changes in CMS, processes, or controls since the last reporting period.

(f) Each affected source that has obtained a title V operating permit pursuant to 40 CFR part 70 or 71 must report all deviations as defined in this subpart in the semiannual monitoring report required by 40 CFR 70.6 (a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A). If an affected source submits a Compliance report pursuant to Table 7 of this subpart along with, or as part of, the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), and the Compliance report includes all required information concerning deviations from any emission or operating limitation in this subpart, submission of the Compliance report shall be deemed to satisfy any obligation to report the same deviations in the semiannual monitoring report. However, submission of a Compliance report shall not otherwise affect any obligation the affected source may have to report deviations from permit requirements to the permit authority.

(g) If you are operating as a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must submit an annual report according to Table 7 of this subpart by the date specified unless the Administrator has approved a different schedule, according to the information described in paragraphs (b)(1) through (b)(5) of this section. You must report the data specified in (g)(1) through (g)(3) of this section.

(1) Fuel flow rate of each fuel and the heating values that were used in your calculations. You must also demonstrate that the percentage of heat input provided by landfill gas or digester gas is equivalent to 10 percent or more of the total fuel consumption on an annual basis.

(2) The operating limits provided in your federally enforceable permit, and any deviations from these limits.

(3) Any problems or errors suspected with the meters.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9677, Mar. 3, 2010]

### **§ 63.6655 What records must I keep?**

(a) If you must comply with the emission and operating limitations, you must keep the records described in paragraphs (a)(1) through (a)(5), (b)(1) through (b)(3) and (c) of this section.

(1) A copy of each notification and report that you submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted, according to the requirement in §63.10(b)(2)(xiv).

(2) Records of the occurrence and duration of each malfunction of operation ( *i.e.*, process equipment) or the air pollution control and monitoring equipment.

(3) Records of performance tests and performance evaluations as required in §63.10(b)(2)(viii).

(4) Records of all required maintenance performed on the air pollution control and monitoring equipment.

(5) Records of actions taken during periods of malfunction to minimize emissions in accordance with §63.6605(b), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation.

(b) For each CEMS or CPMS, you must keep the records listed in paragraphs (b)(1) through (3) of this section.

(1) Records described in §63.10(b)(2)(vi) through (xi).

(2) Previous ( *i.e.*, superseded) versions of the performance evaluation plan as required in §63.8(d)(3).

(3) Requests for alternatives to the relative accuracy test for CEMS or CPMS as required in §63.8(f)(6)(i), if applicable.

(c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must keep the records of your daily fuel usage monitors.

(d) You must keep the records required in Table 6 of this subpart to show continuous compliance with each emission or operating limitation that applies to you.

(e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;

(1) An existing stationary RICE with a site rating of less than 100 brake HP located at a major source of HAP emissions.

(2) An existing stationary emergency RICE.

(3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.

(f) If you own or operate any of the stationary RICE in paragraphs (f)(1) or (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. If the engines are used for demand response operation, the owner or operator must keep records of the notification of the emergency situation, and the time the engine was operated as part of demand response.

(1) An existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions that does not meet the standards applicable to non-emergency engines.

(2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010]

### **§ 63.6660 In what form and how long must I keep my records?**

(a) Your records must be in a form suitable and readily available for expeditious review according to §63.10(b)(1).

(b) As specified in §63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.

(c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to §63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

### **Other Requirements and Information**

#### **§ 63.6665 What parts of the General Provisions apply to me?**

Table 8 to this subpart shows which parts of the General Provisions in §§63.1 through 63.15 apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at

a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with any of the requirements of the General Provisions specified in Table 8: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing stationary RICE that combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, an existing emergency stationary RICE, or an existing limited use stationary RICE. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in the General Provisions specified in Table 8 except for the initial notification requirements: A new stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new emergency stationary RICE, or a new limited use stationary RICE.

[75 FR 9678, Mar. 3, 2010]

### **§ 63.6670 Who implements and enforces this subpart?**

(a) This subpart is implemented and enforced by the U.S. EPA, or a delegated authority such as your State, local, or tribal agency. If the U.S. EPA Administrator has delegated authority to your State, local, or tribal agency, then that agency (as well as the U.S. EPA) has the authority to implement and enforce this subpart. You should contact your U.S. EPA Regional Office to find out whether this subpart is delegated to your State, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or tribal agency under 40 CFR part 63, subpart E, the authorities contained in paragraph (c) of this section are retained by the Administrator of the U.S. EPA and are not transferred to the State, local, or tribal agency.

(c) The authorities that will not be delegated to State, local, or tribal agencies are:

- (1) Approval of alternatives to the non-opacity emission limitations and operating limitations in §63.6600 under §63.6(g).
- (2) Approval of major alternatives to test methods under §63.7(e)(2)(ii) and (f) and as defined in §63.90.
- (3) Approval of major alternatives to monitoring under §63.8(f) and as defined in §63.90.
- (4) Approval of major alternatives to recordkeeping and reporting under §63.10(f) and as defined in §63.90.
- (5) Approval of a performance test which was conducted prior to the effective date of the rule, as specified in §63.6610(b).

### **§ 63.6675 What definitions apply to this subpart?**

[Link to an amendment published at 76 FR 12867, March 9, 2011.](#)

Terms used in this subpart are defined in the Clean Air Act (CAA); in 40 CFR 63.2, the General Provisions of this part; and in this section as follows:

*Area source* means any stationary source of HAP that is not a major source as defined in part 63.

*Associated equipment* as used in this subpart and as referred to in section 112(n)(4) of the CAA, means equipment associated with an oil or natural gas exploration or production well, and includes all equipment from the well bore to the point of custody transfer, except glycol dehydration units, storage vessels with potential for flash emissions, combustion turbines, and stationary RICE.

*Black start engine* means an engine whose only purpose is to start up a combustion turbine.

CAA means the Clean Air Act (42 U.S.C. 7401 *et seq.*, as amended by Public Law 101-549, 104 Stat. 2399).

*Commercial emergency stationary RICE* means an emergency stationary RICE used in commercial establishments such as office buildings, hotels, stores, telecommunications facilities, restaurants, financial institutions such as banks, doctor's offices, and sports and performing arts facilities.

*Compression ignition* means relating to a type of stationary internal combustion engine that is not a spark ignition engine.

*Custody transfer* means the transfer of hydrocarbon liquids or natural gas: After processing and/or treatment in the producing operations, or from storage vessels or automatic transfer facilities or other such equipment, including product loading racks, to pipelines or any other forms of transportation. For the purposes of this subpart, the point at which such liquids or natural gas enters a natural gas processing plant is a point of custody transfer.

*Deviation* means any instance in which an affected source subject to this subpart, or an owner or operator of such a source:

- (1) Fails to meet any requirement or obligation established by this subpart, including but not limited to any emission limitation or operating limitation;
- (2) Fails to meet any term or condition that is adopted to implement an applicable requirement in this subpart and that is included in the operating permit for any affected source required to obtain such a permit; or
- (3) Fails to meet any emission limitation or operating limitation in this subpart during malfunction, regardless or whether or not such failure is permitted by this subpart.
- (4) Fails to satisfy the general duty to minimize emissions established by §63.6(e)(1)(i).

*Diesel engine* means any stationary RICE in which a high boiling point liquid fuel injected into the combustion chamber ignites when the air charge has been compressed to a temperature sufficiently high for auto-ignition. This process is also known as compression ignition.

*Diesel fuel* means any liquid obtained from the distillation of petroleum with a boiling point of approximately 150 to 360 degrees Celsius. One commonly used form is fuel oil number 2. Diesel fuel also includes any non-distillate fuel with comparable physical and chemical properties ( e.g. biodiesel) that is suitable for use in compression ignition engines.

*Digester gas* means any gaseous by-product of wastewater treatment typically formed through the anaerobic decomposition of organic waste materials and composed principally of methane and CO<sub>2</sub>.

*Dual-fuel engine* means any stationary RICE in which a liquid fuel (typically diesel fuel) is used for compression ignition and gaseous fuel (typically natural gas) is used as the primary fuel.

*Emergency stationary RICE* means any stationary internal combustion engine whose operation is limited to emergency situations and required testing and maintenance. Examples include stationary RICE used to produce power for critical networks or equipment (including power supplied to portions of a facility) when electric power from the local utility (or the normal power source, if the facility runs on its own power production) is interrupted, or stationary RICE used to pump water in the case of fire or flood, etc. Stationary RICE used for peak shaving are not considered emergency stationary RICE. Stationary RICE used to supply power to an electric grid or that supply non-emergency power as part of a financial arrangement with another entity are not considered to be emergency engines, except as permitted under §63.6640(f). All emergency stationary RICE must comply with the requirements specified in §63.6640(f) in order to be considered emergency stationary RICE. If the engine does not comply with the requirements specified in §63.6640(f), then it is not considered to be an emergency stationary RICE under this subpart.

*Engine startup* means the time from initial start until applied load and engine and associated equipment reaches steady state or normal operation. For stationary engine with catalytic controls, engine startup means the time from initial start until applied load and engine and associated equipment, including the catalyst, reaches steady state or normal operation.

*Four-stroke engine* means any type of engine which completes the power cycle in two crankshaft revolutions, with intake and compression strokes in the first revolution and power and exhaust strokes in the second revolution.

*Gaseous fuel* means a material used for combustion which is in the gaseous state at standard atmospheric temperature and pressure conditions.

*Gasoline* means any fuel sold in any State for use in motor vehicles and motor vehicle engines, or nonroad or stationary engines, and commonly or commercially known or sold as gasoline.

*Glycol dehydration unit* means a device in which a liquid glycol (including, but not limited to, ethylene glycol, diethylene glycol, or triethylene glycol) absorbent directly contacts a natural gas stream and absorbs water in a contact tower or absorption column (absorber). The glycol contacts and absorbs water vapor and other gas stream constituents from the natural gas and becomes "rich" glycol. This glycol is then regenerated in the glycol dehydration unit reboiler. The "lean" glycol is then recycled.

*Hazardous air pollutants (HAP)* means any air pollutants listed in or pursuant to section 112(b) of the CAA.

*Institutional emergency stationary RICE* means an emergency stationary RICE used in institutional establishments such as medical centers, nursing homes, research centers, institutions of higher education, correctional facilities, elementary and secondary schools, libraries, religious establishments, police stations, and fire stations.

*ISO standard day conditions* means 288 degrees Kelvin (15 degrees Celsius), 60 percent relative humidity and 101.3 kilopascals pressure.

*Landfill gas* means a gaseous by-product of the land application of municipal refuse typically formed through the anaerobic decomposition of waste materials and composed principally of methane and CO<sub>2</sub>.

*Lean burn engine* means any two-stroke or four-stroke spark ignited engine that does not meet the definition of a rich burn engine.

*Limited use stationary RICE* means any stationary RICE that operates less than 100 hours per year.

*Liquefied petroleum gas* means any liquefied hydrocarbon gas obtained as a by-product in petroleum refining of natural gas production.

*Liquid fuel* means any fuel in liquid form at standard temperature and pressure, including but not limited to diesel, residual/crude oil, kerosene/naphtha (jet fuel), and gasoline.

*Major Source*, as used in this subpart, shall have the same meaning as in §63.2, except that:

- (1) Emissions from any oil or gas exploration or production well (with its associated equipment (as defined in this section)) and emissions from any pipeline compressor station or pump station shall not be aggregated with emissions from other similar units, to determine whether such emission points or stations are major sources, even when emission points are in a contiguous area or under common control;
- (2) For oil and gas production facilities, emissions from processes, operations, or equipment that are not part of the same oil and gas production facility, as defined in §63.1271 of subpart HHH of this part, shall not be aggregated;
- (3) For production field facilities, only HAP emissions from glycol dehydration units, storage vessel with the potential for flash emissions, combustion turbines and reciprocating internal combustion engines shall be aggregated for a major source determination; and
- (4) Emissions from processes, operations, and equipment that are not part of the same natural gas transmission and storage facility, as defined in §63.1271 of subpart HHH of this part, shall not be aggregated.

*Malfunction* means any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner which causes, or has the potential to cause, the emission limitations in an applicable standard to be exceeded. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.

*Natural gas* means a naturally occurring mixture of hydrocarbon and non-hydrocarbon gases found in geologic formations beneath the Earth's surface, of which the principal constituent is methane. Natural gas may be field or pipeline quality.

*Non-selective catalytic reduction (NSCR)* means an add-on catalytic nitrogen oxides (NO<sub>x</sub>) control device for rich burn engines that, in a two-step reaction, promotes the conversion of excess oxygen, NO<sub>x</sub>, CO, and volatile organic compounds (VOC) into CO<sub>2</sub>, nitrogen, and water.

*Oil and gas production facility* as used in this subpart means any grouping of equipment where hydrocarbon liquids are processed, upgraded ( *i.e.*, remove impurities or other constituents to meet contract specifications), or stored prior to the point of custody transfer; or where natural gas is processed, upgraded, or stored prior to entering the natural gas transmission and storage source category. For purposes of a major source determination, facility (including a building, structure, or installation) means oil and natural gas production and processing equipment that is located within the boundaries of an individual surface site as defined in this section. Equipment that is part of a facility will typically be located within close proximity to other equipment located at the same facility. Pieces of production equipment or groupings of equipment located on different oil and gas leases, mineral fee tracts, lease tracts, subsurface or surface unit areas, surface fee tracts, surface lease tracts, or separate surface sites, whether or not connected by a road, waterway, power line or pipeline, shall not be considered part of the same facility. Examples of facilities in the oil and natural gas production source category include, but are not limited to, well sites, satellite tank batteries, central tank batteries, a compressor station that transports natural gas to a natural gas processing plant, and natural gas processing plants.

*Oxidation catalyst* means an add-on catalytic control device that controls CO and VOC by oxidation.

*Peaking unit or engine* means any standby engine intended for use during periods of high demand that are not emergencies.

*Percent load* means the fractional power of an engine compared to its maximum manufacturer's design capacity at engine site conditions. Percent load may range between 0 percent to above 100 percent.

*Potential to emit* means the maximum capacity of a stationary source to emit a pollutant under its physical and operational design. Any physical or operational limitation on the capacity of the stationary source to emit a pollutant, including air pollution control equipment and restrictions on hours of operation or on the type or amount of material combusted, stored, or processed, shall be treated as part of its design if the limitation or the effect it would have on emissions is federally enforceable. For oil and natural gas production facilities subject to subpart HH of this part, the potential to emit provisions in §63.760(a) may be used. For natural gas transmission and storage facilities subject to subpart HHH of this part, the maximum annual facility gas throughput for storage facilities may be determined according to §63.1270(a)(1) and the maximum annual throughput for transmission facilities may be determined according to §63.1270(a)(2).

*Production field facility* means those oil and gas production facilities located prior to the point of custody transfer.

*Production well* means any hole drilled in the earth from which crude oil, condensate, or field natural gas is extracted.

*Propane* means a colorless gas derived from petroleum and natural gas, with the molecular structure C<sub>3</sub>H<sub>8</sub>.

*Residential emergency stationary RICE* means an emergency stationary RICE used in residential establishments such as homes or apartment buildings.

*Responsible official* means responsible official as defined in 40 CFR 70.2.

*Rich burn engine* means any four-stroke spark ignited engine where the manufacturer's recommended operating air/fuel ratio divided by the stoichiometric air/fuel ratio at full load conditions is less than or equal to 1.1. Engines

originally manufactured as rich burn engines, but modified prior to December 19, 2002 with passive emission control technology for NO<sub>x</sub>(such as pre-combustion chambers) will be considered lean burn engines. Also, existing engines where there are no manufacturer's recommendations regarding air/fuel ratio will be considered a rich burn engine if the excess oxygen content of the exhaust at full load conditions is less than or equal to 2 percent.

*Site-rated HP* means the maximum manufacturer's design capacity at engine site conditions.

*Spark ignition* means relating to either: A gasoline-fueled engine; or any other type of engine a spark plug (or other sparking device) and with operating characteristics significantly similar to the theoretical Otto combustion cycle. Spark ignition engines usually use a throttle to regulate intake air flow to control power during normal operation. Dual-fuel engines in which a liquid fuel (typically diesel fuel) is used for CI and gaseous fuel (typically natural gas) is used as the primary fuel at an annual average ratio of less than 2 parts diesel fuel to 100 parts total fuel on an energy equivalent basis are spark ignition engines.

*Stationary reciprocating internal combustion engine (RICE)* means any reciprocating internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

*Stationary RICE test cell/stand* means an engine test cell/stand, as defined in subpart P P P P P of this part, that tests stationary RICE.

*Stoichiometric* means the theoretical air-to-fuel ratio required for complete combustion.

*Storage vessel with the potential for flash emissions* means any storage vessel that contains a hydrocarbon liquid with a stock tank gas-to-oil ratio equal to or greater than 0.31 cubic meters per liter and an American Petroleum Institute gravity equal to or greater than 40 degrees and an actual annual average hydrocarbon liquid throughput equal to or greater than 79,500 liters per day. Flash emissions occur when dissolved hydrocarbons in the fluid evolve from solution when the fluid pressure is reduced.

*Subpart* means 40 CFR part **63**, subpart **Z Z Z Z**.

*Surface site* means any combination of one or more graded pad sites, gravel pad sites, foundations, platforms, or the immediate physical location upon which equipment is physically affixed.

*Two-stroke engine* means a type of engine which completes the power cycle in single crankshaft revolution by combining the intake and compression operations into one stroke and the power and exhaust operations into a second stroke. This system requires auxiliary scavenging and inherently runs lean of stoichiometric.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3607, Jan. 18, 2008; 75 FR 9679, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010]

**Table 1 to Subpart Z Z Z Z of Part 63— Emission Limitations for Existing, New, and Reconstructed Spark Ignition, 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions**

As stated in §§**63.6600** and **63.6640**, you must comply with the following emission limitations at 100 percent load plus or minus 10 percent for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .
1. 4SRB stationary	a. Reduce formaldehyde emissions by 76 percent or more. If you commenced	Minimize the engine's time spent at idle and minimize the engine's startup time at

RICE	construction or reconstruction between December 19, 2002 and June 15, 2004, you may reduce formaldehyde emissions by 75 percent or more until June 15, 2007 or	startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. <sup>1</sup>
	b. Limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O <sub>2</sub>	

<sup>1</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[75 FR 9679, Mar. 3, 2010, as amended at 75 FR 51592, Aug. 20, 2010]

**Table 1bto Subpart ZZZZ of Part 63—Operating Limitations for Existing, New, and Reconstructed Spark Ignition 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions and Existing Spark Ignition 4SRB Stationary RICE >500 HP Located at an Area Source of HAP Emissions**

[Link to an amendment published at 76 FR 12867, March 9, 2011.](#)

As stated in §§63.6600, 63.6630 and 63.6640, you must comply with the following operating limitations for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions and existing 4SRB stationary RICE >500 HP located at an area source of HAP emissions that operate more than 24 hours per calendar year:

<b>For each . . .</b>	<b>You must meet the following operating limitation . . .</b>
1. 4SRB stationary RICE complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75 percent or more, if applicable) and using NSCR; or	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst measured during the initial performance test and
4SRB stationary RICE complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O <sub>2</sub> and using NSCR; or	b. maintain the temperature of your stationary RICE exhaust so the catalyst inlet temperature is greater than or equal to 750 °F and less than or equal to 1250 °F.
4SRB stationary RICE complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 2.7 ppmvd or less at 15 percent O <sub>2</sub> and using NSCR.	
2. 4SRB stationary RICE complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75	Comply with any operating limitations approved by the Administrator.

percent or more, if applicable) and not using NSCR; or	
4SRB stationary RICE complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O <sub>2</sub> and not using NSCR; or	
4SRB stationary RICE complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 2.7 ppmvd or less at 15 percent O <sub>2</sub> and using NSCR.	

[75 FR 51592, Aug. 20, 2010]

**Table 2 to Subpart ZZZZ of Part 63—Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions**

As stated in §§63.6600 and 63.6640, you must comply with the following emission limitations for new and reconstructed lean burn and new and reconstructed compression ignition stationary RICE at 100 percent load plus or minus 10 percent:

<b>For each . . .</b>	<b>You must meet the following emission limitation, except during periods of startup . . .</b>	<b>During periods of startup you must . . .</b>
1. 2SLB stationary RICE	a. Reduce CO emissions by 58 percent or more; or b. Limit concentration of formaldehyde in the stationary RICE exhaust to 12 ppmvd or less at 15 percent O <sub>2</sub> . If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004, you may limit concentration of formaldehyde to 17 ppmvd or less at 15 percent O <sub>2</sub> until June 15, 2007	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. <sup>1</sup>
2. 4SLB stationary RICE	a. Reduce CO emissions by 93 percent or more; or b. Limit concentration of formaldehyde in the stationary RICE exhaust to 14 ppmvd or less at 15 percent O <sub>2</sub>	
3. CI stationary	a. Reduce CO emissions by 70 percent or more; or	

RICE		
	b. Limit concentration of formaldehyde in the stationary RICE exhaust to 580 ppbvd or less at 15 percent O <sub>2</sub>	

<sup>1</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[75 FR 9680, Mar. 3, 2010]

**Table 2bto Subpart ZZZZ of Part 63— Operating Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions, Existing Compression Ignition Stationary RICE >500 HP, and Existing 4SLB Stationary RICE >500 HP Located at an Area Source of HAP Emissions**

[Link to an amendment published at 76 FR 12867, March 9, 2011.](#)

As stated in §§63.6600, 63.6601, 63.6630, and 63.6640, you must comply with the following operating limitations for new and reconstructed 2SLB and compression ignition stationary RICE located at a major source of HAP emissions; new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions; existing compression ignition stationary RICE >500 HP; and existing 4SLB stationary RICE >500 HP located at an area source of HAP emissions that operate more than 24 hours per calendar year:

For each . . .	You must meet the following operating limitation . . .
1. 2SLB and 4SLB stationary RICE and CI stationary RICE complying with the requirement to reduce CO emissions and using an oxidation catalyst; or 2SLB and 4SLB stationary RICE and CI stationary RICE complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and using an oxidation catalyst; or 4SLB stationary RICE and CI stationary RICE complying with the requirement to limit the concentration of CO in the stationary RICE exhaust and using an oxidation catalyst	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst that was measured during the initial performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 450 °F and less than or equal to 1350 °F. <sup>1</sup>
2. 2SLB and 4SLB stationary RICE and CI stationary RICE complying with the requirement to reduce CO emissions and not using an oxidation catalyst; or 2SLB and 4SLB stationary RICE and CI stationary RICE complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and not using an oxidation catalyst; or 4SLB stationary RICE and CI stationary RICE complying with the requirement to limit the concentration of CO in the stationary RICE exhaust	Comply with any operating limitations approved by the Administrator.

and not using an oxidation catalyst	
-------------------------------------	--

<sup>1</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.8(g) for a different temperature range.

[75 FR 51593, Aug. 20, 2010]

**Table 2cto Subpart ZZZZ of Part 63—Requirements for Existing Compression Ignition Stationary RICE Located at a Major Source of HAP Emissions and Existing Spark Ignition Stationary RICE ≤500 HP Located at a Major Source of HAP Emissions**

As stated in §§63.6600, 63.6602, and 63.6640, you must comply with the following requirements for existing compression ignition stationary RICE located at a major source of HAP emissions and existing spark ignition stationary RICE ≤500 HP located at a major source of HAP emissions:

<b>For each . . .</b>	<b>You must meet the following requirement, except during periods of startup . . .</b>	<b>During periods of startup you must . . .</b>
1. Emergency stationary CI RICE and black start stationary CI RICE. <sup>1</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; <sup>2</sup> b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. <sup>3</sup>
2. Non-Emergency, non-black start stationary CI RICE <100 HP	a. Change oil and filter every 1,000 hours of operation or annually, whichever comes first; <sup>2</sup>	
	b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first;	
	c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	

3. Non-Emergency, non-black start CI stationary RICE $100 \leq \text{HP} \leq 300$ HP	Limit concentration of CO in the stationary RICE exhaust to 230 ppmvd or less at 15 percent O <sub>2</sub>	
4. Non-Emergency, non-black start CI stationary RICE $300 < \text{HP} \leq 500$	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd or less at 15 percent O <sub>2</sub> ; or	
	b. Reduce CO emissions by 70 percent or more.	
5. Non-Emergency, non-black start stationary CI RICE $> 500$ HP	a. Limit concentration of CO in the stationary RICE exhaust to 23 ppmvd or less at 15 percent O <sub>2</sub> ; or	
	b. Reduce CO emissions by 70 percent or more.	
6. Emergency stationary SI RICE and black start stationary SI RICE. <sup>1</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; <sup>2</sup>	
	b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first;	
	c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	
7. Non-Emergency, non-black start stationary SI RICE $< 100$ HP that are not 2SLB stationary RICE	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; <sup>2</sup>	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first;	
	c. Inspect all hoses and belts every 1,440 hours of	

	operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	
8. Non-Emergency, non-black start 2SLB stationary SI RICE <100 HP	a. Change oil and filter every 4,320 hours of operation or annually, whichever comes first; <sup>2</sup>	
	b. Inspect spark plugs every 4,320 hours of operation or annually, whichever comes first;	
	c. Inspect all hoses and belts every 4,320 hours of operation or annually, whichever comes first, and replace as necessary. <sup>3</sup>	
9. Non-emergency, non-black start 2SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 225 ppmvd or less at 15 percent O <sub>2</sub>	
10. Non-emergency, non-black start 4SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 47 ppmvd or less at 15 percent O <sub>2</sub>	
11. Non-emergency, non-black start 4SRB stationary RICE 100≤HP≤500	Limit concentration of formaldehyde in the stationary RICE exhaust to 10.3 ppmvd or less at 15 percent O <sub>2</sub>	
12. Non-emergency, non-black start landfill or digester gas-fired stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 177 ppmvd or less at 15 percent O <sub>2</sub>	

<sup>1</sup>If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the work practice requirements on the schedule required in Table 2c of this subpart, or if performing the work practice on the required schedule would otherwise pose an unacceptable risk under Federal, State, or local law, the work practice can be delayed until the emergency is over or the unacceptable risk under Federal, State, or local law has abated. The work practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under Federal, State, or local law has abated. Sources must report any failure to perform the work practice on the schedule required and the Federal, State or local law under which the risk was deemed unacceptable.

<sup>2</sup>Sources have the option to utilize an oil analysis program as described in §63.6625(i) in order to extend the specified oil change requirement in Table 2c of this subpart.

<sup>3</sup>Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[75 FR 51593, Aug. 20, 2010]

**Table 2d to Subpart ZZZZ of Part 63— Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions**

As stated in §§63.6603 and 63.6640, you must comply with the following requirements for existing stationary RICE located at area sources of HAP emissions:

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
1. Non-Emergency, non-black start CI stationary RICE $\leq 300$ HP	a. Change oil and filter every 1,000 hours of operation or annually, whichever comes first; <sup>1</sup>	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.
	b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	
2. Non-Emergency, non-black start CI stationary RICE $300 < \text{HP} \leq 500$	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd at 15 percent O <sub>2</sub> ; or	
	b. Reduce CO emissions by 70 percent or more.	
3. Non-Emergency, non-black start CI	a. Limit concentration	

stationary RICE >500 HP	of CO in the stationary RICE exhaust to 23 ppmvd at 15 percent O <sub>2</sub> ; or	
	b. Reduce CO emissions by 70 percent or more.	
4. Emergency stationary CI RICE and black start stationary CI RICE. <sup>2</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first; and	
	c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	
5. Emergency stationary SI RICE; black start stationary SI RICE; non-emergency, non-black start 4SLB stationary RICE >500 HP that operate 24 hours or less per calendar year; non-emergency, non-black start 4SRB stationary RICE >500 HP that operate 24 hours or less per calendar year. <sup>2</sup>	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; <sup>1</sup> b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first; and c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	
6. Non-emergency, non-black start 2SLB stationary RICE	a. Change oil and filter every 4,320 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs	

	every 4,320 hours of operation or annually, whichever comes first; and	
	c. Inspect all hoses and belts every 4,320 hours of operation or annually, whichever comes first, and replace as necessary.	
7. Non-emergency, non-black start 4SLB stationary RICE $\leq$ 500 HP	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	
8. Non-emergency, non-black start 4SLB stationary RICE >500 HP	a. Limit concentration of CO in the stationary RICE exhaust to 47 ppmvd at 15 percent O <sub>2</sub> ; or	
	b. Reduce CO emissions by 93 percent or more.	
9. Non-emergency, non-black start 4SRB stationary RICE $\leq$ 500 HP	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first; and	

	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	
10. Non-emergency, non-black start 4SRB stationary RICE >500 HP	a. Limit concentration of formaldehyde in the stationary RICE exhaust to 2.7 ppmvd at 15 percent O <sub>2</sub> ; or	
	b. Reduce formaldehyde emissions by 76 percent or more.	
11. Non-emergency, non-black start landfill or digester gas-fired stationary RICE	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; <sup>1</sup>	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	

<sup>1</sup>Sources have the option to utilize an oil analysis program as described in §63.6625(i) in order to extend the specified oil change requirement in Table 2d of this subpart.

<sup>2</sup>If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in Table 2d of this subpart, or if performing the management practice on the required schedule would otherwise pose an unacceptable risk under Federal, State, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under Federal, State, or local law has abated. The management practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under Federal, State, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the Federal, State or local law under which the risk was deemed unacceptable.

[75 FR 51595, Aug. 20, 2010]

**Table 3 to Subpart ZZZZ of Part 63—Subsequent Performance Tests**

As stated in §§63.6615 and 63.6620, you must comply with the following subsequent performance test requirements:

<b>For each . . .</b>	<b>Complying with the requirement to . . .</b>	<b>You must . . .</b>
1. New or reconstructed 2SLB stationary RICE with a brake horsepower >500 located at major sources; new or reconstructed 4SLB stationary RICE with a brake horsepower ≥250 located at major sources; and new or reconstructed CI stationary RICE with a brake horsepower >500 located at major sources	Reduce CO emissions and not using a CEMS	Conduct subsequent performance tests semiannually. <sup>1</sup>
2. 4SRB stationary RICE with a brake horsepower ≥5,000 located at major sources	Reduce formaldehyde emissions	Conduct subsequent performance tests semiannually. <sup>1</sup>
3. Stationary RICE with a brake horsepower >500 located at major sources and new or reconstructed 4SLB stationary RICE with a brake horsepower 250≤HP≤500 located at major sources	Limit the concentration of formaldehyde in the stationary RICE exhaust	Conduct subsequent performance tests semiannually. <sup>1</sup>
4. Existing non-emergency, non-black start CI stationary RICE with a brake horsepower >500 that are not limited use stationary RICE; existing non-emergency, non-black start 4SLB and 4SRB stationary RICE located at an area source of HAP emissions with a brake horsepower >500 that are operated more than 24 hours per calendar year that are not limited use stationary RICE	Limit or reduce CO or formaldehyde emissions	Conduct subsequent performance tests every 8,760 hrs. or 3 years, whichever comes first.
5. Existing non-emergency, non-black start CI stationary RICE with a brake horsepower >500 that are limited use stationary RICE; existing non-emergency, non-black start 4SLB and 4SRB stationary RICE located at an area source of HAP emissions with a brake horsepower >500 that are operated more than 24 hours per calendar year and are limited use stationary RICE	Limit or reduce CO or formaldehyde emissions	Conduct subsequent performance tests every 8,760 hrs. or 5 years, whichever comes first.

<sup>1</sup>After you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.

[75 FR 51596, Aug. 20, 2010]

**Table 4 to Subpart ZZZZ of Part 63—Requirements for Performance Tests**

As stated in §§63.6610, 63.6611, 63.6612, 63.6620, and 63.6640, you must comply with the following requirements for performance tests for stationary RICE:

For each . ..	Complying with the requirement to ...	You must ...	Using ...	According to the following requirements . ..
1. 2SLB, 4SLB, and CI stationary RICE	a. Reduce CO emissions	i. Measure the O <sub>2</sub> at the inlet and outlet of the control device; and	(1) Portable CO and O <sub>2</sub> analyzer	(a) Using ASTM D6522–00 (2005) <sup>a</sup> (incorporated by reference, see §63.14). Measurements to determine O <sub>2</sub> must be made at the same time as the measurements for CO concentration.
		ii. Measure the CO at the inlet and the outlet of the control device	(1) Portable CO and O <sub>2</sub> analyzer	(a) Using ASTM D6522–00 (2005) <sup>ab</sup> (incorporated by reference, see §63.14) or Method 10 of 40 CFR appendix A. The CO concentration must be at 15 percent O <sub>2</sub> , dry basis.
2. 4SRB stationary RICE	a. Reduce formaldehyde emissions	i. Select the sampling port location and the number of traverse points; and	(1) Method 1 or 1A of 40 CFR part 60, appendix A §63.7(d)(1)(i)	(a) Sampling sites must be located at the inlet and outlet of the control device.
		ii. Measure O <sub>2</sub> at the inlet and outlet of the control device; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A, or ASTM Method D6522–00m (2005)	(a) Measurements to determine O <sub>2</sub> concentration must be made at the same time as the measurements for formaldehyde concentration.
		iii. Measure moisture content at the inlet and outlet of the control device; and	(1) Method 4 of 40 CFR part 60, appendix A, or Test Method 320 of 40 CFR part 63, appendix A, or ASTM D 6348–03	(a) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde concentration.
		iv. Measure formaldehyde at	(1) Method 320 or 323 of 40 CFR part	(a) Formaldehyde concentration must be at

		the inlet and the outlet of the control device	<b>63</b> , appendix A; or ASTM D6348–03, <sup>c</sup> provided in ASTM D6348–03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	15 percent O <sub>2</sub> , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.
3. Stationary RICE	a. Limit the concentration of formaldehyde or CO in the stationary RICE exhaust	i. Select the sampling port location and the number of traverse points; and	(1) Method 1 or 1A of 40 CFR part 60, appendix A § <b>63.7</b> (d)(1)(i)	(a) If using a control device, the sampling site must be located at the outlet of the control device.
		ii. Determine the O <sub>2</sub> concentration of the stationary RICE exhaust at the sampling port location; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A, or ASTM Method D6522–00 (2005)	(a) Measurements to determine O <sub>2</sub> concentration must be made at the same time and location as the measurements for formaldehyde concentration.
		iii. Measure moisture content of the stationary RICE exhaust at the sampling port location; and	(1) Method 4 of 40 CFR part 60, appendix A, or Test Method 320 of 40 CFR part <b>63</b> , appendix A, or ASTM D 6348–03	(a) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde concentration.
		iv. Measure formaldehyde at the exhaust of the stationary RICE; or	(1) Method 320 or 323 of 40 CFR part <b>63</b> , appendix A; or ASTM D6348–03, <sup>c</sup> provided in ASTM D6348–03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	(a) Formaldehyde concentration must be at 15 percent O <sub>2</sub> , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.

		v. Measure CO at the exhaust of the stationary RICE	(1) Method 10 of 40 CFR part 60, appendix A, ASTM Method D6522–00 (2005), <sup>a</sup> Method 320 of 40 CFR part 63, appendix A, or ASTM D6348–03	(a) CO Concentration must be at 15 percent O <sub>2</sub> , dry basis. Results of this test consist of the average of the three 1-hour longer runs.
--	--	---	---	---

<sup>a</sup>You may also use Methods 3A and 10 as options to ASTM–D6522–00 (2005). You may obtain a copy of ASTM–D6522–00 (2005) from at least one of the following addresses: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428–2959, or University Microfilms International, 300 North Zeeb Road, Ann Arbor, MI 48106. ASTM–D6522–00 (2005) may be used to test both CI and SI stationary RICE.

<sup>b</sup>You may also use Method 320 of 40 CFR part 63, appendix A, or ASTM D6348–03.

<sup>c</sup>You may obtain a copy of ASTM–D6348–03 from at least one of the following addresses: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428–2959, or University Microfilms International, 300 North Zeeb Road, Ann Arbor, MI 48106.

[75 FR 51597, Aug. 20, 2010]

**Table 5 to Subpart ZZZZ of Part 63—Initial Compliance With Emission Limitations and Operating Limitations**

[Link to an amendment published at 76 FR 12867, March 9, 2011.](#)

As stated in §§63.6612, 63.6625 and 63.6630, you must initially comply with the emission and operating limitations as required by the following:

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, existing non-emergency stationary CI RICE >500 HP located at an area source of HAP, and existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are operated more than 24 hours per	a. Reduce CO emissions and using oxidation catalyst, and using a CPMS	i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.

<p>calendar year</p>		
<p>2. New or reconstructed non-emergency 2SLB stationary RICE &gt;500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE &gt;500 HP located at a major source of HAP, existing non-emergency stationary CI RICE &gt;500 HP located at an area source of HAP, and existing non-emergency 4SLB stationary RICE &gt;500 HP located at an area source of HAP that are operated more than 24 hours per calendar year</p>	<p>a. Reduce CO emissions and not using oxidation catalyst</p>	<p>i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and                  ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and                  iii. You have recorded the approved operating parameters (if any) during the initial performance test.</p>
<p>3. New or reconstructed non-emergency 2SLB stationary RICE &gt;500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE &gt;500 HP located at a major source of HAP, existing non-emergency stationary CI RICE &gt;500 HP located at an area source of HAP, and existing non-emergency 4SLB stationary RICE &gt;500 HP located at an area source of HAP that are operated more than 24 hours per calendar year</p>	<p>a. Reduce CO emissions, and using a CEMS</p>	<p>i. You have installed a CEMS to continuously monitor CO and either O2 or CO2 at both the inlet and outlet of the oxidation catalyst according to the requirements in §63.6625(a); and                  ii. You have conducted a performance evaluation of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B; and                  iii. The average reduction of CO calculated using §63.6620 equals or exceeds the required percent reduction. The initial test comprises the first 4-hour period after successful validation of the CEMS. Compliance is based on the average percent reduction achieved during the 4-hour period.</p>
<p>4. Non-emergency 4SRB stationary RICE &gt;500 HP located at a major source of HAP, and existing non-emergency 4SRB stationary RICE &gt;500 HP located at an area source of HAP that are operated more than 24 hours per calendar year</p>	<p>a. Reduce formaldehyde emissions and using NSCR</p>	<p>i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction; and                  ii. You have installed a CPMS to</p>

		continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
5. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP located at an area source of HAP that are operated more than 24 hours per calendar year	a. Reduce formaldehyde emissions and not using NSCR	i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and iii. You have recorded the approved operating parameters (if any) during the initial performance test.
6. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE $250 \leq \text{HP} \leq 500$ located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or NSCR	i. The average formaldehyde concentration, corrected to 15 percent O <sub>2</sub> , dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
7. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE $250 \leq \text{HP} \leq 500$ located at a major source of HAP, and existing non-emergency 4SRB	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. The average formaldehyde concentration, corrected to 15 percent O <sub>2</sub> , dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to

stationary RICE >500 HP		continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and iii. You have recorded the approved operating parameters (if any) during the initial performance test.
8. Existing non-emergency stationary RICE $100 \leq HP \leq 500$ located at a major source of HAP, and existing non-emergency stationary CI RICE $300 < HP \leq 500$ located at an area source of HAP	a. Reduce CO or formaldehyde emissions	i. The average reduction of emissions of CO or formaldehyde, as applicable determined from the initial performance test is equal to or greater than the required CO or formaldehyde, as applicable, percent reduction.
9. Existing non-emergency stationary RICE $100 \leq HP \leq 500$ located at a major source of HAP, and existing non-emergency stationary CI RICE $300 < HP \leq 500$ located at an area source of HAP	a. Limit the concentration of formaldehyde or CO in the stationary RICE exhaust	i. The average formaldehyde or CO concentration, as applicable, corrected to 15 percent O <sub>2</sub> , dry basis, from the three test runs is less than or equal to the formaldehyde or CO emission limitation, as applicable.

[75 FR 51598, Aug. 20, 2010]

**Table 6 to Subpart ZZZZ of Part 63—Continuous Compliance With Emission Limitations, Operating Limitations, Work Practices, and Management Practices**

[Link to an amendment published at 76 FR 12870, March 9, 2011.](#)

As stated in §63.6640, you must continuously comply with the emissions and operating limitations and work or management practices as required by the following:

<b>For each . . .</b>	<b>Complying with the requirement to . . .</b>	<b>You must demonstrate continuous compliance by . . .</b>
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE $\geq 250$ HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and using an oxidation catalyst, and using a CPMS	i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved; <sup>a</sup> and ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and iii. Reducing these data to 4-hour rolling averages; and iv. Maintaining the 4-hour rolling

		averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
2. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and not using an oxidation catalyst, and using a CPMS	i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved; <sup>a</sup> and ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and iii. Reducing these data to 4-hour rolling averages; and iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
3. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, new or reconstructed non-emergency stationary CI RICE >500 HP located at a major source of HAP, existing non-emergency stationary CI RICE >500 HP, existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are operated more than 24 hours per calendar year	a. Reduce CO emissions and using a CEMS	i. Collecting the monitoring data according to §63.6625(a), reducing the measurements to 1-hour averages, calculating the percent reduction of CO emissions according to §63.6620; and ii. Demonstrating that the catalyst achieves the required percent reduction of CO emissions over the 4-hour averaging period; and iii. Conducting an annual RATA of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B, as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.
4. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and using NSCR	i. Collecting the catalyst inlet temperature data according to §63.6625(b); and ii. Reducing these data to 4-hour

		rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		iv. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
5. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and not using NSCR	i. Collecting the approved operating parameter (if any) data according to §63.6625(b); and ii. Reducing these data to 4-hour rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
6. Non-emergency 4SRB stationary RICE with a brake HP ≥5,000 located at a major source of HAP	a. Reduce formaldehyde emissions	Conducting semiannual performance tests for formaldehyde to demonstrate that the required formaldehyde percent reduction is achieved. <sup>a</sup>
7. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit; <sup>a</sup> and ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and

		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
8. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE $250 \leq HP \leq 500$ located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit; <sup>a</sup> and ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
9. Existing emergency and black start stationary RICE $\leq 500$ HP located at a major source of HAP, existing non-emergency stationary RICE <100 HP located at a major source of HAP, existing emergency and black start stationary RICE located at an area source of HAP, existing non-emergency stationary CI RICE $\leq 300$ HP located at an area source of HAP, existing non-emergency 2SLB stationary RICE located at an area source of HAP, existing non-emergency landfill or digester gas stationary SI RICE located at an area source of HAP, existing non-emergency 4SLB and 4SRB stationary RICE $\leq 500$ HP located at an area source of HAP, existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP	a. Work or Management practices	i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.

<p>that operate 24 hours or less per calendar year</p>		
<p>10. Existing stationary CI RICE &gt;500 HP that are not limited use stationary RICE, and existing 4SLB and 4SRB stationary RICE &gt;500 HP located at an area source of HAP that operate more than 24 hours per calendar year and are not limited use stationary RICE</p>	<p>a. Reduce CO or formaldehyde emissions, or limit the concentration of formaldehyde or CO in the stationary RICE exhaust, and using oxidation catalyst or NSCR</p>	<p>i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and</p>
		<p>ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and</p>
		<p>iii. Reducing these data to 4-hour rolling averages; and</p>
		<p>iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and</p>
		<p>v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.</p>
<p>11. Existing stationary CI RICE &gt;500 HP that are not limited use stationary RICE, and existing 4SLB and 4SRB stationary RICE &gt;500 HP located at an area source of HAP that operate more than 24 hours per calendar year and are not limited use stationary RICE</p>	<p>a. Reduce CO or formaldehyde emissions, or limit the concentration of formaldehyde or CO in the stationary RICE exhaust, and not using oxidation catalyst or NSCR</p>	<p>i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and</p>
		<p>ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and</p>
		<p>iii. Reducing these data to 4-hour rolling averages; and</p>

		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
12. Existing limited use CI stationary RICE >500 HP and existing limited use 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that operate more than 24 hours per calendar year	a. Reduce CO or formaldehyde emissions or limit the concentration of formaldehyde or CO in the stationary RICE exhaust, and using an oxidation catalyst or NSCR	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
13. Existing limited use CI stationary RICE >500 HP and existing limited use 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that operate more than 24 hours per calendar year	a. Reduce CO or formaldehyde emissions or limit the concentration of formaldehyde or CO in the stationary RICE exhaust, and using an oxidation catalyst or NSCR	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the approved operating parameter (if any) data

		according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.

<sup>a</sup>After you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.

[75 FR 51600, Aug. 20, 2010]

**Table 7 to Subpart ZZZZ of Part 63—Requirements for Reports**

As stated in §63.6650, you must comply with the following requirements for reports:

<b>For each ...</b>	<b>You must submit a ...</b>	<b>The report must contain ...</b>	<b>You must submit the report ...</b>
1. Existing non-emergency, non-black start stationary RICE $100 \leq HP \leq 500$ located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE $>500$ HP located at a major source of HAP; existing non-emergency 4SRB stationary RICE $>500$ HP located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE $>300$ HP located at an area source of HAP; existing non-emergency, non-black start 4SLB and 4SRB stationary RICE $>500$ HP located at an area source of HAP and operated more than 24 hours per calendar year; new or reconstructed non-	Compliance report	a. If there are no deviations from any emission limitations or operating limitations that apply to you, a statement that there were no deviations from the emission limitations or operating limitations during the reporting period. If there were no periods during which the CMS, including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), a statement that there were not periods during which the CMS was out-of-control during the reporting period; or b. If you had a deviation from any emission limitation or operating limitation during the reporting period, the information in §63.6650(d). If there were periods during	i. Semiannually according to the requirements in §63.6650(b)(1)–(5) for engines that are not limited use stationary RICE subject to numerical emission limitations; and ii. Annually according to the requirements in §63.6650(b)(6)–(9) for engines that are limited use stationary RICE subject to numerical emission limitations. i. Semiannually according to the requirements in §63.6650(b). i. Semiannually according to the requirements in

emergency stationary RICE >500 HP located at a major source of HAP; and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP		which the CMS, including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), the information in §63.6650(e); or c. If you had a malfunction during the reporting period, the information in §63.6650(c)(4)	§63.6650(b).
2. New or reconstructed non-emergency stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	Report	a. The fuel flow rate of each fuel and the heating values that were used in your calculations, and you must demonstrate that the percentage of heat input provided by landfill gas or digester gas, is equivalent to 10 percent or more of the gross heat input on an annual basis; and	i. Annually, according to the requirements in §63.6650.
		b. The operating limits provided in your federally enforceable permit, and any deviations from these limits; and	i. See item 2.a.i.
		c. Any problems or errors suspected with the meters.	i. See item 2.a.i.

[75 FR 51603, Aug. 20, 2010]

**Table 8 to Subpart ZZZZ of Part 63—Applicability of General Provisions to Subpart ZZZZ.**

As stated in §63.6665, you must comply with the following applicable general provisions.

<b>General provisions citation</b>	<b>Subject of citation</b>	<b>Applies to subpart</b>	<b>Explanation</b>
§63.1	General applicability of the General Provisions	Yes.	
§63.2	Definitions	Yes	Additional terms defined in §63.6675.
§63.3	Units and abbreviations	Yes.	

§63.4	Prohibited activities and circumvention	Yes.	
§63.5	Construction and reconstruction	Yes.	
§63.6(a)	Applicability	Yes.	
§63.6(b)(1)–(4)	Compliance dates for new and reconstructed sources	Yes.	
§63.6(b)(5)	Notification	Yes.	
§63.6(b)(6)	[Reserved]		
§63.6(b)(7)	Compliance dates for new and reconstructed area sources that become major sources	Yes.	
§63.6(c)(1)–(2)	Compliance dates for existing sources	Yes.	
§63.6(c)(3)–(4)	[Reserved]		
§63.6(c)(5)	Compliance dates for existing area sources that become major sources	Yes.	
§63.6(d)	[Reserved]		
§63.6(e)	Operation and maintenance	No.	
§63.6(f)(1)	Applicability of standards	No.	
§63.6(f)(2)	Methods for determining compliance	Yes.	
§63.6(f)(3)	Finding of compliance	Yes.	
§63.6(g)(1)–(3)	Use of alternate standard	Yes.	
§63.6(h)	Opacity and visible emission standards	No	Subpart <b>ZZZZ</b> does not contain opacity or visible emission standards.
§63.6(i)	Compliance extension procedures and criteria	Yes.	
§63.6(j)	Presidential compliance exemption	Yes.	
§63.7(a)(1)–(2)	Performance test dates	Yes	Subpart <b>ZZZZ</b> contains performance test dates at §§63.6610, 63.6611, and 63.6612.

§63.7(a)(3)	CAA section 114 authority	Yes.	
§63.7(b)(1)	Notification of performance test	Yes	Except that §63.7(b)(1) only applies as specified in §63.6645.
§63.7(b)(2)	Notification of rescheduling	Yes	Except that §63.7(b)(2) only applies as specified in §63.6645.
§63.7(c)	Quality assurance/test plan	Yes	Except that §63.7(c) only applies as specified in §63.6645.
§63.7(d)	Testing facilities	Yes.	
§63.7(e)(1)	Conditions for conducting performance tests	No.	Subpart <b>ZZZZ</b> specifies conditions for conducting performance tests at §63.6620.
§63.7(e)(2)	Conduct of performance tests and reduction of data	Yes	Subpart <b>ZZZZ</b> specifies test methods at §63.6620.
§63.7(e)(3)	Test run duration	Yes.	
§63.7(e)(4)	Administrator may require other testing under section 114 of the CAA	Yes.	
§63.7(f)	Alternative test method provisions	Yes.	
§63.7(g)	Performance test data analysis, recordkeeping, and reporting	Yes.	
§63.7(h)	Waiver of tests	Yes.	
§63.8(a)(1)	Applicability of monitoring requirements	Yes	Subpart <b>ZZZZ</b> contains specific requirements for monitoring at §63.6625.
§63.8(a)(2)	Performance specifications	Yes.	
§63.8(a)(3)	[Reserved]		
§63.8(a)(4)	Monitoring for control devices	No.	
§63.8(b)(1)	Monitoring	Yes.	
§63.8(b)(2)–(3)	Multiple effluents and multiple monitoring systems	Yes.	
§63.8(c)(1)	Monitoring system operation	Yes.	

	and maintenance		
§63.8(c)(1)(i)	Routine and predictable SSM	Yes.	
§63.8(c)(1)(ii)	SSM not in Startup Shutdown Malfunction Plan	Yes.	
§63.8(c)(1)(iii)	Compliance with operation and maintenance requirements	Yes.	
§63.8(c)(2)–(3)	Monitoring system installation	Yes.	
§63.8(c)(4)	Continuous monitoring system (CMS) requirements	Yes	Except that subpart <b>ZZZZ</b> does not require Continuous Opacity Monitoring System (COMS).
§63.8(c)(5)	COMS minimum procedures	No	Subpart <b>ZZZZ</b> does not require COMS.
§63.8(c)(6)–(8)	CMS requirements	Yes	Except that subpart <b>ZZZZ</b> does not require COMS.
§63.8(d)	CMS quality control	Yes.	
§63.8(e)	CMS performance evaluation	Yes	Except for §63.8(e)(5)(ii), which applies to COMS.
		Except that §63.8(e) only applies as specified in §63.6645.	
§63.8(f)(1)–(5)	Alternative monitoring method	Yes	Except that §63.8(f)(4) only applies as specified in §63.6645.
§63.8(f)(6)	Alternative to relative accuracy test	Yes	Except that §63.8(f)(6) only applies as specified in §63.6645.
§63.8(g)	Data reduction	Yes	Except that provisions for COMS are not applicable. Averaging periods for demonstrating compliance are specified at §§63.6635 and 63.6640.
§63.9(a)	Applicability and State delegation of notification requirements	Yes.	

§63.9(b)(1)–(5)	Initial notifications	Yes	Except that §63.9(b)(3) is reserved.
		Except that §63.9(b) only applies as specified in §63.6645.	
§63.9(c)	Request for compliance extension	Yes	Except that §63.9(c) only applies as specified in §63.6645.
§63.9(d)	Notification of special compliance requirements for new sources	Yes	Except that §63.9(d) only applies as specified in §63.6645.
§63.9(e)	Notification of performance test	Yes	Except that §63.9(e) only applies as specified in §63.6645.
§63.9(f)	Notification of visible emission (VE)/opacity test	No	Subpart <b>ZZZZ</b> does not contain opacity or VE standards.
§63.9(g)(1)	Notification of performance evaluation	Yes	Except that §63.9(g) only applies as specified in §63.6645.
§63.9(g)(2)	Notification of use of COMS data	No	Subpart <b>ZZZZ</b> does not contain opacity or VE standards.
§63.9(g)(3)	Notification that criterion for alternative to RATA is exceeded	Yes	If alternative is in use.
		Except that §63.9(g) only applies as specified in §63.6645.	
§63.9(h)(1)–(6)	Notification of compliance status	Yes	Except that notifications for sources using a CEMS are due 30 days after completion of performance evaluations. §63.9(h)(4) is reserved.
			Except that §63.9(h) only applies as specified in

			§63.6645.
§63.9(i)	Adjustment of submittal deadlines	Yes.	
§63.9(j)	Change in previous information	Yes.	
§63.10(a)	Administrative provisions for recordkeeping/reporting	Yes.	
§63.10(b)(1)	Record retention	Yes.	
§63.10(b)(2)(i)–(v)	Records related to SSM	No.	
§63.10(b)(2)(vi)–(xi)	Records	Yes.	
§63.10(b)(2)(xii)	Record when under waiver	Yes.	
§63.10(b)(2)(xiii)	Records when using alternative to RATA	Yes	For CO standard if using RATA alternative.
§63.10(b)(2)(xiv)	Records of supporting documentation	Yes.	
§63.10(b)(3)	Records of applicability determination	Yes.	
§63.10(c)	Additional records for sources using CEMS	Yes	Except that §63.10(c)(2)–(4) and (9) are reserved.
§63.10(d)(1)	General reporting requirements	Yes.	
§63.10(d)(2)	Report of performance test results	Yes.	
§63.10(d)(3)	Reporting opacity or VE observations	No	Subpart <b>ZZZZ</b> does not contain opacity or VE standards.
§63.10(d)(4)	Progress reports	Yes.	
§63.10(d)(5)	Startup, shutdown, and malfunction reports	No.	
§63.10(e)(1) and (2)(i)	Additional CMS Reports	Yes.	
§63.10(e)(2)(ii)	COMS-related report	No	Subpart <b>ZZZZ</b> does not require COMS.
§63.10(e)(3)	Excess emission and parameter	Yes.	Except that §63.10(e)(3)(i)

	exceedances reports		(C) is reserved.
§63.10(e)(4)	Reporting COMS data	No	Subpart <b>ZZZZ</b> does not require COMS.
§63.10(f)	Waiver for recordkeeping/reporting	Yes.	
§63.11	Flares	No.	
§63.12	State authority and delegations	Yes.	
§63.13	Addresses	Yes.	
§63.14	Incorporation by reference	Yes.	
§63.15	Availability of information	Yes.	

## Indiana Department of Environmental Management Office of Air Quality

### Technical Support Document (TSD) for a Registration Revision

#### Source Description and Location

<b>Source Name:</b>	<b>Samtec, Inc.</b>
<b>Source Location:</b>	<b>520 Park East Blvd, New Albany, Indiana 47150</b>
<b>County:</b>	<b>Floyd</b>
<b>SIC Code:</b>	<b>3679</b>
<b>Registration No.:</b>	<b>043-20264-00059</b>
<b>Registration Issuance Date:</b>	<b>February 25, 2005</b>
<b>Registration Revision No.:</b>	<b>043-30128-00059</b>
<b>Permit Reviewer:</b>	<b>Bruce Farrar</b>

On February 19, 2010, the Office of Air Quality (OAQ) received an application from Samtec, Inc. related to a modification to an existing electronic components electroplating and assembly source.

#### Existing Approvals

The source was issued Registration No. 043-20264-00059 on February 25, 2005.

#### County Attainment Status

The source is located in Floyd County.

Pollutant	Designation
SO <sub>2</sub>	Better than national standards.
CO	Unclassifiable or attainment effective November 15, 1990.
O <sub>3</sub>	Attainment effective July 19, 2007, for the 8-hour ozone standard. <sup>1</sup>
PM <sub>10</sub>	Unclassifiable effective November 15, 1990.
NO <sub>2</sub>	Cannot be classified or better than national standards.
Pb	Not designated.
<sup>1</sup> Attainment effective October 23, 2001, for the 1-hour ozone standard for the Louisville area, including Floyd County, and is a maintenance area for the 1-hour ozone National Ambient Air Quality Standard (NAAQS) for purposes of 40 CFR Part 51, Subpart X*. The 1-hour standard was revoked effective June 15, 2005.  Basic nonattainment designation effective federally April 5, 2005, for PM <sub>2.5</sub> .	

- (a) **Ozone Standards**  
 Volatile organic compounds (VOC) and Nitrogen Oxides (NOx) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone. Therefore, VOC and NOx emissions are considered when evaluating the rule applicability relating to ozone. Floyd County has been designated as attainment or unclassifiable for ozone. Therefore, VOC and NOx emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.
- (b) **PM<sub>2.5</sub>**  
 U.S. EPA, in the Federal Register Notice 70 FR 943 dated January 5, 2005, has designated Floyd as nonattainment for PM<sub>2.5</sub>. On March 7, 2005 the Indiana Attorney General's Office, on behalf of IDEM, filed a lawsuit with the Court of Appeals for the District of Columbia Circuit challenging U.S.

EPA's designation of nonattainment areas without sufficient data. However, in order to ensure that sources are not potentially liable for a violation of the Clean Air Act, the OAQ is following the U.S. EPA's New Source Review Rule for PM<sub>2.5</sub> promulgated on May 8, 2008. These rules became effective on July 15, 2008. Therefore, direct PM<sub>2.5</sub> and SO<sub>2</sub> emissions were reviewed pursuant to the requirements of Nonattainment New Source Review, 326 IAC 2-1.1-5. See the State Rule Applicability – Entire Source section.

- (c) Other Criteria Pollutants  
 Floyd County has been classified as attainment or unclassifiable in Indiana for all other pollutants. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

**Fugitive Emissions**

The fugitive emissions of criteria pollutants and hazardous air pollutants are counted toward the determination of 326 IAC 2-5.1-2 (Registrations) applicability.

**Status of the Existing Source**

The table below summarizes the potential to emit of the entire source, prior to the proposed revision, after consideration of all enforceable limits established in the effective permits:

Process/ Emission Unit	Potential To Emit of the Entire Source Prior to Revision (tons/year)								
	PM	PM10	PM2.5	SO <sub>2</sub>	NOx	VOC	CO	Total HAPs	Worst Single HAP
Non-Chromium Electroplating (PE1-22, PE-30, PE62-65)	3.85	3.85	3.85	-	-	4.53	-	2.87	2.83 (Nickel)
Combustion Units	0.137	0.547	0.547	0.04	8.15	0.47	5.99	0.123	0.123 (Hexane)
Woodworking	0.92	0.92	0.92	-	-	-	-	-	-
<b>Total PTE of the Entire Source</b>	<b>4.91</b>	<b>5.32</b>	<b>5.32</b>	<b>0.04</b>	<b>8.15</b>	<b>5.00</b>	<b>5.99</b>	<b>&lt;25</b>	<b>&lt;10</b>
Registration Levels	25	25	25	25	25	25	100	25	10

negl. = negligible  
 These emissions are based upon Registration 043-20264-00059, issued on February 25, 2005.

**Description of Proposed Revision**

The Office of Air Quality (OAQ) has reviewed an application, submitted by Samtec, Inc. on January 18, 2011, relating to construction of ten (10) additional non-chromium lines, one (1) plating on plastic line, and additional combustion units.

The following is a list of the new emission units and pollution control devices:

- (n) Ten (10) Strip Plating Lines, identified as PE81 - PE90, used to plate nickel, tin, copper, or gold, approved for construction in 2011, equipped with scrubbers (CE15 through CE17), with PE81, PE82 and PE83 to scrubber CE15 and exhausting to stack EU51; PE84, PE85 and PE86 to scrubber CE16, exhausting to stack EU52; PE87, PE88, PE 89 and PE90 to scrubber CE17, exhausting to stack EU53 with a capacity of 31.5 pounds per hour, each.

The following is a list of the unpermitted emission units:

- (a) One (1) Strip Plating Line, identified as PE80, used to plate nickel, tin, copper, or gold, installed in 2008, equipped with a scrubbers (CE10), exhausting to stacks EU22, capacity: 31.5 pounds per hour.
- (b) One (1) Plating on Plastic Line, identified as PE69, used to plate nickel, tin, copper, or gold onto plastic, installed in 2008, equipped with a scrubber (CE1), exhausting to stack EU1, capacity: 31.5 pounds per hour.
- (c) One (1) natural gas fired heater, H3, installed in 2008, rated at 0.130 million British thermal units per hour.
- (d) Four (4) natural gas fired air rotation/heaters, identified as N1 - N4, installed in 2008, exhausting to stacks N1 - N4, respectively, rated at 0.48 million British thermal units per hour, each.
- (e) One (1) natural gas fired air rotation/heater, identified as O1, installed in 2008, rated at 0.50 million British thermal units per hour, exhausting internally.
- (f) Two (2) natural gas fired space heaters, identified as P1 and P2, installed in 2008, rated at 0.75 million British thermal units per hour, each, and exhausting internally.
- (g) One (1) natural gas fired space heater, identified as Q1, installed in 2008, rated at 0.10 million British thermal units per hour, and exhausting internally.
- (h) Four (4) natural gas fired space heaters, identified as R1 - R4, installed in 2008, rated at 0.25 million British thermal units per hour, each, and exhausting internally.
- (i) One (1) natural gas fired furnace, identified as S1, installed in 2008, rated at 0.05 million British thermal units per hour, and exhausting internally.
- (j) One (1) natural gas fired furnace, identified as T1, installed in 2008, rated at 0.10 million British thermal units per hour, and exhausting internally.
- (k) One (1) natural gas fired space heater, identified as U1, installed in 2008, rated at 0.25 million British thermal units per hour, and exhausting internally.
- (l) One (1) natural gas fired space heater, identified as V1, installed in 2008, rated at 0.50 million British thermal units per hour, and exhausting internally.
- (m) One (1) natural gas fired furnace, identified as W1, installed in 2008, rated at 0.10 million British thermal units per hour, and exhausting internally.
- (n) One (1) natural gas fired furnace, identified as X1, installed in 2008, rated at 0.12 million British thermal units per hour, and exhausting internally.
- (o) Eight (8) natural gas fired space heaters, identified as Y1 - Y8, installed in 2008, rated at 0.12 million British thermal units per hour, each, and exhausting internally.
- (p) Two (2) natural gas fired space heaters, identified as Z1 and Z2, installed in 2008, rated at 0.15 million British thermal units per hour, each, and exhausting internally.

The following is a list of the removed emission units:

- (a) Four (4) Strip Plating Lines, identified as PE62 - PE65, used to plate nickel, tin, copper, or gold, to be installed in 2005, equipped with scrubbers (CE13 and CE14), exhausting to stacks EU54 and EU55, capacity: 31.5 pounds per hour, each.
- (b) One (1) Hot Air Solder Leveler, identified as PE30, installed in 2003, equipped with an electrostatic precipitator (CE2), exhausting to stack EU3, capacity: 30 panels per hour or 6.72 pounds per hour.
- (c) One (1) natural gas fired heater, identified as A10, installed in 2005, exhausting to stack A10, rated at 0.47 million British thermal units per hour.
- (d) One (1) natural gas fired heater, identified as C28, installed in 1998, exhausting to stack C28, rated at 0.260 million British thermal units per hour.
- (e) Four (4) natural gas fired heaters, identified as E1 - E4, installed in 1998, exhausting to stacks E1 - E4, respectively, rated at 0.201 million British thermal units per hour, each.
- (f) One (1) natural gas fired heater, identified as F1, installed in 1998, exhausting to stack F1, rated at 0.200 million British thermal units per hour.
- (g) One (1) natural gas fired heater, identified as J5, installed in 1998, exhausting to stack J5, rated at 0.120 million British thermal units per hour.

<b>Enforcement Issues</b>
---------------------------

DEM is aware that equipment has been constructed and operated prior to receipt of the proper permit. IDEM is reviewing this matter and will take the appropriate action. This proposed approval is intended to satisfy the requirements of the construction permit rules.

<b>Emission Calculations</b>
------------------------------

See Appendix A of this TSD for detailed emission calculations.

In October 1993, a Final Order Granting Summary Judgment was signed by an Administrative Law Judge (ALJ) resolving an appeal of an IDEM permit related to the method by which IDEM calculated potential emissions from woodworking operations. In his findings, the ALJ determined that particulate controls were necessary for the facility to produce its normal product and is integral to the normal operation of the facility, and therefore, potential emissions were to be calculated after consideration of the controls.

<b>Permit Level Determination – Registration Revision</b>
---

The following table is used to determine the appropriate permit level under 326 IAC 2-5.5-6. This table reflects the PTE before controls of the proposed revision.

Process/ Emission Unit	PTE of Proposed Revision (tons/year)								
	PM	PM10*	PM2.5	SO <sub>2</sub>	NO <sub>x</sub>	VOC	CO	Total HAPs	Worst Single HAP
Non-Chromium Electroplating/PE69 PE81 - PE90	0.021	0.021	0.021	19.53	0.42	3.91	-	0.95	0.47 Nickel
Combustion Units (Space Heaters)/ H3, N1-N4, O1, P1, Q1, R1-R4, S1, T1, W1, X1, Y1-Y8, Z1-Z2	0.056	0.226	0.226	0.0178	2.97	0.163	2.49	0.06	0.05 Hexane
Total PTE of Proposed Revision	0.077	0.246	0.246	19.55	3.39	4.03	2.49	1.01	

negl. = negligible  
 \* Under the Part 70 Permit program (40 CFR 70), particulate matter with an aerodynamic diameter less than or equal to a nominal 10 micrometers (PM10), not particulate matter (PM), is considered as a "regulated air pollutant".

This Registration is being revised through a Registration Revision pursuant to 326 IAC 2-5.5.6(g), because the revision involves the addition of a new type of process (plastic on plastic line), which is not described in 326 IAC 2-5.5.6(d) (Registration Notice-Only Changes).

**PTE of the Entire Source After Issuance of the Registration Revision**

The table below summarizes the potential to emit of the entire source after issuance of this revision, reflecting all limits, of the emission units.

Process/ Emission Unit	Potential To Emit of the Entire Source with the Revision (tons/year)								
	PM	PM10*	PM2.5	SO <sub>2</sub>	NO <sub>x</sub>	VOC	CO	Total HAPs	Worst Single HAP
Non-Chromium Electroplating (PE1-22, PE-30, PE62-65) <b>PE69, PE81 - PE90</b>	<del>3.85</del> <b>3.87</b>	<del>3.85</del> <b>3.87</b>	<del>3.85</del> <b>3.87</b>	- <b>19.53</b>	- <b>0.42</b>	<del>4.53</del> <b>8.44</b>	-	<del>2.87</del> <b>3.82</b>	<del>2.83</del> <b>3.3</b> (Nickel)
Combustion Units	<del>0.137</del> <b>0.23</b>	<del>0.547</del> <b>0.77</b>	<del>0.547</del> <b>0.77</b>	<del>0.04</del> <b>0.058</b>	<del>8.15</del> <b>11.12</b>	<del>0.47</del> <b>0.63</b>	<del>5.99</del> <b>8.48</b>	<del>0.123</del> <b>0.18</b>	<del>0.123</del> <b>0.28</b> (Hexane)
Woodworking	0.92	0.92	0.92	-	-	-	-	-	-
<b>Total PTE of Entire Source</b>	<del>4.94</del> <b>4.97</b>	<del>5.32</del> <b>5.50</b>	<del>5.32</del> <b>5.50</b>	<del>0.04</del> <b>19.59</b>	<del>8.15</del> <b>10.73</b>	<del>5.00</del> <b>9.03</b>	<del>5.99</del> <b>7.80</b>	<del>&lt;25</del> <b>&lt;25</b>	<del>&lt;10</del> <b>&lt;10</b>
Registration Levels	25	25	25	25	25	25	100	25	10

negl. = negligible  
 \* Under the Part 70 Permit program (40 CFR 70), particulate matter with an aerodynamic diameter less than or equal to a nominal 10 micrometers (PM10), not particulate matter (PM), is considered as a "regulated air pollutant".

The table below summarizes the potential to emit of the entire source after issuance of this revision, reflecting all limits, of the emission units. (Note: the table below was generated from the above table, with bold text un-bolded and strikethrough text deleted)

Process/ Emission Unit	Potential To Emit of the Entire Source After Issuance of Revision (tons/year)								
	PM	PM10*	PM2.5	SO <sub>2</sub>	NO <sub>x</sub>	VOC	CO	Total HAPs	Worst Single HAP
Non-Chromium Electroplating (PE1-22, PE-30, PE62-65, PE69, PE81 - PE90)	3.87	3.87	3.87	19.53	0.42	8.44	-	3.82	3.3 (Nickel)
Combustion Units	0.23	0.77	0.77	0.058	11.12	0.63	8.48	0.18	0.28 (Hexane)
Woodworking	0.92	0.92	0.92	-	-	-	-	-	-
<b>Total PTE of Entire Source</b>	4.97	5.50	5.50	19.59	10.73	9.03	7.80	<25	<10
Registration Levels	25	25	25	25	25	25	100	25	10
negl. = negligible * Under the Part 70 Permit program (40 CFR 70), particulate matter with an aerodynamic diameter less than or equal to a nominal 10 micrometers (PM10), not particulate matter (PM), is considered as a "regulated air pollutant".									

- (a) This revision will not change the registration status of the source, because the uncontrolled/unlimited potential to emit of all pollutants from the entire source will still be within the ranges listed in 326 IAC 2-5.5-1(b)(1) and the PTE of all other regulated criteria pollutants will still be less than the ranges listed in 326 IAC 2-5.5-1(b)(1). Therefore, the source will still be subject to the provisions of 326 IAC 2-5.5 (Registrations).
- (b) This revision will not change the minor status of the source, because the uncontrolled/unlimited potential to emit of any single HAP will still be less than ten (10) tons per year and the PTE of a combination of HAPs will still be less than twenty-five (25) tons per year. Therefore, this source is an area source under Section 112 of the Clean Air Act (CAA) and not subject to the provisions of 326 IAC 2-7.

**Federal Rule Applicability Determination**

The federal rules applicable to the existing emission units at this source will not change as a result of this revision.

The federal rule applicability for this revision is as follows:

New Source Performance Standards (NSPS)

- (a) The requirements of the New Source Performance Standard for Stationary Spark Ignition Internal Combustion Engines, 40 CFR 60, Subpart JJJJ (326 IAC 12), are not included for this proposed revision, since the propane fired internal combustion engine, emergency generator, identified as PE61, was constructed before June 12, 2006.
- (b) There are no New Source Performance Standards (NSPS) (326 IAC 12 and 40 CFR Part 60) included for this proposed revision.

National Emission Standards for Hazardous Air Pollutants (NESHAP)

- (c) The requirements of the Subpart N—National Emission Standards for Chromium Emissions From Hard and Decorative Chromium Electroplating and Chromium Anodizing Tanks, 40 CFR 63.340, Subpart N (326 IAC 20-8-1), are not included for this proposed revision, since this source does not use chromium in any of its electroplating operations.
- (d) The requirements of the National Emission Standards for Hazardous Air Pollutants for Chemical Manufacturing Area Sources: Chromium Compounds, 40 CFR 63.11407, Subpart NNNNNN, are not included for this proposed revision, since this source does not use any chromium compounds.
- (e) The propane fired internal combustion engine, emergency generator, identified as PE61 and rated at 60.4 horsepower, is subject the requirements of the 40 CFR 63, Subpart ZZZZ, National Emission Standards for Hazardous Air Pollutants (NESHAP) for Stationary Reciprocating Internal Combustion Engines (326 IAC 20-82), because it is considered a existing stationary reciprocating internal combustion engine (RICE) (manufactured before June 12, 2006) at an area source of hazardous air pollutants (HAP). The propane fired internal combustion engine, emergency generator, identified as PE61, was manufactured prior to December 2004.

The propane fired internal combustion engine, emergency generator, identified as PE61 is subject the following applicable portions of the NESHAP for existing commercial emergency stationary RICE (constructed before June 12, 2006) at an area source of HAP:

- (1) 40 CFR 63.6580
- (2) 40 CFR 63.6585
- (3) 40 CFR 63.6590(a)(1)(iii), (b)(3)
- (4) 40 CFR 63.6670
- (5) 40 CFR 63.6675

Pursuant to 40 CFR 63.6590(b)(3), the propane fired internal combustion engine, emergency generator, identified as PE61 does not have to meet the requirements of 40 CFR 63, Subpart A (General Provisions), since it is considered an existing commercial emergency stationary RICE at an area source of HAP emissions.

- (f) The requirements of the National Emission Standards for Hazardous Air Pollutants for Area Source Standards for Nine Metal Fabrication and Finishing Source Categories (40 CFR 63, Subpart XXXXXX (6X)), are not included for this proposed revision, because this source's SIC is not listed.
- (g) There are no other National Emission Standards for Hazardous Air Pollutants (NESHAPs) (326 IAC 14, 326 IAC 20 and 40 CFR Part 63) included for this proposed revision.

Compliance Assurance Monitoring (CAM)

- (h) Pursuant to 40 CFR 64.2, Compliance Assurance Monitoring (CAM) is not included in the permit, because the potential to emit of the source is limited to less than the Title V major source thresholds and the source is not required to obtain a Part 70 or Part 71 permit.

**State Rule Applicability Determination**

The state rules applicable to the existing emission units at this source will not change as a result of this revision.

The following state rules are applicable to the proposed revision:

- (a) 326 IAC 2-5.5 (Registrations)  
 Registration applicability is discussed under the Permit Level Determination – Registration section above.
- (b) 326 IAC 2-4.1 (Major Sources of Hazardous Air Pollutants (HAP))  
 The proposed revision is not subject to the requirements of 326 IAC 2-4.1, since the unlimited potential to emit of HAPs from the new units is less than ten (10) tons per year for any single HAP and less than twenty-five (25) tons per year of a combination of HAPs.
- (c) 326 IAC 2-6 (Emission Reporting)  
 Pursuant to 326 IAC 2-6-1, this source is not subject to this rule, because it is not required to have an operating permit under 326 IAC 2-7 (Part 70), it is not located in Lake, Porter, or LaPorte County, and it does not emit lead into the ambient air at levels equal to or greater than 5 tons per year. Therefore, 326 IAC 2-6 does not apply.
- (d) 326 IAC 5-1 (Opacity Limitations)  
 Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:
  - (1) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.
  - (2) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.
- (e) 326 IAC 6-4 (Fugitive Dust Emissions Limitations)  
 Pursuant to 326 IAC 6-4 (Fugitive Dust Emissions Limitations), the source shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4.

Non Chromium Electroplating Operation, PE1-PE22, PE22-PE65, PE-69, and PE81-PE90

- (f) 326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)  
 Pursuant to 326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes) the particulate from the processes listed in the table below shall be limited by the following:

<b>Emission Unit</b>	<b>Process Weight Rate (lbs/hr)</b>	<b>Allowable PM Limit (lbs/hr)</b>
PE1	5.00	0.551
PE2	5.00	0.551
PE3	31.5	0.551
PE4	31.5	0.551
PE5	31.5	0.551
PE6	31.5	0.551
PE7	31.5	0.551
PE8	31.5	0.551
PE9	31.5	0.551
PE10	31.5	0.551
PE11	31.5	0.551

Emission Unit	Process Weight Rate (lbs/hr)	Allowable PM Limit (lbs/hr)
PE12	31.5	0.551
PE13	31.5	0.551
PE14	31.5	0.551
PE15	31.5	0.551
PE16	31.5	0.551
PE17	31.5	0.551
PE18	31.5	0.551
PE19	3.36	0.551
PE20	2.69	0.551
PE21	224	0.946
PE22	224	0.946
PE69	31.5	0.551
PE80	31.5	0.551
PE81	31.5	0.551
PE82	31.5	0.551
PE83	31.5	0.551
PE84	31.5	0.551
PE85	31.5	0.551
PE86	31.5	0.551
PE87	31.5	0.551
PE88	31.5	0.551
PE89	31.5	0.551
PE90	31.5	0.551

The pound per hour limitation was calculated with the following equation:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour shall be accomplished by use of the equation:

$$E = 4.10 P^{0.67} \quad \text{where } E = \text{rate of emission in pounds per hour and} \\ P = \text{process weight rate in tons per hour}$$

Based on the calculations, the control devices are not needed to comply with these limits.

- (g) 326 IAC 8-1-6 (VOC Rules: General Reduction Requirements for New Facilities)  
 The proposed revision is not subject to the requirements of 326 IAC 8-1-6, since the unlimited VOC potential emissions from each all non chromium units is less than twenty-five (25) tons per year.
- (h) There are no other 326 IAC 8 Rules that are applicable to these units.

Propane Fired Internal Combustion Engine, PE61

- (i) 326 IAC 20 (Hazardous Air Pollutants)  
 See Federal Rule Applicability Section of this TSD.

### Proposed Changes

The entire Registration has been revised to reflect the current formatting for Registrations.

### Conclusion and Recommendation

Unless otherwise stated, information used in this review was derived from the application and additional information submitted by the applicant. An application for the purposes of this review was received on January 18, 2011.

The construction and operation of this proposed revision shall be subject to the conditions of the attached proposed Registration Revision No. R043-30128-00059. The staff recommends to the Commissioner that this Registration Revision be approved.

### IDEM Contact

- (a) Questions regarding this proposed permit can be directed to Bruce Farrar at the Indiana Department Environmental Management, Office of Air Quality, Permits Branch, 100 North Senate Avenue, MC 61-53 IGCN 1003, Indianapolis, Indiana 46204-2251 or by telephone at (317) 234-5401 or toll free at 1-800-451-6027 extension 4-5401.
- (b) A copy of the findings is available on the Internet at: <http://www.in.gov/ai/appfiles/idem-caats/>
- (c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM's Guide for Citizen Participation and Permit Guide on the Internet at: [www.in.gov/idem](http://www.in.gov/idem)

**Appendix A: Emissions Calculations  
Total Source Emissions Summary**

Company Name: Samtec, Inc.  
Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150  
Registration Revision No: 043-30128-00059  
Plt ID: 043-00059  
Reviewer: Bruce Farrar  
Date: January 18, 2011

Potential Emissions										
Unit ID/Control Device	Process	PM (tons/yr)	PM10 (tons/yr)	PM2.5 (tons/yr)	SO2 (tons/yr)	NOx (tons/yr)	VOC (tons/yr)	CO (tons/yr)	Total HAPs (tons/yr)	Single HAP (tons/yr)
<b>Total PTE before revision<sup>α</sup></b>		<b>4.91</b>	<b>5.32</b>	<b>5.32</b>	<b>0.041</b>	<b>8.15</b>	<b>5.00</b>	<b>5.99</b>	<b>3</b>	<b>2.83</b> Nickel
<b>Removed Space Heaters (A10, C28, E1-4, F1, J5)</b>		<b>-0.02</b>	<b>-0.06</b>	<b>-0.06</b>	<b>-4.87E-03</b>	<b>-0.81</b>	<b>-0.04</b>	<b>-0.68</b>	<b>-1.53E-02</b>	<b>-1.71E-05</b> Nickel
PE69, PE81 - PE90	Non Chromium Electroplating	0.021	0.021	0.021	19.539	0.42	3.910	-	0.951	0.470 Nickel
H3, N1-N4, O1, P1, Q1, R1-R4, S1, T1, W1, X1, Y1-Y8, Z1-Z2	Combustion Units (Space Heaters)	0.056	0.226	0.226	0.0178	2.97	0.163	2.49	0.06	6.24E-05 Nickel
<b>Total PTE after Revision</b>		<b>4.97</b>	<b>5.50</b>	<b>5.50</b>	<b>19.59</b>	<b>10.73</b>	<b>9.03</b>	<b>7.80</b>	<b>3.99</b>	<b>3.30</b> Nickel

Potential HAP Emissions											
Unit ID	Process	Potential Toluene (tons/yr)	Potential Nickel (tons/yr)	Potential Chromium (tons/yr)	Potential Formaldehyde (tons/yr)	Potential Lead (tons/yr)	Potential Hexane (tons/yr)	Potential Cadmium (tons/yr)	Potential Manganese (tons/yr)	Potential Benzene (tons/yr)	Potential Dichlorobenzene (tons/yr)
<b>Total PTE before revision<sup>α</sup></b>		<b>2.32E-04</b>	<b>2.83E+00</b>	<b>1.00E-04</b>	<b>5.00E-03</b>	<b>4.30E-02</b>	<b>1.23E-01</b>	<b>8.00E-05</b>	<b>3.00E-05</b>	<b>1.43E-04</b>	<b>8.00E-05</b>
<b>Removed Space Heaters (A10, C28, E1-4, F1, J5)</b>		<b>-2.76E-05</b>	<b>-1.71E-05</b>	<b>-1.14E-05</b>	<b>-6.09E-04</b>	<b>-4.06E-06</b>	<b>-1.46E-02</b>	<b>-8.93E-06</b>	<b>-3.09E-06</b>	<b>-1.71E-05</b>	<b>-9.74E-06</b>
PE69, PE81 - PE90	Non Chromium Electroplating	-	0.470	-	-	0.045	-	-	-	-	-
H3, N1-N4, O1, P1, Q1, R1-R4, S1, T1, W1, X1, Y1-Y8, Z1-Z2	Combustion Units (Space Heaters)	1.01E-04	6.24E-05	4.16E-05	2.23E-03	1.48E-05	5.35E-02	3.27E-05	1.13E-05	6.24E-05	3.56E-05
<b>Total PTE after Revision</b>		<b>0.0003</b>	<b>3.30E+00</b>	<b>1.30E-04</b>	<b>6.62E-03</b>	<b>8.85E-02</b>	<b>1.62E-01</b>	<b>1.04E-04</b>	<b>3.82E-05</b>	<b>1.88E-04</b>	<b>1.06E-04</b>

Unit ID	Process	Potential Ethylene Glycol (tons/yr)	Potential Hydrochloric Acid (tons/yr)	Potential Cyanide (tons/yr)
PE69	Non Chromium Electroplating	2.12E-03	0.26	0.17
		<b>2.12E-03</b>	<b>0.26</b>	<b>0.17</b>

**Combined HAPs 3.99**

<sup>α</sup> - PTE from Registration #043-20264-00059 issued on February 25, 2005.

**Appendix A: Emissions Calculations**

**Natural Gas Combustion Only**

**MM BTU/HR <100**

**Removed Space Heaters**

**Company Name: Samtec, Inc.**

**Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150**

**Registration Number: 043-30128-00059**

**Plt ID: 043-00059**

**Reviewer: Bruce Farrar**

**Application Date: January 18, 2011**

Heat Input Capacity MMBtu/hr	Potential Throughput MMCF/yr	Unit Description
0.47	4.1	Heater A10 0.47 MMBtu/hr
0.26	2.3	Heater C28, 0.28 MMBtu/hr
0.804	7.0	Heaters E1 - E4, 0.204 MMBtu/hr, each
0.2	1.8	Heater F1, 0.09 MMBtu/hr
0.12	1.1	Heater J5, 0.125 MMBtu/hr, each
<b>Total MMBtu/hr</b>	<b>Total Potential Throughput MMCF/yr</b>	
1.9	16	

Emission Factor in lb/MMCF	Pollutant					
	PM*	PM10*	SO2	NOx	VOC	CO
	1.90	7.60	0.600	100 **see below	5.50	84.0
Potential Emission in tons/yr	0.015	0.062	0.005	0.81	0.045	0.68

\*PM emission factor is filterable PM only. PM10 emission factor is filterable and condensable PM10 combined.

\*\*Emission Factors for NOx: Uncontrolled = 100, Low NOx Burner = 50, Low NOx Burners/Flue gas recirculation = 32

**Methodology**

All emission factors are based on normal firing.

MMBtu = 1,000,000 Btu

MMCF = 1,000,000 Cubic Feet of Gas

Potential Throughput (MMCF) = Heat Input Capacity (MMBtu/hr) x 8,760 hrs/yr x 1 MMCF/1,000 MMBtu

Emission Factors are from AP 42, Chapter 1.4, Tables 1.4-1, 1.4-2, 1.4-3, SCC #1-02-006-02, 1-01-006-02, 1-03-006-02, and 1-03-006-03 (SUPPLEMENT D 3/98)

Emission (tons/yr) = Throughput (MMCF/yr) x Emission Factor (lb/MMCF)/2,000 lb/ton

See page 3 for HAPs emissions calculations.

**Appendix A: Emissions Calculations**  
**Natural Gas Combustion Only**  
**MM BTU/HR <100**  
**Removed Space Heaters**  
**HAPs Emissions**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Number:** 043-30128-00059  
**Pit ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Application Date:** January 18, 2011

HAPs - Organics					
Emission Factor in lb/MMcf	Benzene 0.00210	Dichlorobenze 0.00120	Formaldehyde 0.07500	Hexane 1.80000	Toluene 0.00340
Potential Emission in tons/yr	0.000017	0.000010	0.000609	0.014617	0.000028

HAPs - Metals						
Emission Factor in lb/MMcf	Lead 0.0005	Cadmium 0.0011	Chromium 0.0014	Manganese 0.0004	Nickel 0.0021	<b>Total</b>
Potential Emission in tons/yr	4.06E-06	8.93E-06	1.14E-05	3.09E-06	1.71E-05	<b>0.015</b>

Methodology is the same as page 2.

The five highest organic and metal HAPs emission factors are provided above. Additional HAPs emission factors are available in AP-42, Chapter 1.4.

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Acid Activator**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** January 18, 2011

Estimation Method: Mass Balance

Maximum Process

Throughput: 4 Gallons per week on a stripping line (X10) and  
POP (X1) and AG (X1) Lines 66.3% sulfate

Specific Gravity 1.84

No. of Lines = 12

Acid Activator

SOx Emissions (tons/yr) = 19.151

**Methodology:**

Acid Activator

SOX emissions (tons/year) = (Maximum Process Throughput) \* (Specific Gravity) \* (# of Lines) \*  
 (8.34 lb/gal) \* (52 week/year) (1 ton/2000 lb) - ((Minumum Process wasted) \*  
 (Specific Gravity) \* (# of Lines) \* (8.34 lb/gal) \* (52 week/year) (1 ton/2000 lb)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Copper Sulfate**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** January 18, 2011

Estimation Method: Mass Balance

Maximum Process  
 Throughput: 40 Gallons per year stripping line (10X), POP (1X)  
 Copper Sulfate = 12 ounces per gallon at 66.3% sulfate  
 1 gallon per week  
 Copper Gleam PCM = 0.50% percent of mixture at 99% VOC  
 Sulfuric Acid = 25 ounces per gallon at 66.3% Sulfate  
 0.5 gallon per week  
 Chloride = 75 parts per million at 41% VOC  
 Copper Nuggets = 25 pounds per week  
 Copper Application = 0.000015 inch  
 No. of Lines = 11  
 Sulfuric Acid Emission  
 Factor = 0.1 lb/ton

Copper Sulfate

SOx Emissions  
 (tons/yr) = 0.11

Copper Gleam PCP

VOC emissions  
 (tons/year) = 0.01

Sulfuric Acid

SOx Emissions  
 (tons/yr) = 0.23

Copper Chloride

VOC Emissions  
 (tons/yr) = 5.84E-06

**Methodology:**

Copper Sulfate

SOX emissions (tons/year) = (Maximum Process Throughput) \* (% Sulfate) \*  
 (# lines) \* (1lb/16 oz) \* 1 ton/2000 lbs)

Copper Gleam PCP

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (1.01 Specific gravity) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

Sulfuric Acid

SOx emissions (tons/year) = (Maximum Process Throughput) \* (% Sulfate) \*  
 (# stripping lines) \* (1lb/16 oz) \* 1 ton/2000 lbs)

Copper Chloride

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (4.14 Specific gravity) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Nickel Sulfamate**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** January 18, 2011

Maximum Process  
 Throughput: 70 Gallons per year stripping line (10X), POP(1X)  
 Nickel chloride = 2 ounces per gallon

Liquid Nickel Sulfamate = 22 ounces per gallon at 68% VOC  
 0.5 gallon per week  
 No. of Lines = 11

Nickel Chloride

VOC Emissions (tons/yr)  
 = 0.0197

Liquid Nickel Sulfamate

VOC emissions  
 (tons/year) = 0.3600

**Methodology:**

Nickel Chloride

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

Liquid Nickel Sulfamate

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
AU Cyanide Process**

**Company Name: Samtec, Inc.**  
**Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150**  
**Registration Revision No: 043-30128-00059**  
**Plt ID: 043-00059**  
**Reviewer: Bruce Farrar**  
**Date: January 18, 2011**

Estimation Method: Mass Balance

Maximum Process Throughput:	40 Gallons per year stripping line (10X), POP/ENIG (1X)
Ronovel CM Acid Salt =	0.53 ounces per gallon at 66.3% sulfate
Ronovel CM Additive =	0.25% percent of mixture at 90% VOC
Ronovel CM Colbalt Concentrate =	2.00% percent of mixture at 95% VOC
Ronovel CM Conductivity Salt =	2.7 ounces per gallon
Ronovel CM Makeup Solution =	75.00% percent of mixture at 80% VOC
No. of Lines=	11
<u>Ronovel CM Additive</u>	
VOC Emissions (tons/yr) =	0.0047
<u>Ronovel CM Colbalt Concentrate</u>	
VOC emissions (tons/year) =	0.3110
<u>Ronovel CM Makeup Solution</u>	
VOC Emissions (tons/yr) =	1.2110

**Methodology:**

Ronovel CM Additive

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (1.14 Specific gravity) \* (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

Ronovel CM Colbalt Concentrate

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (8.92 Specific gravity) \* (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

Ronovel CM Makeup Solution

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (1.10 Specific gravity) \* (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Solderon Tin Process**

**Company Name: Samtec, Inc.**  
**Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150**  
**Registration Revision No: 043-30128-00059**  
**Pit ID: 043-00059**  
**Reviewer: Bruce Farrar**  
**Date: January 18, 2011**

Estimation Method: Mass Balance

Maximum Process Throughput:	75 Gallons per year stripping line (10X), POP/ENIG (1X)
Solderon Acid =	11.50% percent of mixture at 65% VOC
Solderon BTD Additive =	4.00% percent of mixture at 97% VOC
Solderon BTD Carrier =	4.00% percent of mixture at 60% VOC
Solderon Tin Concentrate =	33.00% percent of mixture
	1 gal per year
Tin Anodes =	200 pounds per week
	0.0000015 thickness in inches per pin
	0.00741 Quantity of Tin applied to pin
	1 tons per year of Tin wasted to Landfill
No. of Lines =	11
<u>Solderon Acid</u>	
VOC Emissions (tons/yr) =	0.3292
<u>Solderon BTD Additive</u>	
VOC emissions (tons/year) =	0.1308
<u>Solderon BTD Carrier</u>	
VOC Emissions (tons/yr) =	0.0877

**Methodology:**

Solderon Acid

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (1.28 Specific gravity) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

Solderon BTD Additive

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (0.98 Specific gravity) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

Solderon BTD Carrier

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (1.062 Specific gravity) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Solderon Lead Process**

**Company Name: Samtec, Inc.  
Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150  
Registration Revision No: 043-30128-00059  
Plt ID: 043-00059  
Reviewer: Bruce Farrar  
Date: January 18, 2011**

Estimation Method: Mass Balance

Maximum Process Throughput: 75 Gallons per year stripping line (10X), POP (1X)

Solderon Lead Concentrate = 33.00% percent of mixture at 70% VOC and 30% PM  
2.00 additional liters added per year  
Tin Anodes = 200 pounds per week  
0.000002 thickness in inches per pin  
0.01085 Quantity of Lead applied to pin  
No.of Lines = 11

Solderon Lead Concentrate

VOC Emissions (tons/yr) = 1.3695

PM/PM10/PM2.5 Emissions  
(tons/year)= 0.0108

HAP (Lead) Emissions  
(tons/year)= 0.0216

**Methodology:**

Solderon Lead Concentrate

VOC emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (Specific gravity) \*  
(# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

PM/PM10/PM2.5 emissions (tons/year) = (Maximum Process Throughput)\*(%PM)\*(# lines)\*  
(0.0022lb/gram)\* (1 ton/2000 lb) - (Quantity applied to pins)

Quantity applied to pins = (Thickness of Pins) \* (area of pins) \* (Specific gravity) \* (# pins/month)  
\* (12 months) \*(62.3 lbs/cu ft) \* (1 cu ft/1,728 cu in) \* (1 ton/2000 lbs)

HAP (Lead Emissions) (tons/year) = (Maximum Process Throughput)\*(%PM)\*(# lines)\*  
(0.0022lb/gram)\* (1 ton/2000 lb)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Nickel Phosphorus**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Estimation Method: Mass Balance

Maximum Process

Throughput: 120 Gallons per year stripping line (1X)  
 PhosKlad 636 = 100.00% percent of mixture at 5% Nickel  
 Hydrochloric Acid = 1.00% Replenish at 37% HAP  
 Nickel Carbonate 15 pounds per year at 66% particulate and 66 % HAP (Nickel)  
 No. of Line = 2

PhosKlad 636

HAP (nickel) Emissions  
 (tons/yr) = 0.5370

Hydrochloric Acid

HAP emissions  
 (tons/year) = 0.0024

Nickel Carbonate

PM/PM10/PM2.5  
 Emissions (tons/yr) = 0.0099  
 HAP (Nickel) emissions  
 (tons/Year) = 0.0099

**Methodology:**

PhosKlad 636

HAPs emissions (tons/year) = (Maximum Process Throughput) \* (%HAP (nickel)) \*  
 (# stripping lines) \* (8.95lb/1 gal) \* 1 ton/2000 lbs)

Hydrochloric Acid

HAP emissions (tons/year) = (Maximum Process Throughput) \* (% HAP) \*  
 (# stripping lines) \* (10.855lbs/1 gal) \* 1 ton/2000 lbs)

Nickel Anodes

PM/PM10/PM2.5 emissions (tons/year) = (Maximum Amount per year) \* (% HAP)  
 HAP emissions (tons/year) = (Maximum Amount per year) \* (% HAP)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Plate on Plastic Bath**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Estimation Method: Emission Factors and Mass Balance  
Maximum Process  
Throughput: 50 Gallons per year PoP/ENIG Line  
HighSpec2 Brighter 0.20% percent of mixture (Sulfuric Acid 1%)

Sulfuric Acid

SOx Emissions (tons/yr) = 5.00E-07

**Methodology:**

Sulfuric Acid

SOx emissions (tons/year) = (Maximum Process Throughput) \* (%Sulfuric Acid) \* (1ton/2000lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
PoP/ENIG Line Pre-Dip**

**Company Name: Samtec, Inc.**  
**Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150**  
**Registration Revision No: 043-30128-00059**  
**Plt ID: 043-00059**  
**Reviewer: Bruce Farrar**  
**Date: February 10, 2010**

Maximum Process  
 Throughput: 1300 Gallons per year PoP/ENIG Line  
 Macuplex 78 = 2.00% percent of mixture at 15% HAP  
 Hydrochloric Acid = 2.00% Replenish at 37% HAP

Macuplex 78

HAP Emissions (tons/yr) = 0.0198  
Hydrochloric Acid  
 HAP emissions  
 (tons/year) = 0.0522

**Methodology:**

Macuplex 78

HAPs emissions (tons/year) = (Maximum Process Throughput) \* (%HAP) \*  
 (# stripping lines) \* (10.151lb/1 gal) \* 1 ton/2000 lbs)

Hydrochloric Acid

HAP emissions (tons/year) = (Maximum Process Throughput) \* (% HAP) \*  
 (# stripping lines) \* (10.855lbs/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Mactivate Activator**

**Company Name: Samtec, Inc.**  
**Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150**  
**Registration Revision No: 043-30128-00059**  
**Plt ID: 043-00059**  
**Reviewer: Bruce Farrar**  
**Date: February 10, 2010**

Estimation Method: Emission Factors and Mass Balance

Maximum Process  
 Throughput: 50 Gallons per year PoP/ENIG Line  
 Mactivate 360 = 0.80% of mixture at 15% HAP (Hydrochloric Acid)  
 Macuplex 78 = 2.00% percent of mixture at 15% HAP (Hydrochloric Acid)  
 Hydrochloric Acid = 25.00% Replenish, at 37% Hydrochloric Acid)

Mactivate 360

HAP Emissions (tons/yr) = 0.0004

Macuplex 78

HAP emissions  
 (tons/year) = 0.0051

Hydrochloric Acid

HAP emissions  
 (tons/year) = 0.0251

**Methodology:**

Mactivate 360

HAPs emissions (tons/year) = (Maximum Process Throughput) \* (% HAP) \*  
 (# stripping lines) \* (13.281lb/1 gal) \* 1 ton/2000 lbs)

Macuplex 78

HAPs emissions (tons/year) = (Maximum Process Throughput) \* (% HAP) \*  
 (# stripping lines) \* (10.151lb/1 gal) \* 1 ton/2000 lbs)

Hydrochloric Acid

HAP emissions (tons/year) = (Maximum Process Throughput) \* (% HAP) \*  
 (# stripping lines) \* (10.855lbs/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
PoP/ENIG Line Accelerator**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Estimation Method: Emission Factors and Mass Balance

Maximum Process

Throughput: 1300 Gallons per year PoP/ENIG Line

Maccelerator 25 = 8.00% percent of mixture at 15% VOC/HAP (Formaldehyde)

Hydrochloric Acid = 6.50% percent of mixture at 37% HAP

Maccelerator 25

VOC Emissions (tons/yr)

= 0.0703

HAP (Formaldehyde)

Emissions (tons/yr) = 0.0703

Hydrochloric Acid

HAP emissions

(tons/year) = 0.1697

**Methodology:**

Maccelerator 25

VOC/HAPs emissions (tons/year) = (Maximum Process Throughput) \* (%VOC/HAP) \*  
 (9.007 lbs/1 gal) \* 1 ton/2000 lbs)

Hydrochloric Acid

HAP emissions (tons/year) = (Maximum Process Throughput) \* (% HAP) \*  
 (# stripping lines) \* (10.855lbs/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Electroless Nickel Strike**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Maximum Process  
Throughput: 60 Gallons per year PoP/ENIG Line

Nacuplex Elec No conc J-60 7.00% percent of mixture  
 Macuplex J-64 7 gallons per year

Nacuplex Elec No conc J-60 4.2 gal/year  
% Ni Cl 14.00%

Macuplex J-64 7.0000 gals/year  
%Ni Cl 25%

VOC Emissions (tons/yr) = 1.166E-03 Using the J-60 Spec Grav & VOC % from Ni Cl on Nickel Tab

VOC Emissions (tons/yr) = 3.770E-03 Using the J-64 Spec Grav & VOC % from Ni Cl on Nickel Tab

**Methodology:**

Nacuplex Elec No conc J-60  
 emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (1.16 Specific gravity) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

Macuplex J-64  
 emissions (tons/year) = (Maximum Process Throughput) \* (% VOC) \* (1.26 Specific gravity) \*  
 (# stripping lines) \* (8.34lb/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Acid Cleaner**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Maximum Process Throughput: 400 Gallons per year PoP/ENIG Line

Final Finish Acid Cleaner: 10.00% percent of mixture (Sulfuric Acid 1%)

Final Finish Acid Cleaner  
 VOC Emissions (tons/yr)  
 = 0.0021

Final Finish Acid Cleaner  
 HAP (Ethylene Glycol)  
 Emissions (tons/yr) = 0.0021

**Methodology:**

Final Finish Acid Cleaner  
 HAP/VOC emissions (tons/year) = (Maximum Process Throughput) \* (%Ethylene Glycol)\* (10.592 lbs/gal) \* (1/2000)  
 \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Immersion Pd Activator**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Maximum Process  
Throughput: 400 Gallons per year PoP/ENIG Line (n0 VOC/HAP)  
Hydrochloric Acid = 2.00% Replenish, at 37% HAP (Hydrochloric Acid)

Hydrochloric Acid

HAP emissions  
(tons/year) = 0.02

**Methodology:**

Hydrochloric Acid

HAP emissions (tons/year) = (Maximum Process Throughput) \* (% HAP) \*  
(10.855lbs/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Electroless Nickel**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Maximum Process  
 Throughput: 400 Gallons per year PoP/ENIG Line  
Planar Electroless Nickel  
Part A 6.60% % Mixture for this ingredient  
 30.00% % Nickel Sulfate

Nickel Sulfate  
 PM/PM10/PM2.5  
 emissions (tons/year) = 0.04  
 HAP (Nickel) emissions  
 (tons/year) = 0.04  
 SOx Emissions (tons/yr) = 0.05

**Methodology:**PM/HAP (Nickel)

PM/HAP emissions (tons/year) = (Maximum Process Throughput) \* (% Mixture) \*  
 (%Nickel Sulfate) \* (10.5lbs/1 gal) \* 1 ton/2000 lbs)

SOx

Sox emissions (tons/year) = (Maximum Process Throughput) \* (% Mixture) \*  
 (%Nickel Sulfate) \* (1.235 Specific Gravity) \* (10.5lbs/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Immersion AU Process**

**Company Name: Samtec, Inc.**  
**Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150**  
**Registration Revision No: 043-30128-00059**  
**Pit ID: 043-00059**  
**Reviewer: Bruce Farrar**  
**Date: January 18, 2011**

Estimation Method: Mass Balance

Maximum Process Throughput: 100 Gallons per year PoP/ENIG Line  
Metalor AU Salts = 0.33 ounces per gallon

Maximum Process Throughput: 120 Gallons per year PoP/ENIG Line  
AU Strip DB Blend = 200 grams/gallon

Metalor AU Salts

HAP (Cyanide) Emissions  
(tons/yr) = 0.0716

AU Strip DB Blend

HAP (Cyanide) Emissions  
(tons/yr) = 0.0991  
Lead Emissions (tons/yr) = 0.0022

**Methodology:**

Metalor AU Salts

HAP (Cyanide) emissions (tons/year) = (Maximum Process Throughput) \* (AU Salt oz/gal) (40%HAP) \*  
((10.858.34lb/1 gal) \* 1 ton/2000 lbs)

AU Strip DB Blend

HAP (Cyanide) emissions (tons/year) = (Maximum Process Throughput) \* (grams DB Blend/ gal) \* (45% HAP) \*  
(1 gram/0.0022 lbs) \* (8.35lb/1 gal) \* 1 ton/2000 lbs)

Lead emissions (tons/year) = (Maximum Process Throughput) \* (grams DB Blend/ gal) \* (1% Lead) \*  
(1 gram/0.0022 lbs) \* (8.35lb/1 gal) \* 1 ton/2000 lbs)

**Appendix A: Emission Calculations  
Non-Chromium Electroplating Process  
Nitric Acid Stripper**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Revision No:** 043-30128-00059  
**Plt ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Date:** February 10, 2010

Estimation Method:

Maximum Process

Throughput: 400 Gallons per year PoP/ENIG Line

Final Finish Acid Cleaner: 25.00% percent of mixture 67.2% by weight

Number of Lines 1

Nitric Acide 42 Deg. BE

NOx Emissions (tons/yr) = 0.4175

**Methodology:**

Nitric Acide 42 Deg. BE

NOx emissions (tons/year) = (Maximum Process Throughput) \* (# of lines) \* (8.35 lbs/gal) \* (1/2000)

**Appendix A: Emissions Calculations**

**Natural Gas Combustion Only**

**MM BTU/HR <100**

**Space Heaters**

**Company Name: Samtec, Inc.**

**Address City IN Zip: 520 Park East Blvd., New Albany, Indiana 47150**

**Registration Number: 043-30128-00059**

**Plt ID: 043-00059**

**Reviewer: Bruce Farrar**

**Application Date: January 18, 2011**

Heat Input Capacity MMBtu/hr	Potential Throughput MMCF/yr	Unit Description
0.13	1.1	Heater H3, 0.13 MMBtu/hr
1.92	16.8	Heaters N1 - N4, 0.48 MMBtu/hr, each
0.5	4.4	Heater O1, 0.50 MMBtu/hr
1.5	13.1	Heaters P1 - P2, 0.75 MMBtu/hr, each
0.1	0.9	Heater Q1, 0.10 MMBtu/hr
1	8.8	Heaters R1 - R4, 0.25 MMBtu/hr, each
0.05	0.4	HeaterS1, 0.05 MMBtu/hr, each
0.1	0.9	Heater T1, 0.10 MMBtu/hr
0.10	0.9	Heater W1, 0.10 MMBtu/hr, each
0.12	1.1	Heater X1, 0.12 MMBtu/hr, each
0.96	8.4	Heaters Y1 - Y8, 0.12 MMBtu/hr, each
0.3	2.6	HeatersZ1 - Z2, 0.15 MMBtu/hr, each

Total MMBtu/hr	Total Potential Throughput MMCF/yr
6.8	59

Emission Factor in lb/MMCF	Pollutant					
	PM*	PM10*	SO2	NOx 100 **see below	VOC	CO
Potential Emission in tons/yr	0.056	0.226	0.018	2.97	0.163	2.49

\*PM emission factor is filterable PM only. PM10 emission factor is filterable and condensable PM10 combined.

\*\*Emission Factors for NOx: Uncontrolled = 100, Low NOx Burner = 50, Low NOx Burners/Flue gas recirculation = 32

**Methodology**

All emission factors are based on normal firing.

MMBtu = 1,000,000 Btu

MMCF = 1,000,000 Cubic Feet of Gas

Potential Throughput (MMCF) = Heat Input Capacity (MMBtu/hr) x 8,760 hrs/yr x 1 MMCF/1,000 MMBtu

Emission Factors are from AP 42, Chapter 1.4, Tables 1.4-1, 1.4-2, 1.4-3, SCC #1-02-006-02, 1-01-006-02, 1-03-006-02, and 1-03-006-03 (SUPPLEMENT D 3/98)

Emission (tons/yr) = Throughput (MMCF/yr) x Emission Factor (lb/MMCF)/2,000 lb/ton

See page 21 for HAPs emissions calculations.

**Appendix A: Emissions Calculations**  
**Natural Gas Combustion Only**  
**MM BTU/HR <100**  
**Small Industrial Boiler**  
**HAPs Emissions**

**Company Name:** Samtec, Inc.  
**Address City IN Zip:** 520 Park East Blvd., New Albany, Indiana 47150  
**Registration Number:** 043-30128-00059  
**Pit ID:** 043-00059  
**Reviewer:** Bruce Farrar  
**Application Date:** January 18, 2011

HAPs - Organics					
Emission Factor in lb/MMcf	Benzene	Dichlorobenze	Formaldehyde	Hexane	Toluene
	0.00210	0.00120	0.07500	1.80000	0.00340
Potential Emission in tons/yr	0.000062	0.000036	0.002227	0.053454	0.000101

HAPs - Metals						
Emission Factor in lb/MMcf	Lead	Cadmium	Chromium	Manganese	Nickel	Total
	0.0005	0.0011	0.0014	0.0004	0.0021	
Potential Emission in tons/yr	0.00001	0.00003	0.00004	0.00001	0.00006	<b>0.056</b>

Methodology is the same as page 20.

The five highest organic and metal HAPs emission factors are provided above. Additional HAPs emission factors are available in AP-42, Chapter 1.4.



# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
**Governor**

*Thomas W. Easterly*  
**Commissioner**

100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

## SENT VIA U.S. MAIL: CONFIRMED DELIVERY AND SIGNATURE REQUESTED

**TO:** Nick Knable  
Samtec, Inc.  
520 Park E Blvd  
New Albany, IN 47150

**DATE:** April 20, 2011

**FROM:** Matt Stuckey, Branch Chief  
Permits Branch  
Office of Air Quality

**SUBJECT:** Final Decision  
Registration Revision  
043-30128-00059

Enclosed is the final decision and supporting materials for the air permit application referenced above. Please note that this packet contains the original, signed, permit documents.

The final decision is being sent to you because our records indicate that you are the contact person for this application. However, if you are not the appropriate person within your company to receive this document, please forward it to the correct person.

A copy of the final decision and supporting materials has also been sent via standard mail to:  
OAQ Permits Branch Interested Parties List

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit. If you think you have received this document in error, please contact Joanne Smiddie-Brush of my staff at 1-800-451-6027 (ext 3-0185), or via e-mail at [jbrush@idem.IN.gov](mailto:jbrush@idem.IN.gov).

Final Applicant Cover letter.dot 11/30/07

# Mail Code 61-53

IDEM Staff	CDENNY 4/20/2011 Samtec, Inc. 043-30128-00059 (final)		Type of Mail:  <b>CERTIFICATE OF MAILING ONLY</b>	AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender		Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204		

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee	Remarks
1		Nick Knable Samtec, Inc. 520 Park E Blvd New Albany IN 47150 (Source CAATS)										
2		Mr. Robert Bottom Paddlewheel Alliance P.O. Box 35531 Louisville KY 40232-5531 (Affected Party)										
3		Floyd County Commissioners 311-319 West 1st St, Rm 214 New Albany IN 47150 (Local Official)										
4		New Albany City Council and Mayors Office City County Building #316 New Albany IN 47150 (Local Official)										
5		Floyd County Health Department 1917 Bono Rd New Albany IN 47150-4607 (Health Department)										
6		Ms. Sue Green 1985 Kopley Road Georgetown IN 47122 (Affected Party)										
7		Jennifer Bent Environmental Compliance Source PO Box 6849 New Albany IN 47151 (Consultant)										
8												
9												
10												
11												
12												
13												
14												
15												

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is \$50,000 per piece subject to a limit of \$50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is \$500. The maximum indemnity payable is \$25,000 for registered mail, sent with optional postal insurance. See <b>Domestic Mail Manual R900, S913, and S921</b> for limitations of coverage on inured and COD mail. See <b>International Mail Manual</b> for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
---	--	--	--