INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

TO: Interested Parties / Applicant

DATE: October 12, 2011

RE: Multi-Color Corporation / 143-30351-00007

FROM: Matthew Stuckey, Branch Chief
Permits Branch
Office of Air Quality

Notice of Decision: Approval – Effective Immediately

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the enclosed matter. Pursuant to IC 13-15-5-3, this permit is effective immediately, unless a petition for stay of effectiveness is filed and granted, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

If you wish to challenge this decision, IC 4-21.5-3-7 and IC 13-15-6-1(b) or IC 13-15-6-1(a) require that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Office of Environmental Adjudication, 100 North Senate Avenue, Government Center North, Suite N 501E, Indianapolis, IN 46204.

For an **initial Title V Operating Permit**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **thirty (30)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(b).

For a **Title V Operating Permit renewal**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **fifteen (15)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(a).

The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

(1) the date the document is delivered to the Office of Environmental Adjudication (OEA);
(2) the date of the postmark on the envelope containing the document, if the document is mailed to OEA by U.S. mail; or
(3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OEA by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

Recycled Paper An Equal Opportunity Employer *Please Recycle*

(1) the name and address of the person making the request;
(2) the interest of the person making the request;
(3) identification of any persons represented by the person making the request;
(4) the reasons, with particularity, for the request;
(5) the issues, with particularity, proposed for considerations at any hearing; and
(6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

Pursuant to 326 IAC 2-7-18(d), any person may petition the U.S. EPA to object to the issuance of an initial Title V operating permit, permit renewal, or modification within sixty (60) days of the end of the forty-five (45) day EPA review period. Such an objection must be based only on issues that were raised with reasonable specificity during the public comment period, unless the petitioner demonstrates that it was impractible to raise such issues, or if the grounds for such objection arose after the comment period.

To petition the U.S. EPA to object to the issuance of a Title V operating permit, contact:

U.S. Environmental Protection Agency
401 M Street
Washington, D.C. 20406

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.

Enclosures
FNTVOP.dot12/3/07

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

Part 70 Operating Permit Renewal
OFFICE OF AIR QUALITY

Multi-Color Corporation
2281 South U.S. 31
Scottsburg, Indiana 47170

(herein known as the Permittee) is hereby authorized to operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this permit.

The Permittee must comply with all conditions of this permit. Noncompliance with any provisions of this permit is grounds for enforcement action; permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Noncompliance with any provision of this permit, except any provision specifically designated as not federally enforceable, constitutes a violation of the Clean Air Act. It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. An emergency does constitute an affirmative defense in an enforcement action provided the Permittee complies with the applicable requirements set forth in Section B, Emergency Provisions.

This permit is issued in accordance with 326 IAC 2 and 40 CFR Part 70 Appendix A and contains the conditions and provisions specified in 326 IAC 2-7 as required by 42 U.S.C. 7401, et. seq. (Clean Air Act as amended by the 1990 Clean Air Act Amendments), 40 CFR Part 70.6, IC 13-15 and IC 13-17.

Operation Permit No.: T143-30351-00007	
Issued by: Chrystal A. Wagner, Section Chief Permits Branch Office of Air Quality	Issuance Date: October 12, 2011 Expiration Date: October 12, 2016

TABLE OF CONTENTS

A. SOURCE SUMMARY 6
A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]
A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)] [326 IAC 2-7-5(15)]
A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-7-4(c)] [326 IAC 2-7-5(15)]
A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

B. GENERAL CONDITIONS 8
B.1 Definitions [326 IAC 2-7-1]
B.2 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)] [IC 13-15-3-6(a)]
B.3 Term of Conditions [326 IAC 2-1.1-9.5]
B.4 Enforceability [326 IAC 2-7-7] [IC 13-17-12]
B.5 Severability [326 IAC 2-7-5(5)]
B.6 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]
B.7 Duty to Provide Information [326 IAC 2-7-5(6)(E)]
B.8 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]
B.9 Annual Compliance Certification [326 IAC 2-7-6(5)]
B.10 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)] [326 IAC 1-6-3]
B.11 Emergency Provisions [326 IAC 2-7-16]
B.12 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]
B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]
B.14 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]
B.15 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]
B.16 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]
B.17 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]
B.18 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)] [326 IAC 2-7-12(b)(2)]
B.19 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]
B.20 Source Modification Requirement [326 IAC 2-7-10.5]
B.21 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]
B.22 Transfer of Ownership or Operational Control [326 IAC 2-7-11]
B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]
B.24 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

C. SOURCE OPERATION CONDITIONS 19

Emission Limitations and Standards [326 IAC 2-7-5(1)]
C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]
C.2 Opacity [326 IAC 5-1]
C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]
C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]
C.5 Fugitive Dust Emissions [326 IAC 6-4]
C.6 Stack Height [326 IAC 1-7]
C.7 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

Testing Requirements [326 IAC 2-7-6(1)]
C.8 Performance Testing [326 IAC 3-6]

Compliance Requirements [326 IAC 2-1.1-11]
C.9 Compliance Requirements [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]
C.10 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]
C.11 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]
C.12 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]
C.13 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]
C.14 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]
C.15 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5] [326 IAC 2-7-6]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]
C.16 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)] [326 IAC 2-6]
C.17 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]
C.18 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11]

Stratospheric Ozone Protection
C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

D.1 FACILITY OPERATION CONDITIONS - Presses 1 through 4 Using Compliant Coating Material for 326 IAC 8 Compliance Purposes

Emission Limitations and Standards [326 IAC 2-7-5(1)]
D.1.1 Graphic Arts Operations [326 IAC 8-5-5] [326 IAC 8-1-12]
D.1.2 Graphic Arts Operations [326 IAC 8-5-5]
D.1.3 PSD Minor Limit [326 IAC 2-2]
D.1.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

Compliance Determination Requirements
D.1.5 Volatile Organic Compounds (VOC) Control
D.1.6 Volatile Organic Compounds (VOC) [326 IAC 8-1-4][326 IAC 8-1-2(a)]
D.1.7 Testing Requirements [326 IAC 2-7-6(1), (6)] [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]
D.1.8 Thermal Oxidizer Temperature
D.1.9 Catalytic Incinerator Temperature

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]
D.1.10 Contemporaneous Log for Alternate Operating Scenarios [326 IAC 2-7-5(9)]
D.1.11 Record keeping Requirements [326 IAC 8-1-10]
D.1.12 Record Keeping Requirements
D.1.13 Reporting Requirements [326 IAC 8-1-10]
D.1.14 Reporting Requirements

D.2 FACILITY OPERATION CONDITIONS - Presses 1 through 4 Using Oxidizers for 326 IAC 8 Compliance Purposes

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.2.1 Graphic Arts Operations [326 IAC 8-5-5] [326 IAC 8-1-12]
D.2.2 Graphic Arts Operations [326 IAC 8-5-5] [326 IAC 8-1-12]
D.2.3 PSD Minor Limit [326 IAC 2-2]
D.2.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

Compliance Determination Requirements
D.2.5 Volatile Organic Compounds (VOC) Control
D.2.6 Volatile Organic Compounds (VOC) [326 IAC 8-1-4][326 IAC 8-1-2(a)]
D.2.7 Testing Requirements [326 IAC 8-1-12]
D.2.8 Testing Requirements [326 IAC 2-7-6(1), (6)] [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]
D.2.9 Thermal Oxidizer Temperature
D.2.10 Catalytic Incinerator Temperature
D.2.11 Monitoring Requirements [326 IAC 8-1-12]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]
D.2.12 Contemporaneous Log for Alternate Operating Scenarios [326 IAC 2-7-5(9)]
D.2.13 Record Keeping Requirements [326 IAC 8-1-12]
D.2.14 Record Keeping Requirements
D.2.15 Reporting Requirements [326 IAC 8-1-12]
D.2.16 Reporting Requirements

D.3 FACILITY OPERATION CONDITIONS - Degreasing Operations

Emission Limitations and Standards [326 IAC 2-7-5(1)]
D.3.1 Volatile Organic Compounds (VOC) [326 IAC 8-3-2]
D.3.2 Volatile Organic Compounds (VOC) [326 IAC 8-3-5]
D.3.3 PSD Minor Limit [326 IAC 2-2]
D.3.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

Compliance Determination Requirements
D.3.5 Volatile Organic Compounds (VOC)

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]
D.3.6 Record Keeping Requirements
D.3.7 Reporting Requirements

D.4 FACILITY OPERATION CONDITIONS - Insignificant Activities

Emission Limitations and Standards [326 IAC 2-7-5(1)]
D.4.1 Particulate Matter (PM) [326 IAC 6-2-4]
D.4.2 Volatile Organic Compounds (VOC) [326 IAC 8-2-5]

Compliance Determination Requirements
D.4.3 Volatile Organic Compounds (VOC) [326 IAC 8-1-4] [326 IAC 8-1-2(a)]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]
D.4.4 Record Keeping Requirements

E.1 FACILITY OPERATION CONDITIONS - NESHAP, Subpart KK

National Emission Standards for Hazardous Air Pollutants (NESHAP) Requirements [326 IAC 2-7-5(1)]
E.1.1 General Provisions Relating to NESHAP Subpart KK [326 IAC 20-1] [40 CFR Part 63, Subpart A]

E.1.2 Printing and Publishing Industry) NESHAP [40 CFR 63, Subpart KK] [326 IAC 20-18]
E.1.3 One Time Deadlines Relating to NESHAP, Subpart KK

Certification
Emergency Occurrence Report
Quarterly Report
Quarterly Report
Quarterly Deviation and Compliance Monitoring Report
Attachment A - NESHAP, Subpart KK

SECTION A SOURCE SUMMARY

This permit is based on information requested by the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ). The information describing the source contained in conditions A.1 through A.3 is descriptive information and does not constitute enforceable conditions. However, the Permittee should be aware that a physical change or a change in the method of operation that may render this descriptive information obsolete or inaccurate may trigger requirements for the Permittee to obtain additional permits or seek modification of this permit pursuant to 326 IAC 2, or change other applicable requirements presented in the permit application.

A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]

The Permittee owns and operates a stationary packaging rotogravure printing operation.

Source Address:	2281 South U.S. 31, Scottsburg, Indiana 47170
General Source Phone Number:	(812) 752-8205
SIC Code:	2754
County Location:	Scott
Source Location Status:	Attainment for all criteria pollutants
Source Status:	Part 70 Operating Permit Program Minor Source, under PSD and Emission Offset Rules Major Source, Section 112 of the Clean Air Act Not 1 of 28 Source Categories

A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)] [326 IAC 2-7-5(15)]

This stationary source consists of the following emission units and pollution control devices:

(a) One (1) ten (10) station packaging rotogravure printing press identified as Press #1 (ten stations: P1U1 through P1U10), constructed in May of 1990, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P1U1-P1U10 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #1 (ten stations: P1U1 through P1U10) are considered an existing affected source.

(b) One (1) nine (9) station packaging rotogravure printing press identified as Press #2 (nine stations: P2U1 through P2U9), constructed in April of 1991, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P2U1-P2U9 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #2 (nine stations: P2U1 through P2U9) are considered an existing affected source.

(c) One (1) eight (8) station packaging rotogravure printing press identified as Press #3 (eight stations: P3U1 through P3U8), constructed in April of 1997, with a maximum line speed of 800 ft/min when printing with ink and 700 ft/min when printing with ink and adhesive. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P3U1-P3U8 are controlled by one (1) catalytic oxidizing incinerator identified as OXD#2 exhausting through one (1) stack identified as S-OXD2. Under

NESHAP Subpart KK the packaging rotogravure printing operations at Press #3 (eight stations: P3U1 through P3U8) are considered an existing affected source.

(d) One (1) packaging rotogravure printing press, identified as Press # 4, (ten stations: P4U1 through P4U10), constructed in January of 2004, with a maximum line speed of 800 feet per minute (ft/min) and firing natural gas with a total heat input rate of five (5) million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P4U1-P4U10 are controlled by one (1) catalytic oxidizer, identified as OXD#5, then exhausted through one (1) stack identified as S-OXD5. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press # 4, (ten stations: P4U1 through P4U10) are considered an existing affected source; and

(e) One (1) mechanical spray cold cleaner degreaser, identified as PW2, constructed in April of 2001, with a projected solvent consumption rate of eight (8) gallons per day, utilizing closed-loop solvent recycling and distillation for VOC emissions control, and exhausting through one (1) stack (S/V ID: S-MR1).

(f) One (1) mechanical spray cold cleaner degreaser, identified as PW3, approved for construction in 2010, with a projected solvent consumption rate of twelve (12) gallons per day, utilizing a closed-loop solvent recycling and distillation system, and venting indoors.

A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)] [326 IAC 2-7-4(c)] [326 IAC 2-7-5(15)]

This stationary source also includes the following insignificant activities, as defined in 326 IAC 2-7-1(21), which are specifically regulated:

(a) Natural gas-fired combustion sources with heat input equal to or less than ten (10) million Btu per hour:

(1) One (1) natural gas fired hot oil boiler identified as TH1 used to heat Press #3, rated at 6 MMBtu per hour and exhausting through one (1) stack identified as S004. [326 IAC 6-2-4]

(b) Degreasing operations that do not exceed 145 gallons per twelve (12) months, except if subject to 326 IAC 20-6, 326 IAC 8-3-2 or 326 IAC 8-3-5.[326 IAC 8-3-2][326 IAC 8-3-5]

(c) Other categories with emissions below insignificant thresholds:

(1) One (1) Offset Gravure Coater station, with a maximum line speed of 1000 feet per minute and a printing width of 42 inches with maximum coverage of 4.74 pounds per million square inches. [326 IAC 8-2-5]

A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

This stationary source is required to have a Part 70 permit by 326 IAC 2-7-2 (Applicability) because:

(a) It is a major source, as defined in 326 IAC 2-7-1(22);

(b) It is a source in a source category designated by the United States Environmental Protection Agency (U.S. EPA) under 40 CFR 70.3 (Part 70 - Applicability).

SECTION B GENERAL CONDITIONS

B.1 Definitions [326 IAC 2-7-1]

Terms in this permit shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-7) shall prevail.

B.2 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]

(a) This permit, T143-30351-00007, is issued for a fixed term of five (5) years from the issuance date of this permit, as determined in accordance with IC 4-21.5-3-5(f) and IC 13-15-5-3. Subsequent revisions, modifications, or amendments of this permit do not affect the expiration date of this permit.

(b) If IDEM, OAQ, upon receiving a timely and complete renewal permit application, fails to issue or deny the permit renewal prior to the expiration date of this permit, this existing permit shall not expire and all terms and conditions shall continue in effect, including any permit shield provided in 326 IAC 2-7-15, until the renewal permit has been issued or denied.

B.3 Term of Conditions [326 IAC 2-1.1-9.5]

Notwithstanding the permit term of a permit to construct, a permit to operate, or a permit modification, any condition established in a permit issued pursuant to a permitting program approved in the state implementation plan shall remain in effect until:

(a) the condition is modified in a subsequent permit action pursuant to Title I of the Clean Air Act; or

(b) the emission unit to which the condition pertains permanently ceases operation.

B.4 Enforceability [326 IAC 2-7-7] [IC 13-17-12]

Unless otherwise stated, all terms and conditions in this permit, including any provisions designed to limit the source's potential to emit, are enforceable by IDEM, the United States Environmental Protection Agency (U.S. EPA) and by citizens in accordance with the Clean Air Act.

B.5 Severability [326 IAC 2-7-5(5)]

The provisions of this permit are severable; a determination that any portion of this permit is invalid shall not affect the validity of the remainder of the permit.

B.6 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]

This permit does not convey any property rights of any sort or any exclusive privilege.

B.7 Duty to Provide Information [326 IAC 2-7-5(6)(E)]

(a) The Permittee shall furnish to IDEM, OAQ, within a reasonable time, any information that IDEM, OAQ may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. Upon request, the Permittee shall also furnish to IDEM, OAQ copies of records required to be kept by this permit.

(b) For information furnished by the Permittee to IDEM, OAQ, the Permittee may include a claim of confidentiality in accordance with 326 IAC 17.1. When furnishing copies of requested records directly to U. S. EPA, the Permittee may assert a claim of confidentiality in accordance with 40 CFR 2, Subpart B.

B.8 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]

(a) A certification required by this permit meets the requirements of 326 IAC 2-7-6(1) if:

(1) it contains a certification by a "responsible official" as defined by 326 IAC 2-7-1(34), and

(2) the certification states that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

(b) The Permittee may use the attached Certification Form, or its equivalent with each submittal requiring certification. One (1) certification may cover multiple forms in one (1) submittal.

(c) A "responsible official" is defined at 326 IAC 2-7-1(34).

B.9 Annual Compliance Certification [326 IAC 2-7-6(5)]

(a) The Permittee shall annually submit a compliance certification report which addresses the status of the source's compliance with the terms and conditions contained in this permit, including emission limitations, standards, or work practices. All certifications shall cover the time period from January 1 to December 31 of the previous year, and shall be submitted no later than July 1 of each year to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V
Air and Radiation Division, Air Enforcement Branch - Indiana (AE-17J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

(b) The annual compliance certification report required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(c) The annual compliance certification report shall include the following:

(1) The appropriate identification of each term or condition of this permit that is the basis of the certification;

(2) The compliance status;

(3) Whether compliance was continuous or intermittent;

(4) The methods used for determining the compliance status of the source, currently and over the reporting period consistent with 326 IAC 2-7-5(3); and

(5) Such other facts, as specified in Sections D of this permit, as IDEM, OAQ may require to determine the compliance status of the source.

The submittal by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

B.10 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)][326 IAC 1-6-3]

(a) A Preventive Maintenance Plan meets the requirements of 326 IAC 1-6-3 if it includes, at a minimum:

(1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;

(2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and

(3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

The Permittee shall implement the PMPs.

(b) If required by specific condition(s) in Section D of this permit where no PMP was previously required, the Permittee shall prepare and maintain Preventive Maintenance Plans (PMPs) no later than ninety (90) days after issuance of this permit or ninety (90) days after initial start-up, whichever is later, including the following information on each facility:

(1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;

(2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and

(3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

If, due to circumstances beyond the Permittee’s control, the PMPs cannot be prepared and maintained within the above time frame, the Permittee may extend the date an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

The PMP extension notification does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

The Permittee shall implement the PMPs.

(c) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Permittee to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions. The

PMPs and their submittal do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(d) To the extent the Permittee is required by 40 CFR Part 60/63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

B.11 Emergency Provisions [326 IAC 2-7-16]

(a) An emergency, as defined in 326 IAC 2-7-1(12), is not an affirmative defense for an action brought for noncompliance with a federal or state health-based emission limitation.

(b) An emergency, as defined in 326 IAC 2-7-1(12), constitutes an affirmative defense to an action brought for noncompliance with a technology-based emission limitation if the affirmative defense of an emergency is demonstrated through properly signed, contemporaneous operating logs or other relevant evidence that describe the following:

(1) An emergency occurred and the Permittee can, to the extent possible, identify the causes of the emergency;

(2) The permitted facility was at the time being properly operated;

(3) During the period of an emergency, the Permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards or other requirements in this permit;

(4) For each emergency lasting one (1) hour or more, the Permittee notified IDEM, OAQ, or Southeast Regional Office within four (4) daytime business hours after the beginning of the emergency, or after the emergency was discovered or reasonably should have been discovered;

Telephone Number: 1-800-451-6027 (ask for Office of Air Quality, Compliance and Enforcement Branch), or
Telephone Number: 317-233-0178 (ask for Office of Air Quality, Compliance and Enforcement Branch)
Facsimile Number: 317-233-6865
Southeast Regional Office phone: (812) 358-2027; fax: (812) 358-2058**.**

(5) For each emergency lasting one (1) hour or more, the Permittee submitted the attached Emergency Occurrence Report Form or its equivalent, either by mail or facsimile to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

within two (2) working days of the time when emission limitations were exceeded due to the emergency.

The notice fulfills the requirement of 326 IAC 2-7-5(3)(C)(ii) and must contain the following:

(A) A description of the emergency;

(B) Any steps taken to mitigate the emissions; and

(C) Corrective actions taken.

The notification which shall be submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(6) The Permittee immediately took all reasonable steps to correct the emergency.

(c) In any enforcement proceeding, the Permittee seeking to establish the occurrence of an emergency has the burden of proof.

(d) This emergency provision supersedes 326 IAC 1-6 (Malfunctions). This permit condition is in addition to any emergency or upset provision contained in any applicable requirement.

(e) The Permittee seeking to establish the occurrence of an emergency shall make records available upon request to ensure that failure to implement a PMP did not cause or contribute to an exceedance of any limitations on emissions. However, IDEM, OAQ may require that the Preventive Maintenance Plans required under 326 IAC 2-7-4(c)(9) be revised in response to an emergency.

(f) Failure to notify IDEM, OAQ by telephone or facsimile of an emergency lasting more than one (1) hour in accordance with (b)(4) and (5) of this condition shall constitute a violation of 326 IAC 2-7 and any other applicable rules.

(g) If the emergency situation causes a deviation from a technology-based limit, the Permittee may continue to operate the affected emitting facilities during the emergency provided the Permittee immediately takes all reasonable steps to correct the emergency and minimize emissions.

B.12 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]

(a) Pursuant to 326 IAC 2-7-15, the Permittee has been granted a permit shield. The permit shield provides that compliance with the conditions of this permit shall be deemed compliance with any applicable requirements as of the date of permit issuance, provided that either the applicable requirements are included and specifically identified in this permit or the permit contains an explicit determination or concise summary of a determination that other specifically identified requirements are not applicable. The Indiana statutes from IC 13 and rules from 326 IAC, referenced in conditions in this permit, are those applicable at the time the permit was issued. The issuance or possession of this permit shall not alone constitute a defense against an alleged violation of any law, regulation or standard, except for the requirement to obtain a Part 70 permit under 326 IAC 2-7 or for applicable requirements for which a permit shield has been granted.

This permit shield does not extend to applicable requirements which are promulgated after the date of issuance of this permit unless this permit has been modified to reflect such new requirements.

(b) If, after issuance of this permit, it is determined that the permit is in nonconformance with an applicable requirement that applied to the source on the date of permit issuance, IDEM, OAQ, shall immediately take steps to reopen and revise this permit and issue a compliance order to the Permittee to ensure expeditious compliance with the applicable

requirement until the permit is reissued. The permit shield shall continue in effect so long as the Permittee is in compliance with the compliance order.

(c) No permit shield shall apply to any permit term or condition that is determined after issuance of this permit to have been based on erroneous information supplied in the permit application. Erroneous information means information that the Permittee knew to be false, or in the exercise of reasonable care should have been known to be false, at the time the information was submitted.

(d) Nothing in 326 IAC 2-7-15 or in this permit shall alter or affect the following:

(1) The provisions of Section 303 of the Clean Air Act (emergency orders), including the authority of the U.S. EPA under Section 303 of the Clean Air Act;

(2) The liability of the Permittee for any violation of applicable requirements prior to or at the time of this permit's issuance;

(3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act; and

(4) The ability of U.S. EPA to obtain information from the Permittee under Section 114 of the Clean Air Act.

(e) This permit shield is not applicable to any change made under 326 IAC 2-7-20(b)(2) (Sections 502(b)(10) of the Clean Air Act changes) and 326 IAC 2-7-20(c)(2) (trading based on State Implementation Plan (SIP) provisions).

(f) This permit shield is not applicable to modifications eligible for group processing until after IDEM, OAQ, has issued the modifications. [326 IAC 2-7-12(c)(7)]

(g) This permit shield is not applicable to minor Part 70 permit modifications until after IDEM, OAQ, has issued the modification. [326 IAC 2-7-12(b)(8)]

B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]

(a) All terms and conditions of permits established prior to T143-30351-00007 and issued pursuant to permitting programs approved into the state implementation plan have been either:

(1) incorporated as originally stated,

(2) revised under 326 IAC 2-7-10.5, or

(3) deleted under 326 IAC 2-7-10.5.

(b) Provided that all terms and conditions are accurately reflected in this permit, all previous registrations and permits are superseded by this Part 70 operating permit.

B.14 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]

The Permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least nine (9) months prior to the date of expiration of the source’s existing permit, consistent with 326 IAC 2-7-3 and 326 IAC 2-7-4(a).

B.15 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]

(a) This permit may be modified, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a Part 70 Operating Permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any condition of this permit. [326 IAC 2-7-5(6)(C)] The notification by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(b) This permit shall be reopened and revised under any of the circumstances listed in IC 13-15-7-2 or if IDEM, OAQ determines any of the following:

(1) That this permit contains a material mistake.

(2) That inaccurate statements were made in establishing the emissions standards or other terms or conditions.

(3) That this permit must be revised or revoked to assure compliance with an applicable requirement. [326 IAC 2-7-9(a)(3)]

(c) Proceedings by IDEM, OAQ to reopen and revise this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening and revision shall be made as expeditiously as practicable. [326 IAC 2-7-9(b)]

(d) The reopening and revision of this permit, under 326 IAC 2-7-9(a), shall not be initiated before notice of such intent is provided to the Permittee by IDEM, OAQ at least thirty (30) days in advance of the date this permit is to be reopened, except that IDEM, OAQ may provide a shorter time period in the case of an emergency. [326 IAC 2-7-9(c)]

B.16 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]

(a) The application for renewal shall be submitted using the application form or forms prescribed by IDEM, OAQ and shall include the information specified in 326 IAC 2-7-4. Such information shall be included in the application for each emission unit at this source, except those emission units included on the trivial or insignificant activities list contained in 326 IAC 2-7-1(21) and 326 IAC 2-7-1(40). The renewal application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Request for renewal shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(b) A timely renewal application is one that is:

(1) Submitted at least nine (9) months prior to the date of the expiration of this permit; and

(2) If the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(c) If the Permittee submits a timely and complete application for renewal of this permit, the source's failure to have a permit is not a violation of 326 IAC 2-7 until IDEM, OAQ takes final action on the renewal application, except that this protection shall cease to apply if, subsequent to the completeness determination, the Permittee fails to submit by the deadline specified, pursuant to 326 IAC 2-7-4(a)(2)(D), in writing by IDEM, OAQ any additional information identified as being needed to process the application.

B.17 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]

(a) Permit amendments and modifications are governed by the requirements of 326 IAC 2-7-11 or 326 IAC 2-7-12 whenever the Permittee seeks to amend or modify this permit.

(b) Any application requesting an amendment or modification of this permit shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.18 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)][326 IAC 2-7-12(b)(2)]

(a) No Part 70 permit revision or notice shall be required under any approved economic incentives, marketable Part 70 permits, emissions trading, and other similar programs or processes for changes that are provided for in a Part 70 permit.

(b) Notwithstanding 326 IAC 2-7-12(b)(1) and 326 IAC 2-7-12(c)(1), minor Part 70 permit modification procedures may be used for Part 70 modifications involving the use of economic incentives, marketable Part 70 permits, emissions trading, and other similar approaches to the extent that such minor Part 70 permit modification procedures are explicitly provided for in the applicable State Implementation Plan (SIP) or in applicable requirements promulgated or approved by the U.S. EPA.

B.19 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]

(a) The Permittee may make any change or changes at the source that are described in 326 IAC 2-7-20(b),(c), or (e) without a prior permit revision, if each of the following conditions is met:

(1) The changes are not modifications under any provision of Title I of the Clean Air Act;

(2) Any preconstruction approval required by 326 IAC 2-7-10.5 has been obtained;

(3) The changes do not result in emissions which exceed the limitations provided in this permit (whether expressed herein as a rate of emissions or in terms of total emissions);

(4) The Permittee notifies the:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V
Air and Radiation Division, Regulation Development Branch - Indiana (AR-18J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

in advance of the change by written notification at least ten (10) days in advance of the proposed change. The Permittee shall attach every such notice to the Permittee's copy of this permit; and

(5) The Permittee maintains records on-site, on a rolling five (5) year basis, which document all such changes and emission trades that are subject to 326 IAC 2-7-20(b),(c), or (e). The Permittee shall make such records available, upon reasonable request, for public review.

Such records shall consist of all information required to be submitted to IDEM, OAQ in the notices specified in 326 IAC 2-7-20(b)(1), (c)(1), and (e)(2).

(b) The Permittee may make Section 502(b)(10) of the Clean Air Act changes (this term is defined at 326 IAC 2-7-1(36)) without a permit revision, subject to the constraint of 326 IAC 2-7-20(a). For each such Section 502(b)(10) of the Clean Air Act change, the required written notification shall include the following:

(1) A brief description of the change within the source;

(2) The date on which the change will occur;

(3) Any change in emissions; and

(4) Any permit term or condition that is no longer applicable as a result of the change.

The notification which shall be submitted is not considered an application form, report or compliance certification. Therefore, the notification by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) Emission Trades [326 IAC 2-7-20(c)]
The Permittee may trade emissions increases and decreases at the source, where the applicable SIP provides for such emission trades without requiring a permit revision, subject to the constraints of Section (a) of this condition and those in 326 IAC 2-7-20(c).

(d) Alternative Operating Scenarios [326 IAC 2-7-20(d)]
The Permittee may make changes at the source within the range of alternative operating scenarios that are described in the terms and conditions of this permit in accordance with 326 IAC 2-7-5(9). No prior notification of IDEM, OAQ, or U.S. EPA is required.

(e) Backup fuel switches specifically addressed in, and limited under, Section D of this permit shall not be considered alternative operating scenarios. Therefore, the notification requirements of part (a) of this condition do not apply.

B.20 Source Modification Requirement [326 IAC 2-7-10.5]

A modification, construction, or reconstruction is governed by the requirements of 326 IAC 2.

B.21 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]

Upon presentation of proper identification cards, credentials, and other documents as may be required by law, and subject to the Permittee's right under all applicable laws and regulations to assert that the information collected by the agency is confidential and entitled to be treated as such, the Permittee shall allow IDEM, OAQ, U.S. EPA, or an authorized representative to perform the following:

(a) Enter upon the Permittee's premises where a Part 70 source is located, or emissions related activity is conducted, or where records must be kept under the conditions of this permit;

(b) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, have access to and copy any records that must be kept under the conditions of this permit;

(c) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, inspect any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit;

(d) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, sample or monitor substances or parameters for the purpose of assuring compliance with this permit or applicable requirements; and

(e) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, utilize any photographic, recording, testing, monitoring, or other equipment for the purpose of assuring compliance with this permit or applicable requirements.

B.22 Transfer of Ownership or Operational Control [326 IAC 2-7-11]

(a) The Permittee must comply with the requirements of 326 IAC 2-7-11 whenever the Permittee seeks to change the ownership or operational control of the source and no other change in the permit is necessary.

(b) Any application requesting a change in the ownership or operational control of the source shall contain a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new Permittee. The application shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]

(a) The Permittee shall pay annual fees to IDEM, OAQ within thirty (30) calendar days of receipt of a billing. Pursuant to 326 IAC 2-7-19(b), if the Permittee does not receive a bill from IDEM, OAQ the applicable fee is due April 1 of each year.

(b) Except as provided in 326 IAC 2-7-19(e), failure to pay may result in administrative enforcement action or revocation of this permit.

(c) The Permittee may call the following telephone numbers: 1-800-451-6027 or 317-233-4230 (ask for OAQ, Billing, Licensing, and Training Section), to determine the appropriate permit fee.

B.24 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

For the purpose of submitting compliance certifications or establishing whether or not the Permittee has violated or is in violation of any condition of this permit, nothing in this permit shall preclude the use, including the exclusive use, of any credible evidence or information relevant to whether the Permittee would have been in compliance with the condition of this permit if the appropriate performance or compliance test or procedure had been performed.

SECTION C SOURCE OPERATION CONDITIONS

Entire Source

Emission Limitations and Standards [326 IAC 2-7-5(1)]

C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2(e)(2), particulate emissions from any process not exempt under 326 IAC 6-3-1(b) or (c) which has a maximum process weight rate less than 100 pounds per hour and the methods in 326 IAC 6-3-2(b) through (d) do not apply shall not exceed 0.551 pounds per hour.

C.2 Opacity [326 IAC 5-1]

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-1 (Applicability) and 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

(a) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.

(b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]

The Permittee shall not operate an incinerator except as provided in 326 IAC 4-2 or in this permit. The Permittee shall not operate a refuse incinerator or refuse burning equipment except as provided in 326 IAC 9-1-2 or in this permit.

C.5 Fugitive Dust Emissions [326 IAC 6-4]

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions). 326 IAC 6-4-2(4) is not federally enforceable.

C.6 Stack Height [326 IAC 1-7]

The Permittee shall comply with the applicable provisions of 326 IAC 1-7 (Stack Height Provisions), for all exhaust stacks through which a potential (before controls) of twenty-five (25) tons per year or more of particulate matter or sulfur dioxide is emitted. The provisions of 326 IAC 1-7-1(3), 326 IAC 1-7-2, 326 IAC 1-7-3(c) and (d), 326 IAC 1-7-4, and 326 IAC 1-7-5(a), (b), and (d) are not federally enforceable.

C.7 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

(a) Notification requirements apply to each owner or operator. If the combined amount of regulated asbestos containing material (RACM) to be stripped, removed or disturbed is at least 260 linear feet on pipes or 160 square feet on other facility components, or at least

thirty-five (35) cubic feet on all facility components, then the notification requirements of 326 IAC 14-10-3 are mandatory. All demolition projects require notification whether or not asbestos is present.

(b) The Permittee shall ensure that a written notification is sent on a form provided by the Commissioner at least ten (10) working days before asbestos stripping or removal work or before demolition begins, per 326 IAC 14-10-3, and shall update such notice as necessary, including, but not limited to the following:

(1) When the amount of affected asbestos containing material increases or decreases by at least twenty percent (20%); or

(2) If there is a change in the following:

(A) Asbestos removal or demolition start date;

(B) Removal or demolition contractor; or

(C) Waste disposal site.

(c) The Permittee shall ensure that the notice is postmarked or delivered according to the guidelines set forth in 326 IAC 14-10-3(2).

(d) The notice to be submitted shall include the information enumerated in 326 IAC 14-10-3(3).

All required notifications shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

The notice shall include a signed certification from the owner or operator that the information provided in this notification is correct and that only Indiana licensed workers and project supervisors will be used to implement the asbestos removal project. The notifications do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(e) Procedures for Asbestos Emission Control
The Permittee shall comply with the applicable emission control procedures in 326 IAC 14-10-4 and 40 CFR 61.145(c). Per 326 IAC 14-10-1, emission control requirements are applicable for any removal or disturbance of RACM greater than three (3) linear feet on pipes or three (3) square feet on any other facility components or a total of at least 0.75 cubic feet on all facility components.

(f) Demolition and Renovation
The Permittee shall thoroughly inspect the affected facility or part of the facility where the demolition or renovation will occur for the presence of asbestos pursuant to 40 CFR 61.145(a).

(g) Indiana Licensed Asbestos Inspector
The Permittee shall comply with 326 IAC 14-10-1(a) that requires the owner or operator, prior to a renovation/demolition, to use an Indiana Licensed Asbestos Inspector to

thoroughly inspect the affected portion of the facility for the presence of asbestos. The requirement to use an Indiana Licensed Asbestos inspector is not federally enforceable.

Testing Requirements [326 IAC 2-7-6(1)]

C.8 Performance Testing [326 IAC 3-6]

(a) For performance testing required by this permit, a test protocol, except as provided elsewhere in this permit, shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

no later than thirty-five (35) days prior to the intended test date. The protocol submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(b) The Permittee shall notify IDEM, OAQ of the actual test date at least fourteen (14) days prior to the actual test date. The notification submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) Pursuant to 326 IAC 3-6-4(b), all test reports must be received by IDEM, OAQ not later than forty-five (45) days after the completion of the testing. An extension may be granted by IDEM, OAQ if the Permittee submits to IDEM, OAQ a reasonable written explanation not later than five (5) days prior to the end of the initial forty-five (45) day period.

Compliance Requirements [326 IAC 2-1.1-11]

C.9 Compliance Requirements [326 IAC 2-1.1-11]

The commissioner may require stack testing, monitoring, or reporting at any time to assure compliance with all applicable requirements by issuing an order under 326 IAC 2-1.1-11. Any monitoring or testing shall be performed in accordance with 326 IAC 3 or other methods approved by the commissioner or the U. S. EPA.

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

C.10 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]

Unless otherwise specified in this permit, for all monitoring requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or of initial start-up, whichever is later, to begin such monitoring. If due to circumstances beyond the Permittee's control, any monitoring equipment required by this permit cannot be installed and operated no later than ninety (90) days after permit issuance or the date of initial startup, whichever is later, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification which shall be submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Unless otherwise specified in the approval for the new emission unit(s), compliance monitoring for new emission units or emission units added through a source modification shall be implemented when operation begins.

C.11 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

(a) When required by any condition of this permit, an analog instrument used to measure a parameter related to the operation of an air pollution control device shall have a scale such that the expected maximum reading for the normal range shall be no less than twenty percent (20%) of full scale.

(b) The Permittee may request that the IDEM, OAQ approve the use of an instrument that does not meet the above specifications provided the Permittee can demonstrate that an alternative instrument specification will adequately ensure compliance with permit conditions requiring the measurement of the parameters.

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]

C.12 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]

Pursuant to 326 IAC 1-5-2 (Emergency Reduction Plans; Submission):

(a) The Permittee shall maintain the most recently submitted written emergency reduction plans (ERPs) consistent with safe operating procedures.

(b) Upon direct notification by IDEM, OAQ that a specific air pollution episode level is in effect, the Permittee shall immediately put into effect the actions stipulated in the approved ERP for the appropriate episode level. [326 IAC 1-5-3]

C.13 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]

If a regulated substance, as defined in 40 CFR 68, is present at a source in more than a threshold quantity, the Permittee must comply with the applicable requirements of 40 CFR 68.

C.14 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]

Upon detecting an excursion where a response step is required by the D Section or an exceedance of a limitation in this permit:

(a) The Permittee shall take reasonable response steps to restore operation of the emissions unit (including any control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing excess emissions.

(b) The response shall include minimizing the period of any startup, shutdown or malfunction. The response may include, but is not limited to, the following:

(1) initial inspection and evaluation;

(2) recording that operations returned or are returning to normal without operator action (such as through response by a computerized distribution control system); or

(3) any necessary follow-up actions to return operation to normal or usual manner of operation.

(c) A determination of whether the Permittee has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include, but is not limited to, the following:

(1) monitoring results;

(2) review of operation and maintenance procedures and records; and/or

(3) inspection of the control device, associated capture system, and the process.

(d) Failure to take reasonable response steps shall be considered a deviation from the permit.

(e) The Permittee shall record the reasonable response steps taken.

C.15 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]

(a) When the results of a stack test performed in conformance with Section C - Performance Testing, of this permit exceed the level specified in any condition of this permit, the Permittee shall submit a description of its response actions to IDEM, OAQ, no later than seventy-five (75) days after the date of the test.

(b) A retest to demonstrate compliance shall be performed no later than one hundred eighty (180) days after the date of the test. Should the Permittee demonstrate to IDEM, OAQ that retesting in one hundred eighty (180) days is not practicable, IDEM, OAQ may extend the retesting deadline

(c) IDEM, OAQ reserves the authority to take any actions allowed under law in response to noncompliant stack tests.

The response action documents submitted pursuant to this condition do require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

C.16 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]

Pursuant to 326 IAC 2-6-3(b)(3), starting in 2006 and every three (3) years thereafter, the Permittee shall submit by July 1 an emission statement covering the previous calendar year. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4(c) and shall meet the following requirements:

(1) Indicate estimated actual emissions of all pollutants listed in 326 IAC 2-6-4(a);

(2) Indicate estimated actual emissions of regulated pollutants as defined by 326 IAC 2-7-1(32) (“Regulated pollutant, which is used only for purposes of Section 19 of this rule”) from the source, for purpose of fee assessment.

The statement must be submitted to:

Indiana Department of Environmental Management
Technical Support and Modeling Section, Office of Air Quality
100 North Senate Avenue
MC 61-50 IGCN 1003
Indianapolis, Indiana 46204-2251

The emission statement does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

C.17 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]

(a) Records of all required monitoring data, reports and support information required by this permit shall be retained for a period of at least five (5) years from the date of monitoring sample, measurement, report, or application. These records shall be physically present or electronically accessible at the source location for a minimum of three (3) years. The records may be stored elsewhere for the remaining two (2) years as long as they are available upon request. If the Commissioner makes a request for records to the Permittee, the Permittee shall furnish the records to the Commissioner within a reasonable time.

(b) Unless otherwise specified in this permit, for all record keeping requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or the date of initial start-up, whichever is later, to begin such record keeping.

C.18 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11]

(a) The Permittee shall submit the attached Quarterly Deviation and Compliance Monitoring Report or its equivalent. Any deviation from permit requirements, the date(s) of each deviation, the cause of the deviation, and the response steps taken must be reported except that a deviation required to be reported pursuant to an applicable requirement that exists independent of this permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. This report shall be submitted not later than thirty (30) days after the end of the reporting period. The Quarterly Deviation and Compliance Monitoring Report shall include a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34). A deviation is an exceedance of a permit limitation or a failure to comply with a requirement of the permit.

(b) The address for report submittal is:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(c) Unless otherwise specified in this permit, any notice, report, or other submission required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(d) Reporting periods are based on calendar years, unless otherwise specified in this permit. For the purpose of this permit “calendar year” means the twelve (12) month period from January 1 to December 31 inclusive.

Stratospheric Ozone Protection

C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

Pursuant to 40 CFR 82 (Protection of Stratospheric Ozone), Subpart F, except as provided for motor vehicle air conditioners in Subpart B, the Permittee shall comply with applicable standards for recycling and emissions reduction.

SECTION D.1 FACILITY OPERATION CONDITIONS

Presses 1 through 4 Using Compliant Coating Material for 326 IAC 8 Compliance Purpose

Facility Description [326 IAC 2-7-5(15)]:

(a) One (1) ten (10) station packaging rotogravure printing press identified as Press #1 (ten stations: P1U1 through P1U10), constructed in May of 1990, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P1U1-P1U10 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #1 (ten stations: P1U1 through P1U10) are considered an existing affected source.

(b) One (1) nine (9) station packaging rotogravure printing press identified as Press #2 (nine stations: P2U1 through P2U9), constructed in April of 1991, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P2U1-P2U9 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #2 (nine stations: P2U1 through P2U9) are considered an existing affected source.

(c) One (1) eight (8) station packaging rotogravure printing press identified as Press #3 (eight stations: P3U1 through P3U8), constructed in April of 1997, with a maximum line speed of 800 ft/min when printing with ink and 700 ft/min when printing with ink and adhesive. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P3U1-P3U8 are controlled by one (1) catalytic oxidizing incinerator identified as OXD#2 exhausting through one (1) stack identified as S-OXD2. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #3 (eight stations: P3U1 through P3U8) are considered an existing affected source; and

(d) One (1) packaging rotogravure printing press, identified as Press # 4, (ten stations: P4U1 through P4U10), constructed in January of 2004, with a maximum line speed of 800 feet per minute (ft/min) and firing natural gas with a total heat input rate of five (5) million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P4U1-P4U10 are controlled by one (1) catalytic oxidizer, identified as OXD#5, then exhausted through one (1) stack identified as S-OXD5. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press # 4, (ten stations: P4U1 through P4U10) are considered an existing affected source.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.1.1 Graphic Arts Operations [326 IAC 8-5-5]

Pursuant to 326 IAC 8-5-5 (Graphic Arts Operations), the Permittee may not cause, allow, or permit the operation of the facility unless the Permittee uses one of the following types of compliant coatings:

(a) The volatile fraction of the ink, as it is applied to the substrate, contains twenty-five percent (25%) by volume or less of VOC, and seventy-five percent (75%) by volume or more of water; or

(b) The ink as it is applied to the substrate, less water, contains sixty percent (60%) by volume or more nonvolatile material; or

(c) The ink, as applied to the substrate, meets an emission limit of five-tenths (0.5) pounds of VOC per pound of solids in the ink.

D.1.2 Graphic Arts Operations [326 IAC 8-5-5]

Pursuant to 326 IAC 8-5-5(f), work practices for Presses #1 through #4 shall include, but not be limited to, the following:

(a) When not in use, all cleaning materials shall be kept in closed containers.

(b) Cleaning materials shall be conveyed from one (1) location to another in closed containers or pipes.

D.1.3 PSD Minor Limit [326 IAC 2-2]

The total input of VOC, including coatings, dilution solvents, and cleaning solvents, to Presses #1 through #4 (emission units P1U1 through P1U10, P2U1 through P2U9, P3U1 through P3U8, and P4U1 through P4U10) shall be limited to 3,458 tons per twelve (12) consecutive month period with compliance determined at the end of each month. The minimum overall VOC control efficiency shall be 94.20%.

Compliance with the above limit in conjunction with Condition D.3.3 and VOC emissions from natural gas combustion, and the insignificant activities will limit source-wide VOC emissions to less than 250 tons per year. Therefore, this is a minor source under 326 IAC 2-2.

D.1.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for these facilities and their control devices. Section B - Preventive Maintenance Plan contains the Permittee's obligation with regard to the preventive maintenance plan required by this condition.

Compliance Determination Requirements

D.1.5 Volatile Organic Compounds (VOC) Control

In order to comply with Condition D.1.2, the thermal oxidizers OXD#2, OXD#5 and OXD#6 shall be in operation and control emissions from the associated presses at all times the associated presses are in operation.

D.1.6 Volatile Organic Compounds (VOC) [326 IAC 8-1-4] [326 IAC 8-1-2(a)]

Compliance with the VOC content and usage limitations contained in Conditions D.1.1 and D.1.3 shall be determined pursuant to 326 IAC 8-1-4(a)(3) and 326 IAC 8-1-2(a) by preparing or obtaining from the manufacturer the copies of the “as supplied” and “as applied” VOC data sheets. IDEM, OAQ, reserves the authority to determine-compliance using Method 24 in

conjunction with the analytical procedures specified in 326 IAC 8-1-4.

D.1.7 Testing Requirements [326 IAC 2-7-6(1), (6)] [326 IAC 2-1.1-11]

In order to demonstrate the compliance with Condition D.1.3, the Permittee shall conduct VOC control efficiency (as the product of destruction efficiency and capture efficiency) testing on OXD#2, OXD#5 and OXD#6 no later than 2.5 years from the most recent testing performed on these oxidizers. The testing shall be conducted using methods approved by the Commissioner. The test shall be repeated at least once every 2.5 years from the date of the most recent valid compliance demonstration. Section C – Performance Testing contains the Permittee's obligation with regard to the performance testing required by this condition.

Compliance Monitoring Requirements [326 IAC 2-7-6 (1)] [326 IAC 2-7-5 (1)]

D.1.8 Thermal Oxidizer Temperature

(a) The Permittee shall determine the 3-hour average combustion zone temperature from the most recent valid stack test that demonstrates compliance with the minimum overall VOC control efficiency requirement in condition D.1.3, as approved by IDEM.

(b) A continuous monitoring system shall be calibrated, maintained, and operated on OXD#6 for measuring combustion zone temperature. The output of the temperature monitoring system shall be recorded as a 3-hour average. The Permittee shall take appropriate response steps in accordance with Section C - Response to Excursions or Exceedances whenever the 3-hour average temperature of the thermal oxidizer is below the temperature determined in the most recent compliance test. A 3-hour average temperature that is below the temperature determined in the most recent compliance test is not a deviation from this permit. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

D.1.9 Catalytic Incinerator Temperature

(a) The Permittee shall determine the 3-hour average catalyst bed inlet and outlet temperatures from the most recent valid stack test that demonstrates compliance with minimum overall VOC control efficiency requirement in condition D.1.3, as approved by IDEM.

(b) A continuous monitoring system shall be calibrated, maintained, and operated on OXD#2 and OXD#5 for measuring catalyst bed inlet and outlet temperatures. The output of the temperature monitoring system shall be recorded as a 3-hour average. The Permittee shall take appropriate response steps in accordance with Section C - Response to Excursions or Exceedances whenever the 3-hour average catalyst bed inlet and outlet temperatures of the thermal oxidizer are below the temperatures determined in the most recent compliance test. A 3-hour average temperature that is below the temperature determined in the most recent compliance test is not a deviation from this permit. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.1.10 Contemporaneous Log for Alternate Operating Scenarios [326 IAC 2-7-5(9)]

(a) Pursuant to 326 IAC 2-7-5(9)(A), contemporaneously with making a change from one (1) alternative operating scenario to another, the Permittee shall make a record in a log at the permitted facility of the scenario under which it is operating. The record should state the alternative operating scenario for each station, since different stations at the same press may be operating under different scenarios.

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

D.1.11 Record keeping Requirements [326 IAC 8-1-10]

(a) To document the compliance status with Condition D.1.1, pursuant to 326 IAC 8-1-10(c) (Compliance Certification, Record Keeping and Reporting Requirements for Certain Coating Facilities Using Compliant Coatings), upon changing the method of compliance for an existing coating facility from control devices (326 IAC 8-5- 5(c)(3)(B)) to the use of compliant coatings (326 IAC 8-5-5(c)(1), (2), or (4)), the Permittee shall for each coating facility and for each coating used collect and record each day and maintain all of the following information:

(1) The name and identification number of each coating, as applied;

(2) The mass of VOC (excluding water and exempt compounds) per volume of coating for each coating, as applied, or the VOC content of each coating, as applied, expressed in units necessary to determine compliance;

(3) As new compliant coatings are added to a coating facility, the records required by this condition shall be updated to include the new coating; and

(4) If use of a coating is discontinued, the records required by this section shall be maintained consistent with 326 IAC 8-1-9(c).

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

D.1.12 Record Keeping Requirements

(a) To document the compliance status with Condition D.1.3, the Permittee shall maintain records in accordance with (1) through (6) below. Records maintained for (1) through (6) shall be taken monthly and shall be complete and sufficient to establish compliance with the VOC usage limit and/or the VOC emission limit established in Condition D.1.3. Records necessary to demonstrate compliance shall be available within 30 days at the end of each compliance period.

(1) The amount and VOC content of each coating material and solvent used.

(2) The coatings and solvents applied during each month, purchase orders, invoices, and material safety data sheets (MSDS) necessary to verify the coating or solvent used.

(3) A log of the dates of use.

(4) The total VOC usage for each month at each press.

(5) The weight of VOCs emitted for each compliance period for each press.

(6) The following operation parameters of catalytic incinerators and thermal oxidizer:

(A) VOC capture efficiency;

(B) VOC destruction efficiency of the control devices;

(C) A description of the data used to establish the capture and destruction

efficiencies; and

(D) Continuous temperature readings.

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

D.1.13 Reporting Requirements [326 IAC 8-1-10]

(a) In order to demonstrate compliance with Condition D.1.1, pursuant to 326 IAC 8-5-5(c)(1), (2), or (4) and 326 IAC 8-1-10(d), the Permittee shall notify IDEM, OAQ in either of the following instances:

(1) Any record showing use of any noncompliant coatings shall be reported by submitting a copy of the record to IDEM, OAQ within thirty (30) days following use; such record shall also be submitted with the quarterly compliance monitoring report attached to this permit. The following information shall accompany each submittal:

(A) Name and location of the coating facility;

(B) Time, date, and duration of the noncompliance; and

(C) Corrective action taken.

(2) At least thirty (30) calendar days before changing the method of compliance from the use of compliant coatings (326 IAC 8-5-5(c)(1), (2), or (4)) to control devices (326 IAC 8-5-5(c)(3)(B)), the Permittee shall comply with all requirements of 326 IAC 8-1-12(b) of this rule, respectively. Upon changing the method of compliance for a coating facility from the use of compliant coatings to control devices, the Permittee shall comply with all requirements of 326 IAC 8-1-12.

(b) Pursuant to 326 IAC 8-1-10(b), upon changing the method of compliance for an existing coating facility from control devices (326 IAC 8-5-5(c)(3)(B)) to the use of compliant coatings (326 IAC 8-5-5(c)(1), (2), or (4)), the Permittee shall certify to IDEM, OAQ that the coating facility is in compliance with the requirements of 326 IAC 8-1-10. The certification shall include the following:

(1) The name and location of the source;

(2) The name, address, and telephone number of the person responsible for the source;

(3) Identification of each VOC emitting coating facility and identification of the applicable emission limitation;

(4) The name and identification number of each coating, as applied, used at each coating facility; and

(5) The mass of VOC (excluding water and exempt compounds) per volume of coating and the volume of each coating, as applied.

D.1.14 Reporting Requirements

A quarterly summary of the information to document compliance with Condition D.1.3 shall be submitted to the address listed in Section C - General Reporting Requirements, of this permit, using the reporting forms located at the end of this permit, or their equivalent, within thirty (30)

days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by the “responsible official” as defined by 326 IAC 2-7-1(34).

SECTION D.2 FACILITY OPERATION CONDITIONS

Presses 1 through 4 Using Oxidizers for 326 IAC 8 Compliance Purpose

Facility Description [326 IAC 2-7-5(15)]:

(a) One (1) ten (10) station packaging rotogravure printing press identified as Press #1 (ten stations: P1U1 through P1U10), constructed in May of 1990, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P1U1-P1U10 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #1 (ten stations: P1U1 through P1U10) are considered an existing affected source.

(b) One (1) nine (9) station packaging rotogravure printing press identified as Press #2 (nine stations: P2U1 through P2U9), constructed in April of 1991, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P2U1-P2U9 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #2 (nine stations: P2U1 through P2U9) are considered an existing affected source.

(c) One (1) eight (8) station packaging rotogravure printing press identified as Press #3 (eight stations: P3U1 through P3U8), constructed in April of 1997, with a maximum line speed of 800 ft/min when printing with ink and 700 ft/min when printing with ink and adhesive. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P3U1-P3U8 are controlled by one (1) catalytic oxidizing incinerator identified as OXD#2 exhausting through one (1) stack identified as S-OXD2. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #3 (eight stations: P3U1 through P3U8) are considered an existing affected source; and

(d) One (1) packaging rotogravure printing press, identified as Press # 4, (ten stations: P4U1 through P4U10), constructed in January of 2004, with a maximum line speed of 800 feet per minute (ft/min) and firing natural gas with a total heat input rate of five (5) million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P4U1-P4U10 are controlled by one (1) catalytic oxidizer, identified as OXD#5, then exhausted through one (1) stack identified as S-OXD5. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press # 4, (ten stations: P4U1 through P4U10) are considered an existing affected source.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.2.1 Graphic Arts Operations [326 IAC 8-5-5] [326 IAC 8-1-12]

(a) Pursuant to 326 IAC 8-5-5(c)(3)(B) (Graphic Arts Operations), the Permittee may not cause, allow, or permit the operation of the facility unless the Permittee installs and operates an incineration system(s) that oxidizes at least ninety percent (90%) of the

nonmethane volatile organic compounds (volatile organic compounds measured as total combustible carbon) to carbon dioxide and water.

(b) A capture system must be used in conjunction with each emission control system. The capture system shall attain an efficiency sufficient to achieve an overall control efficiency, in conjunction with the emission control system, of sixty-five percent (65%) for packaging rotogravure processes.

(c) Pursuant to 326 IAC 8-5-5(c)(3)(B), the following shall apply:

(1) The catalytic oxidizing incinerator identified as OXD#2 shall maintain a minimum operating temperature of 600°F or at least a temperature determined in the most recent compliance test to maintain a minimum 90% destruction of the nonmethane VOC captured.

(2) The catalytic oxidizing incinerator identified as OXD#5 shall maintain a minimum operating temperature of 600°F or at least a temperature determined in the most recent compliance test to maintain a minimum 90% destruction of the nonmethane VOC captured.

(3) The natural gas fired regenerative thermal oxidizer identified as OXD#6 shall maintain a minimum operating temperature of 1500°F or at least a temperature determined in the most recent compliance test to maintain a minimum 90% destruction of the nonmethane VOC captured.

(d) Pursuant to 326 IAC 8-1-12 (Compliance Certification, Record Keeping and Reporting Requirements for Certain Coating Facilities Using Control Devices), the presses 1 through 4 are subject to the following requirements when utilizing a thermal and/or catalytic oxidizer to comply with 326 IAC 8-5-5(c)(3)(B):

(1) Each incineration control system shall be operated and maintained according to the manufacturer's recommendations but may be modified based on the results of the initial or subsequent compliance test or upon the written request of IDEM, OAQ.

(2) A copy of the operating and maintenance procedures shall be maintained in a convenient location at the source property and as close to each control system as possible for reference by plant personnel and IDEM, OAQ inspectors.

D.2.2 Graphic Arts Operations [326 IAC 8-5-5]

Pursuant to 326 IAC 8-5-5(f), work practices for Presses #1 through #4 shall include, but not be limited to, the following:

(a) When not in use, all cleaning materials shall be kept in closed containers.

(b) Cleaning materials shall be conveyed from one (1) location to another in closed containers or pipes.

D.2.3 PSD Minor Limit [326 IAC 2-2]

The total input of VOC, including coatings, dilution solvents, and cleaning solvents, to Presses #1 through #4 (emission units P1U1 through P1U10, P2U1 through P2U9, P3U1 through P3U8, and P4U1 through P4U10) shall be limited to 3,458 tons per twelve (12) consecutive month period with compliance determined at the end of each month. The minimum overall VOC control efficiency shall be 94.20%.

Compliance with the above limit in conjunction with Condition D.3.3 and VOC emissions from natural gas combustion, and the insignificant activities will limit source-wide VOC emissions to less than 250 tons per year. Therefore, this is a minor source under 326 IAC 2-2.

D.2.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for these facilities and their control devices. Section B - Preventive Maintenance Plan contains the Permittee's obligation with regard to the preventive maintenance plan required by this condition.

Compliance Determination Requirements

D.2.5 Volatile Organic Compounds (VOC) Control

In order to comply with Conditions D.2.1 and D.2.3, the thermal oxidizers OXD#2, OXD#5 and OXD#6 shall be in operation and control emissions from the associated presses at all times the associated presses are in operation.

D.2.6 Volatile Organic Compounds (VOC) [326 IAC 8-1-4] [326 IAC 8-1-2(a)]

Compliance with the VOC content and usage limitations contained in Conditions D.2.1 and D.2.3 shall be determined pursuant to 326 IAC 8-1-4(a)(3) and 326 IAC 8-1-2(a) by preparing or obtaining from the manufacturer the copies of the “as supplied” and “as applied” VOC data sheets. IDEM, OAQ, reserves the authority to determine-compliance using Method 24 in conjunction with the analytical procedures specified in 326 IAC 8-1-4.

D.2.7 Testing Requirements [326 IAC 8-1-12]

Pursuant to 326 IAC 8-5-5(c)(3)(B) and 326 IAC 8-1-12, each incineration control system shall be tested according to the following schedule and in the following situations:

(a) An initial compliance test shall be conducted. Compliance tests shall be conducted no later than every thirty (30) months after the date of the initial test.

(b) A compliance test shall be conducted whenever the Permittee chooses to operate a control system under conditions different from those that were in place at the time of the previous test.

(c) A compliance test shall be performed within ninety (90) days of:

(1) Startup of a new coating facility;

(2) Changing the method of compliance for an existing coating facility from compliant coatings or daily-weighted averaging to control devices; or

(3) Receipt of a written request from IDEM, OAQ or the U.S. EPA.

(d) All compliance tests shall be conducted according to a protocol approved by IDEM, OAQ at least thirty (30) days before the test. The protocol shall contain, at a minimum, the following information:

(1) Test procedures;

(2) Operating and control system parameters;

(3) Type of VOC containing process material being used; and

(4) The process and control system parameters that will be monitored during the test.

D.2.8 Testing Requirements [326 IAC 2-7-6(1),(6)] [326 IAC 2-1.1-11]

In order to demonstrate the compliance with Condition D.2.3, the Permittee shall conduct VOC control efficiency (as the product of destruction efficiency and capture efficiency) testing on OXD#2, OXD#5 and OXD#6 no later than 2.5 years from the most recent testing performed on these oxidizers. The testing shall be conducted using methods approved by the Commissioner. The test shall be repeated at least once every 2.5 years from the date of the most recent valid compliance demonstration. Section C – Performance Testing contains the Permittee's obligation with regard to the performance testing required by this condition.

Compliance Monitoring Requirements [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]

D.2.9 Thermal Oxidizer Temperature

(a) The Permittee shall determine the 3-hour average combustion zone temperature from the most recent valid stack test that demonstrates compliance with Conditions D.2.1 and D.2.3, as approved by IDEM.

(b) A continuous monitoring system shall be calibrated, maintained, and operated on OXD#6 for measuring combustion zone temperature. The output of the temperature monitoring system shall be recorded as a 3-hour average. The Permittee shall take appropriate response steps in accordance with Section C - Response to Excursions or Exceedances whenever the 3-hour average temperature of the thermal oxidizer is below the temperature determined in the most recent compliance test. A 3-hour average temperature that is below the temperature determined in the most recent compliance test is not a deviation from this permit. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

D.2.10 Catalytic Incinerator Temperature

(a) The Permittee shall determine the 3-hour average catalyst bed inlet and outlet temperatures from the most recent valid stack test that demonstrates compliance with Conditions D.2.1 and D.2.3, as approved by IDEM.

(b) A continuous monitoring system shall be calibrated, maintained, and operated on OXD#2 and OXD#5 for measuring catalyst bed inlet and outlet temperatures. The output of the temperature monitoring system shall be recorded as a 3-hour average. The Permittee shall take appropriate response steps in accordance with Section C - Response to Excursions or Exceedances whenever the 3-hour average catalyst bed inlet and outlet temperatures of the thermal oxidizer are below the temperatures determined in the most recent compliance test. A 3-hour average temperature that is below the temperature determined in the most recent compliance test is not a deviation from this permit. Failure to take response steps in accordance with Section C - Response to Excursions or Exceedances shall be considered a deviation from this permit.

D.2.11 Monitoring Requirements [326 IAC 8-1-12]

Pursuant to 326 IAC 8-5-5(c)(3)(B) and 326 IAC 8-1-12, the monitoring equipment requirements shall be as follows:

(a) When the thermal incinerator is used for VOC reduction, a temperature monitoring device capable of continuously recording the temperature of the gas stream in the combustion zone of the incinerator shall be used. The temperature monitoring device shall have an accuracy of one percent (1%) of the temperature being measured in degrees Centigrade,

or plus or minus five-tenths degree Centigrade (± 0.5°C), whichever is more accurate; and

(b) When a catalytic incinerator is used for VOC reduction, a temperature device capable of continuously recording the temperature in the gas stream immediately before and after the catalyst bed of each incinerator shall be used. The temperature monitoring device shall have an accuracy of one percent (1%) of the temperature being measured in degrees Centigrade, or plus or minus five-tenths degree Centigrade (± 0.5°C), whichever is more accurate.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.2.12 Contemporaneous Log for Alternate Operating Scenarios [326 IAC 2-7-5(9)]

(a) Pursuant to 326 IAC 2-7-5(9)(A), contemporaneously with making a change from one (1) alternative operating scenario to another, the Permittee shall make a record in a log at the permitted facility of the scenario under which it is operating. The record should state the alternative operating scenario for each station, since different stations at the same press may be operating under different scenarios.

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

D.2.13 Record Keeping Requirements [326 IAC 8-1-12]

(a) Pursuant to 326 IAC 8-1-12(c), upon changing the method of compliance for an existing coating facility from the use of compliant coatings (326 IAC 8-5-5(c)(1), (2), or (4)) to control devices (326 IAC 8-5-5(c)(3)(B)), the Permittee shall collect and record each day and maintain all of the following information for each coating facility:

(1) The name and identification of each coating used at each coating facility.

(2) The mass of VOC per unit volume of coating solids, as applied, the volume solids content, as applied, and the volume, as applied, of each coating expressed in units necessary to determine compliance, used each day at each coating facility.

(3) The maximum VOC content (mass of VOC per unit volume of coating solids, as applied) or the daily weighted average VOC content (mass of VOC per unit volume of coating solids, as applied) of the coatings used each day on each coating facility.

(4) The required overall emission reduction efficiency for each day for each coating facility.

(5) The actual overall emission reduction efficiency achieved for each day for each coating facility as determined during the compliance test required by Condition D.2.9 pursuant to 326 IAC 8-1-12(b)(1)(C).

(6) Control device monitoring data as follows:

(A) For the thermal incinerator, the following:

(i) Continuous records of the temperature in the gas stream in the combustion zone of the incinerator; and

(ii) Records of all three (3) hour periods of operation in which the average combustion temperature of the gas stream in the

combustion zone was more than fifty degrees Fahrenheit (50°F) (twenty-eight degrees Centigrade (28°C)) below the average combustion temperature that existed during the most recent test that demonstrated that the coating facility was in compliance.

(B) For each catalytic incinerator, the following:

(i) Continuous records of the temperature of the gas stream both upstream and downstream of the catalyst bed of the incinerator;

(ii) Records of all three (3) hour periods of operation in which the average temperature measured at the process vent stream immediately before the catalyst bed is more than fifty degrees Fahrenheit (50°F) (twenty-eight degrees Centigrade (28°C)) below the average temperature of the process vent stream that existed during the most recent test that demonstrated that the coating facility was in compliance; and

(iii) Records of all three (3) hour periods of operation in which the average temperature difference across the catalyst bed is less than eighty percent (80%) of the temperature difference measured during the most recent test that demonstrated that the coating facility was in compliance.

(7) A log of operating time for each capture system, control device, monitoring equipment, and the associated coating facility.

(8) A maintenance log for each capture system, control device, and monitoring equipment detailing all routine and nonroutine maintenance performed including dates and duration of any outages.

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

D.2.14 Record Keeping Requirements

(a) To document compliance with Condition D.2.3, the Permittee shall maintain records in accordance with (1) through (6) below. Records maintained for (1) through (6) shall be taken monthly and shall be complete and sufficient to establish compliance with the VOC usage limit and/or the VOC emission limit established in Condition D.2.3. Records necessary to demonstrate compliance shall be available within 30 days at the end of each compliance period.

(1) The amount and VOC content of each coating material and solvent used.

(2) The coatings and solvents applied during each month, purchase orders, invoices, and material safety data sheets (MSDS) necessary to verify the coating or solvent used.

(3) A log of the dates of use;

(4) The total VOC usage for each month at each press;

(5) The weight of VOCs emitted for each compliance period for each press; and

(6) The following operation parameters of catalytic incinerators and thermal

oxidizer:

(A) VOC capture efficiency;

(B) VOC destruction efficiency of the control devices;

(C) A description of the data used to establish the capture and destruction efficiencies; and

(D) Continuous temperature readings.

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

D.2.15 Reporting Requirements [326 IAC 8-1-12]

Pursuant to 326 IAC 8-5-5(c)(3)(B) and 326 IAC 8-1-12, the Permittee shall notify IDEM, OAQ in either of the following instances:

(a) Any record showing noncompliance with the applicable requirements for control devices shall be reported by submitting a copy of the record to IDEM, OAQ within thirty (30) days following noncompliance; such record shall also be submitted with the quarterly compliance monitoring report attached to this permit. The following information shall accompany each submittal:

(1) Name and location of the coating facility;

(2) Identification of the control system where the noncompliance occurred and the coating facility it served;

(3) Time, date and duration of the noncompliance; and

(4) Corrective action taken.

(b) At least thirty (30) calendar days before changing the method of compliance from control devices (326 IAC 8-5-5(c)(3)(B)) to the use of compliant coatings (326 IAC 8-5-5(c)(1), (2),or (4)), the Permittee shall comply with all applicable requirements of 326 IAC 8-1-10(b). Upon changing the method of compliance from control devices to the use of compliant coatings, the Permittee shall comply with all requirements of 326 IAC 8-1-10(b), applicable to the coating facility subject to 326 IAC 8-5-5.

D.2.16 Reporting Requirements

A quarterly summary of the information to document compliance with Condition D.2.3 shall be submitted to the address listed in Section C - General Reporting Requirements, of this permit, using the reporting form located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by the “responsible official” as defined by 326 IAC 2-7-1(34).

SECTION D.3 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-7-5(15)]:

(a) One (1) mechanical spray cold cleaner degreaser, identified as PW2, constructed in April of 2001, with a projected solvent consumption rate of eight (8) gallons per day, utilizing closed-loop solvent recycling and distillation for VOC emissions control, and exhausting through one (1) stack (S/V ID: S-MR1).

(b) One (1) mechanical spray cold cleaner degreaser, identified as PW3, approved for construction in 2010, with a projected solvent consumption rate of twelve (12) gallons per day, utilizing a closed-loop solvent recycling and distillation system, and venting indoors.

(c) Degreasing operations that do not exceed 145 gallons per twelve (12) months, except if subject to [326 IAC 20-6], [326 IAC 8-3-2] and [326IAC 8-3-5].

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.3.1 Volatile Organic Compounds (VOC) [326 IAC 8-3-2]

Pursuant to 326 IAC 8-3-2 (Cold Cleaner Operations), the owner or operator of the cold cleaning facility shall comply with the following except when using acetone:

(a) equip the cleaner with a cover;

(b) equip the cleaner with a facility for draining cleaned parts;

(c) close the degreaser cover whenever parts are not being handled in the cleaner;

(d) drain cleaned parts for at least fifteen (15) seconds or until dripping ceases;

(e) provide a permanent, conspicuous label summarizing the operation requirements;

(f) store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.

D.3.2 Volatile Organic Compounds (VOC) [326 IAC 8-3-5]

The cold cleaner degreasing operations and insignificant degreasing operation are subject to this rule. These degreasing operations shall comply with the following requirements except when using acetone:

(a) Pursuant to 326 IAC 8-3-5(a) (Cold Cleaner Degreaser Operation and Control), the owner or operator of a cold cleaner degreaser facility shall ensure that the following control equipment requirements are met:

(1) Equip the degreaser with a cover. The cover must be designed so that it can be easily operated with one (1) hand if:

(A) The solvent volatility is greater than two (2) kiloPascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pounds per square inch)

measured at thirty-eight degrees Celsius (38ºC) (one hundred degrees Fahrenheit (100ºF));

(B) The solvent is agitated; or

(C) The solvent is heated.

(2) Equip the degreaser with a facility for draining cleaned articles. If the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury) or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38ºC) (one hundred degrees Fahrenheit (100ºF)), then the drainage facility must be internal such that articles are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.

(3) Provide a permanent, conspicuous label which lists the operating requirements outlined in subsection (b).

(4) The solvent spray, if used, must be a solid, fluid stream and shall be applied at a pressure which does not cause excessive splashing.

(5) Equip the degreaser with one (1) of the following control devices if the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury) or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38ºC) (one hundred degrees Fahrenheit (100ºF)), or if the solvent is heated to a temperature greater than forty-eight and nine-tenths degrees Celsius (48.9ºC) (one hundred twenty degrees Fahrenheit (120ºF)):

(A) A freeboard that attains a freeboard ratio of seventy-five hundredths (0.75) or greater.

(B) A water cover when solvent is used is insoluble in, and heavier than, water.

(C) Other systems of demonstrated equivalent control such as a refrigerated chiller of carbon adsorption. Such systems shall be submitted to the U.S EPA as a SIP revision.

(b) Pursuant to 326 IAC 8-3-5(b) (Cold Cleaner Degreaser Operation and Control), the owner or operator of a cold cleaning facility shall ensure that the following operating requirements are met:

(1) Close the cover whenever articles are not being handled in the degreaser.

(2) Drain cleaned articles for at least fifteen (15) seconds or until dripping ceases.

(3) Store waste solvent only in covered containers and prohibit the disposal or transfer of waste solvent in any manner in which greater than twenty percent (20%) of the waste solvent by weight could evaporate.

D.3.3 PSD Minor Limit [326 IAC 2-2]

The total VOC usage at PW2 and PW3 shall be limited to 28.45 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

Compliance with the above limit in conjunction with Condition D.2.3/D.3.3 and VOC emissions from natural gas combustion, and the insignificant activities will limit source wide VOC emissions to less than 250 tons per year. Therefore, this is a minor source under 326 IAC 2-2.

D.3.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for these facilities and their control devices. Section B - Preventive Maintenance Plan contains the Permittee's obligation with regard to the preventive maintenance plan required by this condition.

Compliance Determination Requirements

D.3.5 Volatile Organic Compounds (VOC)

Compliance with the VOC content and usage limitations contained in Conditions D.3.3 shall be determined pursuant to 326 IAC 8-1-4(a)(3) and 326 IAC 8-1-2(a) using formulation data supplied by the solvent manufacturer.

Record Keeping and Reporting Requirement [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.3.6 Record Keeping Requirements

(a) To document compliance with Conditions D.3.3, the Permittee shall maintain records in accordance with (1) through (5) below. Records maintained for (1) through (5) shall be taken monthly and shall be complete and sufficient to establish compliance with the VOC usage limits established in Conditions D.3.3.

(1) The amount and VOC content of each solvent used. Records shall include purchase orders, invoices, and material safety data sheets (MSDS) necessary to verify the type and amount used.

(2) A log of the dates of use.

(3) The cleanup solvent usage for each month.

(4) The total VOC usage in parts washer PW2 and PW3 for each month.

(5) The weight of VOC emitted for each compliance period.

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

D.3.7 Reporting Requirements

A quarterly summary of the information to document compliance with Condition D.3.3 shall be submitted to the address listed in Section C - General Reporting Requirements, using the reporting forms located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported. The report submitted by the Permittee does require the certification by the “responsible official” as defined by 326 IAC 2-7-1(34).

SECTION D.4 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-7-5(15)]:

(a) One (1) natural gas fired hot oil boiler identified as TH1 used to heat Press #3, rated at 6 MMBtu per hour and exhausting through one (1) stack identified as S004 [326 IAC 6-2-4].

(b) One (1) Offset Gravure Coater station, with a maximum line speed of 1000 feet per minute and a printing width of 42 inches with maximum coverage of 4.74 pounds per million square inches. [326 IAC 8-2-5]

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.4.1 Particulate Matter (PM) [326 IAC 6-2-4]

Pursuant to 326 IAC 6-2-4 (Particulate Matter Emission Limitations for Sources of Indirect Heating), the PM emissions from the 6.0 MMBtu per hour heat input boiler shall be limited to 0.6 pounds per MMBtu heat input.

D.4.2 Volatile Organic Compounds (VOC) [326 IAC 8-2-5]

Pursuant to 326 IAC 8-2-5 (Surface Coating Emission Limitations: Paper Coating Operations), the Permittee may not cause, allow, or permit the discharge into the atmosphere of any volatile organic compounds in excess of two and nine-tenths (2.9) pounds per gallon excluding water, delivered to the Offset Gravure Coater station from a label coating line.

Compliance Determination Requirements

D.4.3 Volatile Organic Compounds (VOC) [326 IAC 8-1-4] [326 IAC 8-1-2(a)]

Compliance with the VOC content and usage limitations contained in Conditions D.4.2 shall be determined pursuant to 326 IAC 8-1-4(a)(3) and 326 IAC 8-1-2(a) by preparing or obtaining from the manufacturer the copies of the “as supplied” and “as applied” VOC data sheets. IDEM, OAQ, reserves the authority to determine-compliance using Method 24 in conjunction with the analytical procedures specified in 326 IAC 8-1-4.

Record Keeping and Reporting Requirement [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.4.4 Record Keeping Requirements

(a) To document compliance with Conditions D.4.2, the Permittee shall maintain records in accordance with (1) through (5) below. Records maintained for (1) through (5) shall be taken monthly and shall be complete and sufficient to establish compliance with the VOC usage limits and/or the VOC emission limits established in Conditions D.4.2.

(1) The amount and VOC content of each solvent used in the coating applicator of the label coating line. Records shall include purchase orders, invoices, and material safety data sheets (MSDS) necessary to verify the type and amount used.

(2) A log of the dates of use.

(3) The cleanup solvent usage for each month.

(4) The weight of VOC emitted for each compliance period.

(b) Section C – General Record Keeping Requirements, of this permit contains the Permittee's obligations with regard to the records required by this condition.

SECTION E.1 FACILITY OPERATION CONDITIONS

Facility Description [326 IAC 2-7-5(15)]:

(a) One (1) ten (10) station packaging rotogravure printing press identified as Press #1 (ten stations: P1U1 through P1U10), constructed in May of 1990, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P1U1-P1U10 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #1 (ten stations: P1U1 through P1U10) are considered an existing affected source.

(b) One (1) nine (9) station packaging rotogravure printing press identified as Press #2 (nine stations: P2U1 through P2U9), constructed in April of 1991, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P2U1-P2U9 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #2 (nine stations: P2U1 through P2U9) are considered an existing affected source.

(c) One (1) eight (8) station packaging rotogravure printing press identified as Press #3 (eight stations: P3U1 through P3U8), constructed in April of 1997, with a maximum line speed of 800 ft/min when printing with ink and 700 ft/min when printing with ink and adhesive. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P3U1-P3U8 are controlled by one (1) catalytic oxidizing incinerator identified as OXD#2 exhausting through one (1) stack identified as S-OXD2. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #3 (eight stations: P3U1 through P3U8) are considered an existing affected source; and

(d) One (1) packaging rotogravure printing press, identified as Press # 4, (ten stations: P4U1 through P4U10), constructed in January of 2004, with a maximum line speed of 800 feet per minute (ft/min) and firing natural gas with a total heat input rate of five (5) million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P4U1-P4U10 are controlled by one (1) catalytic oxidizer, identified as OXD#5, then exhausted through one (1) stack identified as S-OXD5. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press # 4, (ten stations: P4U1 through P4U10) are considered an existing affected source.

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

National Emission Standards for Hazardous Air Pollutants (NESHAP) Requirements [326 IAC 2-7-5(1)]

E.1.1 General Provisions Relating to NESHAP Subpart KK [326 IAC 20-1] [40 CFR Part 63, Subpart A]

Pursuant to 40 CFR 63.823, the Permittee shall comply with the provisions of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated by reference as 326 IAC 20-1-1, as specified in Table 1 of 40 CFR Part 63, Subpart KK in accordance with schedule in 40 CFR 63 Subpart KK.

E.1.2 Printing and Publishing Industry) NESHAP [40 CFR 63, Subpart KK] [326 IAC 20-18]

Pursuant to CFR Part 63, Subpart KK, the Permittee shall comply with the following provisions of 40 CFR Part 63, Subpart KK (included as Attachment A), which are incorporated by reference as 326 IAC 20-18-1, as specified below.

(a) 40 CFR 63.820 (a)
(b) 40 CFR 63.821
(c) 40 CFR 63.822
(d) 40 CFR 63.823
(e) 40 CFR 63.825
(f) 40 CFR 63.826 (a) and (c)
(g) 40 CFR 63.827
(h) 40 CFR 63.828
(i) 40 CFR 63.829, except 40 CFR 63.829 (f)
(j) 40 CFR 63.830
(k) 40 CFR 63.831

E.1.3 One Time Deadlines Relating to NESHAP, Subpart KK

The Permittee shall conduct the performance tests, performance evaluations, design evaluations, capture efficiency testing, and other initial compliance demonstrations by May 30, 1999. The initial performance test was conducted on January 15, 1999.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
PART 70 OPERATING PERMIT
CERTIFICATION

Source Name: Multi-Color Corporation
Source Address: 2281 South U.S. 31, Scottsburg, Indiana 47170
Part 70 Permit No.: T143-30351-00007

This certification shall be included when submitting monitoring, testing reports/results or other documents as required by this permit.

Please check what document is being certified:

☐ Annual Compliance Certification Letter

☐ Test Result (specify)

☐ Report (specify)

☐ Notification (specify)

☐ Affidavit (specify)

☐ Other (specify)

I certify that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.
Signature:
Printed Name:
Title/Position:
Phone:
Date:

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
Phone: (317) 233-0178
Fax: (317) 233-6865

PART 70 OPERATING PERMIT
EMERGENCY OCCURRENCE REPORT

Source Name: Multi-Color Corporation
Source Address: 2281 South U.S. 31, Scottsburg, Indiana 47170
Part 70 Permit No.: T143-30351-00007

This form consists of 2 pages **Page 1 of 2**

☐ This is an emergency as defined in 326 IAC 2-7-1(12)

- The Permittee must notify the Office of Air Quality (OAQ), within four (**4**) business hours (1-800-451-6027 or 317-233-0178, ask for Compliance Section); and
- The Permittee must submit notice in writing or by facsimile within two (**2**) working days (Facsimile Number: 317-233-6865), and follow the other requirements of 326 IAC 2-7-16.

If any of the following are not applicable, mark N/A

Facility/Equipment/Operation:
Control Equipment:
Permit Condition or Operation Limitation in Permit:
Description of the Emergency:
Describe the cause of the Emergency:

If any of the following are not applicable, mark N/A **Page 2 of 2**

Date/Time Emergency started:
Date/Time Emergency was corrected:
Was the facility being properly operated at the time of the emergency? Y N
Type of Pollutants Emitted: TSP, PM-10, SO_2, VOC, NO_X, CO, Pb, other:
Estimated amount of pollutant(s) emitted during emergency:
Describe the steps taken to mitigate the problem:
Describe the corrective actions/response steps taken:
Describe the measures taken to minimize emissions:
If applicable, describe the reasons why continued operation of the facilities are necessary to prevent imminent injury to persons, severe damage to equipment, substantial loss of capital investment, or loss of product or raw materials of substantial economic value:

Form Completed by:_____

Title / Position: _____

Date:_____

Phone: _____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH

Part 70 Quarterly Report

Source Name: Multi-Color Corporation
Source Address: 2281 South U.S. 31, Scottsburg, Indiana 47170
Part 70 Permit No.: T143-30351-00007
Facility: Presses #1 - #4 emission units P1U1-10, P2U1-9, P3U1-8, and P4U1-10
Parameter: Volatile organic compounds (VOC) usage
Limit: The total input VOC, including coatings, dilution solvents, and cleaning solvents, to Presses #1 through #4 (emission units P1U1 through P1U10, P2U1 through P2U9, P3U1 through P3U8, and P4U1 through P4U10) shall be limited to 3,458 tons per twelve (12) consecutive month period with compliance determined at the end of each month.

QUARTER : YEAR:

Month	Column 1	Column 2	Column 1 + Column 2
	This Month	Previous 11 Months	12 Month Total
Month 1			
Month 2			
Month 3			

☐ No deviation occurred in this quarter.

☐ Deviation/s occurred in this quarter.
Deviation has been reported on:

Submitted by: _____
Title / Position: _____
Signature: _____
Date: _____
Phone: _____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH

Part 70 Quarterly Report

Source Name: Multi-Color Corporation
Source Address: 2281 South U.S. 31, Scottsburg, Indiana 47170
Part 70 Permit No.: T143-30351-00007
Facility: Parts Washers PW2 and PW3
Parameter: Volatile organic compounds (VOC) usage
Limit: The total VOC usage at PW2 and PW3 shall be limited to 28.45 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

QUARTER : YEAR:

Month	Column 1	Column 2	Column 1 + Column 2
	This Month	Previous 11 Months	12 Month Total
Month 1			
Month 2			
Month 3			

☐ No deviation occurred in this quarter.

☐ Deviation/s occurred in this quarter.
Deviation has been reported on:

Submitted by: _____
Title / Position: _____
Signature: _____
Date: _____
Phone: _____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
PART 70 OPERATING PERMIT
QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT

Source Name: Multi-Color Corporation
Source Address: 2281 South U.S. 31, Scottsburg, Indiana 47170
Part 70 Permit No.: T143-30351-00007

Months: _____ to _____ Year: _____

Page 1 of 2

This report shall be submitted quarterly based on a calendar year. Any deviation from the requirements of this permit, the date(s) of each deviation, the probable cause of the deviation, and the response steps taken must be reported. A deviation required to be reported pursuant to an applicable requirement that exists independent of the permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. Additional pages may be attached if necessary. If no deviations occurred, please specify in the box marked "No deviations occurred this reporting period".	
☐ NO DEVIATIONS OCCURRED THIS REPORTING PERIOD.	
☐ THE FOLLOWING DEVIATIONS OCCURRED THIS REPORTING PERIOD	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Form Completed by:_____

Title / Position: _____

Date:_____

Phone: _____

Attachment A
to Part 70 Operating Permit Renewal No. T143-30351-00007

Multi-Color Corporation
2281 South U.S. 31, Scottsburg, Indiana 47170

Subpart KK—National Emission Standards for the Printing and Publishing Industry

Source: 61 FR 27140, May 30, 1996, unless otherwise noted.

§ 63.820 Applicability.

(a) The provisions of this subpart apply to:

(1) Each new and existing facility that is a major source of hazardous air pollutants (HAP), as defined in 40 CFR 63.2, at which publication rotogravure, product and packaging rotogravure, or wide-web flexographic printing presses are operated, and

(2) Each new and existing facility at which publication rotogravure, product and packaging rotogravure, or wide-web flexographic printing presses are operated for which the owner or operator chooses to commit to and meets the criteria of paragraphs (a)(2)(i) and (ii) of this section for purposes of establishing the facility to be an area source of HAP with respect to this subpart. A facility which establishes area source status through some other mechanism, as described in paragraph (a)(7) of this section, is not subject to the provisions of this subpart.

(i) Use less than 9.1 Mg (10 tons) per each rolling 12-month period of each HAP at the facility, including materials used for source categories or purposes other than printing and publishing, and

(ii) Use less than 22.7 Mg (25 tons) per each rolling 12-month period of any combination of HAP at the facility, including materials used for source categories or purposes other than printing and publishing.

(3) Each facility for which the owner or operator chooses to commit to and meets the criteria stated in paragraph (a)(2) of this section shall be considered an area source, and is subject only to the provisions of §§63.829(d) and 63.830(b)(1) of this subpart.

(4) Each facility for which the owner or operator commits to the conditions in paragraph (a)(2) of this section may exclude material used in routine janitorial or facility grounds maintenance, personal uses by employees or other persons, the use of products for the purpose of maintaining electric, propane, gasoline and diesel powered motor vehicles operated by the facility, and the use of HAP contained in intake water (used for processing or noncontact cooling) or intake air (used either as compressed air or for combustion).

(5) Each facility for which the owner or operator commits to the conditions in paragraph (a)(2) of this section to become an area source, but subsequently exceeds either of the thresholds in paragraph (a)(2) of this section for any rolling 12-month period (without first obtaining and complying with other limits that keep its potential to emit HAP below major source levels), shall be considered in violation of its commitment for that 12-month period and shall be considered a major source of HAP beginning the first month after the end of the 12-month period in which either of the HAP-use thresholds was exceeded. As a major source of HAP, each such facility would be subject to the provisions of this subpart as noted in paragraph (a)(1) of this section and would no longer be eligible to use the provisions of paragraph (a)(2) of this section, even if in subsequent 12-month periods the facility uses less HAP than the thresholds in paragraph (a)(2) of this section.

(6) An owner or operator of an affected source subject to paragraph (a)(2) of this section who chooses to no longer be subject to paragraph (a)(2) of this section shall notify the Administrator of such change. If, by no longer being subject to paragraph (a)(2) of this section, the facility at which the affected source is located becomes a major source:

(i) The owner or operator of an existing source must continue to comply with the HAP usage provisions of paragraph (a)(2) of this section until the source is in compliance with all relevant requirements for existing affected sources under this subpart;

(ii) The owner or operator of a new source must continue to comply with the HAP usage provisions of paragraph (a)(2) of this section until the source is in compliance with all relevant requirements for new affected sources under this subpart.

(7) Nothing in this paragraph is intended to preclude a facility from establishing area source status by limiting its potential to emit through other appropriate mechanisms that may be available through the permitting authority.

(b) This subpart does not apply to research or laboratory equipment.

(c) In response to an action to enforce the standards set forth in this subpart, an owner or operator may assert an affirmative defense to a claim for civil penalties for exceedances of such standards that are caused by a malfunction, as defined in §63.2. Appropriate penalties may be assessed, however, if the owner or operator fails to meet the burden of proving all the requirements in the affirmative defense. The affirmative defense shall not be available for claims for injunctive relief.

(1) To establish the affirmative defense in any action to enforce such a limit, the owners or operators of a facility must timely meet the notification requirements of paragraph (c)(2) of this section, and must prove by a preponderance of evidence that:

(i) The excess emissions were caused by a sudden, infrequent, and unavoidable failure of air pollution control and monitoring equipment, or a process to operate in a normal or usual manner; and could not have been prevented through careful planning, proper design or better operation and maintenance practices; and did not stem from any activity or event that could have been foreseen and avoided, or planned for; and were not part of a recurring pattern indicative of inadequate design, operation, or maintenance;

(ii) Repairs were made as expeditiously as possible when the applicable emission limitations were being exceeded. Off-shift and overtime labor were used, to the extent practicable to make these repairs;

(iii) The frequency, amount, and duration of the excess emissions (including any bypass) were minimized to the maximum extent practicable during periods of such emissions;

(iv) If the excess emissions resulted from a bypass of control equipment or a process, then the bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;

(v) All possible steps were taken to minimize the impact of the excess emissions on ambient air quality, the environment, and human health;

(vi) All emissions monitoring and control systems were kept in operation, if at all possible, consistent with safety and good air pollution control practices;

(vii) All of the actions in response to the excess emissions were documented by properly signed, contemporaneous operating logs;

(viii) At all times, the facility was operated in a manner consistent with good practices for minimizing emissions; and

(ix) The owner or operator has prepared a written root cause analysis, the purpose of which is to determine, correct and eliminate the primary causes of the malfunction and the excess emissions resulting from the malfunction event at issue. The analysis shall also specify, using the best monitoring methods and engineering judgment, the amount of excess emissions that were the result of the malfunction.

(2) *Notification.* The owner or operator of the facility experiencing an exceedance of its emission limit(s) during a malfunction shall notify the Administrator by telephone or facsimile (FAX) transmission as soon as possible, but no later than 2 business days after the initial occurrence of the malfunction, if it wishes to avail itself of an affirmative defense to civil penalties for that malfunction. The owner or operator seeking to assert an affirmative defense shall also submit a written report to the Administrator within 45 days of the initial occurrence of the exceedance of the standard in this subpart to demonstrate, with all necessary supporting documentation, that it has met the requirements set forth in paragraph (c)(1) of this section. The owner or operator may seek an extension of this deadline for up to 30 additional days by submitting a written request to the Administrator before the expiration of the 45 day period. Until a request for an extension has been approved by the Administrator, the owner or operator is subject to the requirement to submit such report within 45 days of the initial occurrence of the exceedance.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29799, May 24, 2006; 76 FR 22597, Apr. 21, 2011]

§ 63.821 Designation of affected sources.

(a) The affected sources subject to this subpart are:

(1) All of the publication rotogravure presses and all related equipment, including proof presses, cylinder and parts cleaners, ink and solvent mixing and storage equipment, and solvent recovery equipment at a facility.

(2) All of the product and packaging rotogravure or wide-web flexographic printing presses at a facility plus any other equipment at that facility which the owner or operator chooses to include in accordance with paragraphs (a)(3) or (a)(4) of this section, except

(i) Proof presses, unless the owner or operator chooses to include proof presses in the affected source in accordance with paragraph (a)(5) of this section.

(ii) Any product and packaging rotogravure or wide-web flexographic press which is used primarily for coating, laminating, or other operations which the owner or operator chooses to exclude, provided that

(A) the sum of the total mass of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials applied by the press using product and packaging rotogravure print stations and the total mass of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials applied by the press using wide-web flexographic print stations in each month never exceeds 5 percent of the total mass of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials applied by the press in that month, including all inboard and outboard stations; and

(B) The owner or operator maintains records as required in §63.829(f).

(3) The owner or operator of an affected source, as defined in paragraph (a)(2) of this section, may elect to include in that affected source stand-alone equipment subject to the following provisions:

(i) Stand-alone equipment meeting any of the criteria specified in this subparagraph is eligible for inclusion:

(A) The stand-alone equipment and one or more product and packaging rotogravure or wide-web flexographic presses are used to apply solids-containing materials to the same web or substrate; or

(B) The stand-alone equipment and one or more product and packaging rotogravure or wide-web flexographic presses apply a common solids-containing material; or

(C) A common control device is used to control organic HAP emissions from the stand-alone equipment and from one or more product and packaging rotogravure or wide-web flexographic printing presses;

(ii) All eligible stand-alone equipment located at the facility is included in the affected source; and

(iii) No product and packaging rotogravure or wide-web flexographic presses are excluded from the affected source under the provisions of paragraph (a)(2)(ii) of this section.

(4) The owner or operator of an affected source, as defined in paragraph (a)(2) of this section, may elect to include in that affected source narrow-web flexographic presses subject to the following provisions:

(i) Each narrow-web flexographic press meeting any of the criteria specified in this subparagraph is eligible for inclusion:

(A) The narrow-web flexographic press and one or more product and packaging rotogravure or wide-web flexographic presses are used to apply solids containing material to the same web or substrate; or

(B) The narrow-web flexographic press and one or more product and packaging rotogravure or wide-web flexographic presses apply a common solids-containing material; or

(C) A common control device is used to control organic HAP emissions from the narrow-web flexographic press and from one or more product and packaging rotogravure or wide-web flexographic presses; and

(ii) All eligible narrow-web flexographic presses located at the facility are included in the affected source.

(5) The owner or operator of an affected source, as defined in paragraph (a)(2) of this section, may elect to include in that affected source rotogravure proof presses or flexographic proof presses subject to the following provisions:

(i) Each proof press meeting any of the criteria specified in this subparagraph is eligible for inclusion.

(A) The proof press and one or more product and packaging rotogravure or wide-web flexographic presses apply a common solids-containing material; or

(B) A common control device is used to control organic HAP emissions from the proof press and from one or more product and packaging rotogravure or wide-web flexographic presses; and

(ii) All eligible proof presses located at the facility are included in the affected source.

(6) Affiliated operations such as mixing or dissolving of ink or coating ingredients prior to application; ink or coating mixing for viscosity adjustment, color tint or additive blending, or pH adjustment; cleaning of ink or coating lines and line parts; handling and storage of inks, coatings, and solvents; and conveyance and

treatment of wastewater are part of the printing and publishing industry source category, but are not part of the product and packaging rotogravure or wide-web flexographic printing affected source.

(7) Other presses are part of the printing and publishing industry source category, but are not part of the publication rotogravure affected source or the product and packaging rotogravure or wide-web flexographic printing affected source and are, therefore, exempt from the requirements of this subpart except as provided in paragraph (a)(3) of this section.

(8) Narrow web-flexographic presses are part of the printing and publishing industry source category, but are not part of the publication rotogravure affected source or the product and packaging rotogravure or wide-web flexographic printing affected source and are, therefore, exempt from the requirements of this subpart except as provided in paragraphs (a)(3) through (5) of this section.

(b) Each product and packaging rotogravure or wide-web flexographic printing affected source at a facility that is a major source of HAP, as defined in 40 CFR 63.2, that complies with the criteria of paragraphs (b)(1) or (b)(2) on and after the applicable compliance date as specified in §63.826 of this subpart is subject only to the requirements of §§63.829(e) and 63.830(b)(1) of this subpart.

(1) The owner or operator of the affected source applies no more than 500 kilograms (kg) per month, for every month, of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, and other materials on product and packaging rotogravure or wide-web flexographic printing presses, or

(2) The owner or operator of the affected source applies no more than 400 kg per month, for every month, of organic HAP on product and packaging rotogravure or wide-web flexographic printing presses.

(c) Each product and packaging rotogravure or wide-web flexographic printing affected source at a facility that is a major source of HAP, as defined in 40 CFR 63.2, that complies with neither the criterion of paragraph (b)(1) nor (b)(2) of this section in any month after the applicable compliance date as specified in §63.826 of this subpart is, starting with that month, subject to all relevant requirements of this subpart and is no longer eligible to use the provisions of paragraph (b) of this section, even if in subsequent months the affected source does comply with the criteria of paragraphs (b)(1) or (b)(2) of this section.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29799, May 24, 2006]

§ 63.822 Definitions.

(a) All terms used in this subpart that are not defined below have the meaning given to them in the CAA and in subpart A of this part.

Affirmative defense means, in the context of an enforcement proceeding, a response or a defense put forward by a defendant, regarding which the defendant has the burden of proof, and the merits of which are independently and objectively evaluated in a judicial or administrative proceeding.

Always-controlled work station means a work station associated with a dryer from which the exhaust is delivered to a control device, with no provision for the dryer exhaust to bypass the control device. Sampling lines for analyzers and relief valves needed for safety purposes are not considered bypass lines.

Capture efficiency means the fraction of all organic HAP emissions generated by a process that are delivered to a control device, expressed as a percentage.

Capture system means a hood, enclosed room, or other means of collecting organic HAP emissions into a closed-vent system that exhausts to a control device.

Car-seal means a seal that is placed on a device that is used to change the position of a valve or damper (e.g., from open to closed) in such a way that the position of the valve or damper cannot be changed without breaking the seal.

Certified product data sheet (CPDS) means documentation furnished by suppliers of inks, coatings, varnishes, adhesives, primers, solvents, and other materials or by an independent third party that provides the organic HAP weight fraction of these materials determined in accordance with §63.827(b), or the volatile matter weight fraction or solids weight fraction determined in accordance with §63.827(c). A material safety data sheet (MSDS) may serve as a CPDS provided the MSDS meets the data requirements of §63.827(b) and (c). The purpose of the CPDS is to assist the owner or operator in demonstrating compliance with the emission limitations presented in §§63.824–63.825.

Coating means material applied onto or impregnated into a substrate for decorative, protective, or functional purposes. Such materials include, but are not limited to, solvent-borne coatings, waterborne coatings, wax coatings, wax laminations, extrusion coatings, extrusion laminations, 100 percent solid adhesives, ultra-violet cured coatings, electron beam cured coatings, hot melt coatings, and cold seal coatings. Materials used to form unsupported substrates such as calendaring of vinyl, blown film, cast film, extruded film, and coextruded film are not considered coatings.

Control device means a device such as a carbon adsorber or oxidizer which reduces the organic HAP in an exhaust gas by recovery or by destruction.

Control device efficiency means the ratio of organic HAP emissions recovered or destroyed by a control device to the total organic HAP emissions that are introduced into the control device, expressed as a percentage.

Day means a 24-consecutive-hour period.

Facility means all contiguous or adjoining property that is under common ownership or control, including properties that are separated only by a road or other public right-of-way.

Flexible packaging means any package or part of a package the shape of which can be readily changed. Flexible packaging includes, but is not limited to, bags, pouches, labels, liners and wraps utilizing paper, plastic, film, aluminum foil, metalized or coated paper or film, or any combination of these materials.

Flexographic press means an unwind or feed section, which may include more than one unwind or feed station (such as on a laminator), a series of individual work stations, one or more of which is a flexographic print station, any dryers (including interstage dryers and overhead tunnel dryers) associated with the work stations, and a rewind, stack, or collection section. The work stations may be oriented vertically, horizontally, or around the circumference of a single large impression cylinder. Inboard and outboard work stations, including those employing any other technology, such as rotogravure, are included if they are capable of printing or coating on the same substrate. A publication rotogravure press with one or more flexographic imprinters is not a flexographic press.

Flexographic print station means a print station on which a flexographic printing operation is conducted. A flexographic print station includes an anilox roller that transfers material to a raised image (type or art) on a plate cylinder. The material is then transferred from the image on the plate cylinder to the web or sheet to be printed. A flexographic print station may include a fountain roller to transfer material from the reservoir to the anilox roller, or material may be transferred directly from the reservoir to the anilox roller. The materials applied are of a fluid, rather than paste, consistency.

HAP applied means the organic HAP content of all inks, coatings, varnishes, adhesives, primers, solvent, and other materials applied to a substrate by a product and packaging rotogravure or wide-web flexographic printing affected source.

HAP used means the organic HAP applied by a publication rotogravure printing affected source, including all organic HAP used for cleaning, parts washing, proof presses, and all organic HAP emitted during tank loading, ink mixing, and storage.

Intermittently-controllable work station means a work station associated with a dryer with provisions for the dryer exhaust to be delivered to or diverted from a control device depending on the position of a valve or damper. Sampling lines for analyzers and relief valves needed for safety purposes are not considered bypass lines.

Month means a calendar month or a prespecified period of 28 days to 35 days.

Narrow-web flexographic press means a flexographic press that is not capable of printing substrates greater than 18 inches in width and that does not also meet the definition of rotogravure press (i.e., it has no rotogravure print stations).

Never-controlled work station means a work station which is not equipped with provisions by which any emissions, including those in the exhaust from any associated dryer, may be delivered to a control device.

Other press means a lithographic press, letterpress press, or screen printing press that does not meet the definition of rotogravure press or flexographic press (i.e., it has no rotogravure print stations and no flexographic print stations), and that does not print on fabric or other textiles as defined in the Printing, Coating, and Dyeing of Fabrics and Other Textiles NESHAP (40 CFR part 63, subpart OOOO), wood furniture components as defined in the Wood Furniture Manufacturing Operations NESHAP (40 CFR part 63, subpart JJ

) or wood building products as defined in the Surface Coating of Wood Building Products NESHAP (40 CFR part 63, subpart QQQQ).

Overall Organic HAP control efficiency means the total efficiency of a control system, determined either by:

(1) The product of the capture efficiency and the control device efficiency or

(2) A liquid-liquid material balance.

Print station means a work station on which a printing operation is conducted.

Printing operation means the formation of words, designs, or pictures on a substrate other than wood furniture components as defined in the Wood Furniture Manufacturing Operations NESHAP (40 CFR part 63, subpart JJ), wood building products as defined in the Surface Coating of Wood Building Products NESHAP (40 CFR part 63, subpart QQQQ), and fabric or other textiles as defined in the Printing, Coating, and Dyeing of Fabric and Other Textiles NESHAP (40 CFR part 63, subpart OOOO), except for fabric or other textiles for use in flexible packaging.

Product and packaging rotogravure printing means the production, on a rotogravure press, of any printed substrate not otherwise defined as publication rotogravure printing. This includes, but is not limited to, folding cartons, flexible packaging, labels and wrappers, gift wraps, wall and floor coverings, upholstery, decorative laminates, and tissue products.

Proof press means any press which prints only non-saleable items used to check the quality of image formation of rotogravure cylinders or flexographic plates; substrates such as paper, plastic film, metal foil, or vinyl; or ink, coating varnish, adhesive, primer, or other solids-containing material.

Publication rotogravure press means a rotogravure press used for publication rotogravure printing. A publication rotogravure press may include one or more flexographic imprinters. A publication rotogravure press with one or more flexographic imprinters is not a flexographic press.

Publication rotogravure printing means the production, on a rotogravure press, of the following saleable paper products:

(1) Catalogues, including mail order and premium,

(2) Direct mail advertisements, including circulars, letters, pamphlets, cards, and printed envelopes,

(3) Display advertisements, including general posters, outdoor advertisements, car cards, window posters; counter and floor displays; point of purchase and other printed display material,

(4) Magazines,

(5) Miscellaneous advertisements, including brochures, pamphlets, catalog sheets, circular folders, announcements, package inserts, book jackets, market circulars, magazine inserts, and shopping news,

(6) Newspapers, magazine and comic supplements for newspapers, and preprinted newspaper inserts, including hi-fi and spectacolor rolls and sections,

(7) Periodicals, and

(8) Telephone and other directories, including business reference services.

Research or laboratory equipment means any equipment for which the primary purpose is to conduct research and development into new processes and products, where such equipment is operated under the close supervision of technically trained personnel and is not engaged in the manufacture of products for commercial sale in commerce, except in a de minimis manner.

Rotogravure press means an unwind or feed section, which may include more than one unwind or feed station (such as on a laminator), a series of individual work stations, one or more of which is a rotogravure print station, any dryers associated with the work stations, and a rewind, stack, or collection section. Inboard and outboard work stations, including those employing any other technology, such as flexography, are included if they are capable of printing or coating on the same substrate.

Rotogravure print station means a print station on which a rotogravure printing operation is conducted. A rotogravure print station includes a rotogravure cylinder and supply for ink or other solids containing material. The image (type and art) to be printed is etched or engraved below the surface of the rotogravure cylinder. On a rotogravure cylinder the printing image consists of millions of minute cells.

Stand-alone equipment means an unwind or feed section, which may include more than one unwind or feed station (such as on a laminator); a series of one or more work stations and any associated dryers; and a rewind, stack, or collection section that is not part of a product and packaging rotogravure or wide-web flexographic press. Stand-alone equipment is sometimes referred to as “off-line” equipment.

Wide-web flexographic press means a flexographic press capable of printing substrates greater than 18 inches in width.

Work station means a unit on which material is deposited onto a substrate.

(b) The symbols used in equations in this subpart are defined as follows:

(1) C_{ahi}=the monthly average, as-applied, organic HAP content of solids-containing material, i, expressed as a weight-fraction, kg/kg.

(2) C_{asi}=the monthly average, as applied, solids content, of solids-containing material, i, expressed as a weight-fraction, kg/kg.

(3) C_{hi}=the organic HAP content of ink or other solids-containing material, i, expressed as a weight-fraction, kg/kg.

(4) C_{hij}=the organic HAP content of solvent j, added to solids-containing material i, expressed as a weight-fraction, kg/kg.

(5) C_{hj}=the organic HAP content of solvent j, expressed as a weight-fraction, kg/kg.

(6) [Reserved]

(7) C_{si}=the solids content of ink or other material, i, expressed as a weight-fraction, kg/kg.

(8) C_{vi}=the volatile matter content of ink or other material, i, expressed as a weight-fraction, kg/kg.

(9) E=the organic volatile matter control efficiency of the control device, percent.

(10) F=the organic volatile matter capture efficiency of the capture system, percent.

(11) G_i=the mass fraction of each solids containing material, i, which was applied at 20 weight-percent or greater solids content, on an as-applied basis, kg/kg.

(12) H = the monthly organic HAP emitted, kg.

(13) H_a=the monthly allowable organic HAP emissions, kg.

(14) H_L=the monthly average, as-applied, organic HAP content of all solids-containing materials applied at less than 0.04 kg organic HAP per kg of material applied, kg/kg.

(15) H_s=the monthly average, as-applied, organic HAP to solids ratio, kg organic HAP/kg solids applied.

(16) H_{si}=the as-applied, organic HAP to solids ratio of material i.

(17) L=the mass organic HAP emission rate per mass of solids applied, kg/kg.

(18) M_{Bi}=the sum of the mass of solids-containing material, i, applied on intermittently-controllable work stations operating in bypass mode and the mass of solids-containing material, i, applied on never-controlled work stations, in a month, kg.

(19) M_{Bj}=the sum of the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material, j, applied on intermittently-controllable work stations operating in bypass mode and the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material, j, applied on never-controlled work stations, in a month, kg.

(20) M_{ci}=the sum of the mass of solids-containing material, i, applied on intermittently-controllable work stations operating in controlled mode and the mass of solids-containing material, i, applied on always-controlled work stations, in a month, kg.

(21) M_{cj}=the sum of the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material, j, applied on intermittently-controllable work stations operating in controlled mode and the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material, j, applied on always-controlled work stations in a month, kg.

(22) [Reserved]

(23) M_{fi}=the organic volatile matter mass flow rate at the inlet to the control device, kg/h.

(24) M_{fo}=the organic volatile matter mass flow rate at the outlet of the control device, kg/h.

(25) M_{hu}=the mass of organic HAP used in a month, kg.

(26) M_i=the mass of ink or other material, i, applied in a month, kg.

(27) M_{ij}=the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material, j, added to solids-containing material, i, in a month, kg.

(28) M_j=the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material, j, applied in a month, kg.

(29) M_{Lj}=the mass of solvent, thinner, reducer, diluent, or other non-solids-containing material, j, added to solids-containing materials which were applied at less than 20 weight-percent solids content, on an as-applied basis, in a month, kg.

(30) M_{vr}=the mass of volatile matter recovered in a month, kg.

(31) M_{vu}=the mass of volatile matter, including water, used in a month, kg.

(32) [Reserved]

(33) n=the number of organic compounds in the vent gas.

(34) p=the number of different inks, coatings, varnishes, adhesives, primers, and other materials applied in a month.

(35) q=the number of different solvents, thinners, reducers, diluents, or other non-solids-containing materials applied in a month.

(36) [Reserved]

(37) R=the overall organic HAP control efficiency, percent.

(38) R_e=the overall effective organic HAP control efficiency for publication rotogravure, percent.

(39) R_v=the organic volatile matter collection and recovery efficiency, percent.

(40) S=the mass organic HAP emission rate per mass of material applied, kg/kg.

(41) 0.0416=conversion factor for molar volume, kg-mol/m^3 (@ 293 K and 760 mmHg).

[61 FR 27140, May 30, 1996, as amended at 71 FR 29800, May 24, 2006; 76 FR 22598, Apr. 21, 2011]

§ 63.823 Standards: General.

(a) Table 1 to this subpart provides cross references to the 40 CFR part 63, subpart A, general provisions, indicating the applicability of the general provisions requirements to this subpart KK.

(b) Each owner or operator of an affected source subject to this subpart must at all times operate and maintain that affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator, which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[76 FR 22598, Apr. 21, 2011]

§ 63.824 Standards: Publication rotogravure printing.

(a) Each owner or operator of any publication rotogravure printing affected source that is subject to the requirements of this subpart shall comply with these requirements on and after the compliance dates as specified in §63.826 of this subpart.

(b) Each publication rotogravure affected source shall limit emissions of organic HAP to no more than eight percent of the total volatile matter used each month. The emission limitation may be achieved by overall control of at least 92 percent of organic HAP used, by substitution of non-HAP materials for organic HAP, or by a combination of capture and control technologies and substitution of materials. To demonstrate compliance, each owner or operator shall follow the procedure in paragraph (b)(1) of this section when emissions from the affected source are controlled by a solvent recovery device, the procedure in paragraph (b)(2) of this section when emissions from the affected source are controlled by an oxidizer, and the procedure in paragraph (b)(3) of this section when no control device is used.

(1) Each owner or operator using a solvent recovery device to control emissions shall demonstrate compliance by showing that the HAP emission limitation is achieved by following the procedures in either paragraph (b)(1)(i) or (b)(1)(ii) of this section:

(i) Perform a liquid-liquid material balance for each month as follows:

(A) Measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material used by the affected source during the month.

(B) Determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent and other material used by the affected source during the month following the procedure in §63.827(b)(1).

(C) Determine the volatile matter content, including water, of each ink, coating, varnish, adhesive, primer, solvent, and other material used by the affected source during the month following the procedure in §63.827(c)(1).

(D) Install, calibrate, maintain and operate, according to the manufacturer's specifications, a device that indicates the cumulative amount of volatile matter recovered by the solvent recovery device on a monthly basis. The device shall be initially certified by the manufacturer to be accurate to within ±2.0 percent.

(E) Measure the amount of volatile matter recovered for the month.

(F) Calculate the overall effective organic HAP control efficiency (R_e) for the month using Equation 1:

$$R_e = (100)\frac{M_{vu} - M_{ku} + \left[(M_{vr})(M_{ku}/M_{vu})\right]}{M_{vu}} \qquad Eq\ 1$$

For the purposes of this calculation, the mass fraction of organic HAP present in the recovered volatile matter is assumed to be equal to the mass fraction of organic HAP present in the volatile matter used.

(G) The affected source is in compliance for the month, if $R_e$is at least 92 percent each month.

(ii) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency as specified in paragraphs (b)(1)(ii)(A) through (b)(1)(ii)(E) of this section:

(A) Install continuous emission monitors to collect the data necessary to calculate the total organic volatile matter mass flow in the gas stream entering and the total organic volatile matter mass flow in the gas stream exiting the solvent recovery device for each month such that the percent control efficiency (E) of the solvent recovery device can be calculated for the month. This requires continuous emission monitoring of the total organic volatile matter concentration in the gas stream entering the solvent recovery device, the total organic volatile matter concentration in the gas stream exiting the solvent recovery device, and the volumetric gas flow rate through the solvent recovery device. A single continuous volumetric gas flow measurement should be sufficient for a solvent recovery device since the inlet and outlet volumetric gas flow rates for a solvent recovery device are essentially equal. Each month's individual inlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream entering the solvent recovery device for the month. Each month's individual outlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream exiting the solvent recovery device for the month.

(B) Determine the percent capture efficiency (F) of the capture system according to §63.827(e).

(C) Calculate the overall effective organic HAP control efficiency (R_e) achieved for each month using Equation 2.

$$R_e = (100)\frac{M_{vu} - M_{ku} + \left[(E/100)(F/100)M_{ku}\right]}{M_{vu}} \qquad Eq\ 2$$

(D) Install, calibrate, operate and maintain the instrumentation necessary to measure continuously the site-specific operating parameter established in accordance with §63.828(a)(5) whenever a publication rotogravure printing press is operated.

(E) The affected source is in compliance with the requirement for the month if $R_e$is at least 92 percent, and the capture device is operated at an average value greater than, or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5) for each three-hour period.

(2) Each owner or operator using an oxidizer to control emissions shall demonstrate compliance by showing that the HAP emission limitation is achieved by following the procedure in either paragraph (b)(2)(i) or (b)(2)(ii) of this section:

(i) Demonstrate initial compliance through performance tests and continuing compliance through continuous monitoring as follows:

(A) Determine the oxidizer destruction efficiency (E) using the procedure in §63.827(d).

(B) Determine the capture efficiency (F) using the procedure in §63.827(e).

(C) [Reserved]

(D) Calculate the overall effective organic HAP control efficiency (R_e) achieved using Equation 2.

(E) The affected source is in initial compliance if $R_e$is at least 92 percent. Demonstration of continuing compliance is achieved by continuous monitoring of an appropriate oxidizer operating parameter in accordance with §63.828(a)(4), and by continuous monitoring of an appropriate capture system monitoring parameter in accordance with §63.828(a)(5). The affected source is in continuing compliance if the capture device is operated at an average value greater than or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5), and

(*1*) if an oxidizer other than a catalytic oxidizer is used, the average combustion temperature for all three-hour periods is greater than or equal to the average combustion temperature established under §63.827(d), or

(*2*) if a catalytic oxidizer is used, the average catalyst bed inlet temperature for all three-hour periods is greater than or equal to the average catalyst bed inlet temperature established in accordance with §63.827(d).

(ii) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency. The percent control efficiency of the oxidizer shall be demonstrated in accordance with the requirements of paragraph (b)(1)(ii) of this section except that separate continuous measurements of the inlet volumetric gas flow rate and the outlet volumetric gas flow rate are required for an oxidizer.

(3) To demonstrate compliance without the use of a control device, each owner or operator shall compare the mass of organic HAP used to the mass of volatile matter used each month, as specified in paragraphs (b)(3)(i) through (b)(3)(iv) of this section:

(i) Measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material used in the affected source during the month.

(ii) Determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material used during the month following the procedure in §63.827(b)(1), and

(iii) Determine the volatile matter content, including water, of each ink, coating, varnish, adhesive, primer, solvent, and other material used during the month following the procedure in §63.827(c)(1).

(iv) The affected source is in compliance for the month if the mass of organic HAP used does not exceed eight percent of the mass of volatile matter used.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29801, May 24, 2006]

§ 63.825 Standards: Product and packaging rotogravure and wide-web flexographic printing.

(a) Each owner or operator of any product and packaging rotogravure or wide-web flexographic printing affected source that is subject to the requirements of this subpart shall comply with these requirements on and after the compliance dates as specified in §63.826 of this subpart.

(b) Each product and packaging rotogravure or wide-web flexographic printing affected source shall limit organic HAP emissions to no more than 5 percent of the organic HAP applied for the month; or to no more than 4 percent of the mass of inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, and other materials applied for the month; or to no more than 20 percent of the mass of solids applied for the month; or to a calculated equivalent allowable mass based on the organic HAP and solids contents of the inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, and other materials applied for the month. The owner or operator of each product and packaging rotogravure or wide-web flexographic printing affected source shall demonstrate compliance with this standard by following one of the procedures in paragraphs (b)(1) through (b)(10) of this section:

(1) Demonstrate that each ink, coating, varnish, adhesive, primer, solvent, diluent, reducer, thinner, and other material applied during the month contains no more than 0.04 weight-fraction organic HAP, on an as-purchased basis, as determined in accordance with §63.827(b)(2).

(2) Demonstrate that each ink, coating, varnish, adhesive, primer, and other solids-containing material applied during the month contains no more than 0.04 weight-fraction organic HAP, on a monthly average as-applied basis as determined in accordance with paragraphs (b)(2)(i)–(ii) of this section. The owner or operator shall calculate the as-applied HAP content of materials which are reduced, thinned, or diluted prior to application, as follows:

(i) Determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, diluent, reducer, thinner, and other material applied on an as-purchased basis in accordance with §63.827(b)(2).

(ii) Calculate the monthly average as-applied organic HAP content, $C_{ahi}$of each ink, coating, varnish, adhesive, primer, and other solids-containing material using Equation 3.

$$C_{ahi} = \frac{\left(C_{hi} M_i + \sum_{j=1}^{q} C_{hij} M_{ij} \right)}{M_i + \sum_{j=1}^{q} M_{ij}} \qquad Eq\ 3$$

(3)(i) Demonstrate that each ink, coating, varnish, adhesive, primer, and other solids-containing material applied, either

(A) Contains no more than 0.04 weight-fraction organic HAP on a monthly average as-applied basis, or

(B) Contains no more than 0.20 kg of organic HAP per kg of solids applied, on a monthly average as-applied basis.

(ii) The owner or operator may demonstrate compliance in accordance with paragraphs (b)(3)(ii) (A)–(C) of this section.

(A) Use the procedures of paragraph (b)(2) of this section to determine which materials meet the requirements of paragraph (b)(3)(i)(A) of this section,

(B) Determine the as-applied solids content following the procedure in §63.827(c)(2) of all materials which do not meet the requirements of paragraph (b)(3)(i)(A) of this section. The owner or operator may calculate the monthly average as-applied solids content of materials which are reduced, thinned, or diluted prior to application, using Equation 4, and

$$C_{asi} = \frac{C_{si} M_i}{M_i + \sum_{j=1}^{q} M_{ij}} \qquad Eq\ 4$$

(C) Calculate the as-applied organic HAP to solids ratio, H_{si}, for all materials which do not meet the requirements of paragraph (b)(3)(i)(A) of this section, using Equation 5.

$$H_{si} = \frac{C_{aki}}{C_{asi}} \qquad Eq\ 5$$

(4) Demonstrate that the monthly average as-applied organic HAP content, H_L, of all materials applied is less than 0.04 kg HAP per kg of material applied, as determined by Equation 6.

$$H_L = \frac{\sum_{i=1}^{p} M_i C_{ki} + \sum_{j=1}^{q} M_j C_{kj}}{\sum_{i=1}^{p} M_i + \sum_{j=1}^{q} M_j} \qquad Eq\ 6$$

(5) Demonstrate that the monthly average as-applied organic HAP content on the basis of solids applied, H_s, is less than 0.20 kg HAP per kg solids applied as determined by Equation 7.

$$H_S = \frac{\sum_{i=1}^{p} M_i C_{ki} + \sum_{j=1}^{q} M_j C_{kj}}{\sum_{i=1}^{p} M_i C_{si}} \qquad Eq\ 7$$

(6) Demonstrate that the total monthly organic HAP applied, H_{app}, as determined by Equation 8, is less than the calculated equivalent allowable organic HAP, H_a, as determined by paragraph (e) of this section.

$$H_{app} = \sum_{i=1}^{p} M_i C_{ki} + \sum_{j=1}^{q} M_j C_{kj} \qquad Eq.\ 8$$

Where:

H_{app}= Total monthly organic HAP applied, kg.

(7) Operate a capture system and control device and demonstrate an overall organic HAP control efficiency of at least 95 percent for each month. If the affected source operates more than one capture system or more than one control device, and has only always-controlled work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of either paragraph (f) or (h) of this section. If the affected source operates one or more never-controlled work stations or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance in accordance with the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(8) Operate a capture system and control device and limit the organic HAP emission rate to no more than 0.20 kg organic HAP emitted per kg solids applied as determined on a monthly average as-applied basis. If the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance following the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(9) Operate a capture system and control device and limit the organic HAP emission rate to no more than 0.04 kg organic HAP emitted per kg material applied as determined on a monthly average as-applied basis. If the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance following the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(10) Operate a capture system and control device and limit the monthly organic HAP emissions to less than the allowable emissions as calculated in accordance with paragraph (e) of this section. If the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations, then the owner or operator shall demonstrate compliance in accordance with the provisions of paragraph (f) of this section. Otherwise, the owner or operator shall demonstrate compliance following the procedure in paragraph (c) of this section when emissions from the affected source are controlled by a solvent recovery device or the procedure in paragraph (d) of this section when emissions are controlled by an oxidizer.

(c) To demonstrate compliance with the overall organic HAP control efficiency requirement in §63.825(b)(7) or the organic HAP emissions limitation requirements in §63.825(b)(8)–(10), each owner or operator using a solvent recovery device to control emissions shall show compliance by following the procedures in either paragraph (c)(1) or (c)(2) of this section:

(1) Perform a liquid-liquid material balance for each and every month as follows:

(i) Measure the mass of each ink, coating, varnish, adhesive, primer, solvent and other material applied on the press or group of presses controlled by a common solvent recovery device during the month.

(ii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(b)(2).

(iii) Determine the volatile matter content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(iv) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, determine the solids content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(v) Install, calibrate, maintain, and operate according to the manufacturer's specifications, a device that indicates the cumulative amount of volatile matter recovered by the solvent recovery device on a monthly basis. The device shall be initially certified by the manufacturer to be accurate to within ±2.0 percent.

(vi) Measure the amount of volatile matter recovered for the month.

(vii) Calculate the volatile matter collection and recovery efficiency, R_v, using Equation 9.

$$R_v = 100 \frac{M_{vr}}{\sum_{i=1}^{p} M_i C_{vi} + \sum_{j=1}^{q} M_j} \qquad Eq\ 9$$

(viii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, calculate the organic HAP emitted during the month, H, using Equation 10.

$$H = \left[1 - \frac{R_v}{100}\right]\left[\sum_{i=1}^{p}\left(C_{hi} M_i + \sum_{j=1}^{q} C_{hij} M_{ij}\right)\right] \qquad Eq\ 10$$

(ix) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, calculate the organic HAP emission rate based on solids applied, L, using Equation 11.

$$L = \frac{H}{\sum_{i=1}^{p} C_{si} M_i} \qquad Eq\ 11$$

(x) If demonstrating compliance on the basis of organic HAP emission rate based on materials applied, calculate the organic HAP emission rate based on material applied, S, using Equation 12.

$$S = \frac{H}{\sum_{i=1}^{p}\left[M_i + \sum_{j=1}^{q} M_{ij}\right]} \qquad Eq\ 12$$

(xi) The affected source is in compliance if

(A) The organic volatile matter collection and recovery efficiency, R_v, is 95 percent or greater, or

(B) The organic HAP emission rate based on solids applied, L, is 0.20 kg organic HAP per kg solids applied or less, or

(C) the organic HAP emission rate based on material applied, S, is 0.04 kg organic HAP per kg material applied or less, or

(D) the organic HAP emitted during the month, H, is less than the calculated allowable organic HAP, H_a, as determined using paragraph (e) of this section.

(2) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency following the procedures in paragraphs (c)(2)(i) through (c)(2)(xi) of this section:

(i) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on materials applied, or emission of less than the calculated allowable organic HAP, measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material applied on the press or group of presses controlled by a common control device during the month.

(ii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(b)(2).

(iii) Install continuous emission monitors to collect the data necessary to calculate the total organic volatile matter mass flow in the gas stream entering and the total organic volatile mass flow in the gas stream exiting the solvent recovery device for each month such that the percent control efficiency (E) of the solvent recovery device can be calculated for the month. This requires continuous emission monitoring of the total organic volatile matter concentration in the gas stream entering the solvent recovery device, the total organic volatile matter concentration in the gas stream exiting the solvent recovery device, and the volumetric gas flow rate through the solvent recovery device. A single continuous volumetric gas flow measurement should be sufficient for a solvent recovery device since the inlet and outlet volumetric gas flow rates for a solvent recovery device are essentially equal. Each month's individual inlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream entering the solvent recovery device for the month. Each month's individual outlet concentration values and corresponding individual gas flow rate values are multiplied and then summed to get the total organic volatile matter mass flow in the gas stream exiting the solvent recovery device for the month.

(iv) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, determine the solids content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(v) Install, calibrate, operate and maintain the instrumentation necessary to measure continuously the site-specific operating parameter established in accordance with §63.828(a)(5) whenever a product and packaging rotogravure or wide-web flexographic printing press is operated.

(vi) Determine the capture efficiency (F) in accordance with §63.827(e)–(f).

(vii) Calculate the overall organic HAP control efficiency, (R), achieved for each month using Equation 13.

$$R = \frac{EF}{100} \qquad Eq\ 13$$

(viii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, calculate the organic HAP emitted during the month, H, for each month using Equation 14.

$$H = \left[1 - \left(\frac{E}{100}\frac{F}{100}\right)\right]\left[\sum_{i=1}^{p}\left(C_{ki}M_i + \sum_{j=1}^{q}C_{kij}M_{ij}\right)\right] \qquad Eq\ 14$$

(ix) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, calculate the organic HAP emission rate based on solids applied, L, using Equation 15.

$$L = \frac{H}{\sum_{i=1}^{p}C_{si}M_i} \qquad Eq\ 15$$

(x) If demonstrating compliance on the basis of organic HAP emission rate based on materials applied, calculate the organic HAP emission rate based on material applied, S, using Equation 16.

$$S = \frac{H}{\sum_{i=1}^{p}\left[M_i + \sum_{j=1}^{q}M_{ij}\right]} \qquad Eq\ 16$$

(xi) The affected source is in compliance if the capture system operating parameter is operated at an average value greater than or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5) for each three hour period, and

(A) The organic volatile matter collection and recovery efficiency, R_v, is 95 percent or greater, or

(B) The organic HAP emission rate based on solids applied, L, is 0.20 kg organic HAP per kg solids applied or less, or

(C) The organic HAP emission rate based on material applied, S, is 0.04 kg organic HAP per kg material applied or less, or

(D) The organic HAP emitted during the month, H, is less than the calculated allowable organic HAP, H_a, as determined using paragraph (e) of this section.

(d) To demonstrate compliance with the overall organic HAP control efficiency requirement in §63.825(b)(7) or the overall organic HAP emission rate limitation requirements in §63.825(b)(8)–(10), each owner or operator using an oxidizer to control emissions shall show compliance by following the procedures in either paragraph (d)(1) or (d)(2) of this section:

(1) demonstrate initial compliance through performance tests of capture efficiency and control device efficiency and continuing compliance through continuous monitoring of capture system and control device operating parameters following the procedures in paragraph (d)(1)(i) through (d)(1)(xi) of this section:

(i) Determine the oxidizer destruction efficiency (E) using the procedure in §63.827(d).

(ii) Determine the capture system capture efficiency (F) in accordance with §63.827(e)–(f).

(iii) Calculate the overall organic HAP control efficiency, (R), achieved using Equation 13.

(iv) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on materials applied, or emission of less than the calculated allowable organic HAP, measure the mass of each ink, coating, varnish, adhesive, primer, solvent, and other material applied on the press or group of presses controlled by a common control device during the month.

(v) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, determine the organic HAP content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(b)(2).

(vi) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, determine the solids content of each ink, coating, varnish, adhesive, primer, solvent, and other material applied during the month following the procedure in §63.827(c)(2).

(vii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, organic HAP emission rate based on material applied or emission of less than the calculated allowable organic HAP, calculate the organic HAP emitted during the month, H, for each month using Equation 14.

(viii) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied, calculate the organic HAP emission rate based on solids applied, L, for each month using Equation 15.

(ix) If demonstrating compliance on the basis of organic HAP emission rate based on materials applied, calculate the organic HAP emission rate based on material applied, S, using Equation 16.

(x) Install, calibrate, operate and maintain the instrumentation necessary to measure continuously the site-specific operating parameters established in accordance with §63.828(a)(4)–(5) whenever a product and packaging rotogravure or wide-web flexographic press is operating.

(xi) The affected source is in compliance, if the oxidizer is operated such that the average operating parameter value is greater than the operating parameter value established in accordance with §63.828(a)(4) for each three-hour period, and the capture system operating parameter is operated at an average value greater than or less than (as appropriate) the operating parameter value established in accordance with §63.828(a)(5) for each three hour period, and

(A) The overall organic HAP control efficiency, R, is 95 percent or greater, or

(B) The organic HAP emission rate based on solids applied, L, is 0.20 kg organic HAP per kg solids applied or less, or

(C) The organic HAP emission rate based on material applied, S, is 0.04 kg organic HAP per kg material applied or less, or

(D) The organic HAP emitted during the month, H, is less than the calculated allowable organic HAP, H_a, as determined using paragraph (e) of this section.

(2) Use continuous emission monitors, conduct an initial performance test of capture efficiency, and continuously monitor a site specific operating parameter to assure capture efficiency. The percent control efficiency of the oxidizer shall be demonstrated in accordance with the requirements of paragraph (c)(2)

of this section except that separate continuous volumetric gas flow measurements of the inlet and outlet volumetric gas flow rates are required for an oxidizer.

(e) Owners or operators may calculate the monthly allowable HAP emissions, H_a, for demonstrating compliance in accordance with paragraph (b)(6), (c)(1)(xi)(D), (c)(2)(xi)(D), or (d)(1)(xi)(D) of this section as follows:

(1) Determine the as-purchased mass of each ink, coating, varnish, adhesive, primer, and other solids-containing material applied each month, M_i.

(2) Determine the as-purchased solids content of each ink, coating, varnish, adhesive, primer, and other solids-containing material applied each month, in accordance with §63.827(c)(2), C_{si}.

(3) Determine the as-purchased mass fraction of each ink, coating, varnish, adhesive, primer, and other solids-containing material which was applied at 20 weight-percent or greater solids content, on an as-applied basis, G_i.

(4) Determine the total mass of each solvent, diluent, thinner, or reducer added to materials which were applied at less than 20 weight-percent solids content, on an as-applied basis, each month, M_{Lj}.

(5) Calculate the monthly allowable HAP emissions, H_a, using Equation 17.

$$H_a = 0.20\left[\sum_{i=1}^{p} M_i G_i C_{si}\right] + 0.04\left[\sum_{i=1}^{p} M_i\left(1-G_i\right) + \sum_{j=1}^{q} M_{Lj}\right] \qquad Eq\ 17$$

(f) Owners or operators of product and packaging rotogravure or wide-web flexographic printing presses shall demonstrate compliance according to the procedures in paragraphs (f)(1) through (f)(7) of this section if the affected source operates more than one capture system, more than one control device, one or more never-controlled work stations, or one or more intermittently-controllable work stations.

(1) The owner or operator of each solvent recovery system used to control one or more product and packaging rotogravure or wide-web flexographic presses for which the owner or operator chooses to comply by means of a liquid-liquid mass balance shall determine the organic HAP emissions for those presses controlled by that solvent recovery system either

(i) in accordance with paragraphs (c)(1)(i)–(iii) and (c)(1)(v)–(viii) of this section if the presses controlled by that solvent recovery system have only always-controlled work stations, or

(ii) in accordance with paragraphs (c)(1)(ii)–(iii), (c)(1)(v)–(vi), and (g) of this section if the presses controlled by that solvent recovery system have one or more never-controlled or intermittently-controllable work stations.

(2) The owner or operator of each solvent recovery system used to control one or more product and packaging rotogravure or wide-web flexographic presses, for which the owner or operator chooses to comply by means of an initial test of capture efficiency, continuous emission monitoring of the control device, and continuous monitoring of a capture system operating parameter, shall

(i) For each capture system delivering emissions to that solvent recovery system, monitor an operating parameter established in accordance with §63.828(a)(5) to assure capture system efficiency, and

(ii) Determine the organic HAP emissions for those presses served by each capture system delivering emissions to that solvent recovery system either

(A) In accordance with paragraphs (c)(2)(i)–(iii) and (c)(2)(v)–(viii) of this section if the presses served by that capture system have only always-controlled work stations, or

(B) In accordance with paragraphs (c)(2)(ii)–(iii), (c)(2)(v)–(vii), and (g) of this section if the presses served by that capture system have one or more never-controlled or intermittently-controllable work stations.

(3) The owner or operator of each oxidizer used to control emissions from one or more product and packaging rotogravure or wide-web flexographic presses choosing to demonstrate compliance through performance tests of capture efficiency and control device efficiency and continuing compliance through continuous monitoring of capture system and control device operating parameters, shall

(i) Monitor an operating parameter established in accordance with §63.828(a)(4) to assure control device efficiency, and

(ii) For each capture system delivering emissions to that oxidizer, monitor an operating parameter established in accordance with §63.828(a)(5) to assure capture efficiency, and

(iii) Determine the organic HAP emissions for those presses served by each capture system delivering emissions to that oxidizer either

(A) In accordance with paragraphs (d)(1)(i)–(v) and (d)(1)(vii) of this section if the presses served by that capture system have only always-controlled work stations, or

(B) In accordance with paragraphs (d)(1)(i)–(iii), (d)(1)(v), and (g) of this section if the presses served by that capture system have one or more never-controlled or intermittently-controllable work stations.

(4) The owner or operator of each oxidizer used to control emissions from one or more product and packaging rotogravure or wide-web flexographic presses choosing to demonstrate compliance through an initial capture efficiency test, continuous emission monitoring of the control device and continuous monitoring of a capture system operating parameter, shall

(i) For each capture system delivering emissions to that oxidizer, monitor an operating parameter established in accordance with §63.828(a)(5) to assure capture efficiency, and

(ii) Determine the organic HAP emissions for those presses served by each capture system delivering emissions to that oxidizer either

(A) In accordance with paragraphs (c)(2)(i)–(iii) and (c)(2)(v)–(viii) of this section if the presses served by that capture system have only always-controlled work stations, or

(B) In accordance with paragraphs (c)(2)(ii)–(iii), (c)(2)(v)–(vii), and (g) of this section if the presses served by that capture system have one or more never-controlled or intermittently-controllable work stations.

(5) The owner or operator of one or more uncontrolled product and packaging rotogravure or wide-web flexographic printing presses shall determine the organic HAP applied on those presses using Equation 8. The organic HAP emitted from an uncontrolled press is equal to the organic HAP applied on that press.

(6) If demonstrating compliance on the basis of organic HAP emission rate based on solids applied or emission of less than the calculated allowable organic HAP, the owner or operator shall determine the solids content of each ink, coating, varnish, adhesive, primer, solvent and other material applied during the month following the procedure in §63.827(c)(2).

(7) The owner or operator shall determine the organic HAP emissions for the affected source for the month by summing all organic HAP emissions calculated according to paragraphs (f)(1), (f)(2)(ii), (f)(3)(iii), (f)(4)(ii), and (f)(5) of this section. The affected source is in compliance for the month, if all operating parameters required to be monitored under paragraphs (f)(2)–(4) of this section were maintained at the appropriate values, and

(i) The total mass of organic HAP emitted by the affected source was not more than four percent of the total mass of inks, coatings, varnishes, adhesives, primers, solvents, diluents, reducers, thinners and other materials applied by the affected source, or

(ii) The total mass of organic HAP emitted by the affected source was not more than 20 percent of the total mass of solids applied by the affected source, or

(iii) The total mass of organic HAP emitted by the affected source was not more than the equivalent allowable organic HAP emissions for the affected source, H_a, calculated in accordance with paragraph (e) of this section, or

(iv) The total mass of organic HAP emitted by the affected source was not more than five percent of the total mass of organic HAP applied by the affected source. The total mass of organic HAP applied by the affected source in the month shall be determined by the owner or operator using Equation 8.

(g) Owners or operators determining organic HAP emissions from a press or group of presses having one or more never-controlled or intermittently-controllable work stations and using the procedures specified in paragraphs (f)(1)(ii), (f)(2)(ii)(B), (f)(3)(iii)(B), or (f)(4)(ii)(B) of this section shall for that press or group of presses:

(1) Determine the sum of the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on intermittently-controllable work stations in bypass mode and the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on never-controlled work stations during the month, M_{Bi}.

(2) Determine the sum of the mass of all solvents, reducers, thinners, and other diluents which are applied on intermittently-controllable work stations in bypass mode and the mass of all solvents, reducers, thinners, and other diluents which are applied on never-controlled work stations during the month, M_{Bj}.

(3) Determine the sum of the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on intermittently-controllable work stations in controlled mode and the mass of all inks, coatings, varnishes, adhesives, primers, and other solids-containing materials which are applied on always-controlled work stations during the month, M_{Bj}.

(4) Determine the sum of the mass of all solvents, reducers, thinners, and other diluents which are applied on intermittently-controllable work stations in controlled mode and the mass of all solvents, reducers, thinners, and other diluents which are applied on always-controlled work stations during the month, M_{Cj}.

(5) For each press or group of presses for which the owner or operator uses the provisions of paragraph (f)(1)(ii) of this section, the owner or operator shall calculate the organic HAP emitted during the month using Equation 18.

$$H = \left[\sum_{i=1}^{p} M_{Ci} C_{ki} + \sum_{j=1}^{q} M_{Cj} C_{kj}\right]\left[1 - \frac{M_{vr}}{\sum_{i=1}^{p} M_{Ci} C_{vi} + \sum_{j=1}^{q} M_{Cj}}\right] + \left[\sum_{i=1}^{p} M_{Bi} C_{ki} + \sum_{j=1}^{q} M_{Bj} C_{kj}\right] \qquad Eq\ 18$$

(6) For each press or group of presses for which the owner or operator uses the provisions of paragraphs (f)(2)(ii)(B), (f)(3)(iii)(B), or (f)(4)(ii)(B) of this section, the owner or operator shall calculate the organic HAP emitted during the month using Equation (19).

$$H = \left[\sum_{i=1}^{p} M_{Ci} C_{ki} + \sum_{j=1}^{q} M_{Cj} C_{kj}\right]\left[1 - \left(\frac{E}{100}\frac{F}{100}\right)\right] + \left[\sum_{i=1}^{p} M_{Bi} C_{ki} + \sum_{j=1}^{q} M_{Bj} C_{kj}\right] \qquad Eq\ 19$$

(h) If the affected source operates more than one capture system or more than one control device, and has no never-controlled work stations and no intermittently-controllable work stations, then the affected source is in compliance with the 95 percent overall organic HAP control efficiency requirement for the month if for each press or group of presses controlled by a common control device:

(1) The volatile matter collection and recovery efficiency, R_v, as determined by paragraphs (c)(1)(i), (c)(1)(iii), and (c)(1)(v)–(vii) of this section is equal to or greater than 95 percent, or

(2) The overall organic HAP control efficiency as determined by paragraphs (c)(2)(iii) and (c)(2)(v)–(vii) of this section for each press or group of presses served by that control device and a common capture system is equal to or greater than 95 percent and the average capture system operating parameter value for each capture system serving that control device is greater than or less than (as appropriate) the operating parameter value established for that capture system in accordance with §63.828(a)(5) for each three hour period, or

(3) The overall organic HAP control efficiency as determined by paragraphs (d)(1)(i)–(iii) and (d)(1)(x) of this section for each press or group of presses served by that control device and a common capture system is equal to or greater than 95 percent, the oxidizer is operated such that the average operating parameter value is greater than the operating parameter value established in accordance with §63.828(a)(4) for each three hour period, and the average capture system operating parameter value for each capture system serving that control device is greater than or less than (as appropriate) the operating parameter value established for that capture system in accordance with §63.828(a)(5) for each three hour period.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29801, May 24, 2006]

§ 63.826 Compliance dates.

(a) The compliance date for an owner or operator of an existing affected source subject to the provisions of this subpart is May 30, 1999.

(b) The compliance date for an owner or operator of a new affected source subject to the provisions of this subpart is immediately upon start-up of the affected source, or May 30, 1996, whichever is later.

(c) Affected sources which have undergone reconstruction are subject to the requirements for new affected sources. The costs associated with the purchase and installation of air pollution control equipment are not considered in determining whether the affected source has been reconstructed.

Additionally, the costs of retrofitting and replacement of equipment that is installed specifically to comply with this subpart are not considered reconstruction costs.

§ 63.827 Performance test methods.

Performance tests shall be conducted under such conditions as the Administrator specifies to the owner or operator based on representative performance of the affected source for the period being tested. Upon request, the owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of performance tests.

(a) An owner or operator using a control device to comply with the requirements of §§63.824–63.825 is not required to conduct an initial performance test to demonstrate compliance if one or more of the criteria in paragraphs (a)(1) through (a)(3) of this section are met:

(1) A control device that is in operation prior to May 30, 1996, does not need to be tested if

(i) It is equipped with continuous emission monitors for determining total organic volatile matter concentration and the volumetric gas flow rate, and capture efficiency has been determined in accordance with the requirements of this subpart, such that an overall organic HAP control efficiency can be calculated, and

(ii) The continuous emission monitors are used to demonstrate continuous compliance in accordance with §63.824(b)(1)(ii), §63.825(b)(2)(ii), §63.825(c)(2), or §63.825(d)(2), as applicable, and §63.828, or

(2) The owner or operator has met the requirements of either §63.7(e)(2)(iv) or §63.7(h), or

(3) The control device is a solvent recovery system and the owner or operator chooses to comply by means of a monthly liquid-liquid material balance.

(b) Determination of the weight fraction organic HAP of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, diluents, and other materials used by a publication rotogravure affected source shall be conducted according to paragraph (b)(1) of this section. Determination of the weight fraction organic HAP of inks, coatings, varnishes, adhesives, primers, solvents, thinners, reducers, diluents, and other materials applied by a product and packaging rotogravure or wide-web flexographic printing affected source shall be conducted according to paragraph (b)(2) of this section. If the weight fraction organic HAP values are not determined using the procedures in paragraphs (b)(1) or (b)(2) of this section, the owner or operator must submit an alternative test method for determining their values for approval by the Administrator in accordance with §63.7(f). The recovery efficiency of the test method must be determined for all of the target organic HAP and a correction factor, if necessary, must be determined and applied.

(1) Each owner or operator of a publication rotogravure affected source shall determine the weight fraction organic HAP of each ink, coating, varnish, adhesive, primer, solvent, and other material used by following one of the procedures in paragraphs (b)(1)(i) through (iii) of this section:

(i) The owner or operator may test the material in accordance with Method 311 of appendix A of this part. The Method 311 determination may be performed by the owner or operator of the affected source, the supplier of the material, or an independent third party. The organic HAP content determined by Method 311 must be calculated according to the criteria and procedures in paragraphs (b)(1)(i)(A) through (C) of this section.

(A) Include each organic HAP determined to be present at greater than or equal to 0.1 weight percent for Occupational Safety and Health Administration (OSHA)-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds.

(B) Express the weight fraction of each organic HAP included according to paragraph (b)(1)(i)(A) of this section as a value truncated to four places after the decimal point (for example, 0.3791).

(C) Calculate the total weight fraction of organic HAP in the tested material by summing the weight fraction of each organic HAP included according to paragraph (b)(1)(i)(A) of this section and truncating the result to three places after the decimal point (for example, 0.763).

(ii) The owner or operator may determine the weight fraction volatile matter of the material in accordance with §63.827(c)(1) and use this value for the weight fraction organic HAP for all compliance purposes.

(iii) The owner or operator may use formulation data to determine the weight fraction organic HAP of a material. Formulation data may be provided to the owner or operator on a CPDS by the supplier of the material or an independent third party. Formulation data may be used provided that the weight fraction organic HAP is calculated according to the criteria and procedures in paragraphs (b)(1)(iii)(A) through (D) of this section. In the event of an inconsistency between the formulation data and the result of Method 311 of appendix A of this part, where the test result is higher, the Method 311 data will take precedence unless, after consultation, the owner or operator can demonstrate to the satisfaction of the enforcement agency that the formulation data are correct.

(A) For each raw material used in making the material, include each organic HAP present in that raw material at greater than or equal to 0.1 weight percent for OSHA-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds. The weight fraction of each such organic HAP in each raw material must be determined by Method 311 of appendix A of this part, by an alternate method approved by the Administrator, or from a CPDS provided by the raw material supplier or an independent third party. The weight fraction of each such organic HAP in each raw material must be expressed as a value truncated to four places after the decimal point (for example, 0.1291).

(B) For each raw material used in making the material, the weight fraction contribution of each organic HAP, which is included according to paragraph (b)(1)(iii)(A) of this section, in that raw material to the weight fraction organic HAP of the material is calculated by multiplying the weight fraction, truncated to four places after the decimal point (for example, 0.1291), of that organic HAP in that raw material times the weight fraction of that raw material, truncated to four places after the decimal point (for example, 0.2246), in the material. The product of each such multiplication is to be truncated to four places after the decimal point (for example, 0.1291 times 0.2246 yields 0.02899586 which truncates to 0.0289).

(C) For each organic HAP which is included according to paragraph (b)(1)(iii)(A) of this section, the total weight fraction of that organic HAP in the material is calculated by adding the weight fraction contribution of that organic HAP from each raw material in which that organic HAP is included according to paragraph (b)(1)(iii)(A) of this section. The sum of each such addition must be expressed to four places after the decimal point.

(D) The total weight fraction of organic HAP in the material is the sum of the counted individual organic HAP weight fractions. This sum must be truncated to three places after the decimal point (for example, 0.763).

(2) Each owner or operator of a product and packaging rotogravure or wide-web flexographic printing affected source shall determine the organic HAP weight fraction of each ink, coating, varnish, adhesive, primer, solvent, and other material applied by following one of the procedures in paragraphs (b)(2)(i) through (iii) of this section:

(i) The owner or operator may test the material in accordance with Method 311 of appendix A of this part. The Method 311 determination may be performed by the owner or operator of the affected source, the supplier of the material, or an independent third party. The organic HAP content determined by Method 311 must be calculated according to the criteria and procedures in paragraphs (b)(2)(i)(A) through (C) of this section.

(A) Include each organic HAP determined to be present at greater than or equal to 0.1 weight percent for OSHA-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds.

(B) Express the weight fraction of each organic HAP included according to paragraph (b)(2)(i)(A) of this section as a value truncated to four places after the decimal point (for example, 0.3791).

(C) Calculate the total weight fraction of organic HAP in the tested material by summing the weight fraction of each organic HAP included according to paragraph (b)(2)(i)(A) of this section and truncating the result to three places after the decimal point (for example, 0.763).

(ii) The owner or operator may determine the weight fraction volatile matter of the material in accordance with §63.827(c)(2) and use this value for the weight fraction organic HAP for all compliance purposes.

(iii) The owner or operator may use formulation data to determine the weight fraction organic HAP of a material. Formulation data may be provided to the owner or operator on a CPDS by the supplier of the material or an independent third party. Formulation data may be used provided that the weight fraction organic HAP is calculated according to the criteria and procedures in paragraphs (b)(2)(iii)(A) through (D) of this section. In the event of an inconsistency between the formulation data and the result of Method 311 of appendix A of this part, where the test result is higher, the Method 311 data will take precedence unless, after consultation, the owner or operator can demonstrate to the satisfaction of the enforcement agency that the formulation data are correct.

(A) For each raw material used in making the material, include each organic HAP present in that raw material at greater than or equal to 0.1 weight percent for OSHA-defined carcinogens as specified in 29 CFR 1910.1200(d)(4) and greater than or equal to 1.0 weight percent for other organic HAP compounds. The weight fraction of each such organic HAP in each raw material must be determined by Method 311 of appendix A of this part, by an alternate method approved by the Administrator, or from a CPDS provided by the raw material supplier or an independent third party. The weight fraction of each such organic HAP in each raw material must be expressed as a value truncated to four places after the decimal point (for example, 0.1291).

(B) For each raw material used in making the material, the weight fraction contribution of each organic HAP, which is included according to paragraph (b)(2)(iii)(A) of this section, in that raw material to the weight fraction organic HAP of the material is calculated by multiplying the weight fraction, truncated to four places after the decimal point (for example, 0.1291), of that organic HAP in that raw material times the weight fraction of that raw material, truncated to four places after the decimal point (for example, 0.2246), in the material. The product of each such multiplication is truncated to four places after the decimal point (for example, 0.1291 times 0.2246 yields 0.02899586 which truncates to 0.0289).

(C) For each organic HAP which is included according to paragraph (b)(2)(iii)(A) of this section, the total weight fraction of that organic HAP in the material is calculated by adding the weight fraction contribution of that organic HAP from each raw material in which that organic HAP is included according to paragraph (b)(2)(iii)(A) of this section. The sum of each such addition must be expressed to four places after the decimal point.

(D) The total weight fraction of organic HAP in the material is the sum of the counted individual organic HAP weight fractions. This sum is to be truncated to three places after the decimal point (for example, 0.763).

(c) Determination of the weight fraction volatile matter content of inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, diluents, and other materials used by a publication rotogravure affected source shall be conducted according to paragraph (c)(1) of this section. Determination of the weight fraction volatile matter content and weight fraction solids content of inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, diluents, and other materials applied by a product and packaging rotogravure or wide-web flexographic printing affected source shall be conducted according to paragraph (c)(2) of this section.

(1) Each owner or operator of a publication rotogravure affected source shall determine the volatile matter weight fraction of each ink, coating, varnish, adhesive, primer, solvent, reducer, thinner, diluent, and other material used by following the procedures in paragraph (b)(1)(i) of this section, or by using formulation data as described in paragraph (c)(3) of this section.

(i) Determine the volatile matter weight fraction of the material using Method 24A of 40 CFR part 60, appendix A. The Method 24A determination may be performed by the owner or operator of the affected source, the supplier of the material, or an independent third party. The Method 24A result shall be truncated to three places after the decimal point (for example, 0.763). If these values cannot be determined using Method 24A, the owner or operator shall submit an alternative technique for determining their values for approval by the Administrator.

(2) Each owner or operator of a product and packaging rotogravure or wide-web flexographic printing affected source shall determine the volatile matter weight fraction and solids weight fraction of each ink, coating, varnish, adhesive, primer, solvent, reducer, thinner, diluent, and other material applied by following the procedures in paragraphs (b)(2)(i) and (ii) of this section, or by using formulation data as described in paragraph (c)(3) of this section.

(i) Determine the volatile matter weight fraction of the material using Method 24 of 40 CFR part 60, appendix A. The Method 24 determination may be performed by the owner or operator of the affected source, the supplier of the material, or an independent third party. The Method 24 result shall be truncated to three places after the decimal point (for example, 0.763). If these values cannot be determined using Method 24, the owner or operator shall submit an alternative technique for determining their values for approval by the Administrator.

(ii) Calculate the solids weight fraction Method 24 result by subtracting the volatile matter weight fraction Method 24 result from 1.000. This calculation may be performed by the owner or operator, the supplier of the material, or an independent third party.

(3) The owner or operator may use formulation data to determine the volatile matter weight fraction or solids weight fraction of a material. Formulation data may be provided to the owner or operator on a CPDS by the supplier of the material or an independent third party. The volatile matter weight fraction and solids weight fraction shall be truncated to three places after the decimal point (for example, 0.763). In the event of any inconsistency between the formulation data and the result of Method 24 or Method 24A of 40 CFR part 60, appendix A, where the test result for volatile matter weight fraction is higher or the test result for solids weight fraction is lower, the applicable test method data will take precedence unless, after consultation, the owner or operator can demonstrate to the satisfaction of the enforcement agency that the formulation data are correct.

(d) A performance test of a control device to determine destruction efficiency for the purpose of meeting the requirements of §§63.824–63.825 shall be conducted by the owner or operator in accordance with the following:

(1) An initial performance test to establish the destruction efficiency of an oxidizer and the associated combustion zone temperature for a thermal oxidizer and the associated catalyst bed inlet temperature for a catalytic oxidizer shall be conducted and the data reduced in accordance with the following reference methods and procedures:

(i) Method 1 or 1A of 40 CFR part 60, appendix A is used for sample and velocity traverses to determine sampling locations.

(ii) Method 2, 2A, 2C, or 2D of 40 CFR part 60, appendix A is used to determine gas volumetric flow rate.

(iii) Method 3 of 40 CFR part 60, appendix A is used for gas analysis to determine dry molecular weight.

(iv) Method 4 of 40 CFR part 60, appendix A is used to determine stack gas moisture.

(v) Methods 2, 2A, 3, and 4 of 40 CFR part 60, appendix A shall be performed, as applicable, at least twice during each test period.

(vi) Method 25 of 40 CFR part 60, appendix A, shall be used to determine organic volatile matter concentration, except as provided in paragraphs (d)(1)(vi)(A) through (D) of this section. The owner or operator shall submit notice of the intended test method to the Administrator for approval along with notice of the performance test required under §63.7(c). The same method must be used for both the inlet and outlet measurements. The owner or operator may use Method 25A of 40 CFR part 60, appendix A, if (A) An exhaust gas organic volatile matter concentration of 50 parts per million by volume (ppmv) or less as carbon is required to comply with the standards of §§63.824–63.825, or

(B) The organic volatile matter concentration at the inlet to the control system and the required level of control are such to result in exhaust gas organic volatile matter concentrations of 50 ppmv or less as carbon, or

(C) Because of the high efficiency of the control device, the anticipated organic volatile matter concentration at the control device exhaust is 50 ppmv or less as carbon, regardless of inlet concentration, or

(D) The control device is not an oxidizer.

(vii) Each performance test shall consist of three separate runs; each run conducted for at least one hour under the conditions that exist when the affected source is operating under normal operating conditions. For the purpose of determining organic volatile matter concentrations and mass flow rates, the average of results of all runs shall apply.

(viii) Organic volatile matter mass flow rates shall be determined using Equation 20:

$$M_f = Q_{sd} C_c [12.0] [0.0416] [10^{-6}] \qquad \text{Eq. 20}$$

Where:

M_f= Total organic volatile matter mass flow rate, kg/hour (h).

Q_{sd}= Volumetric flow rate of gases entering or exiting the control device, as determined according to §63.827(d)(1)(ii), dry standard cubic meters (dscm)/h.

C_c= Concentration of organic compounds as carbon, ppmv.

12.0 = Molecular weight of carbon.

0.0416 = Conversion factor for molar volume, kg-moles per cubic meter (mol/m3) (@ 293 Kelvin (K) and 760 millimeters of mercury (mmHg)).

(ix) Emission control device efficiency shall be determined using Equation 21:

$$E = \frac{M_{fi} - M_{fo}}{M_{fi}} \qquad Eq\ 21$$

(2) The owner or operator shall record such process information as may be necessary to determine the conditions of the performance test. Operations during periods of start-up, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test.

(3) For the purpose of determining the value of the oxidizer operating parameter that will demonstrate continuing compliance, the time-weighted average of the values recorded during the performance test shall be computed. For an oxidizer other than catalytic oxidizer, the owner or operator shall establish as the operating parameter the minimum combustion temperature. For a catalytic oxidizer, the owner or operator shall establish as the operating parameter the minimum gas temperature upstream of the catalyst bed. These minimum temperatures are the operating parameter values that demonstrate continuing compliance with the requirements of §§63.824–63.825.

(e) A performance test to determine the capture efficiency of each capture system venting organic emissions to a control device for the purpose of meeting the requirements of §63.824(b)(1)(ii), §63.824(b)(2), §63.825(c)(2), §63.825(d)(1)–(2), §63.825(f)(2)–(4), or §63.825(h)(2)–(3) shall be conducted by the owner or operator in accordance with the following:

(1) You may assume your capture efficiency equals 100 percent if your capture system is a permanent total enclosure (PTE). You must confirm that your capture system is a PTE by demonstrating that it meets the requirements of section 6 of Method 204 of 40 CFR part 51, appendix M, and that all exhaust gases from the enclosure are delivered to a control device.

(2) You may determine capture efficiency according to the protocols for testing with temporary total enclosures that are specified in Methods 204 and 204A through F of 40 CFR part 51, appendix M. You may exclude never controlled work stations from such capture efficiency determinations.

(f) As an alternative to the procedures specified in §63.827(e) an owner or operator required to conduct a capture efficiency test may use any capture efficiency protocol and test methods that satisfy the criteria of either the Data Quality Objective (DQO) or the Lower Confidence Limit (LCL) approach as described in Appendix A of this subpart. The owner or operator may exclude never-controlled work stations from such capture efficiency determinations.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29802, May 24, 2006; 76 FR 22598, Apr. 21, 2011]

§ 63.828 Monitoring requirements.

(a) Following the date on which the initial performance test of a control device is completed, to demonstrate continuing compliance with the standard, the owner or operator shall monitor and inspect each control device required to comply with §§63.824–63.825 to ensure proper operation and maintenance by implementing the applicable requirements in paragraph (a)(1) through (a)(5) of this section.

(1) Owners or operators of product and packaging rotogravure or wide-web flexographic presses with intermittently-controllable work stations shall follow one of the procedures in paragraphs (a)(1)(i) through (a)(1)(iv) of this section for each dryer associated with such a work station:

(i) Install, calibrate, maintain, and operate according to the manufacturer's specifications a flow control position indicator that provides a record indicating whether the exhaust stream from the dryer was directed to the control device or was diverted from the control device. The time and flow control position must be recorded at least once per hour, as well as every time the flow direction is changed. The flow control position indicator shall be installed at the entrance to any bypass line that could divert the exhaust stream away from the control device to the atmosphere.

(ii) Secure any bypass line valve in the closed position with a car-seal or a lock-and-key type configuration; a visual inspection of the seal or closure mechanism shall be performed at least once every month to ensure that the valve or damper is maintained in the closed position and the exhaust stream is not diverted through the bypass line.

(iii) Ensure that any bypass line valve or damper is in the closed position through continuous monitoring of valve position. The monitoring system shall be inspected at least once every month to ensure that it is functioning properly.

(iv) Use an automatic shutdown system in which the press is stopped when flow is diverted away from the control device to any bypass line. The automatic system shall be inspected at least once every month to ensure that it is functioning properly.

(2) Compliance monitoring shall be subject to the provisions of paragraphs (a)(2)(i) and (a)(2)(ii) of this section, as applicable.

(i) All continuous emission monitors shall comply with performance specifications (PS) 8 or 9 of 40 CFR part 60, appendix B, as appropriate. The requirements of appendix F of 40 CFR part 60 shall also be followed. In conducting the quarterly audits required by appendix F, owners or operators must challenge the monitors with compounds representative of the gaseous emission stream being controlled.

(ii) All temperature monitoring equipment shall be installed, calibrated, maintained, and operated according to manufacturers specifications. The calibration of the chart recorder, data logger, or temperature indicator shall be verified every three months; or the chart recorder, data logger, or temperature indicator shall be replaced. The replacement shall be done either if the owner or operator chooses not to perform the calibration, or if the equipment cannot be calibrated properly.

(3) An owner or operator complying with §§63.824–63.825 through continuous emission monitoring of a control device shall install, calibrate, operate, and maintain continuous emission monitors to measure total organic volatile matter concentration and volumetric gas flow rate in accordance with §63.824(b)(1)(ii), §63.825(b)(2)(ii), §63.825(c)(2), or §63.825(d)(2), as applicable.

(4) An owner or operator complying with the requirements of §§63.824–63.825 through the use of an oxidizer and demonstrating continuous compliance through monitoring of an oxidizer operating parameter shall:

(i) For an oxidizer other than a catalytic oxidizer, install, calibrate, operate, and maintain a temperature monitoring device equipped with a continuous recorder. The device shall have an accuracy of ±1 percent of the temperature being monitored in °C or ±1 °C, whichever is greater. The thermocouple or temperature sensor shall be installed in the combustion chamber at a location in the combustion zone.

(ii) For a catalytic oxidizer, install, calibrate, operate, and maintain a temperature monitoring device equipped with a continuous recorder. The device shall be capable of monitoring temperature with an accuracy of ±1 percent of the temperature being monitored in °C or ±1 °C, whichever is greater. The thermocouple or temperature sensor shall be installed in the vent stream at the nearest feasible point to the catalyst bed inlet.

(5) An owner or operator complying with the requirements of §§63.824–63.825 through the use of a control device and demonstrating continuous compliance by monitoring an operating parameter to ensure that the capture efficiency measured during the initial compliance test is maintained, shall:

(i) Submit to the Administrator with the compliance status report required by §63.9(h) of the General Provisions, a plan that

(A) Identifies the operating parameter to be monitored to ensure that the capture efficiency measured during the initial compliance test is maintained,

(B) Discusses why this parameter is appropriate for demonstrating ongoing compliance, and

(C) Identifies the specific monitoring procedures;

(ii) Set the operating parameter value, or range of values, that demonstrate compliance with §§63.824–63.825, and

(iii) Conduct monitoring in accordance with the plan submitted to the Administrator unless comments received from the Administrator require an alternate monitoring scheme.

(b) Any excursion from the required operating parameters which are monitored in accordance with paragraphs (a)(4) and (a)(5) of this section, unless otherwise excused, shall be considered a violation of the emission standard.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006]

§ 63.829 Recordkeeping requirements.

(a) The recordkeeping provisions of 40 CFR part 63 subpart A of this part that apply and those that do not apply to owners and operators of affected sources subject to this subpart are listed in Table 1 of this subpart.

(b) Each owner or operator of an affected source subject to this subpart shall maintain the records specified in paragraphs (b)(1) through (b)(3) of this section on a monthly basis in accordance with the requirements of §63.10(b)(1) of this part:

(1) Records specified in §63.10(b)(2) of this part, of all measurements needed to demonstrate compliance with this standard, such as continuous emission monitor data, control device and capture system operating parameter data, material usage, HAP usage, volatile matter usage, and solids usage that support data that the source is required to report.

(2) Records specified in §63.10(b)(3) of this part for each applicability determination performed by the owner or operator in accordance with the requirements of §63.820(a) of this subpart, and

(3) Records specified in §63.10(c) of this part for each continuous monitoring system operated by the owner or operator in accordance with the requirements of §63.828(a) of this subpart.

(c) Each owner or operator of an affected source subject to this subpart shall maintain records of all liquid-liquid material balances performed in accordance with the requirements of §§63.824–63.825 of this subpart. The records shall be maintained in accordance with the requirements of §63.10(b) of this part.

(d) The owner or operator of each facility which commits to the criteria of §63.820(a)(2) shall maintain records of all required measurements and calculations needed to demonstrate compliance with these criteria, including the mass of all HAP containing materials used and the mass fraction of HAP present in each HAP containing material used, on a monthly basis.

(e) The owner or operator of each facility which meets the limits and criteria of §63.821(b)(1) shall maintain records as required in paragraph (e)(1) of this section. The owner or operator of each facility which meets the limits and criteria of §63.821(b)(2) shall maintain records as required in paragraph (e)(2) of this section. Owners or operators shall maintain these records for five years, and upon request, submit them to the Administrator.

(1) For each facility which meets the criteria of §63.821(b)(1), the owner or operator shall maintain records of the total mass of each material applied on product and packaging rotogravure or wide-web flexographic printing presses during each month.

(2) For each facility which meets the criteria of §63.821(b)(2), the owner or operator shall maintain records of the total mass and organic HAP content of each material applied on product and packaging rotogravure or wide-web flexographic printing presses during each month.

(f) The owner or operator choosing to exclude from an affected source, a product and packaging rotogravure or wide-web flexographic press which meets the limits and criteria of §63.821(a)(2)(ii)(A) shall maintain the records specified in paragraphs (f)(1) and (f)(2) of this section for five years and submit them to the Administrator upon request:

(1) The total mass of each material applied each month on the press, including all inboard and outboard stations, and

(2) The total mass of each material applied each month on the press by product and packaging rotogravure or wide-web flexographic printing operations.

(g) Each owner or operator of an affected source subject to this subpart shall maintain records of the occurrence and duration of each malfunction of operation (*i.e.,* process equipment), air pollution control equipment, or monitoring equipment.

(h) Each owner or operator of an affected source subject to this subpart shall maintain records of actions taken during periods of malfunction to minimize emissions in accordance with §63.823(b), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006; 76 FR 22598, Apr. 21, 2011]

§ 63.830 Reporting requirements.

(a) The reporting provisions of 40 CFR part 63 subpart A of this part that apply and those that do not apply to owners and operators of affected sources subject to this subpart are listed in Table 1 of this subpart.

(b) Each owner or operator of an affected source subject to this subpart shall submit the reports specified in paragraphs (b)(1) through (b)(6) of this section to the Administrator:

(1) An initial notification required in §63.9(b).

(i) Initial notifications for existing sources shall be submitted no later than one year before the compliance date specified in §63.826(a).

(ii) Initial notifications for new and reconstructed sources shall be submitted as required by §63.9(b).

(iii) For the purpose of this subpart, a Title V or part 70 permit application may be used in lieu of the initial notification required under §63.9(b), provided the same information is contained in the permit application as required by §63.9(b), and the State to which the permit application has been submitted has an approved operating permit program under part 70 of this chapter and has received delegation of authority from the EPA.

(iv) Permit applications shall be submitted by the same due dates as those specified for the initial notifications.

(2) A Notification of Performance Tests specified in §§63.7 and 63.9(e) of this part. This notification, and the site-specific test plan required under §63.7(c)(2) shall identify the operating parameter to be monitored to ensure that the capture efficiency measured during the performance test is maintained. The operating parameter identified in the site-specific test plan shall be considered to be approved unless explicitly disapproved, or unless comments received from the Administrator require monitoring of an alternate parameter.

(3) A Notification of Compliance Status specified in §63.9(h) of this part.

(4) Performance test reports specified in §63.10(d)(2) of this part.

(5) [Reserved]

(6) A summary report specified in §63.10(e)(3) of this part shall be submitted on a semi-annual basis (i.e., once every 6-month period). These summary reports are required even if the affected source does not have any control devices or does not take the performance of any control devices into account in demonstrating compliance with the emission limitations in §63.824 or §63.825. In addition to a report of operating parameter exceedances as required by §63.10(e)(3)(i), the summary report shall include, as applicable:

(i) Exceedances of the standards in §§63.824–63.825.

(ii) Exceedances of either of the criteria of §63.820(a)(2).

(iii) Exceedances of the criterion of §63.821(b)(1) and the criterion of §63.821(b)(2) in the same month.

(iv) Exceedances of the criterion of §63.821(a)(2)(ii)(A).

(v) The number, duration, and a brief description for each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report must also include a description of actions taken by an owner or operator during a malfunction of an affected source to minimize emissions in accordance with §63.823(b), including actions taken to correct a malfunction.

(c)(1) As of January 1, 2012, and within 60 days after the date of completing each performance test, as defined in §63.2 and as required in this subpart, you must submit performance test data, except opacity

data, electronically to EPA's Central Data Exchange by using the ERT (see *http://www.epa.gov/ttn/chief/ert/ert tool.html/*) or other compatible electronic spreadsheet. Only data collected using test methods compatible with ERT are subject to this requirement to be submitted electronically into EPA's WebFIRE database.

(2) All reports required by this subpart not subject to the requirements in paragraph (c)(1) of this section must be sent to the Administrator at the appropriate address listed in §63.13. If acceptable to both the Administrator and the owner or operator of a source, these reports may be submitted on electronic media. The Administrator retains the right to require submittal of reports subject to paragraph (c)(1) of this section in paper format.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006; 76 FR 22598, Apr. 21, 2011]

§ 63.831 Implementation and enforcement.

(a) This subpart can be implemented and enforced by the U.S. EPA, or a delegated authority such as the applicable State, local, or Tribal agency. If the U.S. EPA Administrator has delegated authority to a State, local, or Tribal agency, then that agency, in addition to the U.S. EPA, has the authority to implement and enforce this subpart. Contact the applicable U.S. EPA Regional Office to find out if this subpart is delegated to a State, local, or Tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or Tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the Administrator of U.S. EPA and cannot be transferred to the State, local, or Tribal agency.

(c) The authorities that cannot be delegated to State, local, or Tribal agencies are as specified in paragraphs (c)(1) through (4) of this section.

(1) Approval of alternatives to the requirements in §§63.820 through 63.821 and 63.823 through 63.826.

(2) Approval of alternatives to the test method for organic HAP content determination in §63.827(b) and alternatives to the test method for volatile matter in §63.827(c), and major alternatives to other test methods under §63.7(e)(2)(ii) and (f), as defined in §63.90, and as required in this subpart.

(3) Approval of major alternatives to monitoring under §63.8(f), as defined in §63.90, and as required in this subpart.

(4) Approval of major alternatives to recordkeeping and reporting under §63.10(f), as defined in §63.90, and as required in this subpart.

[68 FR 37354, June 23, 2003]

§§ 63.832-63.839 [Reserved]

Table 1 to Subpart KK of Part 63—Applicability of General Provisions to Subpart KK

General provisions reference	Applicable to subpart KK	Comment
§63.1(a)(1)–(a)(4)	Yes.	
§63.1(a)(5)	No	Section reserved.

§63.1(a)(6)–(a)(8)	No.	
§63.1(a)(9)	No	Section reserved.
§63.1(a)(10)–(a)(14)	Yes.	
§63.1(b)(1)	No	Subpart KK specifies applicability.
§63.1(b)(2)–(b)(3)	Yes.	
§63.1(c)(1)	Yes.	
§63.1(c)(2)	No	Area sources are not subject to subpart KK.
§63.1(c)(3)	No	Section reserved.
§63.1(c)(4)	Yes.	
§63.1(c)(5)	No.	
§63.1(d)	No	Section reserved.
§63.1(e)	Yes.	
§63.2	Yes	Additional definitions in subpart KK.
§63.3(a)–(c)	Yes.	
§63.4(a)(1)–(a)(3)	Yes.	
§63.4(a)(4)	No	Section reserved.
§63.4(a)(5)	Yes.	
§63.4(b)–(c)	Yes.	
§63.5(a)(1)–(a)(2)	Yes.	
§63.5(b)(1)	Yes.	
§63.5(b)(2)	No	Section reserved.
§63.5(b)(3)–(b)(6)	Yes.	
§63.5(c)	No	Section reserved.
§63.5(d)	Yes.	
§63.5(e)	Yes.	
§63.5(f)	Yes.	
§63.6(a)	Yes.	
§63.6(b)(1)–(b)(5)	Yes.	
§63.6(b)(6)	No	Section reserved.
§63.6(b)(7)	Yes.	
§63.6(c)(1)–(c)(2)	Yes.	
§63.6(c)(3)–(c)(4)	No	Sections reserved.
§63.6(c)(5)	Yes.	

§63.6(d)	No	Section reserved.
§63.6(e)(1)(i)	No	See 63.823(b) for general duty requirement. Any cross-reference to 63.6(e)(1)(i) in any other general provision incorporated by reference shall be treated as a cross-reference to 63.823(b).
§63.6(e)(1)(ii)	No	
§63.6(e)(1)(iii)	Yes.	
§63.6(e)(2)	No	Section reserved.
§63.6(e)(3)	No	
§63.6(f)(1)	No	
§63.6(f)(2)–(f)(3)	Yes.	
§63.6(g)	Yes.	
§63.6(h)	No	Subpart KK does not require COMS.
§63.6(i)(1)–(i)(14)	Yes.	
§63.6(i)(15)	No	Section reserved.
§63.6(i)(16)	Yes.	
§63.6(j)	Yes.	
§63.7(a)–(d)	Yes.	
§63.7(e)(1)	No	See 63.827 introductory text. Any cross-reference to 63.7(e)(1) in any other general provision incorporated by reference shall be treated as a cross-reference to 63.827 introductory text.
§63.7(e)(2)–(e)(4)	Yes.	
§63.8(a)(1)–(a)(2)	Yes.	
§63.8(a)(3)	No	Section reserved.
§63.8(a)(4)	No	Subpart KK specifies the use of solvent recovery devices or oxidizers.
§63.8(b)	Yes.	
§63.8(c)(1)–(3)	Yes.	
§63.8(c)(4)	No	Subpart KK specifies CMS sampling requirements.
§63.8(c)(5)	No	Subpart KK does not require COMS.
§63.8(c)(6)–(c)(8)	Yes	Provisions for COMS are not applicable.
§63.8(d)(1)–(2)	Yes.	
§63.8(d)(3)	Yes, except for last sentence.	
§63.8(e)–(f)	Yes.	
§63.8(g)	No	Subpart KK specifies CMS data reduction requirements.
§63.9(a)	Yes.	

§63.9(b)(1)	Yes.	
§63.9(b)(2)	Yes	Initial notification submission date extended.
§63.9(b)(3)–(b)(5)	Yes.	
§63.9(c)–(e)	Yes.	
§63.9(f)	No	Subpart KK does not require opacity and visible emissions observations.
§63.9(g)	Yes	Provisions for COMS are not applicable.
§63.9(h)(1)–(h)(3)	Yes.	
§63.9(h)(4)	No	Section reserved.
§63.9(h)(5)–(h)(6)	Yes.	
§63.9(i)	Yes.	
§63.9(j)	Yes.	
§63.10(a)	Yes.	
§63.10(b)(1)	Yes.	
§63.10(b)(2)(i)	No.	
§63.10(b)(2)(ii)	No	See 63.829(g) for recordkeeping of occurrence and duration of malfunctions. See 63.829(h) for recordkeeping of actions taken during malfunction. Any cross-reference to 63.10(b)(2)(ii) in any other general provision incorporated by reference shall be treated as a cross-reference to 63.829(g).
§63.10(b)(2)(iii)	Yes.	
§63.10(b)(2)(iv)–(b)(2)(v)	No.	
§63.10(b)(2)(vi)–(b)(2)(xiv)	Yes.	
§63.10(b)(3)	Yes.	
§63.10(c)(1)	Yes.	
§63.10(c)(2)–(c)(4)	No	Sections reserved.
§63.10(c)(5)–(c)(8)	Yes.	
§63.10(c)(9)	No	Section reserved.
§63.10(c)(10)	No	See 63.830(b)(6)(v) for reporting malfunctions. Any cross-reference to 63.10(c)(10) in any other general provision incorporated by reference shall be treated as a cross-reference to 63.830(b)(6)(v).
§63.10(c)(11)	No	See 63.830(b)(6)(v) for reporting malfunctions. Any cross-reference to 63.10(c)(11) in any other general provision incorporated by reference shall be treated as a cross-reference to 63.830(b)(6)(v).
§63.10(c)(12)–(c)(14)	Yes.	
§63.10(c)(15)	No.	

§63.10(d)(1)–(d)(2)	Yes.	
§63.10(d)(3)	No	Subpart KK does not require opacity and visible emissions observations.
§63.10(d)(4)	Yes.	
§63.10(d)(5)	No.	
§63.10(e)	Yes	Provisions for COMS are not applicable.
§63.10(f)	Yes.	
§63.11	No	Subpart KK specifies the use of solvent recovery devices or oxidizers.
§63.12	Yes.	
§63.13	Yes.	
§63.14	Yes.	
§63.15	Yes.	

[61 FR 27140, May 30, 1996, as amended at 76 FR 22598, Apr. 21, 2011]

Appendix A to Subpart KK of Part 63—Data Quality Objective and Lower Confidence Limit Approaches for Alternative Capture Efficiency Protocols and Test Methods

1. Introduction

1.1 Alternative capture efficiency (CE) protocols and test methods that satisfy the criteria of either the data quality objective (DQO) approach or the lower confidence limit (LCL) approach are acceptable under §63.827(f). The general criteria for alternative CE protocols and test methods to qualify under either the DQO or LCL approach are described in section 2. The DQO approach and criteria specific to the DQO approach are described in section 3. The LCL approach and criteria specific to the LCL approach are described in section 4. The recommended reporting for alternative CE protocols and test methods are presented in section 5. The recommended recordkeeping for alternative CE protocols and test methods are presented in section 6.

1.2 Although the Procedures L, G.1, G.2, F.1, and F.2 in §52.741 of part 52 were developed for TTE and BE testing, the same procedures can also be used in an alternative CE protocol. For example, a traditional liquid/gas mass balance CE protocol could employ Procedure L to measure liquid VOC input and Procedure G.1 to measure captured VOC.

2. General Criteria for DQO and LCL Approaches

2.1 The following general criteria must be met for an alternative capture efficiency protocol and test methods to qualify under the DQO or LCL approach.

2.2 An alternative CE protocol must consist of at least three valid test runs. Each test run must be at least 20 minutes long. No test run can be longer than 24 hours.

2.3 All test runs must be separate and independent. For example, liquid VOC input and output must be determined independently for each run. The final liquid VOC sample from one run cannot be the initial sample for another run. In addition, liquid input for an entire day cannot be apportioned among test runs based on production.

2.4 Composite liquid samples cannot be used to obtain an “average composition” for a test run. For example, separate initial and final coating samples must be taken and analyzed for each run; initial and final samples cannot be combined prior to analysis to derive an “average composition” for the test run.

2.5 All individual test runs that result in a CE of greater than 105 percent are invalid and must be discarded.

2.6 If the source can demonstrate to the regulatory agency that a test run should not be considered due to an identified testing or analysis error such as spillage of part of the sample during shipping or an upset or improper operating conditions that is not considered part of normal operation then the test result for that individual test run may be discarded. This limited exception allows sources to discard as “outliers” certain individual test runs without replacing them with a valid test run as long as the facility has at least three valid test runs to use when calculating its DQO or LCL. This exception is limited solely to test runs involving the types of errors identified above.

2.7 All valid test runs that are conducted must be included in the average CE determination. The individual test run CE results and average CE results cannot be truncated (i.e., 105 percent cannot be reported as 100+ percent) for purposes of meeting general or specific criteria for either the DQO or the LCL. If the DQO is satisfied and the average CE is greater than 100, then 100 percent CE must be considered the result of the test.

2.8 Alternative test methods for measuring VOC concentration must include a three-point calibration of the gas analysis instrument in the expected concentration range.

3. Data Quality Objective Approach

3.1 The purpose of the DQO is to allow sources to use alternative CE protocols and test methods while ensuring reasonable precision consistent with pertinent requirements of the Clean Air Act. In addition to the general criteria described in section 2, the specific DQO criterion is that the width of the two-sided 95 percent confidence interval of the mean measured value must be less than or equal to 10 percent of the mean measured value (see Figure 1). This ensures that 95 percent of the time, when the DQO is met, the actual CE value will be ±5 percent of the mean measured value (assuming that the test protocol is unbiased).

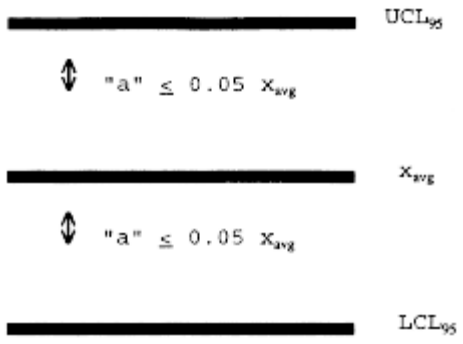

View or download PDF

3.2 The DQO calculation is made as follows using Equations 1 and 2:

$$P = \left[\frac{a}{x_{avg}}\right]100 \qquad \text{Eq. 1}$$

$$a = \frac{t_{0.975}s}{\sqrt{n}} \qquad \text{Eq. 2}$$

Where:

a = Distance from the average measured CE value to the endpoints of the 95-percent (two-sided) confidence interval for the measured value.

n = Number of valid test runs.

P = DQO indicator statistic, distance from the average measured CE value to the endpoints of the 95-percent (two-sided) confidence interval, expressed as a percent of the average measured CE value.

s = Sample standard deviation.

$t_{0.975}$= t-value at the 95-percent (two-sided) confidence level (see Table A–1).

x_{avg}= Average measured CE value (calculated from all valid test runs).

x_i= The CE value calculated from the ith test run.

Table A–1—t-Values

Number of valid test runs, n	$t_{0.975}$	$t_{0.90}$
1 or 2	N/A	N/A
3	4.303	1.886
4	3.182	1.638
5	2.776	1.533
6	2.571	1.476
7	2.447	1.440
8	2.365	1.415
9	2.306	1.397
10	2.262	1.383
11	2.228	1.372
12	2.201	1.363
13	2.179	1.356
14	2.160	1.350
15	2.145	1.345

16	2.131	1.341
17	2.120	1.337
18	2.110	1.333
19	2.101	1.330
20	2.093	1.328
21	2.086	1.325

3.3 The sample standard deviation and average CE value are calculated using Equations 3 and 4 as follows:

$$s = \left[\frac{\sum_{i=1}^{n} \left(x_i - x_{avg} \right)^2}{n-1} \right]^{0.5} \qquad Eq\ 3$$

$$x_{avg} = \frac{\sum_{i=1}^{n} x_i}{n} \qquad Eq\ 4$$

3.4 The DQO criteria are achieved when all of the general criteria in section 2 are achieved and P≤5 percent (i.e., the specific DQO criterion is achieved). In order to meet this objective, facilities may have to conduct more than three test runs. Examples of calculating P, given a finite number of test runs, are shown below. (For purposes of this example it is assumed that all of the general criteria are met.)

3.5 Facility A conducted a CE test using a traditional liquid/gas mass balance and submitted the following results and the calculations shown in Equations 5 and 6:

Run	CE
1	96.1
2	105.0
3	101.2

Therefore:

n=3

$t_{0.975}$=4.30

x_{avg}=100.8

s=4.51

$$a = \frac{(4.30)(4.51)}{\sqrt{n}} = 11.20 \qquad Eq\ 5 \quad P = \frac{11.2}{100.8} 100 = 11.11 \qquad Eq\ 6$$

3.6 Since the facility did not meet the specific DQO criterion, they ran three more test runs.

Run	CE
4	93.2
5	96.2
6	87.6

3.7 The calculations for Runs 1–6 are made as follows using Equations 7 and 8:

n=6

$t_{0.975}$=2.57

x_{avg}=96.6

s=6.11

$$a = \frac{(2.57)(6.11)}{\sqrt{6}} = 6.41 \qquad Eq\ 7 \quad P = \frac{6.41}{96.6}100 = 6.64 \qquad Eq\ 8$$

3.8 The facility still did not meet the specific DQO criterion. They ran three more test runs with the following results:

Run	CE
7	92.9
8	98.3
9	91.0

3.9 The calculations for Runs 1–9 are made as follows using Equations 9 and 10:

n=9

$t_{0.975}$=2.31

x_{avg}=95.7

s=5.33

$$a = \frac{(2.31)(5.33)}{\sqrt{9}} = 4.10 \qquad Eq\ 9 \quad P = \frac{4.10}{95.7}100 = 4.28 \qquad Eq\ 10$$

3.10 Based on these results, the specific DQO criterion is satisfied. Since all of the general criteria were also satisfied, the average CE from the nine test runs can be used to determine compliance.

4. Lower Confidence Limit Approach

4.1 The purpose of the LCL approach is to provide sources, that may be performing much better than their applicable regulatory requirement, a screening option by which they can demonstrate compliance. The approach uses less precise methods and avoids additional test runs which might otherwise be needed to meet the specific DQO criterion while still being assured of correctly demonstrating compliance. It is designed to reduce “false positive” or so called “Type II errors” which may erroneously indicate compliance where more variable test methods are employed. Because it encourages CE performance greater than that required in exchange for reduced compliance demonstration burden, the sources that successfully use the LCL approach could produce emission reductions beyond allowable emissions. Thus, it could provide additional benefits to the environment as well.

4.2 The LCL approach compares the 80 percent (two-sided) LCL for the mean measured CE value to the applicable CE regulatory requirement. In addition to the general criteria described in section 2, the specific LCL criteria are that either the LCL be greater than or equal to the applicable CE regulatory requirement or that the specific DQO criterion is met. A more detailed description of the LCL approach follows:

4.3 A source conducts an initial series of at least three runs. The owner or operator may choose to conduct additional test runs during the initial test if desired.

4.4 If all of the general criteria are met and the specific DQO criterion is met, then the average CE value is used to determine compliance.

4.5 If the data meet all of the general criteria, but do not meet the specific DQO criterion; and the average CE, using all valid test runs, is above 100 percent then the test sequence cannot be used to calculate the LCL. At this point the facility has the option of (a) conducting more test runs in hopes of meeting the DQO or of bringing the average CE for all test runs below 100 percent so the LCL can be used or (b) discarding all previous test data and retesting.

4.6 The purpose of the requirement in Section 4.5 is to protect against protocols and test methods which may be inherently biased high. This is important because it is impossible to have an actual CE greater than 100 percent and the LCL approach only looks at the lower end variability of the test results. This is different from the DQO which allows average CE values up to 105 percent because the DQO sets both upper and lower limits on test variability.

4.7 If at any point during testing the results meet the DQO, the average CE can be used for demonstrating compliance with the applicable regulatory requirement. Similarly, if the average CE is below 100 percent then the LCL can be used for demonstrating compliance with the applicable regulatory requirement without regard to the DQO.

4.8 The LCL is calculated at an 80 percent (two-sided) confidence level as follows using Equation 11:

$$LC_1 = x_{avg} - \frac{t_{0.90}\, s}{\sqrt{n}} \qquad \text{Eq. 11}$$

Where:

LC_1= LCL at an 80-percent (two-sided) confidence level.

n = Number of valid test runs.

s = Sample standard deviation.

$t_{0.90}$= t-value at the 80-percent (two-sided) confidence level (see Table A–1).

x_{avg}= Average measured CE value (calculated from all valid test runs).

4.9 The resulting $LC_1$is compared to the applicable CE regulatory requirement. If LC_1exceeds (i.e., is higher than) the applicable regulatory requirement, then a facility is in initial compliance. However, if the $LC_1$is below the CE requirement, then the facility must conduct additional test runs. After this point the test results will be evaluated not only looking at the LCL, but also the DQO of ±5 percent of the mean at a 95 percent confidence level. If the test results with the additional test runs meet the DQO before the LCL exceeds the applicable CE regulatory requirement, then the average CE value will be compared to the applicable CE regulatory requirement for determination of compliance.

4.10 If there is no specific CE requirement in the applicable regulation, then the applicable CE regulatory requirement is determined based on the applicable regulation and an acceptable destruction efficiency test. If the applicable regulation requires daily compliance and the latest CE compliance demonstration was made using the LCL approach, then the calculated LC_1will be the highest CE value which a facility is allowed to claim until another CE demonstration test is conducted. This last requirement is necessary to assure both sufficiently reliable test results in all circumstances and the potential environmental benefits referenced above.

4.11 An example of calculating the LCL is shown below. Facility B's applicable regulatory requirement is 85 percent CE. Facility B conducted a CE test using a traditional liquid/gas mass balance and submitted the following results and the calculation shown in Equation 12:

Run	CE
1	94.2
2	97.6
3	90.5

Therefore:

n=3

$t_{0.90}$=1.886

x_{avg}=94.1

s=3.55

$$LC_1 = 94.1 - \frac{(1.886)(3.55)}{\sqrt{3}} = 90.23 \qquad Eq\ 12$$

4.12 Since the $LC_1$of 90.23 percent is above the applicable regulatory requirement of 85 percent then the facility is in compliance. The facility must continue to accept the $LC_1$of 90.23 percent as its CE value until a new series of valid tests is conducted. (The data generated by Facility B do not meet the specific DQO criterion.)

5. Recommended Reporting for Alternative CE Protocols

5.1 If a facility chooses to use alternative CE protocols and test methods that satisfy either the DQO or LCL and the additional criteria in section 4., the following information should be submitted with each test report to the appropriate regulatory agency:

1. A copy of all alternative test methods, including any changes to the EPA reference methods, QA/QC procedures and calibration procedures.

2. A table with information on each liquid sample, including the sample identification, where and when the sample was taken, and the VOC content of the sample;

3. The coating usage for each test run (for protocols in which the liquid VOC input is to be determined);

4. The quantity of captured VOC measured for each test run;

5. The CE calculations and results for each test run;

6. The DQO or LCL calculations and results; and

7. The QA/QC results, including information on calibrations (e.g., how often the instruments were calibrated, the calibration results, and information on calibration gases, if applicable).

6. Recommended Recordkeeping for Alternative CE Protocols.

6.1 A record should be kept at the facility of all raw data recorded during the test in a suitable form for submittal to the appropriate regulatory authority upon request.

[61 FR 27140, May 30, 1996, as amended at 71 FR 29804, May 24, 2006]

Indiana Department of Environmental Management
Office of Air Quality

Addendum to the Technical Support Document (ATSD) for a
Part 70 Operating Permit Renewal

Source Description and Location

Source Name:	Multi-Color Corporation
Source Location:	2281 South U.S. 31, Scottsburg, Indiana 47170
County:	Scott
SIC Code:	2754
Permit Renewal No.:	T143-30351-00007
Permit Reviewer:	Mehul Sura

Public Notice Information

On August 13, 2011, the Office of Air Quality (OAQ) had a notice published in the *Scott County Journal,* Scottsburg, Indiana stating that IDEM had received an application from Multi-Color Corporation located at 2281 South U.S. 31, Scottsburg, Indiana 47170 for a renewal of its Part 70 Operating Permit issued on December 28, 2006. The notice also stated that OAQ proposed to issue this Part 70 Operating Permit Renewal and provided information on how the public could review the proposed Part 70 Operating Permit Renewal and other documentation. Finally, the notice informed interested parties that there was a period of thirty (30) days to provide comments on whether or not this Part 70 Operating Permit Renewal should be issued as proposed.

On August 29, 2011, Multi-Color Corporation submitted comments on the proposed Part 70 Operating Permit Renewal which are listed below. The comments are followed by IDEM's response.

Comments
Remove the Electron Beam Curing Unit from the permit and TSD and the Electron Beam Ink Cure Analyzer from the TSD because they are no longer used. Also, add another 8000 gallon vertical storage tank. Correct the emissions calculations in 'TSD Appendix A'.

Response
IDEM has acknowledged that the source has removed the Electron Beam Curing Unit and the Electron Beam Ink Cure Analyzer and added a second 8,000-gallon vertical solvent storage tank. Reference to the Electron Beam Curing Unit has been removed from the permit.

IDEM prefers that the TSD reflect the public-noticed version. Therefore, the TSD has not been amended. This addendum documents any changes to the TSD.

There were summation errors in the 'Total Potential Uncontrolled Emissions' on Page 1 of 10 'TSD Appendix A'. This page has been revised and is attached as 'Appendix A to the TSD Addendum'.

Reference to the insignificant activity listed in Section D.4 was inadvertently omitted from Section A.3. These changes have been made as follows:

Deleted language appears as ~~strikethroughs~~ and new language appears in **bold**.

A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)] [326 IAC 2-7-4(c)] [326 IAC 2-7-5(15)]

. . .

(c) Other categories with emissions below insignificant thresholds:

(1) One (1) Offset Gravure Coater station, with a maximum line speed of 1000 feet per minute and a printing width of 42 inches with maximum coverage of 4.74 pounds per million square inches. [326 IAC 8-2-5]

SECTION D.4 FACILITY OPERATION CONDITIONS

. . .

(b) One (1) Offset Gravure Coater station ~~with an Electron Beam Curing Unit~~, with a maximum line speed of 1000 feet per minute and a printing width of 42 inches with maximum coverage of 4.74 pounds per million square inches~~;~~**. [326 IAC 8-2-5]**

. . .

Appendix A: Emission Calculations
VOC From Printing Press Operations
Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Title V: T143-30351-00007
Reviewer: Mehul Sura
Date: 9/19/2011

Potential Uncontrolled VOC Emissions:

Throughput for Packaging Rotogravure Printing Press:

Press I.D.	Maximum Line Speed (ft/min)	Convert Feet to Inches	Maximum Print Width (in)	60 Min/ Hour	8,760 HR YEAR	1/1,000,000	Potential MMin²/Year
Press #1	740	12	39.4	60	8,760	1,000,000	183,893
Press #2	740	12	39.4	60	8,760	1,000,000	183,893
Press #3	700	12	39.4	60	8,760	1,000,000	173,953
Press #4	800	12	40.0	60	8,760	1,000,000	201,830

PRINTING VOC:

Ink Name	Maximum Coverage lbs/ MMin²	Weight % Organics	Flash Off %	Potential Throughput MMin²/Year	Tons/ 2,000 lbs	Potential VOC Pounds per Hour	Potential VOC Tons per Year	Control Equipment ID	Overall Control Efficiency	Controlled VOC Pounds per Hour	Controlled VOC Tons per Year	VOC Input Limit as % of potential input	Limited/Controlled VOC Tons per Year	Total Limited VOC input Tons per Year
Press #1 - Adcote Adhesive	10.9	77.19%	100%	183,893	2,000	176.62	773.61	OXD#6	94.20%	10.24	44.87	29.44%	13.21	227.75
Press #1 - Minute Maid Yellow Ink	8.5	75.32%	100%	183,893	2,000	134.40	588.66	OXD#6	94.20%	7.80	34.14	29.44%	10.05	173.30
Press #1 - TF IML 2D Topcoat Varnish	8.5	67.34%	100%	183,893	2,000	120.16	526.29	OXD#6	94.20%	6.97	30.52	29.44%	8.99	154.94
							1888.56				109.54			
Press #2 - Adcote Adhesive	10.9	77.19%	100%	183,893	2,000	176.62	773.61	OXD#6	94.20%	10.24	44.87	29.44%	13.21	227.75
Press #2 - Minute Maid Yellow Ink	8.5	75.32%	100%	183,893	2,000	134.40	588.66	OXD#6	94.20%	7.80	34.14	29.44%	10.05	173.30
Press #2 - TF IML 2D Topcoat Varnish	8.5	67.34%	100%	183,893	2,000	120.16	526.29	OXD#6	94.20%	6.97	30.52	29.44%	8.99	154.94
							1888.56				109.54			
Press #3 - Adcote Adhesive	10.80	77.19%	100%	173,953	2,000	165.54	725.08	OXD#2	94.20%	9.60	42.05	29.44%	12.38	213.46
Press #3 - Minute Maid Yellow Ink	8.5	75.32%	100%	173,953	2,000	127.13	556.84	OXD#2	94.20%	7.37	32.30	29.44%	9.51	163.93
Press #3 - TF IML 2D Topcoat Varnish	8.5	67.34%	100%	173,953	2,000	113.66	497.84	OXD#2	94.20%	6.59	28.87	29.44%	8.50	146.57
							1779.76				103.23			
Press #4 - Adhesive	24.4	79.00%	100%	201,830	2,000	443.39	1942.05	OXD#5	94.20%	25.72	112.64	29.44%	33.16	571.74
Press #4 - Ink/Varnish	55.4	76.00%	100%	201,830	2,000	969.38	4245.87	OXD#5	94.20%	56.22	246.26	29.44%	72.50	1249.98
							6187.92	0.00	1.88	81.94	358.90			
Total Potential Uncontrolled Emissions:						**2,681.46**	**11,744.80**				**681.20**		**200.54**	**3,457.67**

Note:
All of the coatings within one category (adhesive, ink, or varnish) are mutually exclusive with the other coatings within that category (adhesive, ink or varnish).
Press # 1 has a maximum line speed of 840 ft/min (printing only) or 740 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 740 ft/min of printing and adhesive.
Press # 2 has a maximum line speed of 840 ft/min (printing only) or 740 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 740 ft/min of printing and adhesive.
Press # 3 has a maximum line speed of 800 ft/min (printing only) or 700 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 700 ft/min of printing and adhesive.
Press # 4 has a maximum line speed of 800 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 800 ft/min of printing and adhesive.
Heatset offset printing has an assumed flash off of 80%. Other types of printers have a flash off of 100%
There are negligible emissions from clean-up operations.

Methodology:
Throughput = Maximum line speed feet per minute * Convert feet to inches * Maximum print width inches * 60 minutes per hour * 8,760 hours per year = MMin² per Year
VOC = Maximum Coverage pounds per MMin² * Weight percentage organics (volatiles minus water) * Flash off * Throughput * Tons per 2,000 pounds = Tons per Year
Controlled/Limited Emissions = Uncontrolled Emissions * (1 - (Overall Control Efficiency)) * VOC Input Limitation (%)

Indiana Department of Environmental Management
Office of Air Quality

Technical Support Document (TSD) for a Part 70 Operating Permit Renewal

Source Background and Description

Source Name:	Multi-Color Corporation
Source Location:	2281 South U.S. 31, Scottsburg, Indiana 47170
County:	Scott
SIC Code:	2754
Permit Renewal No.:	T143-30351-00007
Permit Reviewer:	Mehul Sura

The Office of Air Quality (OAQ) has reviewed the operating permit renewal application from Multi-Color Corporation relating to a stationary packaging rotogravure printing operation. On March 14, 2011, Multi-Color Corporation submitted an application to the OAQ requesting to renew its operating permit. Multi-Color Corporation was issued its first Part 70 Operating Permit Renewal T143-21426-00007 on December 28, 2006.

Permitted Emission Units and Pollution Control Equipment

The source consists of the following permitted emission units:

(a) One (1) ten (10) station packaging rotogravure printing press identified as Press #1 (ten stations: P1U1 through P1U10), constructed in May of 1990, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P1U1-P1U10 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #1 (ten stations: P1U1 through P1U10) are considered an existing affected source.

Note: The design capacity of OXD#6 was erroneously specified as 204 MMBtu/ hr in the previous approvals.

(b) One (1) nine (9) station packaging rotogravure printing press identified as Press #2 (nine stations: P2U1 through P2U9), constructed in April of 1991, with a maximum line speed of 840 feet per minute (ft/min) when printing with ink and 740 ft/min when printing with ink and adhesive, and one (1) natural gas fired press dryer system with a total heat input rate of 7.76 million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P2U1-P2U9 are controlled by one (1) natural gas fired regenerative thermal oxidizer, identified as OXD#6, with a maximum design capacity of 9 MMBtu/ hr, exhausting through one (1) stack identified as SOXD6. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #2 (nine stations: P2U1 through P2U9) are considered an existing affected source.

(c) One (1) eight (8) station packaging rotogravure printing press identified as Press #3 (eight stations: P3U1 through P3U8), constructed in April of 1997, with a maximum line speed of 800 ft/min when printing with ink and 700 ft/min when printing with ink and adhesive. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P3U1-P3U8 are controlled by one (1) catalytic oxidizing incinerator identified as OXD#2 exhausting through one (1) stack identified as S-OXD2. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press #3 (eight stations: P3U1 through P3U8) are considered an existing affected source.

(d) One (1) packaging rotogravure printing press, identified as Press # 4, (ten stations: P4U1 through P4U10), constructed in January of 2004, with a maximum line speed of 800 feet per minute (ft/min) and firing natural gas with a total heat input rate of five (5) million (MM) British thermal units (Btu) per hour. The volatile organic compound (VOC) and hazardous air pollutant (HAP) emissions from P4U1-P4U10 are controlled by one (1) catalytic oxidizer, identified as OXD#5, then exhausted through one (1) stack identified as S-OXD5. Under NESHAP Subpart KK the packaging rotogravure printing operations at Press # 4, (ten stations: P4U1 through P4U10) are considered an existing affected source; and

(e) One (1) mechanical spray cold cleaner degreaser, identified as PW2, constructed in April of 2001, with a projected solvent consumption rate of eight (8) gallons per day, utilizing closed-loop solvent recycling and distillation for VOC emissions control, and exhausting through one (1) stack (S/V ID: S-MR1).

(f) One (1) mechanical spray cold cleaner degreaser, identified as PW3, approved for construction in 2010, with a projected solvent consumption rate of twelve (12) gallons per day, utilizing a closed-loop solvent recycling and distillation system, and venting indoors.

Insignificant Activities

The source also consists of the following insignificant activities:

(a) Natural gas-fired combustion sources with heat input equal to or less than ten (10) million Btu per hour:

(1) One (1) natural gas fired hot oil boiler identified as TH1 used to heat Press #3, rated at 6 MMBtu per hour and exhausting through one (1) stack identified as S004. [326 IAC 6-2-4]

(b) VOC and/or HAP storage tanks with capacity less than or equal to 1,000 gallons and annual throughputs less than 12,000.

(c) Degreasing operations that do not exceed 145 gallons per twelve (12) months, except if subject to 326 IAC 20-6, 326 IAC 8-3-2 or 326 IAC 8-3-5. [326 IAC 8-3-2][326 IAC 8-3-5]

(d) Other categories with emissions below insignificant thresholds:

(1) One (1) corona treater unit which generates ozone at a rate of 0.074 pounds ozone/kilowatt/hour (supplier factor). Ozone generation rates for Press #2 treater: 16 kW = 5.18 tons per year ozone maximum.

(2) One (1) 10,000 gallon, three-compartment horizontal solvent storage tank, storing isopropyl acetate or lower vapor pressure products, with VOC emissions below 15 pounds per day.

(3) One (1) 8,000 gallon vertical solvent storage tank, storing isopropyl acetate or lower vapor pressure products, with VOC emissions below 15 pounds per day.
(4) Ink mixing activities including an automated ink dispensing system with VOC emissions below 15 pounds per day.
(5) One (1) Offset Gravure Coater station with an Electron Beam Curing Unit, with a maximum line speed of 1000 feet per minute and a printing width of 42 inches with maximum coverage of 4.74 pounds per million square inches.
(6) Two (2) cyclone separators for collecting paper and plastic trim generated from label trimming operations, which is then fed to a bailer which bales the material in preparation for off-site recycling or disposal. Potential PM-10 emissions from this operation are less than 25 pounds per day.
(7) One (1) seaming machine has a maximum application rate of 31.84 pounds of solvent per 1,000,000 meters of substrate; and a run speed of 140 meters per minute (mpm).
(8) One (1) Electron Beam ink cure analyzer for testing cure strength of EB coatings.
(9) One (1) high speed seaming machine, has a maximum application rate of 31.84 pounds of solvent per 1,000,000 meters of substrate; and a run speed of 500 meters per minute (mpm).

Emission Units and Pollution Control Equipment Constructed and/or Operated without a Permit

There are no unpermitted emission units operating at this source during this review process.

Emission Units and Pollution Control Equipment Removed From the Source

No emission unit or pollution control equipment has been removed from the source since the Part 70 Operating Permit Renewal T143-21426-00007 was issued on December 28, 2006.

Existing Approvals

Since the issuance of the Part 70 Operating Permit T143-21426-00007 on December 28, 2006, the source has constructed or has been operating under the following additional approvals:

(a) Administrative Amendment No. 143-25425-00007, issued on December 10, 2007.
(b) Minor Source Modification No. 143-28870-00007, issued on February 18, 2010.
(c) Minor Permit Modification No. 143-28901-00007,issued on April 19, 2010.

All terms and conditions of previous permits issued pursuant to permitting programs approved into the State Implementation Plan have been either incorporated as originally stated, revised, or deleted by this permit. All previous registrations and permits are superseded by this permit.

Enforcement Issue

There are no enforcement actions pending.

Emission Calculations

See Appendix A of this document for detailed emission calculations.

County Attainment Status

The source is located in Scott County.

Pollutant	Designation
SO_2	Better than national standards.
CO	Unclassifiable or attainment effective November 15, 1990.
O_3	Unclassifiable or attainment effective June 15, 2004, for the 8-hour ozone standard.[1]
PM_{10}	Unclassifiable effective November 15, 1990.
NO_2	Cannot be classified or better than national standards.
Pb	Not designated.
[1]Unclassifiable or attainment effective October 18, 2000, for the 1-hour ozone standard which was revoked effective June 15, 2005. Unclassifiable or attainment effective April 5, 2005, for PM2.5.	

(a) Ozone Standards
Volatile organic compounds (VOC) and Nitrogen Oxides (NO_x) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone. Therefore, VOC and NO_x emissions are considered when evaluating the rule applicability relating to ozone. Scott County has been designated as attainment or unclassifiable for ozone. Therefore, VOC and NO_x emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

(b) $PM_{2.5}$
Scott County has been classified as attainment for $PM_{2.5}$. On May 8, 2008 U.S. EPA promulgated the requirements for Prevention of Significant Deterioration (PSD) for $PM_{2.5}$ emissions. These rules became effective on July 15, 2008. On May 4, 2011 the air pollution control board issued an emergency rule establishing the direct $PM_{2.5}$ significant level at ten (10) tons per year. This rule became effective, June 28, 2011. Therefore, direct $PM_{2.5}$ and SO_2 emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2. See the State Rule Applicability – Entire Source section.

(c) Other Criteria Pollutants
Scott County has been classified as attainment or unclassifiable in Indiana for all other pollutants. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

Fugitive Emissions

Since this type of operation is not one of the twenty-eight (28) listed source categories under 326 IAC 2-2 and 326 IAC 2-3, and there is no applicable New Source Performance Standard that was in effect on August 7, 1980, fugitive emissions are not counted toward the determination of PSD and Emission Offset.

Unrestricted Potential Emissions

Appendix A of this TSD reflects the unrestricted potential emissions of the source.

(a) The potential to emit (as defined in 326 IAC 2-7-1(29)) of VOC and NOx are each equal to or greater than 100 tons per year. Therefore, the source is subject to the provisions of 326 IAC 2-7 and will be issued a Part 70 Operating Permit Renewal.

(b) The potential to emit (as defined in 326 IAC 2-7-1(29)) of any single HAP is equal to or greater than ten (10) tons per year and/or the potential to emit (as defined in 326 IAC 2-7-1(29)) of a combination of HAPs is equal to or greater than twenty-five (25) tons per year. Therefore, the source is subject to the provisions of 326 IAC 2-7.

Part 70 Permit Conditions

This source is subject to the requirements of 326 IAC 2-7, because the source met the following:

(a) Emission limitations and standards, including those operational requirements and limitations that assure compliance with all applicable requirements at the time of issuance of Part 70 permits.

(b) Monitoring and related record keeping requirements which assume that all reasonable information is provided to evaluate continuous compliance with the applicable requirements.

Potential to Emit After Issuance

The table below summarizes the potential to emit, reflecting all limits, of the emission units. Any control equipment is considered federally enforceable only after issuance of this Part 70 permit renewal, and only to the extent that the effect of the control equipment is made practically enforceable in the permit.

	Potential To Emit of the Entire Source After Issuance of Renewal (tons/year)							
	PM	PM10	SO_2	NOx	VOC	CO	Total HAPs	CO2e
Natural Gas	7.80	7.80	0.61	183.05	5.65	86.21	1.97	87,262
OXD # 2, 5 and 6	-	-	-	-	-	-	-	
Presses #1 through #4	-	-	-	-	200.54*	-	77.22	-
Solvent Degreasing PW2 and PW3	-	-	-	-	28.45*	-	-	-
Insignificant Activities	-	-	-	-	13.77	-	-	-
TOTAL	7.8	7.8	0.6	183.1	248.4	86.2	79.2	-
Total PTE of Entire Source	9.39	9.53	0.02	2.58	<250	2.17	>25	-
Title V Major Source Thresholds	NA	100	100	100	100	100	25	100,000
PSD Major Source Thresholds	250	250	250	250	250	250	NA	100,000

* PTE based on the existing PSD Minor limits in the permit (for details, please refer PSD rule applicability in 'State Rule Applicability - Entire Source' section of this TSD).

This existing source is not a major stationary source, under PSD (326 IAC 2-2), because no regulated pollutant, excluding GHG, is emitted at a rate of two hundred fifty (250) tons per year or more, emissions of GHG are less than one hundred thousand (100,000) tons of CO2 equivalent (CO2e) emissions per year, and it is not one of the twenty-eight (28) listed source categories, as specified in 326 IAC 2-2-1(ff)(1).

Federal Rule Applicability

Compliance Assurance Monitoring (CAM)
Pursuant to 40 CFR 64.2, CAM is applicable to a pollutant-specific emissions unit at a major source that is required to obtain a part 70 or 71 permit if the unit satisfies all of the following criteria:

(1) has a potential to emit before or after controls equal to or greater than the major source threshold for the pollutant involved;

(2) is subject to an emission limitation or standard for that pollutant; and

(3) uses a control device, as defined in 40 CFR 64.1, to comply with that emission limitation or standard.

The following tables are used to identify the applicability of each of the applicability criteria, under 40 CFR 64.1, to each emission unit at this source:

CAM Applicability - VOC

Emission Unit	Emission Limitation (Y/N)	Limit	Rule Citation	VOC Control Device Used for the limit?	Uncontrolled PTE (tons/year)	Controlled PTE (tons/year)	Major Source Threshold (tons/year)	CAM Applicable (Y/N)	Large Unit (Y/N)
Press #1	Y	overall VOC control efficiency (as the product of destruction efficiency and capture efficiency) shall be at least 94.20%	PSD Minor Limit [326 IAC 2-2]	Yes (OXD#6)	1888.56	109.54	100	Y	Y
Press #2				Yes (OXD#6)	1888.56	109.54	100	Y	
Press #3				Yes (OXD#2)	1779.8	103.23	100	Y	
Press #4				Yes (OXD#5)	6188	358.9	100	Y	
Press #1	Y	at least ninety percent (90%) of the nonmethane VOC shall be oxidized to carbon dioxide and water	326 IAC 8-5-5(c)(3)(B)	Yes (OXD#6)	1888.56	109.54	100	Y	
Press #2				Yes (OXD#6)	1888.56	109.54	100	Y	
Press #3				Yes (OXD#2)	1779.8	103.23	100	Y	
Press #4				Yes (OXD#5)	6188	358.9	100	Y	
Press #1	Y	overall organic HAP control efficiency (as the product of destruction efficiency and capture efficiency) shall be at least 95%	40 CFR 63.825 (b)(7) under 40 CFR 63 Subpart KK	Yes (OXD#6)	1888.56	109.54	100	*	Not Applicable
Press #2				Yes (OXD#6)	1888.56	109.54	100	*	
Press #3				Yes (OXD#2)	1779.8	103.23	100	*	
Press #4				Yes (OXD#5)	6188	358.9	100	*	

Emission Unit	Emission Limitation (Y/N)	Limit	Rule Citation	VOC Control Device Used for the limit?	Uncontrolled PTE (tons/year)	Controlled PTE (tons/year)	Major Source Threshold (tons/year)	CAM Applicable (Y/N)	Large Unit (Y/N)
Solvent Degreasing PW2 and PW2	Y	PSD Minor Limit	PSD Minor Limit [326 IAC 2-2]	closed-loop solvent recycling and distillation	82.8	28.45	100	N	N
Solvent Degreasing PW2 and PW3	Y	PSD Minor Limit	PSD Minor Limit [326 IAC 2-2]	closed-loop solvent recycling and distillation	14.93		100	N	N

* CAM is not applicable to the limit specified under 40 CFR 63, Subpart KK for HAP because this limit is pursuant to section 111 or 112 of the Clean Air Act and this limit was proposed by EPA after November 15, 1990.

Based on this evaluation, the requirements of 40 CFR Part 64, CAM for VOC are applicable to the thermal oxidizers equipped on Presses 1 through 4. CAM requirements for these oxidizers are specified in 'Compliance Determination and Monitoring Requirements' section of this TSD.

New Source Performance Standards (NSPS)

(a) 40 CFR Part 60, Subpart Dc (Standards of Performance for Small Industrial-Commercial-Institutional Steam Generating Units)
The natural gas fired 6 MMBtu per hour hot oil boiler at Press #3 (see Insignificant Activities) was constructed after June 9, 1989, and it has a heat input capacity less than 10 MMBtu per hour. Therefore, the requirements of this NSPS are not included in the permit

(b) 40 CFR Part 60, Subpart Kb (Standards of Performance for Volatile Organic Liquid Storage Vessels)
Each isopropyl acetate storage tank at the source has storage capacity less than 75 cubic meters. Therefore, the requirements of this NSPS are not included in the permit

(c) 40 CFR Part 60, Subpart QQ (Standards of Performance for the Graphic Arts Industry: Publication Rotogravure Printing)
The presses #1 through #4 at this source are not publication rotogravure printing presses. Therefore, the requirements of this NSPS are not included in the permit

(d) There are no NSPS (326 IAC 12 and 40 CFR Part 60) included in the permit due to this permit renewal.

National Emission Standards for Hazardous Air Pollutants (NESHAPs)

(a) 40 CFR Part 63, Subpart T (National Emissions Standards for Halogenated Solvent Cleaning)
The requirements of this NESHAP are not included in the permit because the source does not utilize any of the halogenated solvents (methylene chloride, perchloroethylene, trichloroethylene, 1, 1, 1-trichloroethane, carbon tetrachloride, or chloroform), or any combination of these halogenated HAP solvents in a total concentration greater than 5 percent by weight.

(b) 40 CFR Part 63, Subpart KK (National Emissions Standards for Printing and Publishing Industry)

This source is subject to the requirements of this NESHAP (which is incorporated by reference as 326 IAC 20-18) because this source performs packaging rotogravure printing and is a major source of HAPs.

The specific affected facilities include packaging rotogravure printing presses #1 through # 4:

Non applicable portions of the NESHAP will not be included in the permit. This source is subject to the following portions of Subpart KK.

(a) 40 CFR 63.820 (a)
(b) 40 CFR 63.821
(c) 40 CFR 63.822
(d) 40 CFR 63.823
(e) 40 CFR 63.825
(f) 40 CFR 63.826 (a) and (c)
(g) 40 CFR 63.827
(h) 40 CFR 63.828
(i) 40 CFR 63.829, except 40 CFR 63.829 (f)
(j) 40 CFR 63.830
(k) 40 CFR 63.831

The provisions of 40 CFR 63 Subpart A – General Provisions apply to the facility described in this section except when otherwise specified in 40 CFR 63, Subpart KK.

(c) 40 CFR Part 63, Subpart JJJJ (National Emission Standards for Paper and Other Web Coating)
Pursuant to 40 CFR 63.3300, the requirements of this NESHAP are not included in the permit because all the web coating lines at the source are subject to the requirements of 40 CFR 63, Subpart KK.

(d) There are no other NESHAP (326 IAC 14, 326 IAC 20 and 40 CFR Part 63) included in the permit.

State Rule Applicability - Entire Source

326 IAC 2-2 (PSD)
The source has opted to continue to comply with the following existing limits in the permit:

(a) The total input VOC, including coatings, dilution solvents, and cleaning solvents, to Presses #1 through #4 (emission units P1U1 through P1U10, P2U1 through P2U9, P3U1 through P3U8, and P4U1 through P4U10) shall be limited to 3,458 tons per twelve (12) consecutive month period with compliance determined at the end of each month. The minimum overall VOC control efficiency shall be 94.20%.

(b) The total VOC usage at PW2 and PW3 shall be limited to 28.45 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

Compliance with the above limits (a) and (b) in conjunction with VOC emissions from natural gas combustion, and the insignificant activities will limit source-wide VOC emissions to less than 250 tons per year. Therefore, this is a minor source under 326 IAC 2-2.

Compliance with the VOC content and usage limitations contained in the above limits (a) and (b) shall be determined pursuant to 326 IAC 8-1-4(a)(3) and 326 IAC 8-1-2(a) by preparing or obtaining from the manufacturer the copies of the “as supplied” and “as applied” VOC data sheets. IDEM, OAQ, reserves the authority to determine-compliance using Method 24 in conjunction with the analytical procedures specified in 326 IAC 8-1-4.

326 IAC 2-6 (Emission Reporting)
Since this source is required to have an operating permit under 326 IAC 2-7, Part 70 Permit Program, this source is subject to 326 IAC 2-6 (Emission Reporting). The source-wide PTE of CO, NOx, VOC and PM10, each, is less than 250 tons per year and this source is not located in Lake, Porter or LaPorte County. In accordance with the compliance schedule in 326 IAC 2-6-3(b)(3), an emission statement must be submitted triennially by July 1 beginning in 2006 and every 3 years after. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4.

326 IAC 5-1 (Opacity Limitations)
This source is subject to the opacity limitations specified in 326 IAC 5-1-2(1).

326 IAC 6-4 (Fugitive Dust Emissions)
Pursuant to 326 IAC 6-4 (Fugitive Dust Emissions), fugitive dust shall not be visible crossing the boundary or property line of a source. Observances of visible emissions crossing property lines may be refuted by factual data expressed in 326 IAC 6-4-2(1), (2) or (3).

326 IAC 6-5 (Fugitive Particulate Matter Emission Limitations)
The source-wide fugitive particulate emissions are less than 25 tons per year; therefore, this rule does not apply to this source.

State Rule Applicability – Individual Facilities

326 IAC 2-4.1 (Major Sources of Hazardous Air Pollutants (HAP))
Presses #1 through #4 are subject to NESHAP, Subpart KK. Therefore, the requirements of 326 IAC 2-4.1 do not apply to Presses #1 through #4.

PW3 does not emit HAP. PW4 emits less than 10 tons per year of single and combined HAPs, each. Therefore, the requirements of 326 IAC 2-4.1 do not apply to PW2 and PW3.

326 IAC 6-2 (Particulate Emission Limitations for Sources of Indirect Heating)
The 6 MMBtu/hr boiler TH1 was constructed after September 21, 1983. Pursuant 326 IAC 6-2-1(d), the particulate emissions from TH1 shall not exceed 0.6 lb/mmBtu of heat input.

The particulate emission rate from TH1 is 0.0077 lb/mmBtu of heat input; therefore, it can comply with this rule.

326 IAC 8-2-5 (Surface Coating Emission Limitations: Paper Coating Operations)
The Offset Gravure Coater station with an Electron Beam Curing Unit is subject to 326 IAC 8-2-5 because this unit has potential VOC emissions greater than 15 lbs/day, it applies coating to labels and it is not subject to the emission limitations contained in 326 IAC 8-5-5.

Pursuant to 326 IAC 8-2-5(b), no owner or operator of a coating line subject to this section may cause, allow, or permit the discharge into the atmosphere of any volatile organic compounds in excess of two and nine tenths (2.9) pounds per gallon excluding water, delivered to the coating applicator from a label coating line. Based on the manufacturer's data, the coatings are in compliance.

326 IAC 8-3-2 (Cold Cleaner Operations)
The requirements of 326 IAC 8-3-2 apply to PW2, PW3 and other insignificant organic solvent degreasing operations because these facilities were constructed after 1980 and these facilities have potential VOC emissions more than 15 lbs/day.

Pursuant to 326 IAC 8-3-2 (Cold Cleaner Operations), the owner or operator of the cold cleaning facility shall:

(a) equip the cleaner with a cover;

(b) equip the cleaner with a facility for draining cleaned parts;

(c) close the degreaser cover whenever parts are not being handled in the cleaner;

(d) drain cleaned parts for at least fifteen (15) seconds or until dripping ceases;

(e) provide a permanent, conspicuous label summarizing the operation requirements; and

(f) store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.

326 IAC 8-3-5 (Cold Cleaner Degreaser Operation and Control)
The requirements of 326 IAC 8-3-2 apply to PW2, PW3 and other insignificant organic solvent degreasing operations because these facilities are cold cleaner degreasers without remote solvent reservoirs, were constructed after July 1, 1990 and are located in Scott County.

Pursuant to 326 IAC 8-3-5(a) (Cold Cleaner Degreaser Operation and Control), the owner or operator of cold cleaner degreaser facilities shall ensure that the following control equipment requirements are met:

(a) Equip the degreaser with a cover. The cover must be designed so that it can be easily operated with one (1) hand if:

(A) The solvent volatility is greater than two (2) kiloPascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pounds per square inch) measured at thirty-eight degrees Celsius (38ºC) (one hundred degrees Fahrenheit (100ºF));
(B) The solvent is agitated; or
(C) The solvent is heated.

(b) Equip the degreaser with a facility for draining cleaned articles. If the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury) or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38ºC) (one hundred degrees Fahrenheit (100ºF)), then the drainage facility must be internal such that articles are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.

(c) Provide a permanent, conspicuous label which lists the operating requirements outlined in subsection (b).

(d) The solvent spray, if used, must be a solid, fluid stream and shall be applied at a pressure which does not cause excessive splashing.

(e) Equip the degreaser with one (1) of the following control devices if the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury) or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38ºC) (one hundred degrees Fahrenheit (100ºF)), or if the solvent is heated to a temperature greater than forty-eight and nine-tenths degrees Celsius (48.9ºC) (one hundred twenty degrees Fahrenheit (120ºF)):

(A) A freeboard that attains a freeboard ratio of seventy-five hundredths (0.75) or greater.

(B) A water cover when solvent is used is insoluble in, and heavier than, water.
(C) Other systems of demonstrated equivalent control such as a refrigerated chiller of carbon adsorption. Such systems shall be submitted to the U.S EPA as a SIP revision.

Pursuant to 326 IAC 8-3-5(b) (Cold Cleaner Degreaser Operation and Control), the owner or operator of cold cleaning facilities shall ensure that the following operating requirements are met:

(a) Close the cover whenever articles are not being handled in the degreaser.

(b) Drain cleaned articles for at least fifteen (15) seconds or until dripping ceases.

(c) Store waste solvent only in covered containers and prohibit the disposal or transfer of waste solvent in any manner in which greater than twenty percent (20%) of the waste solvent by weight could evaporate.

326 IAC 8-5-5 (Graphic Arts Operations)
The packaging rotogravure printing Presses #1 through #4 are subject to 326 IAC 8-5-5 because they were constructed after 1980 and they have potential VOC emissions greater than 25 tons per year. Pursuant to this rule, no owner or operator of a facility subject to this section and employing solvent-containing ink may cause, allow, or permit the operation of the facility unless:

(a) The volatile fraction of the ink, as it is applied to the substrate, contains twenty-five percent (25%) by volume or less of VOC, and seventy-five percent (75%) by volume or more of water; or

(b) The ink as it is applied to the substrate, less water, contains sixty percent (60%) by volume or more of nonvolatile material; or

(c) The owner or operator installs and operates a control device (i.e. incineration system) that oxidizes at least 90% of the nonmethane VOC to carbon dioxide and water and utilizes a capture system that, when used in conjunction with the control device, shall attain an efficiency sufficient to achieve an overall VOC control efficiency of sixty-five percent (65%); and

(d) The ink, as applied to the substrate, meets an emission limit of 0.5 pounds of VOC per pound of solids in the ink.

The source shall comply with the VOC content limitations specified above by either using compliant coatings or utilizing a VOC capture and control system with an overall VOC control efficiency of 90% at Presses #1 through #4. The permit conditions for the operating scenario of using compliant coatings will be specified in Section D.1 of this permit renewal and the permit conditions for the operating scenario of using a VOC capture and control system will be specified in Section D.2 of this permit renewal.

Pursuant to 326 IAC 8-5-5(f), work practices for Presses #1 through #4 shall include, but not be limited to, the following:

(a) When not in use, all cleaning materials shall be kept in closed containers.

(b) Cleaning materials shall be conveyed from one (1) location to another in closed containers or pipes.

Compliance Determination and Monitoring Requirements

Permits issued under 326 IAC 2-7 are required to ensure that sources can demonstrate compliance with all applicable state and federal rules on a continuous basis. All state and federal rules contain compliance provisions; however, these provisions do not always fulfill the requirement for a continuous demonstration. When this occurs, IDEM, OAQ, in conjunction with the source, must develop specific conditions to satisfy 326 IAC 2-7-5. As a result, Compliance Determination Requirements are included in the permit. The Compliance Determination Requirements in Section D of the permit are those conditions that are found directly within state and federal rules and the violation of which serves as grounds for enforcement action.

If the Compliance Determination Requirements are not sufficient to demonstrate continuous compliance, they will be supplemented with Compliance Monitoring Requirements, also in Section D of the permit. Unlike Compliance Determination Requirements, failure to meet Compliance Monitoring conditions would serve as a trigger for corrective actions and not grounds for enforcement action. However, a violation in relation to a compliance monitoring condition will arise through a source's failure to take the appropriate corrective actions within a specific time period.

The compliance determination requirements applicable to this source are below.

The Permittee shall perform testing as specified follows:

Emission Unit	Control Device	Pollutant	Limit	Rule Citation	Timeframe for Testing	Frequency of Testing
Press #1 through #4	OXD#2, OXD#5 and OXD#6,	VOC	overall VOC control efficiency (as the product of destruction efficiency and capture efficiency) shall be at least 94.20%	PSD Minor Limit [326 IAC 2-2]	no later than 2.5 years from the most recent testing*	every 2.5 years
		organic HAP	overall organic HAP control efficiency (as the product of destruction efficiency and capture efficiency) shall be at least 95%	40 CFR 63.825 (b)(7)		

* The most recent test on thermal oxidizers, identified as OXD#2, OXD#5 and OXD#6, were performed on June 17, 2009, June 18, 2009 and June 16, 2009, respectively.

The compliance monitoring requirements applicable to this source are as follows:

Emission Unit	Control	Parameter	Frequency
Press #1 and Press #2	OXD#6	combustion temperature	continuous
Press #3 and Press #4	OXD#2 and OXD#5	catalyst bed inlet temperature	continuous

The above Compliance monitoring Requirements for Press #1 through #4 will ensure that the thermal oxidizers, identified as OXD#2, OXD#5 and OXD#6 operate properly in order to comply with 326 IAC 2-2, 326 IAC 8-5, CAM and 326 IAC 2-7 (Part 70).

Recommendation

The staff recommends to the Commissioner that the Part 70 Operating Permit Renewal No. T143-30351-00007 be approved. This recommendation is based on the following facts and conditions:

Unless otherwise stated, information used in this review was derived from the application and additional information submitted by the applicant.

An application for the purposes of this review was received on March 14, 2011.

Conclusion

The operation of this stationary packaging rotogravure printing operation shall be subject to the conditions of the attached Part 70 Operating Permit Renewal No. T143-30351-00007.

IDEM Contact

(a) Questions regarding this proposed permit can be directed to Mehul Sura at the Indiana Department Environmental Management, Office of Air Quality, Permits Branch, 100 North Senate Avenue, MC 61-53 IGCN 1003, Indianapolis, Indiana 46204-2251 or by telephone at (317) 233-6868 or toll free at 1-800-451-6027 extension 3-6868.

(b) A copy of the findings is available on the Internet at: http://www.in.gov/ai/appfiles/idem-caats/

(c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM's Guide for Citizen Participation and Permit Guide on the Internet at: www.idem.in.gov

Appendix A: Emission Calculations
VOC From Printing Press Operations
Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Title V: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

Potential Uncontrolled VOC Emissions:

Throughput for Packaging Rotogravure Printing Press:

Press I.D.	Maximum Line Speed (ft/min)	Convert Feet to Inches	Maximum Print Width (in)	60 Min/ Hour	8,760 HR YEAR	1/1,000,000	Potential MMin²/Year
Press #1	740	12	39.4	60	8,760	1,000,000	183,893
Press #2	740	12	39.4	60	8,760	1,000,000	183,893
Press #3	700	12	39.4	60	8,760	1,000,000	173,953
Press #4	800	12	40.0	60	8,760	1,000,000	201,830

PRINTING VOC:

Ink Name	Maximum Coverage lbs/ MMin²	Weight % Organics	Flash Off %	Potential Throughput MMin²/Year	Tons/ 2,000 lbs	Potential VOC Pounds per Hour	Potential VOC Tons per Year	Control Equipment ID	Overall Control Efficiency	Controlled VOC Pounds per Hour	Controlled VOC Tons per Year	VOC Input Limit as % of potential input	Limited/Controlled VOC Tons per Year	Total Limited VOC input Tons per Year
Press #1 - Adcote Adhesive	10.9	77.19%	100%	183,893	2,000	176.62	773.61	OXD#6	94.20%	10.24	44.87	29.44%	13.21	227.75
Press #1 - Minute Maid Yellow Ink	8.5	75.32%	100%	183,893	2,000	134.40	588.66	OXD#6	94.20%	7.80	34.14	29.44%	10.05	173.30
Press #1 - TF IML 2D Topcoat Varnish	8.5	67.34%	100%	183,893	2,000	120.16	526.29	OXD#6	94.20%	6.97	30.52	29.44%	8.99	154.94
							1888.56				109.54			
Press #2 - Adcote Adhesive	10.9	77.19%	100%	183,893	2,000	176.62	773.61	OXD#6	94.20%	10.24	44.87	29.44%	13.21	227.75
Press #2 - Minute Maid Yellow Ink	8.5	75.32%	100%	183,893	2,000	134.40	588.66	OXD#6	94.20%	7.80	34.14	29.44%	10.05	173.30
Press #2 - TF IML 2D Topcoat Varnish	8.5	67.34%	100%	183,893	2,000	120.16	526.29	OXD#6	94.20%	6.97	30.52	29.44%	8.99	154.94
							1888.56				109.54			
Press #3 - Adcote Adhesive	10.80	77.19%	100%	173,953	2,000	165.54	725.08	OXD#2	94.20%	9.60	42.05	29.44%	12.38	213.46
Press #3 - Minute Maid Yellow Ink	8.5	75.32%	100%	173,953	2,000	127.13	556.84	OXD#2	94.20%	7.37	32.30	29.44%	9.51	163.93
Press #3 - TF IML 2D Topcoat Varnish	8.5	67.34%	100%	173,953	2,000	113.66	497.84	OXD#2	94.20%	6.59	28.87	29.44%	8.50	146.57
							1779.76				103.23			
Press #4 - Adhesive	24.4	79.00%	100%	201,830	2,000	443.39	1942.05	OXD#5	94.20%	25.72	112.64	29.44%	33.16	571.74
Press #4 - Ink/Varnish	55.4	76.00%	100%	201,830	2,000	969.38	4245.87	OXD#5	94.20%	56.22	246.26	29.44%	72.50	1249.98
							6187.92	0.00	1.88	81.94	358.90			
Total Potential Uncontrolled Emissions:						**2,681.46**	**17,301.69**				**1,003.50**		**200.54**	**3,457.67**

Note:
All of the coatings within one category (adhesive, ink, or varnish) are mutually exclusive with the other coatings within that category (adhesive, ink or varnish).
Press # 1 has a maximum line speed of 840 ft/min (printing only) or 740 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 740 ft/min of printing and adhesive.
Press # 2 has a maximum line speed of 840 ft/min (printing only) or 740 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 740 ft/min of printing and adhesive.
Press # 3 has a maximum line speed of 800 ft/min (printing only) or 700 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 700 ft/min of printing and adhesive.
Press # 4 has a maximum line speed of 800 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 800 ft/min of printing and adhesive.
Heatset offset printing has an assumed flash off of 80%. Other types of printers have a flash off of 100%
There are negligible emissions from clean-up operations.

Methodology:
Throughput = Maximum line speed feet per minute * Convert feet to inches * Maximum print width inches * 60 minutes per hour * 8,760 hours per year = MMin² per Year
VOC = Maximum Coverage pounds per MMin² * Weight percentage organics (volatiles minus water) * Flash off * Throughput * Tons per 2,000 pounds = Tons per Year
Controlled/Limited Emissions = Uncontrolled Emissions * (1 - (Overall Control Efficiency)) * VOC Input Limitation (%)

Appendix A: Emission Calculations

HAPS From Printing Press Operations

Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Title V: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

Potential Uncontrolled HAP Emissions:

Throughput for Packaging Rotogravure Printing Press:

Press I.D.	Maximum Line Speed (ft/min)	Convert Feet to Inches	Maximum Print Width (in)	60 Min/ Hour	8,760 HR YEAR	1/1,000,000	Potential MMin²/Year
Press #1	740	12	39.4	60	8,760	1,000,000	183,893
Press #2	740	12	39.4	60	8,760	1,000,000	183,893
Press #3	700	12	39.4	60	8,760	1,000,000	173,953
Press #4	800	12	40.0	60	8,760	1,000,000	201,830

PRINTING VOC:

Ink Name	Maximum Coverage lbs/ MMin²	Weight % Toluene As Applied	Flash Off %	Potential Throughput MMin²/Year	Tons/ 2,000 lbs	Potential Toluene Pounds per Hour	Potential Toluene Tons per Year	Control Equipment ID	Destruction Efficiency	Controlled Toluene Pounds per Hour	Controlled Toluene Tons per Year	Toluene Input Limit as % of potential input	Limited/Controlled Toluene Tons per Year	Total Limited Toluene input Tons per Year
Press #1 - Adcote Adhesive	10.9	67.80%	100%	183,893	2,000	155.14	679.50	OXD#6	94.20%	9.00	39.41	29.44%	11.60	200.05
Press #1 - House Black Ink	8.5	10.90%	100%	183,893	2,000	19.45	85.19	OXD#6	94.20%	1.13	4.94	29.44%	1.45	25.08
Press #2 - Adcote Adhesive	10.9	67.80%	100%	183,893	2,000	155.14	679.50	OXD#6	94.20%	9.00	39.41	29.44%	11.60	200.05
Press #2 - House Black Ink	8.5	10.90%	100%	183,893	2,000	19.45	85.19	OXD#6	94.20%	1.13	4.94	29.44%	1.45	25.08
Press #3 - Adcote Adhesive	10.80	67.80%	100%	173,953	2,000	145.41	636.88	OXD#2	94.20%	8.43	36.94	29.44%	10.87	187.50
Press #3 - House Black Ink	8.5	10.90%	100%	173,953	2,000	18.40	80.58	OXD#2	94.20%	1.07	4.67	29.44%	1.38	23.72
Press #4 - Adhesive	24.4	67.80%	100%	201,830	2,000	380.53	1666.72	OXD#5	94.20%	22.07	96.67	29.44%	28.46	490.68
Press #4 - House Black Ink	55.4	10.90%	100%	201,830	2,000	139.03	608.95	OXD#5	94.20%	8.06	35.32	29.44%	10.40	179.27
Total Potential Uncontrolled Emissions:						**1,032.54**	**4,522.51**				**262.31**		**77.22**	**1,331.43**

Note:
All of the coatings within one category (adhesive, ink, or varnish) are mutually exclusive with the other coatings within that category (adhesive, ink or varnish).
Press # 1 has a maximum line speed of 840 ft/min (printing only) or 740 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 740 ft/min of printing and adhesive.
Press # 2 has a maximum line speed of 840 ft/min (printing only) or 740 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 740 ft/min of printing and adhesive.
Press # 3 has a maximum line speed of 800 ft/min (printing only) or 700 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 700 ft/min of printing and adhesive.
Press # 4 has a maximum line speed of 800 ft/min (printing and adhesive). Emission calculations are based on the worst case scenario of 800 ft/min of printing and adhesive.
Heatset offset printing has an assumed flash off of 80%. Other types of printers have a flash off of 100%
There are negligible emissions from clean-up operations.

Methodology:
Throughput = Maximum line speed feet per minute * Convert feet to inches * Maximum print width inches * 60 minutes per hour * 8,760 hours per year = MMin² per Year
Toluene = Maximum Coverage pounds per MMin² * Weight percentage organics (volatiles minus water) * Flash off * Throughput * Tons per 2,000 pounds = Tons per Year
Controlled/Limited Emissions = Uncontrolled Emissions * (1 - (Overall Control Efficiency)) * Toluene Input Limitation (%)

Appendix A: Emissions Calculations

Natural Gas Combustion Only

Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Permit Number: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

					PM/PM10	SO2	NOx	CO	VOC	Benzene	Dichlorobenzene	Formaldehyde	Hexane	Toluene	Cadmium	Chromium	Nickel
Source	Number of Furnaces	mmbtu/hr Rating	Annual Hours of Operation	Annual Natural Gas (mmcf/yr)	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr
Press # 1 Dryer	1	7.76	8760	67.98	0.26	0.02	3.40	2.86	0.19	0.00	0.00	0.00	0.06	0.00	0.00	0.00	0.00
Press # 2 Dryer	1	7.76	8760	67.98	0.26	0.02	3.40	2.86	0.19	0.00	0.00	0.00	0.06	0.00	0.00	0.00	0.00
Press # 3 Boiler	1	6	8760	52.56	0.20	0.02	2.63	2.21	0.14	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00
Press # 4 Dryer	1	5	8760	43.80	0.17	0.01	2.19	1.84	0.12	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00
OXD # 2	1	4	8760	35.04	0.13	0.01	1.75	1.47	0.10	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00
OXD # 5	1	5.8	8760	50.81	0.19	0.02	2.54	2.13	0.14	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00
OXD # 6	1	204	8760	1787.04	6.79	0.54	169.77	75.06	4.91	0.00	0.00	0.07	1.61	0.00	0.00	0.00	0.00
	Combustion Totals, Tons/Year				8.00	0.63	185.68	88.42	5.79	0.00	0.00	0.08	1.89	0.00	0.00	0.00	0.00

Note: Assume that the heating value of natural gas is 1000 Btu / Cubic Foot.

	Natural Gas Emission Factors		
	Rated Capacity, MMBtu/hr		
	0 - 0.3	0.3 - 100	> 100
Units	lb/mmcf		
PM/PM10	7.60	7.60	7.60
SO2	0.60	0.60	0.60
NOx	94.00	100.00	190.00
CO	40.00	84.00	84.00
VOC	5.50	5.50	5.50
Source	AP-42, Chapter 1.4		

HAPs	Natural Gas Emission Factors in lb/MMcf
Benzene	0.0021
Dichlorobenzene	0.0012
Formaldehyde	0.075
Hexane	1.8
Toluene	0.0034
Cadmium	0.0011
Chromium	0.0014
Nickel	0.0021
Source	AP-42, Chapter 1.4

Sample Calculation	MMCF / YR	x	LB / MMCF	x	TONS / LB	=	TONS / YR

Appendix A: Emissions Calculations

Degreasing Operation (PW2) and Insignificant Degreasing Operation

Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Permit Number: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

Degreasing Operation (PW2)

Pollutant	Maximum rate	Emission Factor	Emission Rate	Maximum Uncontrolled Emissions	Pollution Control Efficiency	Maximum Controlled Emissions
	units/hr	lb/units	lb/hr	tons/yr	%	tons/yr
PM	N/A					
PM10	N/A					
SO2	N/A					
NOx	N/A					
VOC	1 cycle	18.9	18.9	82.8	N / A	28.45*
CO	N/A					
Lead	N/A					

Source of Emission Factors : Estimated material usage.
* Proposed permit emission limit is 28.45 tons/year. (Refer Permit No. 143-18145-00007)

Insignificant Degreasing Operation:

Emission Unit	VOC Emission Factor*	Total Amount of Degreaser Consumed in a Year	VOC Emissions
	lbs/gallon	Gallons	Tons/Year
Part Washer	8.42	218.81	**0.92**

Note:
* This Emission Factor is based on the worst case of the solvent used.

Methodology:

VOC Emission (Tons/Year) = (VOC Emission Factor (lbs/gallon) * Total Amount of Degreaser Consumed in a year (Gallons/year))/2000

Appendix A: Emissions Calculations

VOC From Electron Beam Cured Printing Press Line

Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Permit Number: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

THROUGHPUT			
Press I.D.	MAXIMUM LINE SPEED (FEET/MIN)	MAXIMUM PRINT WIDTH (INCHES)	MMin^2/YEAR
EB Coater	1000	42	264902

INK VOCS					
Ink Name Press Id	Maximum Coverage '(lbs/MMin^2)	Weight % Volatiles*	Flash Off %	Throughput (MMin^2/Year)	Emissions (TONS/YEAR)
	4.74	1%	100.00%	264902	6.28

Total VOC Emissions =	**6.28**	**Ton/yr**

*VOC (Tons/Year) = Maximum Coverage pounds per MMin^2 * Weight % volatiles (weight % of water & organics - weight % of water = weight % organics) * Flash off * Throughput * 1 Ton per 2000 pounds

METHODOLOGY

Throughput = Maximum line speed feet per minute * Convert feet to inches * Maximum print width inches * 60 minutes per hour * 8760 hours per year = MMin^2 per Year
VOC = Maximum Coverage pounds per MMin^2 * Weight percentage volatiles (water minus organics) * Flash off * Throughput * Tons per 2000 pounds = Tons per Year
NOTE: HEAT SET OFFSET PRINTING HAS AN ASSUMED FLASH OFF OF 80%. OTHER TYPES OF PRINTERS HAVE A FLASH OFF OF 100%.
(Source -OAQPS Draft Guidance, "Control of Volatile Organic Compound Emissions from Offset Lithographic Printing (9/93))

Appendix A: Emissions Calculations
Seaming Machine

Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Permit Number: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

Speed	**Maximum Application Rate**			
meter/minute	lbs/1,000,000 meter	lbs/mins	lbs/day	tons of VOC/year
140	31	0.00434	6.25	1.14
500	31	0.01550	22.32	4.07
			Total	**5.21**

Appendix A: Emissions Calculations

Insignificant Activities

Company Name: Multi-Color Corporation

Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170

Permit Number: T143-30351-00007

Reviewer: Mehul Sura

Date: 6/8/2011

	PM/PM10	SO2	NOx	CO	VOC
Source	ton/yr	ton/yr	ton/yr	ton/yr	ton/yr
Press # 3 Boiler	0.20	0.02	2.63	2.21	0.14
Isopropyl acetate Storage Tanks	-	-	-	-	0.141
Ink dispensing system	-	-	-	-	2
Degreasing Operation					0.92
Electron Beam Curing Unit	-	-	-	-	6.28
Seaming Machine	-	-	-	-	5.21
Total	0.20	0.02	2.63	2.21	14.69

Appendix A: Emission Calculations
VOC Emission Calculations
Degreasing Operations (PW3)

Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Source Mod: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

Degreasing Operations	Solvent Used	Solvent Density (lbs/gal)	Maximum Usage (gal/yr)	Maximum Usage (lbs/yr)	Weight % VOC	Weight % HAP	VOC Emissions (tons/yr)	HAP Emissions (tons/yr)
PW3	MEK	6.7	1922.4	12880	100.00%	0.00%	6.44	0.00
PW3	Toluene	7.23	2349.6	16988	100.00%	100.00%	8.49	8.49
Total Potential Emissions (tons/yr)							**14.93**	**8.49**

METHODOLOGY
VOC Emissions (tpy) = Material Usage (lbs/yr) * Weight % VOC * 1 ton/2000 lbs
HAP Emissions (tpy) = Material Usage (lbs/yr) * Weight % HAP * 1 ton/2000 lbs

Appendix A: Emissions Calculations
Green House Gas Emissions

Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Permit Number: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

		MMBtu/hr
Press # 1 Dryer	1	7.76
Press # 2 Dryer	1	7.76
Press # 3 Boiler	1	6
Press # 4 Dryer	1	5
OXD # 2	1	4
OXD # 5	1	5.8
OXD # 6	1	9
	Total	45.32

Heat Input Capacity MMBtu/hr	HHV mmBtu / mmscf	Potential Throughput MMCF/yr
45.3	1000	397.0

	Greenhouse Gas		
	CO2	CH4	N2O
Emission Factor in lb/MMcf	120,000	2.3	2.2
Potential Emission in tons/yr	23,820	0.5	0.4
Summed Potential Emissions in tons/yr		23,821	
CO2 emissions, generated due to the VOC oxidation in oxidzers*		63,441	
CO2e Total in tons/yr		87,262	

* CO2 emissions, generated due to the VOC oxidation in oxidzers, have been determined as below.
Conservatively it is assumed that all VOC (17,302 tons/year) vented to oxidizers are carbon and these carbon are conveted into carbon dioxide.

carbon molar mass	12	A
oxygen molar mass	32	B
amount of carbon vented to oxidizers (tons/year)	17,302	C
amount of oxygen utilized in CO2 formation (tons/year)	46,139	D=B*C/A
amount of CO2 (tons/year)	63,441	=C+D

Methodology
The N2O Emission Factor for uncontrolled is 2.2. The N2O Emission Factor for low Nox burner is 0.64.
Emission Factors are from AP 42, Table 1.4-2 SCC #1-02-006-02, 1-01-006-02, 1-03-006-02, and 1-03-006-03.
Greenhouse Warming Potentials (GWP) from Table A-1 of 40 CFR Part 98 Subpart A.
Emission (tons/yr) = Throughput (MMCF/yr) x Emission Factor (lb/MMCF)/2,000 lb/ton
CO2e (tons/yr) = CO2 Potential Emission ton/yr x CO2 GWP (1) + CH4 Potential Emission ton/yr x CH4 GWP (21) + N2O Potential Emission ton/yr x N2O GWP (310).

Appendix A: Emission Calculations
Company Name: Multi-Color Corporation
Address City IN Zip: 2281 South U.S. 31, Scottsburg, Indiana 47170
Title V: T143-30351-00007
Reviewer: Mehul Sura
Date: 6/8/2011

Uncontrolled Potential Emissions (tons/year)

	Emissions Generating Activity					
Pollutant	Natural Gas Combustion	Presses #1 - #4	Solvent Degreasing PW2	Solvent Degreasing PW3	Insignificant Activities	**TOTAL**
PM	7.80	0.00	0.00	0.00	0.00	7.8
PM10	7.80	0.00	0.00	0.00	0.00	7.8
SO2	0.61	0.00	0.00	0.00	0.00	0.6
NOx	183.05	0.00	0.00	0.00	0.00	183.1
VOC	5.65	3,458.00	82.80	14.93	13.77	3,575.2
CO	86.21	0.00	0.00	0.00	0.00	86.2
CO2e	87,261.75	0.00	0.00	0.00	0.00	87,261.8

Total emissions based on rated capacity at 8,760 hours/year.

Controlled Potential Emissions (tons/year)

	Emissions Generating Activity					
Pollutant	Natural Gas	Presses #1 - #4	Solvent Degreasing PW2	Solvent Degreasing PW3	Insignificant Activities	**TOTAL**
PM	7.80	0.00	0.00	0.00	0.00	7.8
PM10	7.80	0.00	0.00	0.00	0.00	7.8
SO2	0.61	0.00	0.00	0.00	0.00	0.6
NOx	183.05	0.00	0.00	0.00	0.00	183.1
VOC	5.65	200.54	28.45	8.49	13.77	256.9
CO	86.21	0.00	0.00	0.00	0.00	86.2
CO2e	87261.75	0	0	0	0	87261.75

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

SENT VIA U.S. MAIL: CONFIRMED DELIVERY AND SIGNATURE REQUESTED

TO: Mike Terselic
Multi-Color Corporation
2281 S US 31
Scottsburg, IN 47170

DATE: October 12, 2011

FROM: Matt Stuckey, Branch Chief
Permits Branch
Office of Air Quality

SUBJECT: Final Decision
Title V - Renewal
143-30351-00007

Enclosed is the final decision and supporting materials for the air permit application referenced above. Please note that this packet contains the original, signed, permit documents.

The final decision is being sent to you because our records indicate that you are the contact person for this application. However, if you are not the appropriate person within your company to receive this document, please forward it to the correct person.

A copy of the final decision and supporting materials has also been sent via standard mail to:
Maurice Lloyd (Alpha-Omega Environmental)
OAQ Permits Branch Interested Parties List

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit. If you think you have received this document in error, please contact Joanne Smiddie-Brush of my staff at 1-800-451-6027 (ext 3-0185), or via e-mail at jbrush@idem.IN.gov.

Final Applicant Cover letter.dot 11/30/07

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

October 12, 2011

TO: Scott County Public Library

From: Matthew Stuckey, Branch Chief
Permits Branch
Office of Air Quality

Subject: **Important Information for Display Regarding a Final Determination**

Applicant Name: Multi-Color Corporation
Permit Number: 143-30351-00007

You previously received information to make available to the public during the public comment period of a draft permit. Enclosed is a copy of the final decision and supporting materials for the same project. Please place the enclosed information along with the information you previously received. To ensure that your patrons have ample opportunity to review the enclosed permit, **we ask that you retain this document for at least 60 days.**

The applicant is responsible for placing a copy of the application in your library. If the permit application is not on file, or if you have any questions concerning this public review process, please contact Joanne Smiddie-Brush, OAQ Permits Administration Section at 1-800-451-6027, extension 3-0185.

Enclosures
Final Library.dot 11/30/07

Mail Code 61-53

IDEM Staff	MIDENNEY 10/12/2011 Multi-Color Corporation 143-30351-00007 (final)			AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender	▶	Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: **CERTIFICATE OF MAILING ONLY**	

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee Remarks
1		Mike Terselic Multi-Color Corporation 2281 S US 31 Scottsburg IN 47170 (Source CAATS) via confirm delivery									
2		Scott County Health Department 1471 N. Gardner St Scottsburg IN 47170-7751 *(Health Department)*									
3		Scottsburg City Council and Mayors Office 2 E. McLain Street Scottsburg IN 47170 *(Local Official)*									
4		Scott Co Public Library 108 S Main St Scottsburg IN 47170-1892 *(Library)*									
5		Scott County Commissioners 1 E. McClain Ave., County Courthouse Scottsburg IN 47170 *(Local Official)*									
6		Maurice Lloyd Alpha-Omega Environmental PO Box 910965 Lexington KY 40591 *(Consultant)*									
7											
8											
9											
10											
11											
12											
13											
14											
15											

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is $50,000 per piece subject to a limit of $50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is $500. The maximum indemnity payable is $25,000 for registered mail, sent with optional postal insurance. See ***Domestic Mail Manual*** **R900, S913**, and **S921** for limitations of coverage on inured and COD mail. See ***International Mail Manual*** for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
5			

FACSIMILIE OF PS Form 3877