



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

TO: Interested Parties / Applicant

DATE: January 24, 2012

RE: Eli Lilly & Company/ 165-31344-00009

FROM: Matthew Stuckey, Branch Chief
Permits Branch
Office of Air Quality

Notice of Decision: Approval - Effective Immediately

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the enclosed matter. Pursuant to IC 13-17-3-4 and 326 IAC 2, this approval is effective immediately, unless a petition for stay of effectiveness is filed and granted, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

If you wish to challenge this decision, IC 4-21.5-3-7 and IC 13-15-7-3 require that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Office Environmental Adjudication, 100 North Senate Avenue, Government Center North, Suite N 501E, Indianapolis, IN 46204, **within eighteen (18) calendar days of the mailing of this notice**. The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

- (1) the date the document is delivered to the Office of Environmental Adjudication (OEA);
- (2) the date of the postmark on the envelope containing the document, if the document is mailed to OEA by U.S. mail; or
- (3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OEA by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

- (1) the name and address of the person making the request;
- (2) the interest of the person making the request;
- (3) identification of any persons represented by the person making the request;
- (4) the reasons, with particularity, for the request;
- (5) the issues, with particularity, proposed for considerations at any hearing; and
- (6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.

Enclosures
FNPER-MOD.dot 12/3/07



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

Mitchell E. Daniels, Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

Mr. Don Blair
Eli Lilly and Company - Clinton Laboratories
10500 South State Road 63
Clinton, IN 47842

January 24, 2012

Re: 165-31344-00009
Minor Source Modification to
Part 70 Permit Renewal No.: T 165-27283-
00009

Dear Mr. Blair:

Eli Lilly and Company - Clinton Laboratories was issued a Part 70 Operating Permit Renewal on October 16, 2009 for a pharmaceutical manufacturing plant. A letter requesting changes to this permit was received on January 9, 2012. Pursuant to 326 IAC 2-7-10.5 the following emission units are approved for construction at the source:

- (a) the addition of two new fermenters in Building C41;
- (b) the addition of three centrifuges in Building C45;
- (c) the addition of two conveyors in Building C45;
- (d) the modification of one existing conveyor and
- (e) the addition of a concentrate tank in Building C45.

The following construction conditions are applicable to the proposed project:

General Construction Conditions


1. The data and information supplied with the application shall be considered part of this source modification approval. Prior to any proposed change in construction which may affect the potential to emit (PTE) of the proposed project, the change must be approved by the Office of Air Quality (OAQ).
2. This approval to construct does not relieve the permittee of the responsibility to comply with the provisions of the Indiana Environmental Management Law (IC 13-11 through 13-20; 13-22 through 13-25; and 13-30), the Air Pollution Control Law (IC 13 17) and the rules promulgated thereunder, as well as other applicable local, state, and federal requirements.
3. Effective Date of the Permit
Pursuant to IC 13-15-5-3, this approval becomes effective upon its issuance.
4. Pursuant to 326 IAC 2-1.1-9 and 326 IAC 2-7-10.5(i), the Commissioner may revoke this approval if construction is not commenced within eighteen (18) months after receipt of this approval or if construction is suspended for a continuous period of one (1) year or more.
5. All requirements and conditions of this construction approval shall remain in effect unless modified in a manner consistent with procedures established pursuant to 326 IAC 2.

6. The source may begin construction and operation when the minor source modification has been issued. Operating conditions shall be incorporated into the Part 70 operating permit as a minor permit modification in accordance with 326 IAC 2-7-10.5(l)(2) and 326 IAC 2-7-12.

All other conditions of the permit shall remain unchanged and in effect. For your convenience, the entire Part 70 Operating Permit as modified will be provided at issuance.

This decision is subject to the Indiana Administrative Orders and Procedures Act – IC 4-21.5-3-5. If you have any questions on this matter, please contact Josiah Balogun, OAQ, 100 North Senate Avenue, MC 61-53, Room 1003, Indianapolis, Indiana, 46204-2251, or call at (800) 451-6027, and ask for Josiah Balogun or extension (4-5257), or dial (317) 234-5257.

Sincerely,



Tripurari P. Sinha, Ph.D., Section Chief
Permits Branch
Office of Air Quality

Attachments:
Updated Permit
Technical Support Document
PTE Calculations

JB

cc: File – Vermillion County
Vermillion County Health Department
U.S. EPA, Region V
Compliance and Enforcement Branch



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

Minor Source Modification to a Part 70 Operating Permit

OFFICE OF AIR QUALITY

Eli Lilly and Company - Clinton Laboratories
10500 South State Road 63
Clinton, Indiana 47842

(herein known as the Permittee) is hereby authorized to construct and operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this permit.

This permit is issued in accordance with 326 IAC 2 and 40 CFR Part 70 Appendix A and contains the conditions and provisions specified in 326 IAC 2-7 as required by 42 U.S.C. 7401, et. seq. (Clean Air Act as amended by the 1990 Clean Air Act Amendments), 40 CFR Part 70.6, IC 13-15 and IC 13-17. This permit also addresses certain new source review requirements and is intended to fulfill the new source review procedures pursuant to 326 IAC 2-2 and 326 IAC 2-7-10.5, applicable to those conditions.


Minor Source Modification No.: 165-31344-00009	
Issued by:  Tripurari P. Sinha, Ph.D., Section Chief Permits Branch Office of Air Quality	Issuance Date: January 24, 2012

TABLE OF CONTENTS

A. SOURCE SUMMARY

- A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]
- A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)]
[326 IAC 2-7-5(15)]
- A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-7-4(c)]
[326 IAC 2-7-5(15)]
- A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

B. GENERAL CONDITIONS

- B.1 Definitions [326 IAC 2-7-1]
- B.2 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)]
[IC 13-15-3-6(a)]
- B.2.1 Term of Conditions [326 IAC 2-1.1-9.5]
- B.3 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]
- B.4 Enforceability [326 IAC 2-7-7] [IC 13-17-12]
- B.5 Severability [326 IAC 2-7-5(5)]
- B.6 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]
- B.7 Duty to Provide Information [326 IAC 2-7-5(6)(E)]
- B.8 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]
- B.9 Annual Compliance Certification [326 IAC 2-7-6(5)]
- B.10 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)]
[326 IAC 1-6-3]
- B.11 Emergency Provisions [326 IAC 2-7-16]
- B.12 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]
- B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]
- B.14 Deviations from Permit Requirements and Conditions [326 IAC 2-7-5(3)(C)(ii)]
- B.15 Permit Modification, Reopening, Revocation and Reissuance, or Termination
[326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]
- B.16 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]
- B.17 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12] [40 CFR 72]
- B.18 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)]
[326 IAC 2-7-12(b)(2)]
- B.19 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]
- B.20 Source Modification Requirement [326 IAC 2-7-10.5]
- B.21 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]
- B.22 Transfer of Ownership or Operational Control [326 IAC 2-7-11]
- B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]
- B.24 Advanced Source Modification Approval [326 IAC 2-7-5(16)][326 IAC 2-7-10.5]
- B.25 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

C. SOURCE OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- C.1 Particulate Emission Limitations For Processes with Process Weight Rates
Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]
- C.2 Opacity [326 IAC 5-1]
- C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]
- C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]
- C.5 Fugitive Dust Emissions [326 IAC 6-4]
- C.6 Stack Height [326 IAC 1-7]
- C.7 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

Testing Requirements [326 IAC 2-7-6(1)]

- C.8 Performance Testing [326 IAC 3-6]

Compliance Requirements [326 IAC 2-1.1-11]

- C.9 Compliance Requirements [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

- C.10 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]
- C.11 Maintenance of Continuous Emission Monitoring Equipment [326 IAC 2-7-5(3)(A)(iii)]
- C.12 Maintenance of Continuous Opacity Monitoring Equipment [326 IAC 2-7-5(3)(A)(iii)]

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]

- C.13 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]
- C.14 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]
- C.15 Response to Abnormal or Out-of-Range Compliance Monitoring Measurements [326 IAC 2-7-5] [326 IAC 2-7-6]
- C.16 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5] [326 IAC 2-7-6]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

- C.17 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)] [326 IAC 2-6]
- C.18 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6] [326 IAC 2-2] [326 IAC 2-3]
- C.19 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11] [326 IAC 2-2]

Stratospheric Ozone Protection

- C.20 Compliance with 40 CFR 82 and 326 IAC 22-1

D.1. EMISSIONS UNIT OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- D.1.1 Particulate Matter [326 IAC 6-2][326 IAC 6-3]
- D.1.2 Sulfur Dioxide (SO₂) [326 IAC 7-4-8]
- D.1.3 Temporary Alternative Opacity Limitations [326 IAC 5-1-3]
- D.1.4 Prevention Maintenance Plan [326 IAC 2-7-5(13)]

Compliance Determination Requirements

- D.1.4.1 Particulate Matter Control
- D.1.5 Testing Requirements [326 IAC 2-7-6(1) and (6)]
- D.1.6 Coal Sampling and Analysis for SO₂ [326 IAC 3-7][326 IAC 7-2]

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

- D.1.7 [Reserved]
- D.1.8 Continuous Opacity Monitoring [326 IAC 3-5]
- D.1.9 Opacity Readings [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

- D.1.10 Coal Characteristics and Consumption Records
- D.1.11 [Reserved]
- D.1.12 Continuous Opacity Monitoring
- D.1.13 [Reserved]

- D.1.14 Standard Operating Procedures
- D.1.15 Reporting Requirement

Modification and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

- D.1.16 Modification and Construction: Advance Approval of Permit Conditions

D.2. EMISSIONS UNIT OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- D.2.1 Particulate Matter [326 IAC 6-3-2]
- D.2.2 NESHAP for Pharmaceuticals Production Non-Applicability Determination [40 CFR Part 63, Subpart GGG]
- D.2.3 Prevention Maintenance Plan [326 IAC 2-7-5(13)]

Testing and Monitoring Requirements

- D.2.4 Testing Requirements [326 IAC 2-7-6(1) and (6)]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

- D.2.5 Record Keeping Requirement

Modification and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

- D.2.6 Modification and Construction: Advanced Approval of Permit Conditions
- D.2.7 Leak Detection and Repair

D.3. EMISSIONS UNIT OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- D.3.1 Particulate Matter [326 IAC 6-2][326 IAC 6-3]
- D.3.2 Volatile Organic Compounds (VOCs) [326 IAC 8-1-6][326 IAC 2-2-3]
- D.3.3 [Reserved]
- D.3.4 Prevention Maintenance Plan [326 IAC 2-7-5(13)]

Leak Detection and Repair Requirements [326 IAC 2-7-5(1)]

- D.3.5 [Reserved]

Testing and Monitoring Requirements

- D.3.6 Testing Requirements [326 IAC 2-7-6(1) and (6)]
- D.3.7 Continuous Emissions Monitoring [2-1.1-11][326 IAC 3-5]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

- D.3.8 Record Keeping Requirement
- D.3.9 [Reserved]

Modification and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

- D.3.10 Modification and Construction: Advanced Approval of Permit Conditions
- D.3.11 Leak Detection and Repair
- D.3.12 Control Strategy for Volatile Organic Compounds (VOCs) [326 IAC 2-2-3]

D.4. EMISSIONS UNIT OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- D.4.1 Particulate Matter [326 IAC 6-3-2]
- D.4.2 Best Available Control Technology (BACT) [326 IAC 8-1-6][326 IAC 2-2-3]
- D.4.2.1 PM and PM10 Control Requirements

- D.4.3 Prevention Maintenance Plan [326 IAC 2-7-5(13)]
- D.4.4 [Reserved]

Testing and Monitoring Requirements

- D.4.5 Testing Requirements [326 IAC 2-7-6(1) and (6)]
- D.4.6 Continuous Emissions Monitoring [2-1.1-11][326 IAC 3-5]
- D.4.7 Visible Emissions Observations [326 IAC 2-1.1-11]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

- D.4.8 Record Keeping Requirements
- D.4.9 Reporting Requirements
- D.4.10 [Reserved]

Modification and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

- D.4.11 Modification and Construction: Advanced Approval of Permit Conditions
- D.4.12 Leak Detection and Repair
- D.4.13 Control Strategy for Volatile Organic Compounds (VOCs) [326 IAC 2-2-3]

D.5. RESERVED

D.6. RESERVED

D.7. RESERVED

D.8. RESERVED

D.9. RESERVED

D.10. RESERVED

D.11. RESERVED

D.12. RESERVED

D.13. RESERVED

D.14. RESERVED

D.15. RESERVED

D.16. EMISSIONS UNIT OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- D.16.1 Cold-Cleaner Degreasers Constructed Between January 1, 1980 and July 1, 1990
[326 IAC 8-3-2]
- D.16.2 Cold-Cleaner Degreasers Constructed after July 1, 1990 [326 IAC 8-3-5]

Modification and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

- D.16.3 Modification and Construction: Advanced Approval of Permit Conditions

E.1. RESERVED

E.2. RESERVED

E.3. EMISSIONS UNIT OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- E.3.1 Leak Detection and Repair (LDAR) for Narasin Process Equipment Emission Units 1-11

F.1. RESERVED

F.2. EMISSIONS UNIT OPERATION CONDITIONS

Emission Limitations and Standards [326 IAC 2-7-5(1)]

- F.2.1 Emission Limits [326 IAC 2-2]

F.2.2 Site Modification and Advance Approval of Modifications [326 IAC 2--7-5(9)]
[326 IAC 2-7-5(16)]

F.2.3 Volatile Organic Compounds (VOC) Emission Limit Determination

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

F.2.4 Records and Reporting of Emissions

F.2.5 Records and Reporting of Site Modifications [326 IAC 2-7-5(16)][326 IAC 2-7-20(a)]
[40 CFR 63.1259][40 CFR 63.1260]

F.2.6 Notification for Site Modifications [326 IAC 2-1.1-12(c) to (f)]

Other Flexibel Permit Requirements

F.2.7 Valid Period for Best Available Control Technology [326 IAC 2-2-3(4)]

F.2.8 NSPS and NESHAP Pre-Construction Notification and Reviews

G.1. EMISSIONS UNIT OPERATION CONDITIONS

Source Wide Emission Limits [326 IAC 2-2.4-7(1)]

G.1.1 Emission Limits [326 IAC 2-2.4-7(1)]

General PAL Requirements [326 IAC 2-2.4-1(c)]

G.1.2 Major New Source Review Applicability [326 IAC 2-2.4-1(c)]

G.1.3 General PAL Requirements [326 IAC 2-2.4-7] [326 IAC 2-2.4-8] [326 IAC 2-2.4-9] [326 IAC
2-2.4-10] [326 IAC 2-2.4-11] [326 IAC 2-2.4-15]

Testing and Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

G.1.4 Nitrogen Oxides (NOx) Emission Limit Determination [326 IAC 2-2.4-7(6) & (7)] [326 IAC 2-
2.4-12]

G.1.5 Sulfur Dioxides (SO2) Emission Limit Determination [326 IAC 2-2.4-7(6) & (7)] [326 IAC 2-
2.4-12]

G.1.6 Validation and Reevaluation of Emission Determination Methods [326 IAC 2-2.4-12(i)]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

G.1.7 Record Keeping Requirement [326 IAC 2-7-5(3)] [326 IAC 2-2.4-13]

G.1.8 Reporting Requirement [326 IAC 2-7-5(3)] [326 IAC 2-2.4-14]

Certification

Emergency Occurrence Report

Quarterly Report

Quarterly Deviation and Compliance Monitoring Report

- (h) [Reserved]
- (i) [Reserved]
- (j) [Reserved]
- (k) [Reserved]
- (l) [Reserved]
- (m) [Reserved]
- (n) [Reserved]
- (o) [Reserved]

A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)] [326 IAC 2-7-4(c)]
[326 IAC 2-7-5(15)]

- (a) This stationary source also includes the following insignificant activities which are specifically regulated, as defined in 326 IAC 2-7-1(21):
 - (1) D.2 Animal Health Manufacturing (AHM) – Fermentation Operations: Various mixers, bump tanks and fermenter tanks in the fermentation operations each emitting less than 5 pounds PM10 per hour or 25 pounds per day. [326 IAC 6-3-2].
 - (2) D.16 Insignificant Activities: This section provides specific requirements for cold-cleaning organic solvent degreasing operations at the site which are defined as insignificant activities pursuant to 326 IAC 2-7-1(21)(G)(vi)(CC).
- (b) This stationary source also includes the following insignificant activities, as defined in 326 IAC 2-7-1(21), that do not have applicable requirements:
 - (1) Natural gas-fired combustion sources with heat input equal to or less than ten million (10,000,000) Btu per hour;
 - (2) Propane or liquefied petroleum gas, or butane-fired combustion sources with heat input equal to or less than six million (6,000,000) Btu per hour;
 - (3) Equipment powered by internal combustion engines of capacity equal to or less than 500,000 Btu/hour, except where total capacity of equipment operated by one stationary source exceeds 2,000,000 Btu/hour;
 - (4) Combustion source flame safety purging on startup;
 - (5) A gasoline fuel transfer and dispensing operation handling less than or equal to 1,300 gallons per day, such as filling of tanks, locomotives, automobiles, having a storage capacity less than or equal to 10,500 gallons;
 - (6) A petroleum fuel, other than gasoline, dispensing facility, having a storage capacity of less than or equal to 10,500 gallons, and dispensing less than or equal to 230,000 gallons per month;
 - (7) VOC/HAP storage tanks with capacity less than or equal to 1,000 gallons and

- annual throughputs less than 12,000 gallons;
- (8) VOC/HAP storage vessels storing lubricating oils, hydraulic oils, machining oils, and machining fluids;
 - (9) Filling drums, pails or other packaging containers with lubricating oils, waxes, and greases;
 - (10) Cleaners and solvents with a combined use less than or equal to 145 gallons per 12 months characterized having a vapor pressure equal to or less than 2 kPa, 15 mm Hg, or 0.3 psi measured at 38°C (100°F); or having a vapor pressure equal to or less than 0.7 kPa, 5 mm Hg, or 0.1 psi measured at 20°C (68°F);
 - (11) Closed loop heating and cooling systems;
 - (12) Activities associated with the transportation and treatment of sanitary sewage, provided discharge to the treatment plant is under the control of the owner/operator, that is, an on-site sewage treatment facility;
 - (13) Any operation using aqueous solutions containing less than 1% by weight of VOCs excluding HAPs;
 - (14) Water based adhesives that are less than or equal to 5% by volume of VOCs excluding HAPs;
 - (15) Noncontact cooling tower systems that are forced and induced draft cooling tower systems not regulated under a NESHAP;
 - (16) Replacement or repair of electrostatic precipitators, bags in baghouses and filters in other air filtration equipment;
 - (17) Heat exchanger cleaning and repair;
 - (18) Process vessel degassing and cleaning to prepare for internal repairs;
 - (19) Stockpiled soils from soil remediation activities that are covered and waiting transport for disposal;
 - (20) Paved and unpaved roads and parking lots with public access;
 - (21) Covered conveyors for coal or coke conveying of less than or equal to 360 tons per day;
 - (22) Coal bunker and coal scale exhausts and associated dust collector vents;
 - (23) Asbestos abatement projects regulated by 326 IAC 14-10;
 - (24) Purging of gas lines and vessels that is related to routine maintenance and repair of buildings, structures, or vehicles at the source where air emissions from those activities would not be associated with any production process;
 - (25) Equipment used to collect any material that might be released during a malfunction, process upset, or spill cleanup including catch tanks, temporary liquid separators, tanks and fluid handling equipment;
 - (26) Blowdown from sight glasses; boilers; compressors; pumps; and cooling towers;

- (27) On-site fire and emergency response training approved by the department;
- (28) Emergency generators including gasoline generators not exceeding 110 horsepower, diesel generators not exceeding 1,600 horsepower; and natural gas turbines or reciprocating engines not exceeding 16,000 horsepower;
- (29) Stationary fire pumps;
- (30) Purge double block and bleed valves;
- (31) Filter or coalescer media changeout;
- (32) Vents from ash transport systems not operated at positive pressure;
- (33) A laboratory as defined in 326 IAC 2-7-1(21)(D); and
- (34) Farm operations.
- (35) Other activities below insignificant threshold levels:
 - (A) Building C86 10,000-gallon storage tank or other portable container(s) for storing hexane used for fire training with emissions less than 5 pounds per day or 1 ton per year of a single HAP.
 - (B) Tanks C9TK01, TK02, TK03, TK04 TK6A TK09, TK10 and TK19 may be used for insignificant activities.
 - (C) Waste water treatment system with VOC emissions less than three (3) pounds per hour or fifteen (15) pounds per day.
 - (D) Loading and unloading stations, storage tanks, processing tanks, crystallizers, and centrifuges for the processing of chicken and lard oil may be used for insignificant activities.

A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

This stationary source is required to have a Part 70 permit by 326 IAC 2-7-2 (Applicability) because:

- (a) It is a major source, as defined in 326 IAC 2-7-1(22);
- (b) It is a source in a source category designated by the United States Environmental Protection Agency (U.S. EPA) under 40 CFR 70.3 (Part 70 - Applicability).

SECTION B GENERAL CONDITIONS

B.1 Definitions [326 IAC 2-7-1]

Terms in this permit shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-7) shall prevail.

B.2 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]

- (a) This permit, T165-27293-00009, is issued for a fixed term of five (5) years from the issuance date of this permit, as determined in accordance with IC 4-21.5-3-5(f) and IC 13-15-5-3. Subsequent revisions, modifications, or amendments of this permit do not affect the expiration date of this permit or of permits issued pursuant to Title IV of the Clean Air Act and 326 IAC 21 (Acid Deposition Control).
- (b) If IDEM, OAQ, upon receiving a timely and complete renewal permit application, fails to issue or deny the permit renewal prior to the expiration date of this permit, this existing permit shall not expire and all terms and conditions shall continue in effect, including any permit shield provided in 326 IAC 2-7-15, until the renewal permit has been issued or denied.

B.2.1 Term of Conditions [326 IAC 2-1.1-9.5]

Notwithstanding the permit term of a permit to construct, a permit to operate, or a permit modification, any condition established in a permit issued pursuant to a permitting program approved in the state implementation plan shall remain in effect until:

- (a) the condition is modified in a subsequent permit action; or
- (b) the emission unit to which the condition pertains permanently ceases operation.

B.3 Enforceability [326 IAC 2-7-7] [IC 13-17-12]

Unless otherwise stated, all terms and conditions in this permit, including any provisions designed to limit the source's potential to emit, are enforceable by IDEM, the United States Environmental Protection Agency (U.S. EPA) and by citizens in accordance with the Clean Air Act.

B.4 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]

The Permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least nine (9) months prior to the date of expiration of the source's existing permit, consistent with 326 IAC 2-7-3 and 326 IAC 2-7-4(a).

B.5 Severability [326 IAC 2-7-5(5)]

The provisions of this permit are severable; a determination that any portion of this permit is invalid shall not affect the validity of the remainder of the permit.

B.6 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]

This permit does not convey any property rights of any sort or any exclusive privilege.

B.7 Duty to Provide Information [326 IAC 2-7-5(6)(E)]

- (a) The Permittee shall furnish to IDEM, OAQ, within a reasonable time, any information that IDEM, OAQ may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. The submittal by the Permittee does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34). Upon request, the Permittee shall also furnish to IDEM, OAQ copies of records required to be kept by this permit.

- (b) For information furnished by the Permittee to IDEM, OAQ, the Permittee may include a claim of confidentiality in accordance with 326 IAC 17.1. When furnishing copies of requested records directly to U. S. EPA, the Permittee may assert a claim of confidentiality in accordance with 40 CFR 2, Subpart B.

B.8 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]

- (a) Where specifically designated by this permit or required by an applicable requirement, any application form, report, or compliance certification submitted shall contain certification by the "responsible official" of truth, accuracy, and completeness. This certification shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.
- (b) One (1) certification shall be included, using the attached Certification Form, with each submittal requiring certification. One (1) certification may cover multiple forms in one (1) submittal.
- (c) A "responsible official" is defined at 326 IAC 2-7-1(34).

B.9 Annual Compliance Certification [326 IAC 2-7-6(5)]

- (a) The Permittee shall annually submit a compliance certification report which addresses the status of the source's compliance with the terms and conditions contained in this permit, including emission limitations, standards, or work practices. All certifications shall cover the time period from January 1 to December 31 of the previous year, and shall be submitted no later than July 1 of each year to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V
Air and Radiation Division, Air Enforcement Branch - Indiana (AE-17J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

- (b) The annual compliance certification report required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (c) The annual compliance certification report shall include the following:
 - (1) The appropriate identification of each term or condition of this permit that is the basis of the certification;
 - (2) The compliance status;
 - (3) Whether compliance was continuous or intermittent;
 - (4) The methods used for determining the compliance status of the source, currently and over the reporting period consistent with 326 IAC 2-7-5(3); and

- (5) Such other facts, as specified in Sections D of this permit, as IDEM, OAQ may require to determine the compliance status of the source.

The submittal by the Permittee does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

B.10 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)][326 IAC 1-6-3]

- (a) If required by specific condition(s) in Section D of this permit, the Permittee shall maintain Preventive Maintenance Plans (PMPs) including the following information on each facility:
- (1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;
 - (2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and
 - (3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.
- (b) The Permittee shall implement the PMPs, including any required record keeping, as necessary to ensure that failure to implement a PMP does not cause or contribute to an exceedance of any limitation on emissions or potential to emit.
- (c) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Permittee to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions or potential to emit. The PMPs do not require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).
- (d) To the extent the Permittee is required by 40 CFR Part 60/63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

B.11 Emergency Provisions [326 IAC 2-7-16]

- (a) An emergency, as defined in 326 IAC 2-7-1(12), is not an affirmative defense for an action brought for noncompliance with a federal or state health-based emission limitation.
- (b) An emergency, as defined in 326 IAC 2-7-1(12), constitutes an affirmative defense to an action brought for noncompliance with a technology-based emission limitation if the affirmative defense of an emergency is demonstrated through properly signed, contemporaneous operating logs or other relevant evidence that describe the following:
- (1) An emergency occurred and the Permittee can, to the extent possible, identify the causes of the emergency;
 - (2) The permitted facility was at the time being properly operated;
 - (3) During the period of an emergency, the Permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards or other requirements in this permit;
 - (4) For each emergency lasting one (1) hour or more, the Permittee notified IDEM, OAQ, within four (4) daytime business hours after the beginning of the

emergency, or after the emergency was discovered or reasonably should have been discovered;

Telephone Number: 1-800-451-6027 (ask for Office of Air Quality, Compliance and Enforcement Branch), or
Telephone Number: 317-233-0178 (ask for Compliance and Enforcement Branch)
Facsimile Number: 317-233-6865

- (5) For each emergency lasting one (1) hour or more, the Permittee submitted the attached Emergency Occurrence Report Form or its equivalent, either by mail or facsimile to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

within two (2) working days of the time when emission limitations were exceeded due to the emergency.

The notice fulfills the requirement of 326 IAC 2-7-5(3)(C)(ii) and must contain the following:

- (A) A description of the emergency;
- (B) Any steps taken to mitigate the emissions; and
- (C) Corrective actions taken.

The notification which shall be submitted by the Permittee does not require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (6) The Permittee immediately took all reasonable steps to correct the emergency.
- (c) In any enforcement proceeding, the Permittee seeking to establish the occurrence of an emergency has the burden of proof.
 - (d) This emergency provision supersedes 326 IAC 1-6 (Malfunctions). This permit condition is in addition to any emergency or upset provision contained in any applicable requirement.
 - (e) The Permittee seeking to establish the occurrence of an emergency shall make records available upon request to ensure that failure to implement a PMP did not cause or contribute to an exceedance of any limitations on emissions. However, IDEM, OAQ may require that the Preventive Maintenance Plans required under 326 IAC 2-7-4(c)(9) be revised in response to an emergency.
 - (f) Failure to notify IDEM, OAQ by telephone or facsimile of an emergency lasting more than one (1) hour in accordance with (b)(4) and (5) of this condition shall constitute a violation of 326 IAC 2-7 and any other applicable rules.
 - (g) If the emergency situation causes a deviation from a technology-based limit, the Permittee may continue to operate the affected emitting facilities during the emergency

provided the Permittee immediately takes all reasonable steps to correct the emergency and minimize emissions.

- (h) The Permittee shall include all emergencies in the Quarterly Deviation and Compliance Monitoring Report.

B.12 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]

- (a) Pursuant to 326 IAC 2-7-15, the Permittee has been granted a permit shield. The permit shield provides that compliance with the conditions of this permit shall be deemed compliance with any applicable requirements as of the date of permit issuance, provided that either the applicable requirements are included and specifically identified in this permit or the permit contains an explicit determination or concise summary of a determination that other specifically identified requirements are not applicable. The Indiana statutes from IC 13 and rules from 326 IAC, referenced in conditions in this permit, are those applicable at the time the permit was issued. The issuance or possession of this permit shall not alone constitute a defense against an alleged violation of any law, regulation or standard, except for the requirement to obtain a Part 70 permit under 326 IAC 2-7 or for applicable requirements for which a permit shield has been granted.

This permit shield does not extend to applicable requirements which are promulgated after the date of issuance of this permit unless this permit has been modified to reflect such new requirements.

- (b) In addition to the nonapplicability determinations set forth in Section D of this permit, the IDEM, OAQ has made the following determination regarding this source.
- (1) **40 CFR Part 60, Subpart D – Fossil-fuel fired steam generating units:** This source is not subject to 40 CFR Part 60, Subpart D because none of the boilers at the plant site exceed 250 MMBtu/hr in heat input capacity. [40 CFR 60.40(a)(1)].
 - (2) **40 CFR Part 60, Subpart Db – Industrial-Commercial-Institutional steam generating units:** This source is not subject to 40 CFR Part 60, Subpart Db because commencement of constructed, modification, or reconstructed of the boilers at plant site with a maximum design heat input capacity of greater than 100 million MMBtu/hr, all occurred before June 1, 1984.
 - (3) **40 CFR Part 60, Subpart Dc – Small Industrial-Commercial-Institutional steam generating units:** This source is not subject to 40 CFR Part 60, Subpart Dc because commencement of constructed, modification, or reconstructed of the boilers at plant site with a maximum design heat input capacity of greater than 100 million MMBtu/hr or less, but greater than or equal to 10 MMBtu/hr, all occurred before June 9, 1989.
 - (4) **40 CFR Part 63, Subpart Q – Industrial Process Cooling Towers:** This source is not subject to 40 CFR Part 63, Subpart Q and 326 IAC 20-4 because the source does not utilize chromium based water treatment compounds in its cooling towers. [40 CFR 63.400].
 - (5) **40 CFR Part 63, Subpart T – Halogenated Solvent Cleaning:** This source is not subject to 40 CFR Part 63, Subpart T and 326 IAC 20-6 because the source does not use halogenated solvents in any solvent cleaning machines. [40 CFR 63.460].
 - (6) **40 CFR Part 63, Subpart MMM – Pesticide Active Ingredient Production:**

This source is not subject to 40 CFR Part 63, Subpart MMM and 326 IAC 20-45 because the source does not contain any pesticide active ingredient process units or associated equipment as described in 40 CFR 63.1360. [40 CFR 63.1360].

- (7) **40 CFR Part 63, Subpart GGGGG – Site Remediation:** This source is not subject to 40 CFR Part 63, Subpart GGGGG because the site is not performing any remediation activities as defined in this rule.
 - (8) **326 IAC 6-5 – Fugitive Particulate Matter Emission Limitations:** This source does not have potential fugitive dust emissions greater than 25 tons per year, and is therefore, not subject to the requirements of this rule.
 - (9) **326 IAC 8-4 – Petroleum Sources:** This source does not operate any facilities subject to the requirements of 326 IAC 8-4. 326 IAC 8-4-6 is not applicable to this source because the source does not accept deliveries of gasoline by transports, as defined by 326 IAC 1-2-84.
 - (10) **40 CFR Part 60, Subpart K - Storage Vessels for Petroleum Liquids:** This source is not subject to 40 CFR 60, Subpart K because none of the storage tanks at the source constructed between June 11, 1973 and May 19, 1978 store petroleum liquids, as defined in 40 CFR 60.111.
 - (11) **40 CFR Part 60, Subpart Ka - Storage Vessels for Petroleum Liquids:** This source is not subject to 40 CFR 60, Subpart K because none of the storage tanks at the source constructed between June 11, 1973 and May 19, 1978 store petroleum liquids, as defined in 40 CFR 60.111.
 - (12) 40 CFR 63, Sections 63.50 through 63.56 - Section 112(j): This is not subject to 40 CFR Part 63, Section 63.50 through 63.56 because there are no affected sources within a source category or subcategory for which USEPA has failed to promulgate emission standards by the section 112 (j) deadlines.
 - (13) **326 IAC 8-6 – Organic Solvent Emissions Limitations:** The provisions of 326 IAC 8-6 are not applicable to this source because the source uses exempt solvent pursuant to 326 IAC 8-6-2(a)(4).
 - (14) **326 IAC 10 – Nitrogen Oxide Rules:** This source does not contain any emission units identified in 326 IAC 10-4. Therefore, the source is not subject to the NO_x emission control requirements of that rule.
 - (15) **326 IAC 15 – Lead Rules:** This source does not contain any emission units described in 326 IAC 15. Therefore, the source is not subject to the requirements of those rules.
 - (16) **326 IAC 21 – Acid Deposition:** This source does not contain any emission units described in 326 IAC 21. Therefore, the source is not subject to the requirements of those rules.
- (c) If, after issuance of this permit, it is determined that the permit is in nonconformance with an applicable requirement that applied to the source on the date of permit issuance, IDEM, OAQ, shall immediately take steps to reopen and revise this permit and issue a compliance order to the Permittee to ensure expeditious compliance with the applicable requirement until the permit is reissued. The permit shield shall continue in effect so long as the Permittee is in compliance with the compliance order.

- (d) No permit shield shall apply to any permit term or condition that is determined after issuance of this permit to have been based on erroneous information supplied in the permit application. Erroneous information means information that the Permittee knew to be false, or in the exercise of reasonable care should have been known to be false, at the time the information was submitted.
- (e) Nothing in 326 IAC 2-7-15 or in this permit shall alter or affect the following:
 - (1) The provisions of Section 303 of the Clean Air Act (emergency orders), including the authority of the U.S. EPA under Section 303 of the Clean Air Act;
 - (2) The liability of the Permittee for any violation of applicable requirements prior to or at the time of this permit's issuance;
 - (3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act; and
 - (4) The ability of U.S. EPA to obtain information from the Permittee under Section 114 of the Clean Air Act.
- (f) This permit shield is not applicable to any change made under 326 IAC 2-7-20(b)(2) (Sections 502(b)(10) of the Clean Air Act changes) and 326 IAC 2-7-20(c)(2) (trading based on State Implementation Plan (SIP) provisions).
- (g) This permit shield is not applicable to modifications eligible for group processing until after IDEM, OAQ, has issued the modifications. [326 IAC 2-7-12(c)(7)]
- (h) This permit shield is not applicable to minor Part 70 permit modifications until after IDEM, OAQ, has issued the modification. [326 IAC 2-7-12(b)(8)]

B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]

- (a) All terms and conditions of permits established prior to T165-27293-00009 and issued pursuant to permitting programs approved into the state implementation plan have been either:
 - (1) incorporated as originally stated,
 - (2) revised under 326 IAC 2-7-10.5, or
 - (3) deleted under 326 IAC 2-7-10.5.
- (b) Provided that all terms and conditions are accurately reflected in this combined permit, all previous registrations and permits are superseded by this combined new source review and part 70 operating permit, except for permits issued pursuant to Title IV of the Clean Air Act and 326 IAC 21 (Acid Deposition Control)

B.14 Deviations from Permit Requirements and Conditions [326 IAC 2-7-5(3)(C)(ii)]

- (a) Deviations from any permit requirements (for emergencies see Section B - Emergency Provisions), the probable cause of such deviations, and any response steps or preventive measures taken shall be reported to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue

MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

using the attached Quarterly Deviation and Compliance Monitoring Report, or its equivalent. A deviation required to be reported pursuant to an applicable requirement that exists independent of this permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report.

The Quarterly Deviation and Compliance Monitoring Report does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (b) A deviation is an exceedance of a permit limitation or a failure to comply with a requirement of the permit.

B.15 Permit Modification, Reopening, Revocation and Reissuance, or Termination
[326 IAC 2-7-5(6)(C)] [326 IAC 2-7-8(a)][326 IAC 2-7-9]

- (a) This permit may be modified, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a Part 70 Operating Permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any condition of this permit. [326 IAC 2-7-5(6)(C)] The notification by the Permittee does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).
- (b) This permit shall be reopened and revised under any of the circumstances listed in IC 13-15-7-2 or if IDEM, OAQ determines any of the following:
- (1) That this permit contains a material mistake.
 - (2) That inaccurate statements were made in establishing the emissions standards or other terms or conditions.
 - (3) That this permit must be revised or revoked to assure compliance with an applicable requirement. [326 IAC 2-7-9(a)(3)]
- (c) Proceedings by IDEM, OAQ to reopen and revise this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening and revision shall be made as expeditiously as practicable. [326 IAC 2-7-9(b)]
- (d) The reopening and revision of this permit, under 326 IAC 2-7-9(a), shall not be initiated before notice of such intent is provided to the Permittee by IDEM, OAQ at least thirty (30) days in advance of the date this permit is to be reopened, except that IDEM, OAQ may provide a shorter time period in the case of an emergency. [326 IAC 2-7-9(c)]

B.16 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]

- (a) The application for renewal shall be submitted using the application form or forms prescribed by IDEM, OAQ and shall include the information specified in 326 IAC 2-7-4. Such information shall be included in the application for each emission unit at this source, except those emission units included on the trivial or insignificant activities list contained in 326 IAC 2-7-1(21) and 326 IAC 2-7-1(40). The renewal application does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

Request for renewal shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

- (b) A timely renewal application is one that is:
- (1) Submitted at least nine (9) months prior to the date of the expiration of this permit; and
 - (2) If the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (c) If the Permittee submits a timely and complete application for renewal of this permit, the source's failure to have a permit is not a violation of 326 IAC 2-7 until IDEM, OAQ takes final action on the renewal application, except that this protection shall cease to apply if, subsequent to the completeness determination, the Permittee fails to submit by the deadline specified in writing by IDEM, OAQ any additional information identified as being needed to process the application.

B.17 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12] [40 CFR 72]

- (a) Permit amendments and modifications are governed by the requirements of 326 IAC 2-7-11 or 326 IAC 2-7-12 whenever the Permittee seeks to amend or modify this permit.
- (b) Any application requesting an amendment or modification of this permit shall be submitted to:
- Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
- Any such application shall be certified by the "responsible official" as defined by 326 IAC 2-7-1(34).
- (c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]
- (d) No permit amendment or modification is required for the addition, operation or removal of a nonroad engine, as defined in 40 CFR 89.2.

B.18 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)] [326 IAC 2-7-12(b)(2)]

- (a) No Part 70 permit revision shall be required under any approved economic incentives, marketable Part 70 permits, emissions trading, and other similar programs or processes for changes that are provided for in a Part 70 permit.
- (b) Notwithstanding 326 IAC 2-7-12(b)(1) and 326 IAC 2-7-12(c)(1), minor Part 70 permit modification procedures may be used for Part 70 modifications involving the use of economic incentives, marketable Part 70 permits, emissions trading, and other similar

approaches to the extent that such minor Part 70 permit modification procedures are explicitly provided for in the applicable State Implementation Plan (SIP) or in applicable requirements promulgated or approved by the U.S. EPA.

B.19 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]

- (a) The Permittee may make any change or changes at the source that are described in 326 IAC 2-7-20(b),(c), or (e) without a prior permit revision, if each of the following conditions is met:
- (1) The changes are not modifications under any provision of Title I of the Clean Air Act;
 - (2) Any preconstruction approval required by 326 IAC 2-7-10.5 has been obtained;
 - (3) The changes do not result in emissions which exceed the limitations provided in this permit (whether expressed herein as a rate of emissions or in terms of total emissions);
 - (4) The Permittee notifies the:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V
Air and Radiation Division, Regulation Development Branch - Indiana (AR-18J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

in advance of the change by written notification at least ten (10) days in advance of the proposed change. The Permittee shall attach every such notice to the Permittee's copy of this permit; and
 - (5) The Permittee maintains records on-site, on a rolling five (5) year basis, which document all such changes and emission trades that are subject to 326 IAC 2-7-20(b),(c), or (e). The Permittee shall make such records available, upon reasonable request, for public review.

Such records shall consist of all information required to be submitted to IDEM, OAQ in the notices specified in 326 IAC 2-7-20(b)(1), (c)(1), and (e)(2).
- (b) The Permittee may make Section 502(b)(10) of the Clean Air Act changes (this term is defined at 326 IAC 2-7-1(36)) without a permit revision, subject to the constraint of 326 IAC 2-7-20(a). For each such Section 502(b)(10) of the Clean Air Act change, the required written notification shall include the following:
- (1) A brief description of the change within the source;
 - (2) The date on which the change will occur;
 - (3) Any change in emissions; and

- (4) Any permit term or condition that is no longer applicable as a result of the change.

The notification which shall be submitted is not considered an application form, report or compliance certification. Therefore, the notification by the Permittee does not require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (c) Emission Trades [326 IAC 2-7-20(c)]
The Permittee may trade emissions increases and decreases at the source, where the applicable SIP provides for such emission trades without requiring a permit revision, subject to the constraints of Section (a) of this condition and those in 326 IAC 2-7-20(c).
- (d) Alternative Operating Scenarios [326 IAC 2-7-20(d)]
The Permittee may make changes at the source within the range of alternative operating scenarios that are described in the terms and conditions of this permit in accordance with 326 IAC 2-7-5(9). No prior notification of IDEM, OAQ, or U.S. EPA is required.
- (e) Backup fuel switches specifically addressed in, and limited under, Section D of this permit shall not be considered alternative operating scenarios. Therefore, the notification requirements of part (a) of this condition do not apply.

B.20 Source Modification Requirement [326 IAC 2-7-10.5]

A modification, construction, or reconstruction is governed by the requirements of 326 IAC 2.

B.21 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]

Upon presentation of proper identification cards, credentials, and other documents as may be required by law, and subject to the Permittee's right under all applicable laws and regulations to assert that the information collected by the agency is confidential and entitled to be treated as such, the Permittee shall allow IDEM, OAQ, U.S. EPA, or an authorized representative to perform the following:

- (a) Enter upon the Permittee's premises where a Part 70 source is located, or emissions related activity is conducted, or where records must be kept under the conditions of this permit;
- (b) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, have access to and copy any records that must be kept under the conditions of this permit;
- (c) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, inspect any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit;
- (d) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, sample or monitor substances or parameters for the purpose of assuring compliance with this permit or applicable requirements; and
- (e) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, utilize any photographic, recording, testing, monitoring, or other equipment for the purpose of assuring compliance with this permit or applicable requirements.

B.22 Transfer of Ownership or Operational Control [326 IAC 2-7-11]

- (a) The Permittee must comply with the requirements of 326 IAC 2-7-11 whenever the Permittee seeks to change the ownership or operational control of the source and no other change in the permit is necessary.

- (b) Any application requesting a change in the ownership or operational control of the source shall contain a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new Permittee. The application shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

The application which shall be submitted by the Permittee does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]

- (a) The Permittee shall pay annual fees to IDEM, OAQ within thirty (30) calendar days of receipt of a billing. Pursuant to 326 IAC 2-7-19(b), if the Permittee does not receive a bill from IDEM, OAQ the applicable fee is due April 1 of each year.
- (b) Except as provided in 326 IAC 2-7-19(e), failure to pay may result in administrative enforcement action or revocation of this permit.
- (c) The Permittee may call the following telephone numbers: 1-800-451-6027 or 317-233-4230 (ask for OAQ, Billing, Licensing, and Training Section), to determine the appropriate permit fee.

B.24 Advanced Source Modification Approval [326 IAC 2-7-5(16)] [326 IAC 2-7-10.5]

- (a) The requirements to obtain a source modification approval under 326 IAC 2-7-10.5 or a permit modification under 326 IAC 2-7-12 are satisfied by this permit for the proposed emission units, control equipment or insignificant activities in Sections A.2 and A.3.
- (b) Pursuant to 326 IAC 2-1.1-9 any permit authorizing construction may be revoked if construction of the emission unit has not commenced within eighteen (18) months from the date of issuance of the permit, or if during the construction, work is suspended for a continuous period of one (1) year or more.

B.25 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

For the purpose of submitting compliance certifications or establishing whether or not the Permittee has violated or is in violation of any condition of this permit, nothing in this permit shall preclude the use, including the exclusive use, of any credible evidence or information relevant to whether the Permittee would have been in compliance with the condition of this permit if the appropriate performance or compliance test or procedure had been performed.

SECTION C SOURCE OPERATION CONDITIONS

Entire Source

Emission Limitations and Standards [326 IAC 2-7-5(1)]

C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2(e)(2), particulate emissions from any process not exempt under 326 IAC 6-3-1(b) or (c) which has a maximum process weight rate less than 100 pounds per hour and the methods in 326 IAC 6-3-2(b) through (d) do not apply shall not exceed 0.551 pounds per hour.

C.2 Opacity [326 IAC 5-1]

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

- (a) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.
- (b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]

The Permittee shall not operate an incinerator or incinerate any waste or refuse except as provided in 326 IAC 4-2 and 326 IAC 9-1-2.

C.5 Fugitive Dust Emissions [326 IAC 6-4]

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions). 326 IAC 6-4-2(4) is not federally enforceable.

C.6 Stack Height [326 IAC 1-7]

The Permittee shall comply with the applicable provisions of 326 IAC 1-7 (Stack Height Provisions), for all exhaust stacks through which a potential (before controls) of twenty-five (25) tons per year or more of particulate matter or sulfur dioxide is emitted. The provisions of 326 IAC 1-7-1(3), 326 IAC 1-7-2, 326 IAC 1-7-3(c) and (d), 326 IAC 1-7-4, and 326 IAC 1-7-5(a), (b), and (d) are not federally enforceable.

C.7 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

The Permittee shall comply with the applicable requirements of 326 IAC 14-10, 326 IAC 18, and 40 CFR 61.140. The requirement in 326 IAC 14-10-1(a) that the owner or operator shall use an Indiana Accredited Asbestos Inspector and all the requirements in 326 IAC 18 related to licensing requirements for asbestos inspectors are not federally enforceable.

Testing Requirements [326 IAC 2-7-6(1)]

C.8 Performance Testing [326 IAC 3-6]

- (a) Compliance testing on new emissions units shall be conducted within 60 days after achieving maximum production rate, but no later than 180 days after initial start-up, if specified in Section D of this approval. All testing shall be performed according to the provisions of 326 IAC 3-6 (Source Sampling Procedures), except as provided elsewhere in this permit, utilizing any applicable procedures and analysis methods specified in 40 CFR 51, 40 CFR 60, 40 CFR 61, 40 CFR 63, 40 CFR 75, or other procedures approved by IDEM, OAQ.

A test protocol, except as provided elsewhere in this permit, shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

no later than thirty-five (35) days prior to the intended test date. The protocol submitted by the Permittee does not require certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (b) The Permittee shall notify IDEM, OAQ of the actual test date at least fourteen (14) days prior to the actual test date. The notification submitted by the Permittee does not require certification by the "responsible official" as defined by 326 IAC 2-7-1(34).
- (c) Pursuant to 326 IAC 3-6-4(b), all test reports must be received by IDEM, OAQ not later than forty-five (45) days after the completion of the testing. An extension may be granted by IDEM, OAQ if the Permittee submits to IDEM, OAQ a reasonable written explanation not later than five (5) days prior to the end of the initial forty-five (45) day period.

Compliance Requirements [326 IAC 2-1.1-11]

C.9 Compliance Requirements [326 IAC 2-1.1-11]

The commissioner may require stack testing, monitoring, or reporting at any time to assure compliance with all applicable requirements by issuing an order under 326 IAC 2-1.1-11. Any monitoring or testing shall be performed in accordance with 326 IAC 3 or other methods approved by the commissioner or the U. S. EPA.

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

C.10 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)] [326 IAC 3-5]

- (a) This section applies to the operation and maintenance of equipment and devices specified in Section D of this permit to determine or monitor compliance, except that it does not apply to continuous emissions monitoring systems or continuous opacity monitoring systems described in Section D. Conditions C.11 (Maintenance of Continuous Emission Monitoring Equipment) and C.12 (Maintenance of Continuous Opacity Monitoring Equipment) establish the general operation and maintenance requirements for continuous emission monitoring systems and continuous opacity monitoring systems, respectively.
- (b) Unless otherwise specified in this permit, all monitoring and record keeping requirements not already legally required shall be implemented within ninety (90) days of permit issuance. If required by Section D, the Permittee shall be responsible for installing any necessary equipment and initiating any required monitoring related to that equipment. If

due to circumstances beyond its control, that equipment cannot be installed and operated within ninety (90) days, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification which shall be submitted by the Permittee does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (c) Unless otherwise specified in the approval for the new emission unit(s), compliance monitoring for new emission units or emission units added through a source modification shall be implemented when operation begins.
- (d) The Permittee shall keep records of monitoring system operation that include the following:
 - (1) All maintenance logs, calibration checks, and other required quality assurance activities.
 - (2) All records of corrective and preventive action.
 - (3) A log of monitoring system downtime, including the following:
 - (A) Date of monitoring system downtime.
 - (B) Time of commencement and completion of each downtime.
 - (C) Reason for each downtime.
- (e) The Permittee shall submit a report of monitoring system downtime as specified in Section D. The report shall include the following:
 - (1) Date of monitoring system downtime.
 - (2) Time of commencement.
 - (3) Duration of each downtime.
 - (4) Reasons for each downtime.
 - (5) Nature of system repairs and adjustments.
- (f) Except where permit conditions streamline similar applicable requirements pursuant to 326 IAC 2-7-24, nothing in this permit nor in 326 IAC 3-5 supersedes the monitoring provisions in 40 CFR Part 60 or 40 CFR Part 63.

C.11 Maintenance of Continuous Emission Monitoring Equipment [326 IAC 2-7-5(3)(A)(iii)] [326 IAC 2-1.1-11] [326 IAC 3-5]

- (a) Unless otherwise specified in this permit, all monitoring and record keeping requirements not already legally required shall be implemented within ninety (90) days of permit

issuance. If required by Section D, the Permittee shall be responsible for installing any necessary equipment and initiating any required monitoring related to that equipment. If due to circumstances beyond its control, that equipment cannot be installed and operated within ninety (90) days, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification, which shall be submitted by the Permittee, does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (b) The Permittee shall install, calibrate, maintain, and operate all necessary continuous emission monitoring systems (CEMS) and related equipment in accordance with applicable federal regulations and 326 IAC 3-5.
- (c) This provision applies only to CEMS operated solely for monitoring compliance with BACT limitations. The CEMS shall be operated at all times as specified in Section D, except during CEMS malfunctions, reasonable periods of necessary CEMS calibration or CEMS maintenance activities. CEMS calibration and maintenance activities shall be properly documented and shall be conducted pursuant to the standard operating procedures under 326 IAC 3-5-4(a).
- (d) The Permittee shall keep records in accordance with 326 IAC 3-5-6(b) that includes the following:
 - (1) All documentation relating to:
 - (A) design, installation, and testing of all elements of the monitoring system; and
 - (B) required corrective action or compliance plan activities.
 - (2) All maintenance logs, calibration checks, and other required quality assurance activities.
 - (3) All records of corrective and preventive action.
 - (4) A log of plant operations, including the following:
 - (A) Date of facility downtime.
 - (B) Time of commencement and completion of each downtime.
 - (C) Reason for each downtime.
- (e) In accordance with 326 IAC 3-5-7(5), the Permittee shall submit reports of continuous monitoring system instrument downtime, except for zero (0) and span checks, which shall be reported separately. The reports shall include the following:

- (1) Date of downtime.
 - (2) Time of commencement.
 - (3) Duration of each downtime.
 - (4) Reasons for each downtime.
 - (5) Nature of system repairs and adjustments.
- (f) Except where permit conditions streamline similar applicable requirements pursuant to 326 IAC 2-7-24, nothing in this permit nor in 326 IAC 3-5 supersedes the monitoring provisions in 40 CFR Part 60 or 40 CFR Part 63.
- (g) The Permittee shall prepare and submit to IDEM, OAQ a written report of the results of the quarterly cylinder gas audits and annual relative accuracy test audits within thirty (30) days after the end of each calendar quarter. The report must contain the information required by 326 IAC 3-5-5(e)(2) is not federally enforceable.
- (h) If the Permittee is required by 326 3-5-4(a) and section D to prepare and implement a written standard operating procedure (SOP) for CEMS, it must be submitted to IDEM, OAQ within ninety (90) days after monitor installation. If revisions are made to the SOP, updates shall be submitted to IDEM, OAQ biennially. 326 IAC 3-5-4(a) is not federally enforceable.

C.12 Maintenance of Continuous Opacity Monitoring Equipment [326 IAC 2-7-5(3)(A)(iii)][326 IAC 3-5]

- (a) As specified in Section D.1 of this permit, the Permittee shall install, calibrate, maintain, and operate the necessary continuous opacity monitoring system (COMS) and related equipment. For the boiler, the COMS shall be in operation at all times that coal is being combusted in the boiler, except during COMS malfunctions and reasonable periods of necessary COMS calibrations, audits, maintenance, or repair activities.
- (b) The continuous opacity monitoring systems shall meet the performance specifications of 40 CFR, Appendix B Performance Specification No.1, and are subject to monitor system certification requirements pursuant to 326 IAC 3-5.
- (c) In the event that a breakdown of a continuous opacity monitoring system (COMS) occurs, a record shall be made of the times and reasons of the breakdown and efforts made to correct the problem.
- (d) Whenever a continuous opacity monitoring system (COMS) is malfunctioning or will be down for calibration, maintenance or repairs for a period of twenty-four (24) hours or more and a backup COMS is not online within twenty-four (24) hours of shutdown or malfunction of the primary COMS, the Permittee shall provide a certified opacity reader(s), who may be an employees of the Permittee or an independent contractors, to self-monitor the emissions from the emission unit stack.
- (1) Visible emission readings shall be performed in accordance with 40 CFR 60, Appendix A, Method 9, for a minimum of five (5) consecutive six (6) minute averaging periods beginning not more than twenty-four (24) hours after the start of the shutdown or malfunction.

- (2) Method 9 opacity readings shall be repeated for a minimum of five (5) consecutive six (6) minute averaging periods at least twice per day during daylight operations, until such time that COMS is online.
- (3) Method 9 readings may be discontinued once a COMS is online.
- (4) Any opacity exceedances determined by Method 9 readings shall be reported with the Quarterly Deviation and COMS Excess Emissions Reports.
- (e) Nothing in this permit shall excuse the Permittee from complying with the requirements to operate a continuous opacity monitoring system pursuant to 326 IAC 3-5, (and 40 CFR 60 and/or 40 CFR 63).

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]

C.13 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]

Pursuant to 326 IAC 1-5-2 (Emergency Reduction Plans; Submission):

- (a) The Permittee shall maintain the most recently submitted written emergency reduction plans (ERPs) consistent with safe operating procedures.
- (b) Upon direct notification by IDEM, OAQ that a specific air pollution episode level is in effect, the Permittee shall immediately put into effect the actions stipulated in the approved ERP for the appropriate episode level. [326 IAC 1-5-3]

C.14 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]

If a regulated substance, as defined in 40 CFR 68, is present at a source in more than a threshold quantity, the Permittee must comply with the applicable requirements of 40 CFR 68.

C.15 Response to Abnormal or Out-of-Range Compliance Monitoring Measurements [326 IAC 2-7-5] [326 IAC 2-7-6]

- (a) Upon detecting a measurement required by a compliance monitoring condition of this permit that is outside the normal or usual range of values for the monitoring parameter, the Permittee shall restore operation of the emissions unit (including any control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions.
- (b) The response shall include minimizing the period of any startup, shutdown or malfunction and taking any necessary corrective actions to restore normal operation and prevent the likely recurrence of the cause of an excursion or exceedance (other than those caused by excused startup or shutdown conditions). Corrective actions may include, but are not limited to, the following:
 - (1) initial inspection and evaluation;
 - (2) recording that operations returned to normal without operator action (such as through response by a computerized distribution control system); or
 - (3) any necessary follow-up actions to return operation to within the indicator range, designated condition, or below the applicable emission limitation or standard, as applicable.
- (c) A determination of whether the Permittee has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include, but is not limited to, the following:

- (1) monitoring results;
 - (2) review of operation and maintenance procedures and records; and/or
 - (3) inspection of the control device, associated capture system, and the process.
- (d) Failure to take reasonable response steps shall be considered a deviation from the permit.

C.16 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]

- (a) When the results of a stack test performed in conformance with Section C - Performance Testing, of this permit exceed the level specified in any condition of this permit, the Permittee shall take appropriate response actions. The Permittee shall submit a description of these response actions to IDEM, OAQ, within thirty (30) days of receipt of the test results. The Permittee shall take appropriate action to minimize excess emissions from the affected facility while the response actions are being implemented.
- (b) A retest to demonstrate compliance shall be performed within one hundred twenty (120) days of receipt of the original test results. Should the Permittee demonstrate to IDEM, OAQ that retesting in one hundred twenty (120) days is not practicable, IDEM, OAQ may extend the retesting deadline.
- (c) IDEM, OAQ reserves the authority to take any actions allowed under law in response to noncompliant stack tests.

The response action documents submitted pursuant to this condition do require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

C.17 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]

- (a) Pursuant to 326 IAC 2-6-3(a)(1), the Permittee shall submit by July 1 of each year an emission statement covering the previous calendar year. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4(c) and shall meet the following requirements:
 - (1) Indicate estimated actual emissions of all pollutants listed in 326 IAC 2-6-4(a);
 - (2) Indicate estimated actual emissions of regulated pollutants as defined by 326 IAC 2-7-1(32) ("Regulated pollutant, which is used only for purposes of Section 19 of this rule") from the source, for purpose of fee assessment.

The statement must be submitted to:

Indiana Department of Environmental Management
Technical Support and Modeling Section, Office of Air Quality
100 North Senate Avenue
MC 61-50 IGCN 1003
Indianapolis, Indiana 46204-2251

The emission statement does require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).

- (b) The emission statement required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by

any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

C.18 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]
[326 IAC 2-2][326 IAC 2-3]

- (a) Records of all required monitoring data, reports and support information required by this permit or Title V Operational Permit T165-6462-00009, third significant permit modification No. 165-26307-00009 shall be retained for a period of at least five (5) years from the date of monitoring sample, measurement, report, or application. These records shall be physically present or electronically accessible at the source location for a minimum of three (3) years. The records may be stored elsewhere for the remaining two (2) years as long as they are available upon request. If the Commissioner makes a request for records to the Permittee, the Permittee shall furnish the records to the Commissioner within a reasonable time.
- (b) Unless otherwise specified in this permit, all record keeping requirements not already legally required shall be implemented within ninety (90) days of permit issuance or ninety (90) days of initial start-up, whichever is later.
- (c) If there is a reasonable possibility (as defined in 40 CFR 51.165(a)(6)(vi)(A), 40 CFR 51.165(a)(6)(vi)(B), 40 CFR 51.166(r)(6)(vi)(a), and/or 40 CFR 51.166(r)(6)(vi)(b)) that a "project" (as defined in 326 IAC 2-2-1(qq) and/or 326 IAC 2-3-1(II)) at an existing emissions unit, other than projects at a source with a Plantwide Applicability Limitation (PAL), which is not part of a "major modification" (as defined in 326 IAC 2-2-1(ee) and/or 326 IAC 2-3-1(z)) may result in significant emissions increase and the Permittee elects to utilize the "projected actual emissions" (as defined in 326 IAC 2-2-1(rr) and/or 326 IAC 2-3-1(mm)), the Permittee shall comply with following:
- (1) Before beginning actual construction of the "project" (as defined in 326 IAC 2-2-1(qq) and/or 326 IAC 2-3-1(II)) at an existing emissions unit, document and maintain the following records:
- (A) A description of the project.
- (B) Identification of any emissions unit whose emissions of a regulated new source review pollutant could be affected by the project.
- (C) A description of the applicability test used to determine that the project is not a major modification for any regulated NSR pollutant, including:
- (i) Baseline actual emissions;
- (ii) Projected actual emissions;
- (iii) Amount of emissions excluded under section 326 IAC 2-2-1(rr)(2)(A)(iii) and/or 326 IAC 2-3-1 (mm)(2)(A)(iii); and
- (iv) An explanation for why the amount was excluded, and any netting calculations, if applicable.
- (d) If there is a reasonable possibility (as defined in 40 CFR 51.165(a)(6)(vi)(A) and/or 40 CFR 51.166(r)(6)(vi)(a)) that a "project" (as defined in 326 IAC 2-2-1(qq) and/or 326 IAC 2-3-1(II)) at an existing emissions unit, other than projects at a source with a Plantwide Applicability Limitation (PAL), which is not part of a "major modification" (as defined in 326 IAC 2-2-1(ee) and/or 326 IAC 2-3-1(z)) may result in significant emissions

increase and the Permittee elects to utilize the "projected actual emissions" (as defined in 326 IAC 2-2-1(rr) and/or 326 IAC 2-3-1(mm)), the Permittee shall comply with following:

- (1) Monitor the emissions of any regulated NSR pollutant that could increase as a result of the project and that is emitted by any existing emissions unit identified in (1)(B) above; and
- (2) Calculate and maintain a record of the annual emissions, in tons per year on a calendar year basis, for a period of five (5) years following resumption of regular operations after the change, or for a period of ten (10) years following resumption of regular operations after the change if the project increases the design capacity of or the potential to emit that regulated NSR pollutant at the emissions unit.

C.19 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11] [326 IAC 2-2]

- (a) The Permittee shall submit the attached Quarterly Deviation and Compliance Monitoring Report or its equivalent. Any deviation from permit requirements, the date(s) of each deviation, the cause of the deviation, and the response steps taken must be reported. This report shall be submitted within thirty (30) days of the end of the reporting period. The Quarterly Deviation and Compliance Monitoring Report shall include the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).
- (b) The report required in (a) of this condition and reports required by conditions in Section D of this permit shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
- (c) Unless otherwise specified in this permit, any notice, report, or other submission required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (d) Unless otherwise specified in this permit, all reports required in Section D of this permit shall be submitted within thirty (30) days of the end of the reporting period. All reports do require the certification by the "responsible official" as defined by 326 IAC 2-7-1(34).
- (e) Reporting periods are based on calendar years, unless otherwise specified in this permit. For the purpose of this permit "calendar year" means the twelve (12) month period from January 1 to December 31 inclusive.
- (f) If the Permittee is required to comply with the recordkeeping provisions of (d) in Section C - General Record Keeping Requirements for any "project" (as defined in 326 IAC 2-2-1 (qq) and/or 326 IAC 2-3-1 (ll)) at an existing emissions unit, and the project meets the following criteria, then the Permittee shall submit a report to IDEM, OAQ:
 - (1) The annual emissions, in tons per year, from the project identified in (c)(1) in Section C- General Record Keeping Requirements exceed the baseline actual emissions, as documented and maintained under Section C- General Record Keeping Requirements (c)(1)(C)(i), by a significant amount, as defined in 326 IAC 2-2-1 (xx) and/or 326 IAC 2-3-1 (qq), for that regulated NSR pollutant, and

- (2) The emissions differ from the preconstruction projection as documented and maintained under Section C - General Record Keeping Requirements (c)(1)(C)(ii).
- (g) The report for project at an existing emissions unit shall be submitted within sixty (60) days after the end of the year and contain the following:
 - (1) The name, address, and telephone number of the major stationary source.
 - (2) The annual emissions calculated in accordance with (d)(1) and (2) in Section C - General Record Keeping Requirements.
 - (3) The emissions calculated under the actual-to-projected actual test stated in 326 IAC 2-2-2(d)(3) and/or 326 IAC 2-3-2(c)(3).
 - (4) Any other information that the Permittee deems fit to include in this report.

Reports required in this part shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

- (h) The Permittee shall make the information required to be documented and maintained in accordance with (c) in Section C- General Record Keeping Requirements available for review upon a request for inspection by IDEM, OAQ. The general public may request this information from the IDEM, OAQ under 326 IAC 17.1.

Stratospheric Ozone Protection

C.20 Compliance with 40 CFR 82 and 326 IAC 22-1

The Permittee shall comply with all the applicable provisions of 40 CFR Part 82, wherever applicable to activities at the source.

SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description: Utilities Operations

(a) The following emissions units are subject to applicable requirements described in this D section.

Bldg.	Unit ID*	Unit Description	Stack/Vent ID	Control Devices**	Capacity	Units
C31	Ash Tank	Ash Tank for C31 Coal Fired Boiler	PVC31ASH TK TRNSFR	Baghouse**	6,361	Cubic Feet
C31	BLR01	Coal Fired Boiler	C31IDF130	Baghouse**	243	MMBTU/hr
C21	BLR01	Natural Gas Fired Boiler	PVC21BLR1		79.5	MMBTU/hr
C21	BLR02	Natural Gas Fired Boiler	PVC21BLR2		79.5	MMBTU/hr
C21	BLR03	Natural Gas Fired Boiler	PVC21BLR3		79.5	MMBTU/hr
C21	BLR04	Natural Gas Fired Boiler	PVC21BLR4		140.6	MMBTU/hr

* Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).

** Control devices marked with a double asterisk are required to meet an applicable limitation.

(b) The following emissions units are not subject to applicable requirements described in this D section, and are listed only for informational purposes.

Bldg.	Unit ID*	Unit Description	Stack/Vent ID	Control Devices**	Capacity	Units
C31	TK600*	Powdered Activated Carbon Silo	FLT630		2,294	Cubic Feet
C24	DFP01*	Diesel Fire Pump	PVC24DFP1		2.15	MMBTU/hr
C24	DFP02*	Diesel Fire Pump	PVC24DFP2		2.15	MMBTU/hr
C44	GEN01*	Emergency Diesel Generator	PVC44GEN1		3.99	MMBTU/hr
C55	GEN01*	Emergency Diesel Generator	PVC55GEN1		1.3	MMBTU/hr
C79	GEN01*	Back-Up Fire Pump Generator	PVC79GEN1		4.86	MMBTU/hr
C23	TK01*	#2 Fuel Oil Storage Tank	PVC23TK1		238,000	Gallons
C24	TK01*	#2 Fuel Oil Storage Tank	PVC24TK1		275	Gallons
C79	TK01*	#2 Fuel Oil Storage Tank	PVC79TK1		500	Gallons
C24	TK02*	#2 Fuel Oil Storage Tank	PVC24TK2		275	Gallons

* Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).

** Control devices marked with a double asterisk are required to meet an applicable limitation.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.1.1 Particulate Matter [326 IAC 6-2] [326 IAC 6-3]

(a) Pursuant to 326 IAC 6-2-3 (Particulate Matter Emission Limitations for Sources of Indirect Heating), the particulate matter emissions from the coal-fired boiler (C31 BLR01) shall not exceed 0.34 pound per million Btu heat input.

- (b) Pursuant to 326 IAC 6-2-3 (Particulate Matter Emission Limitations for Sources of Indirect Heating), the particulate matter emissions from each of the natural gas/fuel oil-fired boilers (C21 BLR01, BLR02, BLR03 and BLR04) shall not exceed 0.19 pound per million Btu heat input.
- (c) Pursuant to 326 IAC 6-3-2 (Particulate Matter Emission Limitations for Manufacturing Processes), particulate matter emissions from the C31 ash tank shall not exceed 2.86 pounds per hour based on a maximum throughput of 0.585 tons per hour.

D.1.2 Sulfur Dioxide (SO₂) [326 IAC 7-4-8]

- (a) Pursuant to 326 IAC 7-4-8 (SO₂ Emission Limitations), the SO₂ emissions from the coal-fired boiler (C31 BLR01) shall not exceed 4.72 pounds per million Btu heat input.
- (b) Pursuant to 326 IAC 7-4-8 (SO₂ Emission Limitations), the SO₂ emissions from each of the natural gas/fuel oil-fired boilers (C21 BLR01, BLR02, BLR03 and BLR04) shall not exceed 0.36 pound per million Btu heat input.

D.1.3 Temporary Alternative Opacity Limitations [326 IAC 5-1-3]

Pursuant to 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), the following conditions apply as an alternative to the opacity limitations in Section C, Condition C.2 - Opacity:

- (a) When building a new fire in a boiler, or shutting down a boiler, opacity may exceed the applicable limit established in 326 IAC 5-1-2 and stated in Section C, Condition C.2 - Opacity. However, opacity levels shall not exceed sixty percent (60%) for any six (6)-minute averaging period. Opacity in excess of the applicable limit established in 326 IAC 5-1-2 shall not continue for more than two (2) six (6)-minute averaging periods in any twenty-four (24) hour period.
- (b) When removing ashes from the fuel bed or furnace in a boiler or blowing tubes, opacity may exceed the applicable limit established in 326 IAC 5-1-2 and stated in Section C, Condition C.2 - Opacity. However, opacity levels shall not exceed sixty percent (60%) for any six (6)-minute averaging period and opacity in excess of the applicable limit shall not continue for more than one (1) six (6)-minute averaging periods in any sixty (60) minute period. The averaging periods shall not be permitted for more than three (3) six (6)-minute averaging periods in a twelve (12) hour period.

D.1.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan is required for the coal-fired boiler and associated control devices. The requirements for a Preventive Maintenance Plan are described in Section B, Condition B.10 – Preventive Maintenance Plan.

Compliance Determination Requirements

D.1.4.1 Particulate Matter Control

In order to comply with Condition D.1.1(a), the baghouse for particulate matter control shall be in operation and control emissions from the coal-fired boiler C31 at all times that this boiler is in operation and combusting coal as the fuel.

D.1.5 Testing Requirements [326 IAC 2-7-6(1) and (6)]

- (a) In order to determine compliance with Condition D.1.1, the Permittee shall perform particulate matter performance tests for the coal-fired boiler (C31 BLR01) by August 2010 utilizing Methods 5 or 17 (40 CFR Part 60, Appendix A) for PM or other methods as approved by the Commissioner. These tests shall be repeated every third calendar year from the calendar year of the most recently completed stack test. The requirements for

conducting performance tests are described in Section C, Condition C.8 – Performance Testing.

- (b) No emissions testing is required for the boilers to assess compliance with the sulfur dioxide emissions limits established in Condition D.1.2(b) at this time, but IDEM may require performance testing when necessary. The requirements for conducting performance tests are described in Section C, Condition C.8 – Performance Testing.

D.1.6 Coal Sampling and Analysis for SO₂ [326 IAC 3-7] [326 IAC 7-2]

The Permittee shall collect coal sampling and analysis data on a calendar month basis in accordance with one of the following methods specified in 326 IAC 3-7 for the coal-fired boiler (C31 BLR01):

- (a) Coal sampling and analysis performed using one of the following procedures:
- (1) Sampling and analyzing the coal according to the Permittee's Coal Sampling and Assay Plan, submitted pursuant to 326 IAC 3-7-5(a). The following minimum sampling and analysis requirements shall be met:
 - (A) The coal sample acquisition point shall be at a location where representative samples of the total coal flow to be combusted by the facility or facilities may be obtained. A single as-bunkered or as-burned sampling station may be used to represent the coal to be combusted by multiple facilities using the same stockpile feed system;
 - (B) Coal shall be sampled at least two (2) times per day and at least one (1) time per twelve (12) hour period unless no coal is bunkered during the preceding twelve (12) hour period. This permit condition satisfies the requirements of 326 IAC 3-7-2(b)(3)(B).
 - (C) Minimum sample size shall be five hundred (500) grams;
 - (D) Samples shall be composited and analyzed at the end of each calendar month;
 - (E) Preparation of the coal sample, heat content analysis, and sulfur content analysis shall be determined pursuant to 326 IAC 3-7-2(c), (d), (e); or
 - (2) Sampling and analyzing the coal pursuant to 326 IAC 3-7-2(a).
- (b) Upon written notification to IDEM by the Permittee, continuous emission monitoring data collected and reported pursuant to 326 IAC 3-5-1 may be used as the means for determining compliance with the emission limitations in 326 IAC 7-1.1-2. Upon such notification, the other requirements of 326 IAC 7-2 shall not apply. [326 IAC 7-2-1(g)]

Compliance Monitoring Requirements [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]

D.1.7 [Reserved]

D.1.8 Continuous Opacity Monitoring [326 IAC 3-5]

Pursuant to 326 IAC 3-5-1 (Continuous Monitoring of Emissions), a continuous monitoring system shall be calibrated, maintained, and operated for measuring opacity from the coal-fired boiler (C31 BLR01).

- (a) The Permittee shall comply with the applicable performance and operating specifications of 326 IAC 3-5-2.
- (b) The Permittee shall comply with the applicable monitor system certification requirements of 326 IAC 3-5-3.
- (c) The Permittee shall comply with the applicable quality assurance and quality control (QA/QC) requirements of 326 IAC 3-5-5.

D.1.9 Opacity Readings [326 IAC 2-7-6(1)][326 IAC 2-7-5(1)]

When the coal-fired boiler (C31 BLR01) is in operation and combusting coal as a fuel:

- (a) Appropriate response steps shall be taken in accordance with Section C - Response to abnormal or out-of-range Compliance Monitoring Measurements whenever the opacity from stack C31IDF130 exceeds fifteen percent (15%) for three (3) consecutive six (6) minute averaging periods. This requirement shall not apply when the Continuous Opacity Monitoring System records opacity levels greater than 15% due to COMS calibration, maintenance, or other quality assurance activities.
- (b) Opacity readings in excess of fifteen percent (15%) but not exceeding the opacity limit for the unit are not a deviation from this permit. Failure to take response steps in accordance with Section C - Response to abnormal or out-of-range Compliance Monitoring Measurements shall be considered a deviation from this permit.
- (c) The Permittee may request that the IDEM, OAQ approve a different opacity trigger level than the one specified in (a) and (b) of this condition, provided the Permittee can demonstrate, through stack testing or other appropriate means, that a different opacity trigger level is appropriate for monitoring compliance with the applicable particulate matter mass emission limits.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)]

D.1.10 Coal Characteristics and Consumption Records

The Permittee shall record the information described in items (a) through (d) below on a calendar month basis for the coal-fired boiler (C31 BLR01).

- (a) The total amount (expressed in tons) of coal combusted;
- (b) The average sulfur content (expressed in percentage by weight) of the coal combusted;
- (c) The average heat content (expressed in Btu per pound) of the coal combusted; and
- (d) The average sulfur dioxide emission rate (expressed in pounds per million Btu) for the coal-fired boiler (C31 BLR01).

D.1.11 [Reserved]

D.1.12 Continuous Opacity Monitoring

The Permittee shall maintain records of the continuous opacity monitor readings of the coal-fired boiler (C31 BLR01).

D.1.13 [Reserved]

D.1.14 Standard Operating Procedures

- (a) Pursuant to 326 IAC 3-5-4, the Permittee shall maintain a complete, written continuous monitoring standard operating procedure (SOP) for the continuous opacity monitor (COM). If revisions are made to the SOP, updates shall be submitted to the department biennially. The COM SOP should contain, at a minimum, the items described in 326 IAC 3-5-4(a).
- (b) Pursuant to 326 IAC 3-7-5(a), the Permittee shall maintain a standard operating procedure (SOP) to be followed for sampling, handling, analysis, quality control, quality assurance, and data reporting of the information collected pursuant to 326 IAC 3-7-2 through 326 IAC 3-7-4. 326 IAC 3-7-4 is not applicable to this source because 326 IAC 3-7-5(a) references only coal-fired facilities. In addition, any revision to the SOP shall be submitted to IDEM, OAQ.

D.1.15 Reporting Requirements

- (a) A quarterly summary of the information shall be submitted using the reporting form located at the end of this permit, or its equivalent. At a minimum, the report shall contain the information specified in Condition D.1.10.
- (b) The Permittee shall prepare and submit a written report of the results of the continuous opacity monitor calibration error audit for each calendar quarter. The report must contain the information required by 326 IAC 3-5-5(e)(2).
- (c) The Permittee shall prepare and submit a written report of excess opacity of the continuous opacity monitor each calendar quarter. The report must contain the information required by 326 IAC 3-5-7(4).
- (d) The Permittee shall prepare and submit a written report of continuous opacity monitor downtime each calendar quarter. The report must contain the information required by 326 IAC 3-5-7(5).

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.1.16 Modifications and Construction: Advance Approval of Permit Conditions

The emission units described in this section D are not subject to the advance approval permit conditions.

SECTION D.2 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description: AHM - Fermentation Operations

(a) The following Unit IDs have applicable conditions in this D Section:

Bldg.	Unit ID*	Narasin Emission Unit***	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C41	TKF01	3	Fermenter	PVC41F01	Cyclone F1VLS	50,000	Gallo ns
C41	TKF02	3	Fermenter	PVC41F02	Cyclone F2VLS	50,000	Gallo ns
C41	TKF03	3	Fermenter	PVC41F03	Cyclone F3VLS	50,000	Gallo ns
C41	TKF04	3	Fermenter	PVC41F04	Cyclone F4VLS	50,000	Gallo ns
C41	TKF05	3	Fermenter	PVC41F05	Cyclone F5VLS	50,000	Gallo ns
C41	TKF06	3	Fermenter	PVC41F06	Cyclone F6VLS	50,000	Gallo ns
C41	TKF07	3	Fermenter	PVC41F07	Cyclone F7VLS	50,000	Gallo ns
C41	TKF08	3	Fermenter	PVC41F08	Cyclone F8VLS	50,000	Gallo ns
C41	TKF09	3	Fermenter	PVC41F09	Cyclone F9VLS	50,000	Gallo ns
C41	TKF10	3	Fermenter	PVC41F10	Cyclone F10VLS	50,000	Gallo ns
C41	TKF11	3	Fermenter	PVC41F11	Cyclone F11VLS	50,000	Gallo ns
C41	TKF12	3	Fermenter	PVC41F12	Cyclone F12VLS	50,000	Gallo ns
C41	TKF13	3	Fermenter	PVC41F13	Cyclone F13VLS	50,000	Gallo ns
C41	TKF14	3	Fermenter	PVC41F14	Cyclone F14VLS	50,000	Gallo ns
C41	TKF15	3	Fermenter	PVC41F16	Cyclone F15VLS	50,000	Gallo ns
C41	TKF16	3	Fermenter	PVC41F16	Cyclone F16VLS	50,000	Gallo ns
C41A	TKF17	No	Fermenter	PVC41AF17	Cyclone F17VLS	50,000	Gallo ns
C41A	TKF18	No	Fermenter	PVC41AF18	Cyclone F18VLS	50,000	Gallo ns
C41A	TKF19	No	Fermenter	PVC41AF19	Cyclone F19VLS	50,000	Gallo ns
C41A	TKF20	No	Fermenter	PVC41AF20	Cyclone F20VLS	50,000	Gallo ns
C41A	TKF21	No	Fermenter	PVC41AF21	Cyclone F21VLS	50,000	Gallo ns
C41A	TKF22	No	Fermenter	PVC41AF22	Cyclone F22VLS	50,000	Gallo ns
C41A	TKF23	No	Fermenter	PVC41AF23	Cyclone F23VLS	50,000	Gallo ns
C41A	TKF24	No	Fermenter	PVC41AF24	Cyclone F24VLS	50,000	Gallo ns
C41A	TKF25	No	Fermenter	PVC41AF25	Cyclone F25VLS	50,000	Gallo ns
C41A	TKF26	No	Fermenter	PVC41AF26	Cyclone F26VLS	50,000	Gallo ns
C41A	TKF27	No	Fermenter	PVC41AF27	Cyclone F27VLS	50,000	Gallo ns

C41A	TKF28	No	Fermenter	PVC41AF28	Cyclone F28VLS	50,000	Gallo ns
C41A	TKF29	No	Fermenter	PVC41AF29	Cyclone F29VLS	50,000	Gallo ns
C41A	TKF30	No	Fermenter	PVC41AF30	Cyclone F30VLS	50,000	Gallo ns
C41A	TKF31	No	Fermenter	PVC41AF31	Cyclone F31VLS	50,000	Gallo ns
C41A	TKF32	No	Fermenter	PVC41AF32	Cyclone F32VLS	50,000	Gallo ns
C41A	TKF33	No	Fermenter	PVC41AF33	Cyclone F33VLS	50,000	Gallo ns
C41A	TKF34	No	Fermenter	PVC41AF34	Cyclone F34VLS	50,000	Gallo ns
C44A	TK047	5	Vibrating Bin	PVC44AC047	Baghouse VS047**	42,000	Kg
C44A	TK048	5	Vibrating Bin	PVC44AC048	Baghouse VS048**	43,680	Kg
C44A	TK049	5	Vibrating Bin	PVC44AC049	Baghouse VS049**	43,680	Kg
C44A	TK050	5	Vibrating Bin	PVC44AC050	Baghouse VS050**	42,000	Kg
C44A	TK051	5	Vibrating Bin	PVC44AC047	Baghouse VS047**	42,000	Kg
C44A	TK052	5	Vibrating Bin	PVC44AC052	Baghouse VS052**	37,408	Kg
C44A	TK053	5	Vibrating Bin	PVC44AC052	Baghouse VS052**	37,408	Kg
C44A	TK054	5	Vibrating Bin	PVC44AC050	Baghouse VS050**	42,000	Kg
C44A	TK055	5	Vibrating Bin	PVC44AC055	Baghouse VS055**	43,680	Kg
C44A	TK056	5	Vibrating Bin	PVC44AC055	Baghouse VS055**	43,680	Kg
C44A	TK057	5	Vibrating Bin	PVC44AC055	Baghouse VS055**	43,680	Kg
C44A	TK058	5	Vibrating Bin	PVC44AC055	Baghouse VS055**	43,680	Kg
C43A	TK301	1	Batch Fermenter Tank	PVC43AAC301	Filter FLT301**, Baghouse VS311	7,500	Gallo ns
C43A	TK302	1	Batch Fermenter Tank	PVC43AAC301	Filter FLT302**, Baghouse VS311	7,500	Gallo ns

*Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).

** Control devices marked with a double asterisk are required to meet an applicable limitation.

*** A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(b) The following Unit IDs are not subject to applicable requirements, and are listed only for informational purposes

Bldg.	Unit ID*	Narasin Emission Units***	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C41	TKB01*	2	Bump Tank	PVC41B01	Cyclone B1VLS	7,000	Gallons
C41	TKB02*	2	Bump Tank	PVC41B02	Cyclone B2VLS	7,000	Gallons
C41	TKB03*	2	Bump Tank	PVC41B03	Cyclone B3VLS	7,000	Gallons
C41	TKB04*	2	Bump Tank	PVC41B04	Cyclone B4VLS	7,000	Gallons
C41	TKB05*	2	Bump Tank	PVC41B05	Cyclone B5VLS	7,000	Gallons
C41	TKB06*	2	Bump Tank	PVC41B06	Cyclone B6VLS	7,000	Gallons
C41	TKB07*	2	Bump Tank	PVC41B07	Cyclone B7VLS	7,000	Gallons

C41	TKB08*	2	Bump Tank	PVC41B08	Cyclone B8VLS	7,000	Gallons
C41	TKB09*	2	Bump Tank	PVC41B09	Cyclone B9VLS	7,000	Gallons
C41	TKB10*	2	Bump Tank	PVC41B10	Cyclone B10VLS	7,000	Gallons
C41	TKB11*	2	Bump Tank	PVC41B11	Cyclone B11VLS	7,000	Gallons
C41	TKB12*	2	Bump Tank	PVC41B12	Cyclone B12VLS	7,000	Gallons
C41	TKB13*	2	Bump Tank	PVC41B13	Cyclone B13VLS	7,000	Gallons
C41	TKB14*	2	Bump Tank	PVC41B14	Cyclone B14VLS	7,000	Gallons
C41	TKB15*	2	Bump Tank	PVC41B15	Cyclone B15VLS	7,000	Gallons
C41	TKB16*	2	Bump Tank	PVC41B16	Cyclone B16VLS	7,000	Gallons
C41A	TKB22*	No	Bump Tank	PVC41AB22	Cyclone B22VLS	7,000	Gallons
C41A	TKB24*	No	Bump Tank	PVC41AB24	Cyclone B24VLS	7,000	Gallons
C41A	TKB26*	No	Bump Tank	PVC41AB26	Cyclone B26VLS	7,000	Gallons
C41A	TKB28*	No	Bump Tank	PVC41AB28	Cyclone B28VLS	7,000	Gallons
C43A	SM311*	1	Screw Mixer	PVC43AAC304	Baghouse VS311	N/A	N/A
C43A	TK305*	No	Mineral Pot	PVC43AAC305	Filter FLT305	80	Gallons
C41	TKH01*	No	Hold Tank	PVC41TKH01		20,000	Gallons
C41	TKH02*	4	Hold Tank	PVC41TKH02		20,000	Gallons
C41	TKH03*	No	Hold Tank	PVC41TKH03		50,000	Gallons
C41	TKH04*	No	Hold Tank	PVC41TKH04		50,000	Gallons
C41	TKH05*	4	Hold Tank	PVC41TKH05		50,000	Gallons
C41	TKA01*	No	Additive Tank	PVC41TKA01	Cyclone VLS01	8,000	Gallons
C41	TKA02*	No	Additive Tank	PVC41TKA02	Cyclone VLS01	8,000	Gallons
C41	TKA03*	3	Additive Tank	PVC41TKA03	Cyclone VLS03	8,000	Gallons
C41	TKA04*	3	Additive Tank	PVC41TKA04	Cyclone VLS05	8,000	Gallons
C41	TKA05*	3	Additive Tank	PVC41TKA05	Cyclone VLS05	8,000	Gallons
C41	TKA06*	3	Additive Tank	PVC41TKA06	Cyclone VLS05	8,000	Gallons
C41A	TKA08*	3	Additive Tank	PVC41ATKA08	Cyclone VLS08	8,000	Gallons
C41A	TKA09*	No	Additive Tank	PVC41ATKA09	Cyclone VLS09	8,000	Gallons
C98	TK001*	No	Land Application Tank	PVC98TK001		10,000	Gallons
C98	TK002*	No	Land Application Tank	PVC98TK002		600	Gallons
C98	TK003*	No	Land Application Tank	PVC98TK003		15,000	Gallons
C25	TK2*	No	Land Application Tank	PVC25TK2		500,000	Gallons
C25	TK3*	No	Land Application Tank	PVC25TK3		1,000,000	Gallons
C41A	TK001*	No	Condensate Tank	PVC41TK001		N/AV	N/AV
C41	TK002*	No	Condensate Tank	PVC41TK002		N/AV	N/AV
C41	TK003*	No	Condensate Tank	PVC41TK003		N/AV	N/AV
C44	TKL21*	6	Liquid Bulk Tank	PVC44TKL21		20,000	Gallons
C44	TKL22*	6	Liquid Bulk Tank	PVC44TKL22		20,000	Gallons
C44	TKL31*	6	Liquid Bulk Tank	PVC44TKL31		30,000	Gallons
C44	TKL32*	6	Liquid Bulk Tank	PVC44TKL32		30,000	Gallons

C44	TKL33*	6	Liquid Bulk Tank	PVC44TKL33		30,000	Gallons
C44	TKL34*	6	Liquid Bulk Tank	PVC44TKL34		30,000	Gallons
C44	TKL35*	6	Liquid Bulk Tank	PVC44TKL35		30,000	Gallons
C44	TKL36*	6	Liquid Bulk Tank	PVC44TKL36		30,000	Gallons
C44	TKL37*	6	Liquid Bulk Tank	PVC44TKL37		30,000	Gallons
C44	TKL51*	6	Liquid Bulk Tank	PVC44TKL51		50,000	Gallons
C44	TKL52*	6	Liquid Bulk Tank	PVC44TKL52		50,000	Gallons
C44	TKL53*	6	Liquid Bulk Tank	PVC44TKL53		50,000	Gallons
C44	TKL54*	6	Liquid Bulk Tank	PVC44TKL54		50,000	Gallons
C44A	AC410*	7	Vacuum Cleaning System	PVC44AACHOUSEVAC	Cyclone VS410B, Baghouse VS410A	N/A	N/A
C44	WH059*	5	Weigh Hopper	PVC44VS059	Baghouse VSWH059	8,000	Kg
C44	WH060*	5	Weigh Hopper	PVC44VS060	Baghouse VSWH060	8,000	Kg
C44	WH061*	5	Weigh Hopper	PVC44VS061	Baghouse VSWH061	8,000	Kg
C43A	WI003 *	1	Weigh Indicator	ACC43AW001		N/AV	N/AV

*Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).
 ** Control devices marked with a double asterisk are required to meet an applicable limitation.
 *** A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.2.1 Particulate Matter (PM) [326 IAC 6-3-2]

- (a) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from each fermenter (TKF01 through TKF34) shall not exceed 18.2 pounds per hour based on a maximum throughput of 9.256 tons per hour.
- (b) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK047 (baghouse VS047) shall not exceed 1.4 pounds per hour based on a maximum throughput of 0.207 tons per hour.
- (c) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK048 (baghouse VS048) shall not exceed 1.2 pounds per hour based on a maximum throughput of 0.148 tons per hour.
- (d) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK049 (baghouse VS049) shall not exceed 1.2 pounds per hour based on a maximum throughput of 0.148 tons per hour.
- (e) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK050 (baghouse VS050) shall not exceed 1.8 pounds per hour based on a maximum throughput of 0.284 tons per hour.
- (f) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK051 (baghouse VS047) shall not exceed 1.4 pounds per hour based on a maximum throughput of 0.207 tons per hour.

- (g) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK052 (baghouse VS052) shall not exceed 0.9 pounds per hour based on a maximum throughput of 0.105 tons per hour.
- (h) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK053 (baghouse VS052) shall not exceed 0.9 pounds per hour based on a maximum throughput of 0.105 tons per hour.
- (i) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK054 (baghouse VS050) shall not exceed 1.8 pounds per hour based on a maximum throughput of 0.284 tons per hour.
- (j) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK055 (baghouse VS055) shall not exceed 1.2 pounds per hour based on a maximum throughput of 0.148 tons per hour.
- (k) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK056 (baghouse VS055) shall not exceed 1.2 pounds per hour based on a maximum throughput of 0.148 tons per hour.
- (l) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK057 (baghouse VS055) shall not exceed 1.2 pounds per hour based on a maximum throughput of 0.148 tons per hour.
- (m) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the vibrating bin TK058 (baghouse VS055) shall not exceed 1.2 pounds per hour based on a maximum throughput of 0.148 tons per hour.
- (n) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the batch fermenter tank TK301 (filter FLT301 and baghouse VS311) shall not exceed 2.1 pounds per hour based on a maximum throughput of 0.372 tons per hour.
- (o) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the batch fermenter tank TK302 (filter FLT302 and baghouse VS311) shall not exceed 2.1 pounds per hour based on a maximum throughput of 0.372 tons per hour.

D.2.2 NESHAP for Pharmaceuticals Production Non-Applicability Determination [40 CFR Part 63, Subpart GGG]

As stated in the Permittee's Notification of Compliance Status Report (NOCSR), submitted on March 20, 2003, which was submitted to satisfy the requirements of 40 CFR 63.1260(f), the fermentation processes are not subject to any of the emission reduction requirements in 40 CFR 63.1253 through 63.1256. Any modification made to these processes that changes the information submitted in the Permittee's NOCSR must be reported to IDEM as required by Condition F.1.12. If a new process operating scenario will trigger applicable requirements not described in this permit or compliance with applicable requirements shall be demonstrated by methodologies not described in this permit, this permit must be revised pursuant to 326 IAC 2-7-12.

D.2.3 Volatile Organic Compounds (VOCs) [326 IAC 2-2-3]

The VOC emissions from the fermenter emission unit, identified as EU-3 operating under the flexible permit conditions in Section F.2 shall not exceed one hundred (100) tons per twelve (12) month period, rolled on a calendar month basis.

During the first calendar year after permit issuance; VOC emissions from the fermenter emission unit (EU-3) operating under the flexible permit conditions shall not exceed eight and one third

(8.33) tons multiplied by the number of calendar months the permit has been in effect.

D.2.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan (PMP) is required for the required facilities and control devices (marked with a double asterisk in the above table), that are used for compliance with an applicable limitation or standard. The requirements for a Preventive Maintenance Plan are described in Section B, Condition B.10 – Preventive Maintenance Plan.

Testing and Monitoring Requirements [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]

D.2.5 Testing Requirements [326 IAC 2-7-6(1) and (6)]

No emissions testing is required for the emission units described in this Section, at this time, but IDEM may require testing at any specific time when necessary to determine if the facility is in compliance. The requirements for conducting performance tests that may be required by IDEM in the future are described in Section C, Condition C.8 – Performance Testing.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)]

D.2.6 Record Keeping Requirements

The Permittee shall maintain records of the Notification of Compliance Status Report (NOCSR), submitted to IDEM on March 20, 2003.

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.2.7 Modifications and Construction: Advanced Approval of Permit Conditions

- (a) The Non Narasin emission units described in this D.2 Section are not subject to the advance approval permit conditions.
- (b) The Permittee may modify Narasin emission units listed in this section of the permit without obtaining a source modification approval (otherwise required by 326 IAC 2-7-10.5), a Title V permit modification (otherwise required by 326 IAC 2-7-12), or a Prevention of Significant Deterioration permit (otherwise required by 326 IAC 2-2), provided the modified emission units are subject to the same applicable requirements listed in this D section, and the Permittee shall comply with the Change Management and Flexible Permit provisions in Section F.2 of this permit.
- (c) The Permittee may construct and install Narasin emission units of the types described in this D.2 section without obtaining a source modification approval (otherwise required by 326 IAC 2-7-10.5), a Title V permit modification (otherwise required by 326 IAC 2-7-12), or a Prevention of Significant Deterioration permit (otherwise required by 326 IAC 2-2), provided the new emission units are subject to the same applicable requirements listed in this D section, and the Permittee shall comply with the Change Management and Flexible Permit provisions in Section F.2 of this permit.

D.2.8 Leak Detection and Repair

Leak Detection and Repair requirements associated with Narasin emission limits listed in this Section D.2 are specified in section E.3.

SECTION D.3 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description: AHM - Product Recovery Operations

(a) The following Unit IDs have applicable conditions in this D Section:

Bldg.	Unit ID*	Narasin Emission Unit***	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C45A	BL410	8	RECYCLE BLENDER	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	CENT401 B*	8	CENTRIFUGE	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	CENT401 C*	8	CENTRIFUGE	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	COS401 D	8	SCREW CONVEYOR	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	COS420A	8	SCREW CONVEYOR	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	COS420L	8	SCREW CONVEYOR	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	COS421A *	8	SCREW CONVEYOR	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	COS421L *	8	SCREW CONVEYOR	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	D420	8	DRYER	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	D421	8	DRYER	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	EV450*	8	EVAPORATOR	PVC45AAC460	Vent Condenser HE450E, Carbon Adsorber CA460**	180	Gallo ns
C45A	SM410A	8	SCREW CONVEYOR MIXER	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45	TK370A*	9	NEW AMYL TANK	PVC45TK370A		38,265	Gallo ns
C45	TK370B*	9	NEW AMYL TANK	PVC45TK370B		20,834	Gallo ns
C45A	TK401*	8	WASH ALCOHOL HOLDING TANK	PVC45AAC460	Carbon Adsorber CA460**	3,620	Gallo ns

C45A	TK401G*	8	STORAGE TANK	PVC45AAC460	Carbon Adsorber CA460**	1,342	Gallo ns
C45A	TK450N*	8	STORAGE TANK	PVC45AAC460	Carbon Adsorber CA460**	36	Gallo ns
C45	VS156	No	TRANSFER BAGHOUSE	PVC45AC156A		N/A	N/A
C45	VS173	No	TRANSFER BAGHOUSE	PVC45AC173		N/A	N/A
C45	VS174	No	TRANSFER BAGHOUSE	PVCAC174A/174B		N/A	N/A
C45A	VS400*	5	TRANSFER BAGHOUSE	PVC45AAC400A		N/A	N/A
C45A	VS420B*	8	TRANSFER BAGHOUSE	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	VS421B*	8	TRANSFER BAGHOUSE	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	VS480A*	8	TRANSFER BAGHOUSE	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45A	VS480B*	8	TRANSFER BAGHOUSE	PVC45AAC460	Carbon Adsorber CA460**	N/A	N/A
C45	EV101	8	EVAPORATOR	PVC45AAC460	Carbon Adsorber CA460**	9,000	Gallo ns
C45	TK350C*	8	RECYCLED AMYL TANK	PVC45TK350C		20,834	Gallo ns
C45	TK350D*	8	RECYCLED AMYL TANK	PVC45TK350D		20,834	Gallo ns
C45	TK360C*	No	RECYCLED AMYL TANK	PVC45TK360C		20,834	Gallo ns
C45	TK361C*	No	RECYCLED AMYL TANK	PVC45TK361C		20,834	Gallo ns

*Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).

** Control devices marked with a double asterisk are required to meet an applicable limitation.

*** A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(b) The following Unit IDs are not subject to applicable requirements, and are listed only for informational purposes

Bldg.	Unit ID*	Narasin Emission Unit***	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C45	EV002	No	EVAPORATOR	PVC45EV002		9,000	Gallons
C45	TK407*	No	CONTENTS EVAPS CLEANING	PVC45AAC407		15,000	Gallons
C45	TK408*	8	CONTENTS EVAPS CLEANING	PVC45AAC408		15,000	Gallons
C45	C24*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT114*	No	CENTRIFUGE	N/A		N/A	N/A

C45	CENT115*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT116*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT117*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT114A*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT115A*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT117A*	No	CENTRIFUGE	N/A		N/A	N/A
C45	COL201*	No	DISTILLATION COLUMN	PVC45TK201		2,100	Gallons
C45	COL204*	8	DISTILLATION COLUMN	PVC45TK204		3,800	Gallons
C45	COL219*	No	DISTILLATION COLUMN	PVC45TK219		3,800	Gallons
C45	COS109A	No	SCREW CONVEYOR	PVC45AC103A	Carbon Adsorber CA103	N/A	N/A
C45	COS109B*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS109D*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS109G*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS109H*	No	SCREW CONVEYOR	N/A	Carbon Adsorber CA103	N/A	N/A
C45	COS109J*	No	SCREW CONVEYOR	N/A	Carbon Adsorber CA103	N/A	N/A
C45	COS153*	8	SCREW CONVEYOR	PVC45COS153	Vent Sock VS153B	N/A	N/A
C45	COS160A*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS160B*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS260*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	D160/VLS160	No	DRYER/VAPOR-LIQUID SEPARATOR	PVC45AC103A	Carbon Adsorber CA103	N/A	N/A
C45	D260/VLS260	No	DRYER/VAPOR-LIQUID SEPARATOR	PVC45AC103A	Carbon Adsorber CA103	N/A	N/A
C45	D16/VS16*	No	DRYER/TRANSFER BAGHOUSE	PVC45AC016A		N/A	N/A
C45	DP17*	No	DRUM PACKER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	EV108*	No	EVAPORATOR	PVC45EV108		1,000	Gallons
C45	EV202*	No	EVAPORATOR	PVC45EV202		937	Gallons
C45	FIL109	No	FILTER BELT	PVC45AC103A	Carbon Adsorber CA103	N/A	N/A
C45	VF109*	No	VIBRATORY FEEDER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	H107*	No	HOPPER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	SCF160*	No	SCREW CONV. FEEDER	N/A		N/A	N/A

C45	SCF260*	No	SCREW CONV. FEEDER	N/A		N/A	N/A
C45	SCR17*	No	SCREENER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	SM109*	No	SCREW CONV. MIXER	PVC45AC103A	Carbon Adsorber CA103	N/A	N/A
C45	SM153	No	SCREW CONVEYOR MIXER	PVC45SM153	Vent Sock VS153	N/A	N/A
C45	TK2A*	No	AMYL & WATER TK	N/A		50	Gallons
C45	TK8A*	No	PRODUCTION TK EV 202	PVC45ATK008A		3,000	Gallons
C45	TK8B*	No	PRODUCTION TK EV 202	PVC45ATK008B		3,000	Gallons
C45	TK8C*	No	RINSE WATER TANK	PVC45ATK008C		3,000	Gallons
C45	TK8D*	No	RINSE WATER TANK	PVC45ATK008D		3,000	Gallons
C45	TK8E*	No	RINSE WATER TANK	PVC45ATK008E		3,000	Gallons
C45	TK8F*	No	CLEANING SOLUTION	PVC45ATK008F		100	Gallons
C45	TK14A*	No	PROCESS TANK	PVC45TK14A		1,000	Gallons
C45	TK14B*	No	EVAP. TANK FOR COL 202	PVC45TK14B		1,000	Gallons
C45	TK14C*	No	PROCESS TANK	N/A		1,000	Gallons
C45	TK14D*	No	PROCESS TANK	PVC45TK14D		1,000	Gallons
C45	TK18A*	No	PRODUCTION TANK	PVC45TK18A		1,300	Gallons
C45	TK20*	No	PRODUCTION TANK	PVC45TK020		300	Gallons
C45	TK21*	No	SODIUM SLURRY TANK	PVC45AC103A	Carbon Adsorber CA103	1,100	Gallons
C45	TK22*	No	SODIUM SLURRY TANK	PVC45AC103A	Carbon Adsorber CA103	1,100	Gallons
C45	TK25*	No	CRYSTALS	PVC45AC103A	Carbon Adsorber CA103	500	Gallons
C45	TK107*	No	SOLVENT STORAGE TK	N/A		400	Gallons
C45	TK108B*	No	EVAP. TANK FOR EV 108	N/A		68	Gallons
C45	TK109A*	No	AMYL & WATER	N/A		300	Gallons
C45	TK109C*	No	PRODUCTION TANK	PVC45HE109C		432	Gallons
C45	TK114A*	No	CENTRIFUGE TANK	PVC45AC103A	Carbon Adsorber CA103	470	Gallons
C45	TK114B*	No	CENTRIFUGE TANK	PVC45AC103A	Carbon Adsorber CA103	470	Gallons

C45	TK118A*	No	CENTRIFUGE TANK	PVC45AC103A	Carbon Adsorber CA103	610	Gallons
C45A	TK147/VS147*	10	STORAGE TANK	PVC45AAC147		50	tons
C45A	TK148/VS148*	10	STORAGE TANK	PVC45AAC148		50	tons
C45	TK149/VS150C*	5	STORAGE TANK	PVC45AAC149		16,638	kg
C45	TK151	No	STORAGE TANK	PVC45TK151	Vent Sock VS151A	N/A	N/A
C45	TK152*	8	MATERIAL HANDLING	PVC45TK152	Vent Sock VS152	N/AV	N/AV
C45	TK153*	8	MATERIAL HANDLING	PVC45TK153	Vent Sock VS153A	N/AV	N/AV
C45	TK201*	No	DECANTER FOR COL201	PVC45TK201		3,000	Gallons
C45	TK202C*	No	PROD. TK FOR EV202	N/A		450	Gallons
C45	TK204*	8	DECANTER FOR COL204	PVC45TK204		N/A	N/A
C45	TK219*	No	DECANTER FOR COL219	PVC45TK219		N/A	N/A
C45	TK350B*	8	STRIPPER FEED TANK	PVC45TK350B		20,834	Gallons
C45	TK360B*	No	STRIPPER FEED TANK	PVC45TK360B		20,834	Gallons
C45	TK361B*	No	STRIPPER FEED TANK	PVC45TK361B		20,834	Gallons
C45	TK350A*	8	DECANTER	PVC45TK350A		20,834	Gallons
C45	TK360A*	No	DECANTER	PVC45TK360A		38,265	Gallons
C45	TK361A*	No	DECANTER	PVC45TK361A		38,265	Gallons
C45	TK380*	No	CLEANING SOLUTION TANK	PVC45TK380		15,000	Gallons
C45	TK381*	No	CLEANING SOLUTION TANK	PVC45TK381		15,000	Gallons
C45A	TK490A*	No	WASTE TANK	PVC45ATK490A		3,500	Gallons
C45A	TK490B*	No	WASTE TANK	PVC45ATK490B		450	Gallons
C45	VS17*	No	VACUUM CLEANING BAGHOUSE	PVC45AC17		N/A	N/A
C45	VS172*	No	TRANSFER BAGHOUSE	PVC45AC172		N/A	N/A
C45	VS107A*	No	TRANSFER BAGHOUSE	PVC45AC107		N/A	N/A
C45	HE204C*	8	Heat Exchanger	N/A		N/A	N/A
C45	HE204B*	8	Heat Exchanger	N/A		N/A	N/A
C45	HE204A*	8	Heat Exchanger	N/A		N/A	N/A
C45	HE204D*	8	Heat Exchanger	N/A		N/A	N/A
C45	HE101H*	8	Heat Exchanger	N/A		N/A	N/A
C45	HE101G*	8	Heat Exchanger	N/A		N/A	N/A
C45	HE101B*	8	Heat Exchanger	N/A		N/A	N/A

C45	HE101A*	8	Heat Exchanger	N/A		N/A	N/A
C45	TK101A*	8	Tank	N/A		N/A	N/A
C45A	TK450A*	8	Tank	N/A		N/A	N/A
C45A	cos410B*	8	Coneyor	N/A		N/A	N/A
C45A	VF400*	8	Feeder	N/A		N/A	N/A
C45A	TK400C*	8	Hopper	N/A		N/A	N/A
C45A	TK450F*	8	Tank	N/A		N/A	N/A
C45A	HE450L*	8	Heat Exchanger	N/A		N/A	N/A
C45A	HE450P*	8	Heat Exchanger	N/A		N/A	N/A
C45A	HE420C*	8	Heat Exchanger	N/A		N/A	N/A
C45A	HE420J*	8	Heat Exchanger	N/A		N/A	N/A
C45A	HE421C*	8	Heat Exchanger	N/A		N/A	N/A
C45A	HE421J*	8	Heat Exchanger	N/A		N/A	N/A
C45A	VLS420C*	8	Condensor/Sep/Receive	N/A		N/A	N/A
C45A	VLS421C*	8	Condensor/Sep/Receive	N/A		N/A	N/A
C45A	FLT480A*	8	Filter	N/A		N/A	N/A
C45A	FLT480B*	8	Filter	N/A		N/A	N/A
C45	TK460*	8	Tank	N/A		N/A	N/A
C45	HE460B*	8	condensor	N/A		N/A	N/A
C45	FLT460*	8	Filter	N/A		N/A	N/A

*Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).
 ** Control devices marked with a double asterisk are required to meet an applicable limitation.
 *** A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.3.1 Particulate Matter (PM) [326 IAC 6-3-2]

- (a) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the transfer baghouse VS156 shall not exceed 7.86 pounds per hour based on a maximum throughput of 2.64 tons per hour.
- (b) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the transfer baghouse VS173 shall not exceed 7.86 pounds per hour based on a maximum throughput of 2.64 tons per hour.
- (c) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from the transfer baghouse VS174 shall not exceed 9.85 pounds per hour based on a maximum throughput of 3.70 tons per hour.

D.3.2 Volatile Organic Compounds (VOCs) [326 IAC 8-1-6] [326 IAC 2-2-3]

- (a) VOC emissions from the equipment routed to stack PVC45AAC460, shall be controlled by carbon adsorber CA460.

- (b) The carbon adsorber CA460 shall be operating at all times that the associated equipment is being operated. However, if there is a malfunction of the carbon adsorber CA460, the Permittee may finish processing any material that has entered equipment listed in this Section.
- (c) Carbon adsorber CA460 shall reduce VOC emissions by ninety-eight percent (98%), as measured by a comparison of the inlet and outlet concentrations to the carbon adsorber, unless outlet concentrations from the carbon adsorber are equal to or less than 30 parts per million (ppmv). These limitations shall be based on a 24-hour block average when the equipment ducted to CA460 is in operation.

D.3.3 [Reserved]

D.3.4 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan (PMP) is required for the CA460 carbon adsorber, which is used for compliance with an applicable limitation or standard. The requirements for a Preventive Maintenance Plan are described in Section B, Condition B.10 – Preventive Maintenance Plan.

Leak Detection and Repair Requirements

D.3.5 [Reserved]

Testing and Monitoring Requirements [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]

D.3.6 Testing Requirements [326 IAC 2-7-6(1) and (6)]

No emissions testing is required for the emission units described in this Section, at this time, but IDEM may require testing at any specific time when necessary to determine if the facility is in compliance. The requirements for conducting performance tests that may be required by IDEM in the future, are described in Section C, Condition C.8 – Performance Testing.

D.3.7 Continuous Emissions Monitoring [326 IAC 2-1.1-11][326 IAC 3-5]

The Permittee shall continuously monitor the inlet and outlet VOC concentrations for carbon adsorber CA460. Continuous monitoring operation is defined as the collection of at least one measurement for each 15-minute block period while the equipment ducted to CA460 is in operation.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)]

D.3.8 Record Keeping Requirements

- (a) The Permittee shall maintain records of the continuous monitoring required by Condition D.3.7. The records shall include data required by 326 IAC 3-5-6.
- (b) Pursuant to 326 IAC 3-5-4, the Permittee shall maintain a complete, written continuous monitoring standard operating procedure (SOP) for the continuous emissions monitors. The CEMS SOP should contain, at a minimum, the items described in 326 IAC 3-5-4(a).

D.3.9 [Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.3.10 Modifications and Construction: Advanced Approval of Permit Conditions

- (a) The Non Narasin emission units described in this D.3 Section are not subject to the advance approval permit conditions.
- (b) The Permittee may modify Narasin emission unit equipment listed in this section of the permit without obtaining a source modification approval (otherwise required by 326 IAC 2-7-10.5), a Title V permit modification (otherwise required by 326 IAC 2-7-12), or a Prevention of Significant Deterioration permit (otherwise required by 326 IAC 2-2), provided the modified emission units are subject to the same applicable requirements listed in this D section, and the Permittee shall comply with the Change Management and Flexible Permit provisions in Section F.2 of this permit.
- (c) The Permittee may construct and install new Narasin emission units of the types described in this D.3 section without obtaining a source modification approval (otherwise required by 326 IAC 2-7-10.5), a Title V permit modification (otherwise required by 326 IAC 2-7-12), or a Prevention of Significant Deterioration permit (otherwise required by 326 IAC 2-2), provided the new emission units are subject to the same applicable requirements listed in this D section, and the Permittee shall comply with the Change Management and Flexible Permit provisions in Section F.2 of this permit.

D.3.11 Leak Detection and Repair

Leak Detection and Repair requirements associated with Emission units listed in this Section D.3 are specified in section E.3.

D.3.12 Control Strategy for Volatile Organic Compounds (VOCs) [36 IAC 2-2-3]

To satisfy the BACT requirements for the Narasin process, the Permittee shall apply the control standards, monitoring, and recordkeeping required by D.3.2, D.3.7, D.3.8 no later than April 30, 2010 for the following:

- (a) EV101 connection to carbon adsorber CA460;
- (b) Any required modifications to CA460 and associated Continuous Emission Monitoring Systems.

Following April 30, 2010, all Narasin Emission Units will satisfy the BACT requirements.

SECTION D.4 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description: AHM - Product Finishing Operations

(a) The following Unit IDs have applicable conditions in this D Section:

Bldg.	Unit ID*	Narasin Emission Unit***	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C47	BAG185*	11	BAGGER	PVC58AC190	Baghouse VS183, Carbon Adsorber CA190**	N/A	N/A
C47E	BAG813*	No	BAGGER	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47E	BL808A*	No	BLENDER	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	1,000	Cubic Ft.
C47E	BL808B*	No	BLENDER	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	1,000	Cubic Ft.
C47E	BL809A*	No	BLENDER	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	1,000	Cubic Ft.
C47E	BL809B*	No	BLENDER	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	1,000	Cubic Ft.
C47E	BL811A*	No	BLENDER MIXER	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	1,000	Cubic Ft.
C47E	BL811B*	No	BLENDER MIXER	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	1,000	Cubic Ft.
C47E	BS812*	No	BAG SLITTER	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	BS812A*	No	MANUAL REFEED HOPPER	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/AV	N/AV
C47B	COD480*	No	DRAG CONVEYOR	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A
C47B	COD481*	No	DRAG CONVEYOR	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A
C47B	COD490*	No	DRAG CONVEYOR	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A

C47B	COD491*	No	DRAG CONVEYOR	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A
C47	COE185*	11	BUCKET ELEVATOR	PVC58AC190	Baghouse VS183, Carbon Adsorber CA190**	N/A	N/A
C47B	COE440*	No	BUCKET ELEVATOR	PVC59AC520	Baghouse VS470, Carbon Adsorber CA520**	13,200	lb/hr
C47B	COE440A*	No	BUCKET ELEVATOR	PVC59AC520	Baghouse VS460, Carbon Adsorber CA520**	N/A	N/A
C47B	COE450*	No	BUCKET ELEVATOR	PVC59AC520	Baghouse VS460, Carbon Adsorber CA520**	N/A	N/A
C47B	COE451*	No	BUCKET ELEVATOR	PVC59AC520	Baghouse VS460, Carbon Adsorber CA520**	N/A	N/A
C47E	COE805*	No	BUCKET ELEVATOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COE807*	No	BUCKET ELEVATOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47	COS185*	11	SCREW CONVEYOR	PVC58AC190	Baghouse VS183, Carbon Adsorber CA190**	N/A	N/A
C47E	COS458*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS805A*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS805B*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS805C*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS805D*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS806A*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS806B*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS806C*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS806D*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A

C47E	COS807*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS807A*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS808*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS809*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	COS810A*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	COS810B*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	COS810C*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	COS810D*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	COS810E*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	COS811A*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47E	COS811B*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47E	COS811C*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47E	COS812A*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	COS812B*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	COS813*	No	SCREW CONVEYOR	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47	CY006*	11	CYCLONE SEPARATOR	PVC58AC190	Baghouse VS18, Carbon Adsorber CA190**	N/A	N/A
C47	CY008*	11	CYCLONE SEPARATOR	PVC58AC190	Baghouse VS17, Carbon Adsorber CA190**	N/A	N/A
C47B	CY461*	No	CYCLONE SEPARATOR	PVC59AC520	Baghouse VS460, Carbon Adsorber CA520**	N/A	N/A

C47B	CY462*	No	CYCLONE SEPARATOR	PVC59AC520	Baghouse VS460, Carbon Adsorber CA520**	N/A	N/A
C47B	CY471*	No	CYCLONE SEPARATOR	PVC59AC520	Baghouse VS470, Carbon Adsorber CA520**	660	lb/hr
C47	DS101*	5	TOTE BAG UNLOAD	PVC47AC285	Baghouse VS285	6.5	Min/Tote
		No	STATION				
C47B	DS470*	No	TOTE BAG DRUM STATION	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A
C47E	DS811*	No	TOTE BAG DRUM STATION	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47E	H101	11	HOPPER	PVC47EH101	Vent Sock H101SOCK	N/A	N/A
C47E	H102	No	HOPPER	PVC47EH102	Vent Sock H102SOCK	N/A	N/A
C47E	H103	No	HOPPER	PVC47EH103	Vent Sock H103SOCK	N/A	N/A
C47	H180	11	HOPPER	PVC47H180	Vent Sock H180SOCK	N/A	N/A
C47B	H410*	No	HOPPER	PVC59AC520	Vent Sock H410SOCK	N/A	N/A
C47B	H431*	No	HOPPER	PVC59AC520		N/A	N/A
C47E	H807*	No	HOPPER	PVC59AC520		N/A	N/A
C47E	H807A*	No	HOPPER	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	H812*	No	HOPPER	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	60	Cubic Ft.
C47E	H813C*	No	HOPPER	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47	PC006*	11	PELLET COOLER	PVC58AC190	Baghouse VS7, Carbon Adsorber CA190**	N/A	N/A
C47B	PC430*	No	PELLET COOLER	PVC59AC520	Baghouse VS430A, Carbon Adsorber CA520**	N/A	N/A
C47	PEL006*	11	PELLET MILL	PVC58AC190		N/A	N/A
C47B	PEL430*	No	PELLET MILL	PVC59AC520	Baghouse VS430A, Carbon Adsorber CA520**	N/A	N/A
C47B	RM440*	No	ROLLER MILL	PVC59AC520	Baghouse VS470, Carbon Adsorber CA520**	N/A	N/A
C47B	RM440A*	No	ROLLER MILL	PVC59AC520	Baghouse VS470, Carbon Adsorber CA520**	N/A	N/A
C47B	RM480*	No	ROLLER MILL	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A

C47B	RM481*	No	ROLLER MILL	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A
C47B	SCR450*	No	SCREENER	PVC59AC520	Baghouse VS460, Carbon Adsorber CA520**	N/A	N/A
C47B	SCR451*	No	SCREENER	PVC59AC520	Baghouse VS460, Carbon Adsorber CA520**	N/A	N/A
C47E	SCR813*	No	SCREENER	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47B	SCR490*	No	SCREENER	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A
C47B	SCR491*	No	SCREENER	PVC59AC520	Baghouse VS480, Carbon Adsorber CA520**	N/A	N/A
C47	SM182*	11	RIBBON MIXER	PVC58AC190	Baghouse VS183, Carbon Adsorber CA190**	1,000	Cubic Ft.
C47	SM280	No	SCREW MIXER	PVC47SM280	Vent Sock SM280SOCK	N/A	N/A
C47	TB185*	11	TOTE BAGGER	PVC58AC190	Baghouse VS183, Carbon Adsorber CA190**	N/A	N/A
C47E	TB813*	No	TOTE BAG FILLER	PVC59AC520	Baghouse VS815B, Carbon Adsorber CA520**	N/A	N/A
C47E	TK101A	11	STORAGE TANK	PVC47ETK101A		1,900	Cubic Ft.
C47E	TK101B	No	STORAGE TANK	PVC47ETK101B		1,900	Cubic Ft.
C47E	TK102A	No	STORAGE TANK	PVC47ETK102A		N/A	N/A
C47E	TK102B	No	STORAGE TANK	PVC47ETK102B		N/A	N/A
C47E	TK103	No	STORAGE TANK	PVC47EVS103A	Baghouse VS103**	1,900	Cubic Ft.
C47	TK11A*	5	STORAGE TANK	PVC47TK11A	Vent Sock TK11ASOCK**	2,000	Cubic Ft.
C47	TK11B*	5	STORAGE TANK	PVC47TK11B	Vent Sock TK11BSOCK**	2,000	Cubic Ft.
C47	TK132*	No	MINERAL OIL TANK	PVC47TK132		31,087	Gallons
C47	TK181	11	STORAGE TANK	PVC47TK181	Vent Sock TK181SOCK	1,897	Cubic Ft.
C47	TK201A	No	SILO	PVC47AC201	Vent Sock TK201ASOCK**	1,900	Cubic Ft.
C47	TK201B	No	SILO	PVC47AC201		1,900	Cubic Ft.
C47	TK270	No	SILO	PVC47TK270		N/AV	N/AV
C47B	TK420	No	STORAGE TANK	PVC47BVS420		1,900	Cubic Ft.

C47E	TK806A*	No	STORAGE TANK	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	2,000	Cubic Ft.
C47E	TK806B*	No	STORAGE TANK	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	2,000	Cubic Ft.
C47E	TK806C*	No	STORAGE TANK	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	2,000	Cubic Ft.
C47E	TK806D*	No	STORAGE TANK	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	2,000	Cubic Ft.
C47	VS001	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS010	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS017	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS018	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS180	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS182	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS183	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS201*	No	TRANSFER BAGHOUSE	PVC47AC201		N/A	N/A
C47	VS210*	No	TRANSFER BAGHOUSE	PVC47AC210		N/A	N/A
C47	VS004	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47	VS400	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47B	VS410	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47B	VS430	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47B	VS430A	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47B	VS431	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47B	VS460	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47B	VS470	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47B	VS480	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47	VS007	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	N/A	N/A
C47E	VS810A*	No	TRANSFER BAGHOUSE	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A

C47E	VS810B*	No	TRANSFER BAGHOUSE	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	VS810C*	No	TRANSFER BAGHOUSE	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	VS812*	No	TRANSFER BAGHOUSE	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	N/A	N/A
C47E	VS815A	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47E	VS815B	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47E	VS815C	No	TRANSFER BAGHOUSE	PVC59AC520	Carbon Adsorber CA520**	N/A	N/A
C47E	WB805	No	WEIGH BELT	PVC59AC520	Baghouse VS815A, Carbon Adsorber CA520**	N/A	N/A
C47E	WH810A*	No	WEIGH HOPPER	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	500	Cubic Ft.
C47E	WH810B*	No	WEIGH HOPPER	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	250	Cubic Ft.
C47E	WH810C*	No	WEIGH HOPPER	PVC59AC520	Baghouse VS815C, Carbon Adsorber CA520**	500	Cubic Ft.
C47C	VS601	11	TRANSFER BAGHOUSE (Transfer Cycle)	PVC58AC190	Carbon Adsorber CA190**	37	kg/min
			TRANSFER BAGHOUSE (Transfer Cycle)			159	
C47C	VS602	11	TRANSFER BAGHOUSE (Mix Cycle)	PVC58AC190	Carbon Adsorber CA190**	159	kg/min
C47C	VS603	11	TRANSFER BAGHOUSE	PVC58AC190	Carbon Adsorber CA190**	159	kg/min
C47C	BS612	11	BAG SLITTER	PVC58AC190	Carbon Adsorber CA190**	131	kg/min
C47C	FD603	11	FEEDER	PVC58AC190	Baghouse VS609**, Carbon Adsorber CA190**	119	kg/min
C47C	FD605	11	FEEDER	PVC58AC190	Baghouse VS609**, Carbon Adsorber CA190**	12	kg/min
C47C	TK610	11	TANK	PVC58AC190	Baghouse VS609**, Carbon Adsorber CA190**	205.5	kg/min
C47C	TK612	11	TANK	PVC58AC190	Baghouse VS609**, Carbon Adsorber CA190**	262	kg/min
C47C	BAG612	11	BAGGER	PVC58AC190	Baghouse VS609**, Carbon Adsorber CA190**	131	kg/min

C47C	FD604	11	FEEDER	PVC58AC190	Baghouse VS609**	38	kg/min
C47C	FD606*	11	FEEDER	PVC58AC190	Baghouse VS609**	35.2	kg/min

* Emission units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).

** Control devices marked with a double asterisk are required to meet an applicable limitation.

***A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(b) The following Unit IDs are not subject to applicable requirements, and are listed only for informational purposes

Bldg.	Unit ID*	Emission Unit	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C47	COS001*	11	SCREW CONVEYOR	N/A		N/A	N/A
C47E	COS101*	5	SCREW CONVEYOR	N/A		N/A	N/A
C47E	COS101A*	No	SCREW CONVEYOR	N/A		N/A	N/A
C47E	COS101B*	No	SCREW CONVEYOR	N/A		N/A	N/A
C47E	COS102*	No	SCREW CONVEYOR	N/A		N/A	N/A
C47E	COS102A*	No	SCREW CONVEYOR	N/A		N/A	N/A
C47E	COS102B*	No	SCREW CONVEYOR	N/A		N/A	N/A
C47E	COS103*	No	SCREW CONVEYOR	N/A		N/A	N/A
C47	COS250A*	No	SCREW CONVEYOR	PVC47AC005B	Baghouse VS005B	N/A	N/A
C47	D250*	No	FLUIDIZED BED DRY	PVC47AC005B	Baghouse VS005B	N/A	N/A
C47	H012*	5	HOPPER	N/A		N/A	N/A
C47	H002*	11	HOPPER	N/A		N/A	N/A
C47	H201*	No	HOPPER	N/A		N/A	N/A
C47	H208*	No	HOPPER	PVC47AC005B	Baghouse VS005B	N/A	N/A
C47	H270*	No	HOPPER	N/A		N/A	N/A
C47	H003*	11	HOPPER	N/A		N/A	N/A
C47	HM006*	11	HAMMER MILL	N/A	Vent Sock HM6SOCK	N/A	N/A
C47	HM008*	11	HAMMER MILL	N/A	Vent Sock HM6SOCK	N/A	N/A
C47	HM250*	No	HAMMER MILL	PVC47AC005B		N/A	N/A
C47	SCR006*	11	SCREENER	N/A		N/A	N/A
C47	SM210A*	No	RIBBON MIXER	PVC47AC005B	Baghouse VS005B	N/A	N/A
C47	SM210B*	No	RIBBON MIXER	PVC47AC005B	Baghouse VS005B	N/A	N/A
C47	SCR250*	No	SCREENERS	PVC47AC005B		N/A	N/A
C47	SUMP003*	No	WASTE SUMP	N/A		4,283	Gallons
C47	TK001A*	11	STORAGE TANK	PVC47TK1A	Vent Sock TK1ASOCK	2,009	Cubic Ft.
C47	TK001B*	11	STORAGE TANK	PVC47TK1B	Vent Sock TK1BSOCK	1,850	Cubic Ft.
C47	TK002*	No	STORAGE TANK	N/A		80	Tons
C47	TK180*	11	STORAGE TANK	N/A		N/A	N/A
C47	TK310*	No	TANK	PVC47TK310		500	Gallons

C47E	TK320*	No	LIQUID WASTE TANK	PVC47TK320		2,400	Gallons
C47	TK320A*	No	TYLOSIN WASTEWATER TANK	PVC47TK320A		175	Gallons
C47	TK330*	No	JACKETED TANK	PVC47 TK330		22,000	Gallons
C47	TK340*	No	TYLOSIN HOT WATER TANK	PVC47TK340		200	Gallons
C47B	TK410A*	No	STORAGE TANK	N/A		36	Tons
C47B	TK410B*	No	STORAGE TANK	N/A		36	Tons
C47B	TK453*	No	WASTE SUMP, PROC. WATER	PVC47TK453		1,000	Gallons
C47	TK006*	11	TRANSFER TANK	N/A		N/A	N/A
C47E	TK803*	No	VEGETABLE OIL TANK	N/A		8,000	Gallons
C47E	TK803A*	No	VEGETABLE OIL TANK	PVC47ETK803A		125	Gallons
C47E	TK804A*	No	MINERAL OIL TANK	PVC47ETK804A		125	Gallons
C47	VS005B*	No	TRANSFER BAGHOUSE	PVC47AC005B		N/A	N/A
C47	VS011*	5	TRANSFER BAGHOUSE	PVC47AC11		N/A	N/A
C47E	VS101*	5	TRANSFER BAGHOUSE	PVC47EAC101A		N/A	N/A
C47E	VS102*	No	TRANSFER BAGHOUSE	PVC47EAC102A		N/A	N/A
C47	VS013*	No	VACUUM CLEANING BAGHOUSE	PVC47AC13		N/A	N/A
C47	VS170A*	No	VACUUM CLEANING BAGHOUSE	PVC47AC170A		N/A	N/A
C47	VS220*	No	TRANSFER BAGHOUSE	PVC47AC220		N/A	N/A
C47	VS270*	No	TRANSFER BAGHOUSE	PVC47AC270		N/A	N/A
C47	VS280*	No	TRANSFER BAGHOUSE	PVC47AC280		N/A	N/A
C47	VS285*	No	TRANSFER BAGHOUSE	PVC47AC285		N/A	N/A
C47B	VS510*	No	VACUUM CLEANING BAGHOUSE	PVC47BAC510		N/A	N/A
C47E	VS815D*	No	VACUUM CLEANING BAGHOUSE	PVC47EAC815D		N/A	N/A
C47C	VS617*	No	VACUUM CLEANING BAGHOUSE	PVC47CAC617		NA	NA
C47C	BL601A*	11	BLENDING SILO (Transfer Cycle)	PVC47CBL601A		37	kg/min
C47C	BL601B*	11	BLENDING SILO (Transfer Cycle)	PVC47CBL601B		37	kg/min
C47C	BL602A*	11	BLENDING SILO (Transfer Cycle)			159	
C47C	BL602A*	11	BLENDING SILO (Mix Cycle)	PVC47CBL602A		159	kg/min
C47C	BL602B*	11	BLENDING SILO (Transfer Cycle)	PVC47CBL602B		159	kg/min

			BLENDING SILO				
			(Mix Cycle)			159	
C47C	VS604*	11	TRANSFER BAGHOUSE	PVC47CC604		50	kg/min
C47C	BS606	11	BAG SLITTER	PVC47CBS606		47	kg/min
C47	TK005	11	Tank	N/A		N/A	N/A
C47	H182	11	Hopper	N/A		N/A	N/A
C47	SCR185A	11	Screener	N/A		N/A	N/A
C47	TK185A	11	Tank	N/A		N/A	N/A
C47	BS140	11	Bag Slitter	N/A		N/A	N/A
C47	COE140	11	Conveyor	N/A		N/A	N/A
C47C	HS612	11	Heat Selaer	N/A		N/A	N/A
C47C	NS612	11	Neck Stretcher	N/A		N/A	N/A
C47C	COE605	11	Conveyor	N/A		N/A	N/A
C47C	COE612	11	Conveyor	N/A		N/A	N/A
C47C	TK608	11	Tank	N/A		N/A	N/A
C47C	SCR611	11	Screener	N/A		N/A	N/A
C47C	MX610	11	Mixer	N/A		N/A	N/A
C47C	COE606	11	Conveyor	N/A		N/A	N/A
C47C	TK606	11	Tank	N/A		N/A	N/A
C47C	DS607	11	Dump Station	N/A		N/A	N/A
C47C	COE607	11	Coneyor	N/A		N/A	N/A
C47C	H140	11	Hopper	N/A		N/A	N/A
C47C	FD607	11	Feeder	N/A		N/A	N/A

* Emission units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).

** Control devices marked with a double asterisk are required to meet an applicable limitation.

***A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.4.1 Particulate Matter (PM) [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2, C47 finishing process equipment shall be limited as follows:

Condition Subpart	Unit ID	Stack/Vent ID	Maximum Process Weight Rate (tons/hr)	Emissions Limitation (lb/hr)
a.	H101	PVC47EH101	12.0	21.7
b.	H102	PVC47EH102	9.60	18.7
c.	H103	PVC47EH103	24.0	34.5
d.	SM280	PVC47SM280	0.66	3.11
e.	TK101A	PVC47ETK101A	6.00	13.6
f.	TK101B	PVC47ETK101B	6.00	13.6
g.	TK102A	PVC47ETK102A	4.80	11.7
h.	TK102B	PVC47ETK102B	4.80	11.7
i.	TK103	PVC47EVS103A	24.0	34.5
j.	TK11A	PVC47TK11A	0.06	0.59
k.	TK11B	PVC47TK11B	0.06	0.59
l.	TK181	PVC47TK181	0.79	3.49
m.	TK201A	PVC47AC201	0.47	2.45
n.	TK201B	PVC47AC201	0.47	2.45
o.	TK270	PVC47TK270	0.66	3.11
p.	TK420	PVC47BVS420	0.03	0.36
q.	VS201	PVC47AC201	0.47	2.45
r.	VS210	PVC47AC210	0.47	2.45
s.	H180	PVC47H180	1.57	5.55
t.	FD603	PVC58AC190	7.85	16.31
u.	FD605	PVC58AC190	0.79	3.51
v.	TK610	PVC58AC190	13.56	23.52
w.	TK612	PVC58AC190	17.29	27.68
x.	BAG612	PVC58AC190	8.65	17.40
y.	FD604	PVC58AC190	2.51	7.59
z.	FD606	PVC58AC190	2.32	7.21
aa	DS101	PV47AC285	4.78	11.7

D.4.2 Best Available Control Technology (BACT) [326 IAC 2-2-3] [326 IAC 8-1-6] [SSM 165-12309] [SSM 165-25636-00009]

-
- (a) VOC emissions from the equipment routed to stack PVC59AC520, shall be controlled by carbon adsorber CA520.
 - (b) The carbon adsorber CA520 shall be operating at all times that the associated equipment is being operated. However, if there is a malfunction of the carbon adsorber CA520, the Permittee may finish processing any material that has entered the pellet mill PEL430.

- (c) Carbon adsorber CA520 shall reduce VOC emissions by ninety-five percent (95%), as measured by a comparison of the inlet and outlet concentrations to the carbon adsorber, unless outlet concentrations from the carbon adsorber are equal to or less than 10 parts per million (ppm). These limitations shall be based on a 3-hour block average.
- (d) VOC emissions from the equipment routed to stack PVC58AC190, as described in the facility description above, shall be controlled by carbon adsorber CA190.
- (e) The carbon adsorber CA190 shall be operating at all times that the associated equipment is being operated. However, if there is a malfunction of the carbon adsorber CA190, the Permittee may finish processing any material that has entered the pellet mill PEL006.
- (f) Carbon adsorber CA190 shall reduce VOC emissions by ninety-eight percent (98%), as measured by a comparison of the inlet and outlet concentrations to the carbon adsorber, unless outlet concentrations from the carbon adsorber are equal to or less than 10 parts per million (ppmv). These limitations shall be based on a 24-hour block average when the equipment vented to CA190 is in operation.

D.4.2.1 PM and PM10 Control Requirements

- (a) The PM and PM10 emissions from feeders FD603, FD604, FD605, and FD606; tanks TK610 and TK612; waste drum; and bagger BAG612 shall be controlled by baghouse VS609.
- (b) Baghouse VS609 shall be operated at all times that the equipment specified in Condition D.4.2.1(a) is being operated. However, if there is a malfunction of Baghouse VS609, the Permittee may finish processing any material that has entered the pellet mill PEL006.
- (c) Baghouse VS609 shall reduce particulate matter emissions by 99.9%. This limitation shall be based on a 1-hour block average. Compliance with this condition shall limit the total PM and PM10 emissions to less than 25 and 15 tons/year, respectively, for the emission units described in the modification permitted under SSM 165-25636-00009, and will render 326 IAC 2-2 not applicable to the modification permitted under SSM 165-25636-00009.

D.4.3 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan is required for the carbon adsorbers CA190 and CA520 and Baghouse VS609. The requirements for a Preventive Maintenance Plan are described in Section B, Condition B.10 – Preventive Maintenance Plan.

D.4.4 [Reserved]

Testing and Monitoring Requirements [326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]

D.4.5 Testing Requirements [326 IAC 2-7-6(1) and (6)]

No emissions testing is required for the emission units described in this Section, at this time, but IDEM may require testing at any specific time when necessary to determine if the facility is in compliance. The requirements for conducting performance tests that may be required by IDEM in the future, are described in Section C, Condition C.8 – Performance Testing.

D.4.6 Continuous Emissions Monitoring [326 IAC 2-1.1-11] [326 IAC 3-5]

The Permittee shall continuously monitor the inlet and outlet VOC concentrations for carbon adsorbers CA520 and CA190. Continuous monitoring operation is defined as the collection of at least one measurement for each successive 15-minute period.

D.4.7 Visible Emissions Observations [326 IAC 2-1.1-11]

The Permittee shall visually observe the emissions from TK103 exhaust while it is operating at least once per day. TK103 is considered to be operating only when raw materials are being unloaded into the tank. If abnormal emissions are observed, the Permittee shall follow Response to Abnormal or Out-of-Range Compliance Monitoring Measurements in Section C.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)]

D.4.8 Record Keeping Requirements

- (a) The Permittee shall maintain records of the continuous monitoring required by Condition D.4.6. The records shall include the data required by 326 IAC 3-5-6.
- (b) The Permittee shall maintain records of the visible emissions observations required by Condition D.4.7.
- (c) Pursuant to 326 IAC 3-5-4, the Permittee shall maintain a complete, written continuous monitoring standard operating procedure (SOP) for the continuous emissions monitors. The CEMS SOP should contain, at a minimum, the items described in 326 IAC 3-5-4(a).
- (d) Reserved

D.4.9 Reporting Requirements

- (a) Reserved
- (b) The Permittee shall prepare and submit a written report of excess emissions of the continuous emissions monitors each calendar quarter. The report must contain the information required by 326 IAC 3-5-7(4).

D.4.10 Reserved

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.4.11 Modifications and Construction: Advanced Approval of Permit Conditions

- (a) The Non Narasin emission units described in this D.4 Section are not subject to the advance approval permit conditions.
- (b) The Permittee may modify Narasin emission units listed in this section D.4 of the permit without obtaining a source modification approval (otherwise required by 326 IAC 2-7-10.5), a Title V permit modification (otherwise required by 326 IAC 2-7-12), or a Prevention of Significant Deterioration permit (otherwise required by 326 IAC 2-2), provided the modified emission units are subject to the same applicable requirements listed in this D section, and the Permittee shall comply with the Change Management and Flexible Permit provisions in Section F.2 of this permit.
- (c) The Permittee may construct and install new Narasin emission units of the types described in this D.4 section without obtaining a source modification approval (otherwise required by 326 IAC 2-7-10.5), a Title V permit modification (otherwise required by 326 IAC 2-7-12), or a Prevention of Significant Deterioration permit (otherwise required by 326 IAC 2-2), provided the new emission units are subject to the same applicable requirements listed in this D section, and the Permittee shall comply with the Change Management and Flexible Permit provisions in Section F.2 of this permit.

D.4.12 Leak Detector and Repair

Leak Detection and Repair requirements associated with Narasin Emission units listed in D.4 are specified in section E.3

D.4.13 Control Strategy for Volatile Organic Compounds (VOCs) 326 IAC 2-2-3]

To satisfy the BACT requirements for the Narasin process, the Permittee shall apply the control standards, monitoring, and recordkeeping required by D.4.2, D.4.6, D.4.8 no later than April 30, 2010 for the following:

- (a) Any required modifications to CA190 and associated Continuous Emission Monitoring Systems.

Following April 30, 2010, all Narasin Emission Units will satisfy the BACT requirements.

SECTION D.5 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.5.1 through D.5.5 [Reserved]

Testing and Monitoring Requirements

D.5.6 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.5.7 [Reserved]

SECTION D.6 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.6.1 through D.6.5 [Reserved]

Testing and Monitoring Requirements

D.6.6 [Reserved]

Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.6.7 [Reserved]

SECTION D.7 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.7.1 through D.7.4 [Reserved]

Testing and Monitoring Requirements

D.7.5 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.7.6 [Reserved]

SECTION D.8 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.8.1 [Reserved]

D.8.2 [Reserved]

D.8.3 [Reserved]

D.8.4 [Reserved]

Testing and Monitoring Requirements

D.8.5 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.8.6 [Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.8.7 [Reserved]

SECTION D.9 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.9.1 [Reserved]

D.9.2 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.9.3 [Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.9.4 [Reserved]

SECTION D.10 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.10.1 through D.10.2 [Reserved]

Testing and Monitoring Requirements

D.10.3 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.10.4 [Reserved]

SECTION D.11 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.11.1 [Reserved]

D.11.2 [Reserved]

D.11.3 [Reserved]

Testing and Monitoring Requirements

D.11.4 [Reserved]

D.11.5 [Reserved]

D.11.6 [Reserved]

D.11.7 [Reserved]

D.11.8 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.11.9 [Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.11.10 [Reserved]

SECTION D.12 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.12.1 [Reserved]

D.12.2 [Reserved]

D.12.3 [Reserved]

D.12.4 [Reserved]

D.12.5 [Reserved]

D.12.6 [Reserved]

D.12.7 [Reserved]

D.12.8 [Reserved]

D.12.9 [Reserved]

D.12.10 [Reserved]

D.12.11 [Reserved]

D.12.12 [Reserved]

Simultaneous Operation of T03/T04 Liquid Waste Incinerators

D.12.13 [Reserved]

Testing and Monitoring Requirements

D.12.14 [Reserved]

D.12.15 [Reserved]

D.12.16 [Reserved]

D.12.17 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.12.18[Reserved]

D.12.19[Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.12.20[Reserved]

SECTION D.13 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.13.1 through D.10.7 [Reserved]

Testing and Monitoring Requirements

D.13.8 through D.13.12 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.13.13[Reserved]

SECTION D.14 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.14.1 [Reserved]

D.14.2 [Reserved]

D.14.3 [Reserved]

D.14.4 [Reserved]

Testing and Monitoring Requirements

D.15.5 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.14.6 [Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.14.7 [Reserved]

SECTION D.15 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.15.1 [Reserved]

D.15.2 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.15.3 [Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-12 and 326 IAC 2-2]

D.15.4 [Reserved]

SECTION D.16 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description: Insignificant Activities

- (a) Cold-cleaning organic solvent degreasing operations that do not exceed 145 gallons of solvent usage per 12 months, except if subject to 326 IAC 20-6.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.16.1 Cold-Cleaner Degreasers Constructed between January 1, 1980 and July 1, 1990 [326 IAC 8-3-2]

For each cold-cleaner degreaser constructed between January 1, 1980 and July 1, 1990, the Permittee shall:

- (1) Equip the cleaner with a cover;
- (2) Equip the cleaner with a facility for draining cleaned parts;
- (3) Close the degreaser cover whenever parts are not being handled in the cleaner;
- (4) Drain cleaned parts for at least fifteen (15) seconds or until dripping ceases;
- (5) Provide a permanent, conspicuous label summarizing the operating requirements;
- (6) Store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.

D.16.2 Cold-Cleaner Degreasers Constructed after July 1, 1990 [326 IAC 8-3-5]

For each cold-cleaner degreaser constructed after July 1, 1990, the Permittee shall ensure that the following control equipment requirements are met:

- (1) Equip the degreaser with a cover. The cover must be designed so that it can be easily operated with one (1) hand if:
 - (A) The solvent volatility is greater than 2 kPa (15 mm Hg or 0.3 psi) measured at 38°C (100°F);
 - (B) The solvent is agitated; or
 - (C) The solvent is heated.
- (2) Equip the degreaser with a facility for draining cleaned articles. If the solvent volatility is greater than 4.3 kPa (32 mm Hg or 0.6 psi) measured at 38°C (100°F), then the drainage facility must be internal such that articles are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.

- (3) Provide a permanent, conspicuous label which lists the operating requirements outlined in Condition D.16.2(6).
- (4) The solvent spray, if used, must be a solid, fluid stream and shall be applied at a pressure which does not cause excessive splashing.
- (5) Equip the degreaser with one of the following control devices if the solvent volatility is greater than 4.3 kPa (32 mm Hg or 0.6 psi) measured at 38°C (100°F), or if the solvent is heated to a temperature greater than 48.9°C (120°F):
 - (A) A freeboard that attains a freeboard ratio of 0.75 or greater.
 - (B) A water cover when solvent used is insoluble in, and heavier than, water.
 - (C) Other systems of demonstrated equivalent control such as a refrigerated chiller or carbon adsorption. Such systems shall be submitted to the U.S. EPA as a SIP revision.
- (6) The owner or operator of a cold cleaning facility shall ensure that the following operating requirements are met:
 - (A) Close the cover whenever articles are not being handled in the degreaser.
 - (B) Drain cleaned articles for at least fifteen (15) seconds or until dripping ceases.
 - (C) Store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-7-12 and 326 IAC 2-2]

D.16.3 Modifications and Construction: Advance Approval of Permit Conditions

The emission units described in this D section are not subject to the advance approval permit conditions

**SECTION E.1 LEAK DETECTION AND REPAIR (LDAR) CONDITIONS FOR BPM PROCESS
SYSTEM COMPONENTS (RESERVED)**

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

E.1.1 and E1.2 [Reserved]

E.1.3 [Reserved]

SECTION E.2 LEAK DETECTION AND REPAIR (LDAR) CONDITIONS FOR WASTE SYSTEM COMPONENTS (RESERVED)

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

E.2.1 [Reserved]

E.2.2 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

E.2.3 [Reserved]

Modifications and Construction Requirements [326 IAC 2-7-10.5, 326 IAC 2-7-12 and 326 IAC 2-2]

E.2.4 [Reserved]

SECTION E.3 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

The Narasin production areas:

- Fermentation Batch Make-up (EU-1)
- Fermentation Bump Tanks (EU-2)
- Fermenters (EU-3)
- Fermentation Harvest Tanks (EU-4)
- Dry Raw Materials Unloading and Storage (EU-5)
- Liquid Raw Materials Unloading and Storage (EU-6)
- Fermentation Vacuum Cleaning (EU-7)
- Recovery Process (EU-8)
- New Amyl Alcohol Unloading and Storage (EU-9)
- New Clay Unloading and Storage (EU-10)
- Finishing Process (EU-11)

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

Section E.3.1 LEAK DETECTION AND REPAIR (LDAR) FOR NARASIN PROCESS EQUIPMENT EMISSION UNITS 1 – 11

- (a) Applicability: The provisions of this section apply to pumps, agitators, valves, and connectors that are intended to operate in volatile organic compound (VOC) service 300 hours or more during the calendar year within the Narasin facility. Each piece of equipment that can reasonably be expected to be in VOC service is presumed to be in VOC service unless the Permittee demonstrates that the piece of equipment is not in VOC service. 40 CFR 63.180(d) shall apply.
- (1) Lines and equipment not containing process fluids are not subject to the provisions of this section. Utilities, and other nonprocess lines, such as heating and cooling systems which do not combine their materials with those in the processes they serve, are considered to not contain process fluids.
 - (2) Equipment that is in vacuum service is excluded from the requirements of this section.
 - (3) Equipment that is in VOC service, but which is in such service less than 300 hours per calendar year, is excluded from the requirements of this section if it is identified as exempt.
 - (4) In VOC service as defined in E.3.1(c)(1) applies.
- (b) Compliance schedule: for equipment which is in operation with LDAR requirements on or before the issuance of this permit, compliance is required as of the date of permit issuance. For equipment which does not have LDAR requirements at the issuance of this permit, compliance is required within 60 days of permit issuance or April 30, 2010; whichever is later.
- (c) Definitions: Except as itemized below, the definitions found at 40 CFR Part 63, Subpart GGG shall apply.

- (1) In Volatile Organic Compound (VOC) service: means that a piece of equipment either contains or contacts a fluid (liquid or gas) that is at least 5 percent by weight of one or a combination of volatile organic compounds as determined according to the provisions of 40 CFR 63.180(d).
 - (2) Repaired: means that equipment
 - (A) Is adjusted, or otherwise altered to eliminate a leak as defined in this section, and
 - (B) Is visually inspected to confirm that the repair has abated the leak, or
 - (C) If the leak was confirmed by monitoring per Test Method 21, the equipment has been monitored using M21 to verify that emissions are below the applicable leak definition.
 - (D) M21 monitoring, verifying that emissions are below the leak applicable definition in (e)(1)(A)-(D), may be used to confirm repair of leaks identified by visual, audible, olfactory or other means.
 - (3) First attempt at repair: means the initial action(s) taken for the purpose of stopping or reducing leakage of VOC to the atmosphere. It does not include visual inspections or instrumental monitoring to confirm whether the attempt was successful.
 - (4) Method 21: The test method and specifications which appears at 40 CFR 63.180(b) and (c), which incorporates by reference 40 CFR Part 60, Appendix A, Test Method 21 as well as containing additional requirements.
- (d) Equipment Identification: Equipment which is subject to the requirements of this section shall be identified such that it can be distinguished from equipment which is not subject. Identification may be done in the field, or by drawings or other means. Components are not required to be individually identified, and no list of component identification numbers is required to be kept.
- (e) Leak Identification and Repair
- (1) When evidence of a potential leak to the atmosphere is found by visual, audible, olfactory, or any other detection method; pumps, valves, agitators, and connectors, in heavy liquid service may be monitored within 5 calendar days using Method 21 to detect a leak. If Method 21 monitoring is used to detect a leak, the following leak definitions apply:
 - (A) Valves: 500 ppmv
 - (B) Pumps: 2000 ppmv
 - (C) Agitators: 10,000 ppmv
 - (D) Connectors: 500 ppmv
 - (2) If Method 21 monitoring is not done, a leak is detected on the date when the evidence of the leak was initially observed.
 - (3) When each leak is detected by visual, audible, or olfactory means, or by monitoring via Method 21, the following identification requirements apply:

- (A) A readily visible marker, containing sufficient information to clearly designate which item of equipment is leaking, shall be attached, to the leaking equipment, or as near as is practicable and safe.
- (B) The marker shall also indicate the date the leak was identified, and the individual who identified the leak. If an observation of visual, audible, or olfactory indications of a leak is confirmed as a leak via M21 monitoring, the date of the monitoring is the date the leak was identified, and the individual performing the monitoring is the individual who identified the leak. When a leak is identified by visual, audible, or olfactory observation, and M21 confirmation is not done, the individual who observed the indications of a leak is the individual who identified the leak, and the date of identification is the date the evidence of a leak was first observed.
- (C) The identification may be removed after the equipment has been repaired.
 - (1) When each leak is detected,
 - (A) The leak shall be repaired as soon as practicable.
 - (B) A first attempt at repair shall be made not later than 5 calendar days after the leak is detected.
 - (C) The leak shall be repaired not later than 15 calendar days after the leak is detected.
 - (5) It is a violation of this section to fail to take action to repair a leak within the specified time. If action is taken to repair the leak within the specified time, failure of that action to successfully repair the leak is not a violation of this section. However, if the repairs are unsuccessful, a leak is detected and the permittee shall take further action as specified in (e)(3) above.
 - (6) Delay of Repair of equipment for which a leak has been detected is allowed if one of the conditions in (6)(A), (6)(B) or (6)(D) applies:
 - (A) The repair is technically infeasible without a process shutdown. The physical work to repair this equipment shall occur by the end of the next scheduled process shutdown.
 - (B) The owner or operator determines that repair personnel would be exposed to an immediate danger if attempting to repair without a process shutdown. The physical work to repair this equipment shall occur by the end of the next scheduled process shutdown.
 - (C) Repair, as defined in this section (i.e., including inspection or monitoring to confirm success), shall be completed either on the date of equipment restart, or within 15 VOC service days, where the equipment has been in VOC service at any point during the calendar day, after the leak was identified, whichever is later.
 - (D) The provisions for delay of repair at 40 CFR 63.171(b)-(e) shall also apply.
- (f) Recordkeeping
 - (1) A record explaining how equipment subject to this section is identified such that it can be distinguished from equipment not subject to this section.

- (2) For each leak detected:
 - (A) The date the leak was detected.
 - (B) Whether the leak was detected using M21 or by visual, audible, olfactory or other evidence.
 - (C) If the leak was detected using M21, the M21 reading that confirmed the leak.
 - (D) The individual who detected the leak.
 - (E) The date of the first attempt to repair the leak.
 - (F) The date the leak was repaired (whether this was successful or not). This will be the date of the visual, audible, olfactory or other inspection confirming repair of the leak, or the M21 test results confirming repair of the leak.
 - (G) The result of the visual, audible, olfactory or other inspection confirming repair of the leak, or the M21 test results confirming repair of the leak.
 - (H) "Repair delayed" and the reason for the delay if a leak is not repaired within 15 calendar days after discovery of the leak. The delay of repair conditions at 40 CFR 63.1255(g)(4)(v)(A) and (B) shall also apply.
 - (I) If repairs were delayed, dates when the equipment was not in VOC service during the delay of repair period.
 - (J) If repairs were delayed, dates of process shutdowns that occurred while the equipment was unrepaired.
- (3) Records of exempt components: Information identifying equipment which is exempt from this section because is it in VOC service less than 300 hours per calendar year.

SECTION F.1 [Reserved]

Emissions Unit Description:

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

F.1.1 [Reserved]

F.1.2 [Reserved]

F.1.3 [Reserved]

F.1.4 [Reserved]

F.1.5 [Reserved]

F.1.6 [Reserved]

F.1.7 [Reserved]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

F.1.8 [Reserved]

F.1.9 [Reserved]

F.1.10 [Reserved]

F.1.11 [Reserved]

F.1.12 [Reserved]

F.1.13 [Reserved]

Other Flexible Permit Requirements

F.1.14 [Reserved]

F.1.15 [Reserved]

SECTION F.2 EMISSIONS UNIT OPERATION CONDITIONS CHANGE MANAGEMENT AND FLEXIBLE PERMIT CONDITIONS FOR THE NARASIN PROCESS EQUIPMENT

Emissions Unit Description:

The information described in the following paragraphs is descriptive information and does not constitute enforceable conditions:

Section F.2 is applicable to process equipment directly associated with the Narasin production. Some of the equipment associated with Narasin production may be used to make other products (herein referred to as Non Narasin Process) when it is not making Narasin.

The Narasin production equipment that IS affected by the proposed modifications include:

- Fermentation Batch Make-up (Emission Unit: EU-1)
- Fermentation Bump Tanks (EU-2)
- Fermenters (EU-3)
- Fermentation Harvest Tanks (EU-4)
- Dry Raw Materials Unloading and Storage (EU-5)
- Liquid Raw Materials Unloading and Storage (EU-6)
- Fermentation Vacuum Cleaning (EU-7)
- Recovery Process (EU-8)
- New Amyl Alcohol Unloading and Storage (EU-9)
- New Clay Unloading and Storage (EU-10)
- Finishing Process (EU-11)

The areas and manufacturing processes that ARE NOT affected by the proposed modifications include:

- Non-Narasin Fermentation Operations
- Non-Narasin Recovery Operations
- Non-Narasin Finishing Operations Analytical Support Laboratories
- Boilers for steam production
- Utilities operations
- Waste Water Treatment Facilities.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

F.2.1 Emission Limits [326 IAC 2-2]

VOC emissions from the facilities operating under the flexible permit conditions shall not exceed three hundred (300) tons per 12-month period, rolled on a calendar month basis.

During the first calendar year after permit issuance; VOC emissions from the facilities operating under the flexible permit conditions shall not exceed twenty five (25) tons multiplied by the number of calendar months the permit has been in effect.

VOC emissions limits from the fermenter emission unit (EU-3) are included in Section D.2.3.

F.2.2 Site Modifications and Advance Approval of Modifications [326 IAC 2-7-5(9)] [326 IAC 2-7-5(16)]

The Permittee may make modifications described in subsection (a) below to the operations described in Section F.2 of this permit. If actual emissions do not exceed the limits in Section F.2.1, and the Permittee complies with the other provisions of this section, then the

Permittee is not required to obtain a source modification approval (otherwise required by 326 IAC 2-7-10.5), a Title V permit modification (otherwise required by 326 IAC 2-7-12), or a Prevention of Significant Deterioration permit (otherwise required by 326 IAC 2-2).

(a) Permitted Modifications

The Permittee may implement changes, including but not limited to, the following modifications in the Narasin Process Equipment (Emission Units 1 - 11) without triggering the administrative review processes described above:

- (1) Process changes to the Narasin process, including but not limited to, raw material storage/utilization, process operating conditions, process operating steps, product specifications, final products manufactured;
- (2) Changes to existing equipment in the Narasin process, including but not limited to, a physical change to existing equipment, reconstruction, or replacement of existing equipment. Equipment includes but is not limited to: Storage tanks/bins/silos, process tanks/bins/hoppers, cyclones, material transfer equipment/piping/ducting, evaporators, heat exchangers, condensers, columns, mills, coolers, screeners, mixers, feeders, baggers, heat exchangers, decanters, dryers, baghouses;
- (3) Addition of new equipment to the Narasin process, including but not limited to, Storage tanks/bins/silos, process tanks/bins/hoppers, cyclones, material transfer equipment/piping/ducting, evaporators, heat exchangers, condensers, columns, mills, coolers, screeners, mixers, feeders, baggers, heat exchangers, decanters, dryers, baghouses;
- (4) Reconstruction or replacement of existing production buildings.
- (5) Each type of change included in Sections F.2.2(a)(1), F.2.2(a)(2), F.2.2(a)(3), and F.2.2(a)(4) could occur by itself, or in combination with one or more of the other types of changes.

(b) Advance Approval and Applicable Requirements

In addition to the emission limits identified in Condition F.2.1 of this permit, the emission limits and standards, testing and monitoring requirements, record keeping requirements, reporting requirements, and other permit conditions applicable to the type of equipment or operation being modified, replaced, reconstructed or installed are described in Sections D.2, D.3, and D.4 of this permit. Each modification will be subject to the relevant provisions of those permit conditions. If a modification would cause an applicable requirement that is not described in this permit to apply, the Permittee shall obtain a source modification approval if otherwise required by 326 IAC 2-7-10.5 and a Title V permit modification pursuant to 326 IAC 2-7-12.

F.2.3 Volatile Organic Compound (VOC) Emission Limit Determination

The Permittee shall determine actual annual emissions, in tons, each quarter by employing the following techniques:

- (a) The following requirements apply to the Carbon Adsorbers CA460 and CA190:
- (1) VOC measurement: The requirements for measuring VOC concentrations in the exhaust gas are described in Sections D.3 and D.4.
 - (2) Gas flow rate measurement: The Permittee shall measure the actual gas flow rate at the carbon adsorbers with a flow monitoring system, or determine it with engineering calculations.
 - (3) Emission calculation: The Permittee shall calculate VOC emissions by using the VOC concentration data and gas flow rate.

- (4) Data substitution:
 - (A) During periods of CEMS calibration, the Permittee shall substitute in one minute increments, the last valid VOC concentration measurement obtained prior to the calibration in lieu of actual readings from the VOC CEMS.
 - (B) During periods of flow meter calibration, the Permittee shall substitute in one minute increments, the last valid gas flow rate measurement obtained prior to the calibration in lieu of actual readings from the flow meter.
 - (C) During periods of CEMS maintenance, malfunction, or repair; other periods of invalid VOC data collection; or any periods when VOC CEMS may not be operating and its operation is not required for compliance the Permittee shall substitute the applicable concentration based limit in lieu of actual readings from the VOC CEMS
 - (D) During periods of flow meter maintenance, malfunction, or repair; other periods of invalid gas flow rate data collection; or any periods when flow meter may not be operating and its operation is not required for compliance, the Permittee shall substitute span value of the flowmeter or the highest expected flow based on historical operation.
- (5) Minimum data collection requirements:

The requirements for monitoring and recording VOC concentrations are described in Section D.3 and D.4.
- (b) Emissions not vented to the Carbon Adsorbers CA460/CA190:

The Permittee shall determine monthly point source VOC emissions from emission units not vented through the carbon adsorbers. The Permittee may use engineering calculation methods based on ideal gas law equations, stoichiometry, or mass balance to estimate these emissions.
- (c) Emissions during Carbon Adsorber CA460/CA190 bypass periods:

The Permittee shall determine monthly VOC emissions during bypass periods. The Permittee may use engineering calculation methods based on ideal gas law equations, stoichiometry, or mass balance to estimate these emissions.
- (d) Fugitive Emissions:
 - (1) The Permittee shall determine monthly fugitive VOC emissions. Emissions for all component types except connectors will be calculated using the "SOCMI Average Emission factors" found at Table 2-1 of the EPA document "Protocol for Equipment Leak Emission Estimates," EPA-453/R-95-017, November 1995. As this document does not provide for any adjustment in connector emissions for the connector's service conditions, the connector emission factors developed by the Texas Council on Environmental Quality (TCEQ) for that purpose will be used. These are found in the TCEQ document "Emissions Factors for Equipment Leak Fugitive Components" (Addendum to RG-360A, January 2008) The emission control factor for an audible/visible/olfactory leak repair program will also be taken from TCEQ, in this case from the TCEQ document "Air Permit Technical Guidance for Chemical Sources: Equipment Leak Fugitives" (October, 2000).

Record Keeping and Reporting [326 IAC 2-7-5(3)]

F.2.4 Records and Reporting of Emissions

- (a) The Permittee shall record and maintain records of all information necessary for estimating emissions including all measurements and calculations described in Conditions F.2.2 and F.2.3.
- (b) The Permittee shall submit a quarterly report of actual emissions of VOC, as determined in accordance with Sections F.2.2 and F.2.3.

F.2.5 Records and Reporting of Site Modifications [326 IAC 2-7-5(16)] [326 IAC 2-7-20(a)][40 CFR 63.1259] [40 CFR 63.1260]

- (a) Changes made pursuant to advance approval provisions:

The Permittee shall record and maintain records of all modifications that would have otherwise required a revision to this permit pursuant to 326 IAC 2-7-12 or a source modification approval if the provisions of 326 IAC 2-7-10.5 were applicable.

F.2.6 Notifications for Site Modifications [326 IAC 2-1.1-12(c) to (f)]

- (a) The Permittee shall submit a notification for any modification that would have otherwise required a source modification approval if the provisions of 326 IAC 2-7-10.5 were applicable, to the address listed in Section C, Condition C.19 – General Reporting Requirements, at least ten (10) days before implementing the modification.
- (b) The notification shall include the following information:
- (1) The company name and address and source and permit identification numbers;
 - (2) A description of the physical or operational change, including an estimate of the potential to emit of the emissions associated with the change;
 - (3) An identification of the emission unit or units being changed on the layout diagram of the source;
 - (4) The schedule for constructing each physical change and implementing each operational change;
 - (5) Identification of any applicable requirements that are applicable to the physical or operational change and include any monitoring, record keeping, or reporting requirements;
 - (6) A statement for all regulated pollutants, except the pollutant for which the emissions limit has been established, that demonstrates that the physical or operational change will not trigger any federal or state permitting requirement for any regulated pollutant; and
 - (7) A statement that the physical or operational change will not result in emissions greater than the emission limits.
- (c) This notification does not require the certification by the “responsible official” as defined by 326 IAC 2-7-1(34).

Other Flexible Permit Requirements

F.2.7 Valid Period for Best Available Control Technology [326 IAC 2-2-3(4)]

The modifications that occur under this permit qualify as a single, ongoing phase of construction and modification to Clinton Laboratories. The BACT requirements established in Sections D.2, D.3, and D.4 shall remain valid over the entire period of this permit. If the time between consecutive modifications exceeds 18 months, the Permittee shall demonstrate that the initial BACT determination incorporated into the permit is still valid or propose new BACT requirements. Upon expiration of this permit, Major New Source Review (NSR) requirements (Prevention of Significant Deterioration and Nonattainment NSR) shall apply.

F.2.8 NSPS and NESHAP Pre-Construction Notification and Reviews

The provisions of this permit do not relieve the Permittee of the notification and pre-construction approval requirements found in 40 CFR 60.7, 40 CFR 61.07, 40 CFR 61.08, and 40 CFR 63.5. If the Permittee constructs, reconstructs, or modifies an affected facility in a manner that requires notification or pre-construction approval under 40 CFR 60.7, 40 CFR 61.07, 40 CFR 61.08, or 40 CFR 63.5, the Permittee shall comply with those requirements.

SECTION G PLANTWIDE APPLICABILITY LIMITATION REQUIREMENTS

Emissions Unit Description:

The entire plant site is subject to the plantwide applicability limitation (PAL) requirements described in this G Section

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Source Wide Emission Limits [326 IAC 2-2.4-7(1)]

G.1.1 Emission limits [326 IAC 2-2.4-7(1)]

- (a) Nitrogen oxides (NO_x) emissions from the entire source shall not exceed 776 tons per 12 consecutive month period with compliance determined at the end of each month. This provision does not supersede any other NO_x emission limits contained in this permit.
- (b) Sulfur dioxide (SO₂) emissions from the entire source shall not exceed 2321 tons per 12 consecutive month period with compliance determined at the end of each month. This provision does not supersede any other SO₂ emission limits contained in this permit.

General PAL requirements [326 IAC 2-2.4-1]

G.1.2 Major New Source Review Applicability [326 IAC 2-2.4-1(c)]

Any physical change in or change in the method of operation of this source is not a major modification for NO_x or SO₂, and is not subject to the review requirements of 326 IAC 2-2 provided actual emissions of NO_x and SO₂ from the entire source do not exceed the emission limits in Condition G.1.1 of this permit. This provision does not supersede or affect the Flexible Permit requirements in Section F of this permit.

G.1.3 General PAL requirements [326 IAC 2-2.4-7, 326 IAC 2-2.4-8, 326 IAC 2-2.4-9, 326 IAC 2-2.4-10, 326 IAC 2-2.4-11, 326 IAC 2-2.4-15]

- (a) The requirements of this section G become effective on the issuance date of the significant permit modification containing the PAL requirements, and expire ten years after the issuance date of the significant permit modification containing the PAL requirements.
- (b) If the permittee applies to renew this PAL at least six months prior to expiration of the PAL, but no earlier than eighteen months prior to the expiration of the PAL, then notwithstanding the expiration date in subsection G.1.3(a), the PAL shall continue to be effective until the revised permit with the renewed PAL is issued. The application must contain the elements described in 326 IAC 2-2.4-3 and 326 IAC 2-2.4-10.
- (c) Once this PAL expires, if not otherwise renewed, then the requirements of 326 IAC 2-2.4-9 are applicable.
- (d) The requirements for renewing this PAL are described in 326 IAC 2-2.4-10.
- (e) The requirements for increasing the emissions limits described in Condition G.1.1 are described in 326 IAC 2-2.4-11.
- (f) The requirements applicable to terminating or revoking this PAL are described in 326 IAC 2-2.4-15.

Testing and Monitoring Requirements [326 IAC 2-2.4-7(6) & (7)] [326 IAC 2-2.4-12]

G.1.4 Nitrogen Oxides (NO_x) Emission Limit Determination [326 IAC 2-2.4-7(6) & (7)] [326 IAC 2-2.4-12]

The Permittee shall determine actual annual emissions of NO_x by employing the following techniques:

- (a) The Permittee shall calculate NO_x emissions from the C31 Boiler, in tons, each calendar month, by multiplying the amount of coal consumed in each calendar month by an NO_x emission factor of 22 lb NO_x/ton of coal burned.
- (b) The Permittee shall calculate NO_x emissions from burning natural gas in C21 Boilers 1, 2, and 3, in tons, each calendar month, by multiplying the amount of natural gas burned in each calendar month by an NO_x emission factor of 100 lb NO_x/million cubic feet of natural gas.
- (c) The Permittee shall calculate NO_x emissions from burning natural gas in C21 Boiler 4 and the C31 Boiler, in tons, each calendar month, by multiplying the amount of natural gas burned in each calendar month by an NO_x emission factor of 280 lb NO_x/million cubic feet of natural gas.
- (d) The Permittee shall determine NO_x emissions from the diesel engines, in tons, each calendar month by multiplying the actual hours of operation per calendar month for each diesel engine by emission factors listed in the table below.

Engine	NO _x emission factor [lb/hr]
C24 Fire Pump 1	9.48
C24 Fire Pump 2	9.48
C44 Emergency Generator	17.60
C55 Emergency Generator	5.73
C79 Back up pump/generator	15.55

- (e) When determining actual annual emissions of NO_x, the Permittee shall include emissions occurring as a result of startups, shutdown, and malfunctions to the extent such emissions are greater than the emission factors expressed in (a) through (d) above.

G.1.5 Sulfur dioxides (SO₂) emission limit determination [326 IAC 2-2.4-7(6) & (7)][326 IAC 2-2.4-12]

The Permittee shall determine actual annual emissions of SO₂ by employing the following techniques:

- (a) The Permittee shall calculate SO₂ emissions from the C31 Boiler, in tons, each calendar month, by multiplying the amount of coal consumed in each calendar month by an SO₂ emission factor of 0.38*S lb SO₂/ton of coal burned, where S = the percent sulfur content of the coal as determined by Condition D.1.6.
- (b) The Permittee shall calculate SO₂ emissions from burning natural gas in the C31 Boiler and C21 Boilers 1, 2, 3 and 4, in tons, each calendar month, by multiplying the amount of natural gas burned in each calendar month by an SO₂ emission factor of 0.6 lb SO₂/million cubic feet of natural gas burned.
- (c) The Permittee shall determine SO₂ emissions from diesel engines, in tons, each calendar month, the Permittee shall calculate SO₂ emissions from the diesel engines by multiplying the actual hours of operation per calendar month for each diesel engine by emission factors listed in the table below.

Engine	SO2 emission factor [lb/hr]
C24 Fire Pump 1	0.62
C24 Fire Pump 2	0.62
C44 Emergency Generator	1.16
C55 Emergency Generator	0.38
C79 Back up pump/generator	2.45

- (d) When determining actual annual emissions of SO₂, the Permittee shall include emissions occurring as a result of startups, shutdown, and malfunctions to the extent such emissions are greater than the emission factors expressed in (a) through (c) above.

G.1.6 Validation and Revalidation of emissions determination methods [326 IAC 2-2.4-12(i)]

- (a) The Permittee shall revalidate the emissions determination methods described in Conditions G.1.4 and G.1.5 through performance testing or other scientifically valid means approved by the department no later than five years after the effective date of the PAL provisions.
- (b) The Permittee shall conduct validation testing on the NO_x emission factor for the C31 boiler no later than 6 months after the issuance of the significant permit modification establishing the PAL requirements. If the validation testing shows an emission factor that is greater than the factor described in Condition G.1.4(a), then Condition G.1.4(a) shall be revised to require the Permittee to use the emission factor that resulted from the validation testing.

Record keeping and reporting [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

G.1.7 Record keeping requirements [326 IAC 2-7-5(3)] [326 IAC 2-2.4-13]

- (a) The Permittee shall retain a copy of all records necessary to determine compliance with the requirements of this G Section, including a determination of each emissions unit's twelve (12) month rolling total emissions, for five years from the date of the record.
- (b) The Permittee shall retain a copy of the PAL permit application, any applications for revisions to the PAL, each annual compliance certification as required by Condition B.9 of this permit, and data relied on in the certification for the duration of the PAL plus five years.

G.1.8 Reporting requirements [326 IAC 2-7-5(3)] [326 IAC 2-2.4-14]

- (a) The Permittee shall submit a report, containing the information described below, to the address listed in Section C – General Reporting Requirements, within thirty (30) days after the end of the calendar quarter being reported. This report requires the certification by the "responsible official" as defined by 326 IAC 2-7-1(34). The report shall include the following information:
- (1) The identification of the owner and operator of the facility and the permit number.
 - (2) Total emissions of NO_x and SO₂, in tons per rolling 12 month period for each month in the reporting period, as determined by Conditions G.1.4 and G.1.5.
 - (3) All data relied upon, including but not limited to, any quality assurance or quality control data, in determining emissions.
 - (4) A list of any emissions units modified or added to the major stationary source during the reporting period.

- (b) The procedures for reporting deviations from the requirements of this Section G, and the procedures for reporting emissions in excess of the limits described in Condition G.1.1 are described in Condition B.14. A report that describes emissions exceeding the PAL limits shall include the quantity of emissions emitted by the source. This term satisfies the requirements of 326 IAC 2-2.4-14(c).
- (c) The Permittee shall submit to the department the results of any revalidation test or method within three months of completion of the test or method. These results do not require responsible official certification.

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
PART 70 OPERATING PERMIT
CERTIFICATION**

Source Name: Eli Lilly and Company - Clinton Laboratories
Source Address: 10500 South Road 63, Clinton, Indiana 47842
Part 70 Permit No.: T165-27283-00009

This certification shall be included when submitting monitoring, testing reports/results or other documents as required by this permit.

Please check what document is being certified:

- Annual Compliance Certification Letter
- Test Result (specify)
- Report (specify)
- Notification (specify)
- Affidavit (specify)
- Other (specify)

I certify that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

Signature:

Printed Name:

Title/Position:

Phone:

Date:

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
Phone: (317) 233-0178
Fax: (317) 233-6865**

**PART 70 OPERATING PERMIT
EMERGENCY OCCURRENCE REPORT**

Source Name: Eli Lilly and Company - Clinton Laboratories
Source Address: 10500 South Road 63, Clinton, Indiana 47842
Part 70 Permit No.: T165-27283-00009

This form consists of 2 pages

Page 1 of 2

- This is an emergency as defined in 326 IAC 2-7-1(12)
- The Permittee must notify the Office of Air Quality (OAQ), not later than four (4) daytime business hours (1-800-451-6027 or 317-233-0178, ask for Compliance Section); and
 - The Permittee must submit notice in writing or by facsimile not later than two (2) working days (Facsimile Number: 317-233-6865), and follow the other requirements of 326 IAC 2-7-16.

If any of the following are not applicable, mark N/A

Facility/Equipment/Operation:
Control Equipment:
Permit Condition or Operation Limitation in Permit:
Description of the Emergency:
Describe the cause of the Emergency:

If any of the following are not applicable, mark N/A

Page 2 of 2

Date/Time Emergency started:
Date/Time Emergency was corrected:
Was the facility being properly operated at the time of the emergency? Y N
Type of Pollutants Emitted: TSP, PM-10, SO ₂ , VOC, NO _x , CO, Pb, other:
Estimated amount of pollutant(s) emitted during emergency:
Describe the steps taken to mitigate the problem:
Describe the corrective actions/response steps taken:
Describe the measures taken to minimize emissions:
If applicable, describe the reasons why continued operation of the facilities are necessary to prevent imminent injury to persons, severe damage to equipment, substantial loss of capital investment, or loss of product or raw materials of substantial economic value:

Form Completed by: _____

Title / Position: _____

Date: _____

Phone: _____

A certification is not required for this report.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT OFFICE OF AIR QUALITY

Section G.1 –Plantwide Applicability Limitations Requirements Quarterly Emission Limit Report

Source Name: Eli Lilly and Company - Clinton Laboratories
Source Address: 10500 South Road 63, Clinton, Indiana 47842
Part 70 Permit No.: T165-27283-00009
Facility: Source wide
Parameter: Plantwide Emission Limits for NO_x, and SO₂
PAL Limit:

Pollutant	(Tons/yr)
NO _x	776
SO ₂	2,321

The attached spreadsheet provides the monthly actual emissions for the PAL NO_x and SO₂ limits. The information is used to determine compliance with the emission limits provided above. This emission summary report was:

Submitted by: _____

Title / Position: _____

Signature: _____

Date: _____

Phone: _____

Attach a signed certification that meets the requirements of 326 IAC 2-7-6(1) to complete this report.

Quarter: Pollutant	Year:	Actual Emission Estimates, tons								
		Month 1	Previous 11 Months	12-month Total	Month 2	Previous 11 Months	12-month Total	Month 3	Previous 11 Months	12-month total
SO ₂										
Site Total										
PAL Limits										
NO _x										
SO ₂										

Submitted by: _____

Title / Position: _____

Signature: _____

Date: _____

Phone: _____

Attach a signed certification that meets the requirements of 326 IAC 2-7-6(1) to complete this report.

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
 OFFICE OF AIR QUALITY
 COMPLIANCE AND ENFORCEMENT BRANCH
 PART 70 OPERATING PERMIT
 QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT**

Source Name: Eli Lilly and Company - Clinton Laboratories
 Source Address: 10500 South Road 63, Clinton, Indiana 47842
 Part 70 Permit No.: T165-27283-00009

Months: _____ to _____ Year: _____

This report shall be submitted quarterly based on a calendar year. Any deviation from the requirements of this permit, the date(s) of each deviation, the probable cause of the deviation, and the response steps taken must be reported. A deviation required to be reported pursuant to an applicable requirement that exists independent of the permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. Additional pages may be attached if necessary. If no deviations occurred, please specify in the box marked "No deviations occurred this reporting period".	
<input type="checkbox"/> NO DEVIATIONS OCCURRED THIS REPORTING PERIOD.	
<input type="checkbox"/> THE FOLLOWING DEVIATIONS OCCURRED THIS REPORTING PERIOD	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Form Completed by: _____

Title / Position: _____

Date: _____

Phone: _____

Attach a signed certification that meets the requirements of 326 IAC 2-7-6(1) to complete this report.

**Indiana Department of Environmental Management
Office of Air Quality**

**Technical Support Document (TSD) for a Part 70 Minor Source and
Minor Permit Modification**

Source Description and Location

Source Name:	Eli Lilly and Company - Clinton Laboratories
Source Location:	10500 South State Road 63, Clinton, IN 47842
County:	Vermillion
SIC Code:	2833, 2834, 2879
Operation Permit No.:	T 165-27283-00009
Operation Permit Issuance Date:	October 16, 2009
Minor Source Modification No.:	165-31344-00009
Minor Permit Modification No.:	165-31347-00009
Permit Reviewer:	Josiah Balogun

Existing Approvals

The source was issued Part 70 Operating Permit No.165-27283-00009 on October 16, 2009. The source has since received the following approvals:

- (a) Significant Permit Modification No. 165-30354-00009, issued on July 19, 2011.

County Attainment Status

The source is located in Vermillion County.

Pollutant	Designation
SO ₂	Better than national standards.
CO	Unclassifiable or attainment effective November 15, 1990.
O ₃	Unclassifiable or attainment effective June 15, 2004, for the 8-hour ozone standard. ¹
PM ₁₀	Attainment effective October 27, 1997, for the part of Clinton Township that includes sections 15, 16, 21, 22, 27, 28, 33, and 34. Unclassifiable effective November 15, 1990, for the remainder of Vermillion County.
NO ₂	Cannot be classified or better than national standards.
Pb	Not designated.

¹Unclassifiable or attainment effective October 18, 2000, for the 1-hour ozone standard which was revoked effective June 15, 2005. Unclassifiable or attainment effective April 5, 2005, for PM_{2.5}.

- (a) Ozone Standards
Volatile organic compounds (VOC) and Nitrogen Oxides (NOx) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone. Therefore, VOC and NOx emissions are considered when evaluating the rule applicability relating to ozone. Vermillion County has been designated as attainment or unclassifiable for ozone. Therefore, VOC and NOx emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

- (b) **PM_{2.5}**
 Vermillion County has been classified as attainment for PM_{2.5}. On May 8, 2008 U.S. EPA promulgated the requirements for Prevention of Significant Deterioration (PSD) for PM_{2.5} emissions. These rules became effective on July 15, 2008. On May 4, 2011 the air pollution control board issued an emergency rule establishing the direct PM_{2.5} significant level at ten (10) tons per year. This rule became effective, June 28, 2011. Therefore, direct PM_{2.5} and SO₂ emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2. See the State Rule Applicability – Entire Source section.
- (c) **Other Criteria Pollutants**
 Vermillion County has been classified as attainment or unclassifiable in Indiana for all criteria pollutants. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

Fugitive Emissions

Since this source is classified as a pharmaceutical operation, it is considered one of the twenty-eight (28) listed source categories, as specified in 326 IAC 2-2, 326 IAC 2-3, or 326 IAC 2-7. Therefore, fugitive emissions are counted toward the determination of PSD, Emission Offset, and Part 70 Permit applicability.

Source Status

The table below summarizes the potential to emit of the entire source, prior to the proposed modification, after consideration of all enforceable limits established in the effective permits:

Pollutant	Emissions (ton/yr)
PM	> 100
PM ₁₀	> 100
PM _{2.5}	> 100
SO ₂	> 100
VOC	> 100
CO	> 100
NO _x	> 100
GHGs as CO ₂ e	----
HAPs	
Single HAPs	> 10
Total HAPs	> 25

- (a) This existing source is a major stationary source, under PSD (326 IAC 2-2), because a regulated pollutant is emitted at a rate of 100 tons per year or more, and it is one of the twenty-eight (28) listed source categories, as specified in 326 IAC 2-2-1(ff)(1).
- (b) This existing source is a major source of HAPs, as defined in 40 CFR 63.2, because HAP emissions are greater than ten (10) tons per year for a single HAP and greater than twenty-five (25) tons per year for a combination of HAPs. Therefore, this source is a major source under Section 112 of the Clean Air Act (CAA).
- (c) These emissions are based upon Part 70 operating Permit No. 165-27283-00009, issued on October 16, 2009.

Actual Emissions

The following table shows the actual emissions as reported by the source. This information reflects the 2010 OAQ emission data.

Pollutant	Actual Emissions (tons/year)
PM ₁₀	48
PM _{2.5}	11
SO ₂	2,078
VOC	606
CO	19
NO _x	626
Ammonia	1
Lead	0.02

Description of Proposed Modification

The Office of Air Quality (OAQ) has reviewed a modification application, submitted by Eli Lilly and Company - Clinton Laboratories on January 9, 2012, relating to the modification to their Monensin Product Recovery Process. The following is a list of the proposed and modified emission unit(s) and pollution control device(s):

The modifications to the Monensin process include the following changes:

- (a) the addition of two new fermenters in Building C41;
- (b) the addition of three centrifuges in Building C45;
- (c) the addition of two conveyors in Building C45;
- (d) the modification of one existing conveyor and
- (e) the addition of a concentrate tank in Building C45.

Enforcement Issues

There are no pending enforcement actions.

Emission Calculations

See Appendix A of this Technical Support Document for detailed emission calculations.

Permit Level Determination – Part 70

Pursuant to 326 IAC 2-1.1-1(16), Potential to Emit is defined as “the maximum capacity of a stationary source or emission unit to emit any air pollutant under its physical and operational design. Any physical or operational limitation on the capacity of a source to emit an air pollutant, including air pollution control equipment and restrictions on hours of operation or type or amount of material combusted, stored, or processed shall be treated as part of its design if the limitation is enforceable by the U. S. EPA, IDEM, or the appropriate local air pollution control agency.”

The following table is used to determine the appropriate permit level under 326 IAC 2-7-10.5. This table reflects the PTE before controls. Control equipment is not considered federally enforceable until it has been required in a federally enforceable permit.

Increase in PTE Before Controls of the Modification	
Pollutant	Potential To Emit (ton/yr)
PM	10.4
PM ₁₀	6.6
PM _{2.5}	2.8
SO ₂	0
VOC	19
CO	0
NO _x	0
GHGs as CO ₂ e	4,426
Single HAPs	--
Total HAPs	--

Pursuant to 326 IAC 2-7-10.5(d)(4), this source modification will be a minor source modification because the PM, PM₁₀, PM_{2.5}, and VOC emissions are less than twenty five (25) tons per year. Additionally, the modification will be incorporated into the Part 70 Operating Permit through a minor permit modification issued pursuant to 326 IAC 2-7-12, because the modification does not involve significant changes to the monitoring and record keeping requirements.

Permit Level Determination – PSD

The table below summarizes the potential to emit, reflecting all limits, of the emission units. Any control equipment is considered federally enforceable only after issuance of this Part 70 permit modification, and only to the extent that the effect of the control equipment is made practically enforceable in the permit.

Process / Emission Unit	Potential to Emit (ton/yr)							
	PM	PM₁₀	PM_{2.5}*	SO₂	VOC	CO	NO_x	GHGs
Two (2) Fermenters	10.4	6.6	2.8	0	0	0	0	4,426
Centrifuge								
COS109J	0	0	0	0	5.1	0	0	0
COS109H	0	0	0	0	10.4	0	0	0
TK118A	0	0	0	0	3.3	0	0	0
Total for Modification	10.4	6.6	2.8	0	19	0	0	4,426
Significant Level	25	15	10	40	40	100	40	75,000 GHGs as CO₂e

This modification to an existing major stationary source is not major because the emissions increase is less than the PSD significant levels. Therefore, pursuant to 326 IAC 2-2, the PSD requirements do not apply.

Federal Rule Applicability Determination

- (a) Pursuant to 40 CFR 64.2, Compliance Assurance Monitoring (CAM) is applicable to new or modified emission units that involve a pollutant-specific emission unit and meet the following criteria:
- (1) has a potential to emit before controls equal to or greater than the Part 70 major source threshold for the pollutant involved;
 - (2) is subject to an emission limitation or standard for that pollutant; and
 - (3) uses a control device, as defined in 40 CFR 64.1, to comply with that emission limitation or standard.

The emission units have the potential to emit regulated pollutants (uncontrolled) less than the major source thresholds.

Based on this evaluation, the requirements of 40 CFR Part 64, CAM are not applicable to any of the modified units as part of this modification.

- (b) There are no New Source Performance Standards (NSPS)(326 IAC 12 and 40 CFR Part 60) applicable to this proposed modification .
- (c) There are no National Emission Standards for Hazardous Air Pollutants (NESHAPs) (326 IAC 14, 326 IAC 20 and 40 CFR Part 63) applicable to this proposed modification

State Rule Applicability Determination

326 IAC 2-2 (PSD)

PSD applicability is discussed under the Permit Level Determination – PSD section.

326 IAC 2-4.1 (Major Sources of Hazardous Air Pollutants (HAP))

The operation of new fermenters, centrifuges, conveyors and the concentrate tanks will emit less than ten (10) tons per year for a single HAP and less than twenty-five (25) tons per year for a combination of HAPs. Therefore, 326 IAC 2-4.1 does not apply.

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)

Pursuant to 326 IAC 6-3-2, the allowable particulate matter (PM) from the emission units shall be as follows. The pound per hour limitation was calculated with the following equation:

Interpolation of the data for the process weight rate up to sixty thousand (60,000) pounds per hour was accomplished by use of the equation:

$$E = 4.10 P^{0.67}$$

Where:

- E = rate of emission in pounds per hour and
- P = process weight rate in tons per hour

Emission Unit	Emission Unit Description	Process Weight Rate (tons/hour)	Rule 326 IAC 6-3-2 PM Emission Limit (lb/hr)
TKF33	Fermenter	9.256	18.2
TKF34	Fermenter	9.256	18.2

326 IAC 8-1-6 (New Facilities; General Reduction Requirements)

The uncontrolled VOC emissions from the fermenters, centrifuges, conveyors and the concentrate tanks are less than 25 tons per year, each. Therefore, the requirements of 326 IAC 8-1-6 (New Facilities; General Reduction Requirements) do not apply to these emission units for this modification.

Compliance Determination and Monitoring Requirements

Permits issued under 326 IAC 2-7 are required to ensure that sources can demonstrate compliance with all applicable state and federal rules on a continuous basis. All state and federal rules contain compliance provisions; however, these provisions do not always fulfill the requirement for a continuous demonstration. When this occurs, IDEM, OAQ, in conjunction with the source, must develop specific conditions to satisfy 326 IAC 2-7-5. As a result, Compliance Determination Requirements are included in the permit. The Compliance Determination Requirements in Section D of the permit are those conditions that are found directly within state and federal rules and the violation of which serves as grounds for enforcement action.

If the Compliance Determination Requirements are not sufficient to demonstrate continuous compliance, they will be supplemented with Compliance Monitoring Requirements, also in Section D of the permit. Unlike Compliance Determination Requirements, failure to meet Compliance Monitoring conditions would serve as a trigger for corrective actions and not grounds for enforcement action. However, a violation in relation to a compliance monitoring condition will arise through a source's failure to take the appropriate corrective actions within a specific time period.

The Compliance Determination Requirements applicable to this modification are as follows:

The carbon adsorbers used to control VOC emissions from centrifuges, conveyors, and tank are operated on a voluntary basis therefore, there are no monitoring requirements. The cyclones on the fermenters are operated on a voluntary basis and do not need any monitoring requirements.

Proposed Changes

The changes listed below have been made to Part 70 Operating Permit No. 165-27283-00009. Deleted language appears as ~~strike throughs~~ and new language appears in **bold**:

Change 1: Section A.3 - Specifically Regulated Insignificant Activities has been updated in the permit accordingly.

A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)] [326 IAC 2-7-4(c)]
[326 IAC 2-7-5(15)]

(a) This stationary source also includes the following insignificant activities which are specifically regulated, as defined in 326 IAC 2-7-1(21):

.....

(35) Other activities below insignificant threshold levels:

(A) *****.

(B) Tanks C9TK01, TK02, TK03, TK04 TK6A TK09, TK10 TK11, TK12, TK13, TK14, TK15, TK16, TK17, **and** TK19 **and** TK20 may be used for insignificant activities.

(C) Waste water treatment system with VOC emissions less than three (3) pounds per hour or fifteen (15) pounds per day.

(D) Loading and unloading stations, storage tanks, processing tanks,

crystallizers, and centrifuges for the processing of chicken and lard oil may be used for insignificant activities.

Change 2: The new emission units and their conditions have been added to Section D.2 of the permit.

SECTION D.2 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description: AHM - Fermentation Operations

(a) The following Unit IDs have applicable conditions in this D Section:

Bldg.	Unit ID*	Narasin Emission Unit***	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C41	TKF01	3	Fermenter	PVC41F01	Cyclone F1VLS	50,000	Gallo ns
....
C41A	TKF33	No	Fermenter	PVC41AF33	Cyclone F33VLS	50,000	Gallo ns
C41A	TKF34	No	Fermenter	PVC41AF34	Cyclone F34VLS	50,000	Gallo ns
....

*Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).
 ** Control devices marked with a double asterisk are required to meet an applicable limitation.
 *** A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(b) The following Unit IDs are not subject to applicable requirements, and are listed only for informational purposes

*Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).
 ** Control devices marked with a double asterisk are required to meet an applicable limitation.
 *** A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the equipment is not associated with the Narasin Process.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.2.1 Particulate Matter (PM) [326 IAC 6-3-2]

(a) Pursuant to 326 IAC 6-3-2, particulate matter (PM) emissions from each fermenter (TKF01 through ~~TKF32~~ **TKF34**) shall not exceed 18.2 pounds per hour based on a maximum throughput of 9.256 tons per hour.

Change 3: The new emission units have been added to Section D.3 and some of the existing emission units have been modified accordingly.

SECTION D.3 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description: AHM - Product Recovery Operations

(a) The following Unit IDs have applicable conditions in this D Section:

(b) The following Unit IDs are not subject to applicable requirements, and are listed only for informational purposes

Bldg.	Unit ID*	Narasin Emission Unit***	Unit Description	Stack/Vent ID	Control**	Capacity	Units
C45	EV002	No	EVAPORATOR	PVC45EV002		9,000	Gallons
C45	CENT114A*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT115A*	No	CENTRIFUGE	N/A		N/A	N/A
C45	CENT117A*	No	CENTRIFUGE	N/A		N/A	N/A
C45	COL201*	No	DISTILLATION COLUMN	PVC45TK201		2,100	Gallons
C45	COL204*	8	DISTILLATION COLUMN	PVC45TK204		3,800	Gallons
C45	COL219*	No	DISTILLATION COLUMN	PVC45TK219		3,800	Gallons
C45	COS109A	No	SCREW CONVEYOR	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	N/A	N/A
C45	COS109B*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS109D*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS109G*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS109H*	No	SCREW CONVEYOR	N/A	Carbon Adsorber CA103	N/A	N/A
C45	COS109J*	No	SCREW CONVEYOR	N/A	Carbon Adsorber CA103	N/A	N/A
C45	COS153*	8	SCREW CONVEYOR	PVC45COS153	Vent Sock VS153B	N/A	N/A
C45	COS160A*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS160B*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	COS260*	No	SCREW CONVEYOR	N/A		N/A	N/A
C45	D160/VLS160	No	DRYER/VAPOR-LIQUID SEPARATOR	PVC45CA140A PVC45AC103A	Carbon Adsorber CA103 GA140	N/A	N/A
C45	D260/VLS260	No	DRYER/VAPOR-LIQUID SEPARATOR	PVC45CA140A PVC45AC103A	Carbon Adsorber CA103 CA140	N/A	N/A
C45	D16/VS16*	No	DRYER/TRANSFER BAGHOUSE	PVC45AC016A		N/A	N/A
C45	DP17*	No	DRUM PACKER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	EV108*	No	EVAPORATOR	PVC45EV108		1,000	Gallons

C45	EV202*	No	EVAPORATOR	PVC45EV202		937	Gallons
C45	FIL109	No	FILTER BELT	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	N/A	N/A
C45	VF109*	No	VIBRATORY FEEDER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	H107*	No	HOPPER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	SCF160*	No	SCREW CONV. FEEDER	N/A		N/A	N/A
C45	SCF260*	No	SCREW CONV. FEEDER	N/A		N/A	N/A
C45	SCR17*	No	SCREENER	PVC45AC18	Baghouse VS18	N/A	N/A
C45	SM109*	No	SCREW CONV. MIXER	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	N/A	N/A
C45	SM153	No	SCREW CONVEYOR MIXER	PVC45SM153	Vent Sock VS153	N/A	N/A
C45	TK2A*	No	AMYL & WATER TK	N/A		50	Gallons
C45	TK20*	No	PRODUCTION TANK	PVC45TK020		300	Gallons
C45	TK21*	No	SODIUM SLURRY TANK	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	1,100	Gallons
C45	TK22*	No	SODIUM SLURRY TANK	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	1,100	Gallons
C45	TK25*	No	CRYSTALS	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	500	Gallons
C45	TK107*	No	SOLVENT STORAGE TK	N/A		400	Gallons
C45	TK108B*	No	EVAP. TANK FOR EV 108	N/A		68	Gallons
C45	TK109A*	No	AMYL & WATER	N/A		300	Gallons
C45	TK109C*	No	PRODUCTION TANK	PVC45HE109C		432	Gallons
C45	TK114A*	No	CENTRIFUGE TANK	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	470	Gallons
C45	TK114B*	No	CENTRIFUGE TANK	PVC45AC140A PVC45AC103A	Carbon Adsorber CA103 CA140	470	Gallons
C45	TK118A*	No	CENTRIFUGE TANK	PVC45AC103A	Carbon Adsorber CA103	610	Gallons
C45A	TK147/VS147*	10	STORAGE TANK	PVC45AAC147		50	tons
C45	TK460*	8	Tank	N/A		N/A	N/A
C45	HE460B*	8	condensor	N/A		N/A	N/A
C45	FLT460*	8	Filter	N/A		N/A	N/A

*Emissions units marked with a single asterisk are insignificant activities as defined in 326 IAC 2-7-1(21).

** Control devices marked with a double asterisk are required to meet an applicable limitation.

*** A number indicates the Narasin Emission Unit that the equipment is associated with. A "NO" indicates that the

equipment is not associated with the Narasin Process.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

.....

Conclusion and Recommendation

The construction and operations of this proposed modification shall be subject to the conditions of the attached proposed Part 70 Minor Source Modification No. 165-31344-00009 and Minor Permit Modification No. 165-31347-00009. The staff recommends to the Commissioner that this Part 70 Minor Source and Minor Permit Modification be approved.

IDEM Contact

- (a) Questions regarding this proposed permit can be directed to Josiah Balogun at the Indiana Department Environmental Management, Office of Air Quality, Permits Branch, 100 North Senate Avenue, MC 61-53 IGCN 1003, Indianapolis, Indiana 46204-2251 or by telephone at (317) 234-5257 or toll free at 1-800-451-6027 extension 4-5257.
- (b) A copy of the findings is available on the Internet at: <http://www.in.gov/ai/appfiles/idem-caats/>
- (c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM's Guide for Citizen Participation and Permit Guide on the Internet at: www.idem.in.gov

Appendix A: Emissions Calculations

Emission Summary

Source Name: Eli Lilly and Company - Clinton Laboratories

Source Location: 10500 South State Road 63, Clinton IN 47842

Minor Source Modification No: 165-31344-00009

Minor Permit Modification No: 165-31347-00009

Permit Reviewer: Josiah Balogun

Date: 11-Jan-2012

Uncontrolled Potential to Emit

	PM (tons/yr)	PM ₁₀ (tons/yr)	PM _{2.5} (tons/yr)	SO ₂ (tons/yr)	VOC (tons/yr)	CO (tons/yr)	NOx (tons/yr)	GHGs as CO ₂ e (tons/yr)	HAPs (tons/yr)
Emission Unit									
Two (2) fermenters	10.4	6.6	2.8	0	0	0	0	4426	0
Centrifuges									
COS109J	0	0	0	0	5.1	0	0	0	0
COS109H	0	0	0	0	10.4	0	0	0	0
TK118A	0	0	0	0	3.3	0	0	0	0
Total Emissions	10.40	6.60	2.80	0.00	18.80	0.00	0.00	4426.00	0

Limited Potential to Emit

	PM (tons/yr)	PM ₁₀ (tons/yr)	PM _{2.5} (tons/yr)	SO ₂ (tons/yr)	VOC (tons/yr)	CO (tons/yr)	NOx (tons/yr)	GHGs as CO ₂ e (tons/yr)	HAPs (tons/yr)
Emission Unit									
Two (2) fermenters	10.4	6.6	2.8	0	0	0	0	4426	0
Centrifuges									
COS109J	0	0	0	0	5.1	0	0	0	0
COS109H	0	0	0	0	10.4	0	0	0	0
TK118A	0	0	0	0	3.3	0	0	0	0
Total Emissions	10.40	6.60	2.80	0.00	18.80	0.00	0.00	4426.00	0

Point	Flow (ACFM)	Temp (F)	Concentration (ppm)	Mass VOC TPY
COS109J	32.6	134.4	2903	5.1
COS109H	24.1	131.1	8032	10.4
TK118A	21.1	124.4	2922	3.3
			Total PTE	18.8

TPY

Example VOC Emission Calculations:

VOC for emission COS109J

Process Gas Temperature = 134.4 F
 Process Gas Amyl Concentration = 2903 ppm

Molecular Density: 359 ft³/lb mole
 Molecular Weight of Amyl Alcohol: 88.1 g/mol
 Hours per year: 8760 hours
 Standard Temperature: 32 F
 Minutes per hour: 60 minutes
 Lbs / ton : 2000

Temperature Compensation:
 $(460F + \text{Process Gas Temp (F)}) / (460F + 32F)$
 $= (460 + 134.4) / (460 + 32)$
 $= 1.2081$

Emissions = (Gas Flow(ACFM)) / (359 * (temp compensation)) * (concentration (ppm) / 1000000) * molecular weight * 60 * 8760 / 2000

Emissions = ((32.6 / (359 * 1.2081)) * (2903 / 1000000) * 88.1 * 60 * 8760 / 2000)
 = 5.1 tons per year (tpy)

FERMENTER 29 TEST RESULTS - 9/29 - 9/30/2011

Test Parameters	Run 1	Run 3	Average
Date	9/29/2011	9/30/2011	
Start Time	10:50	8:04	
Stop Time	13:30	10:40	
Gas Conditions			
Temperature (oF)	91.7	87.3	89.5
Volumetric Flow Rate (acfm)	6,990	6,270	6,630
Volumetric Flow Rate (scfm)	6,530	5,920	6,220
Volumetric Flow Rate (dscfm)	6,200	5,840	6,020
Carbon Dioxide (% dry)	1.5	2.0	1.8
Oxygen (% dry)	21.0	21.0	21.0
Moisture (%)	5.10	1.31	3.20
Particle Size Cut Point (um)	10.1	10.6	10.3

Test Parameters	Run 2	Run 4	Average
Date	9/29/2011	9/30/2011	
Start Time	14:56	11:05	
Stop Time	17:40	13:50	
Gas Conditions			
Temperature (oF)	92.4	88.2	90.3
Volumetric Flow Rate (acfm)	6,900	6,330	6,610
Volumetric Flow Rate (scfm)	6,440	5,960	6,200
Volumetric Flow Rate (dscfm)	6,260	5,690	5,980
Carbon Dioxide (% dry)	1.5	1.6	1.6
Oxygen (% dry)	21.3	21.1	21.2
Moisture (%)	2.75	4.56	3.66
Particle Size Cut Point (um)	2.51	2.36	2.44

CONTROLLED EMISSIONS			
Filterable PM10 Results			
Concentration (grains/dscf)	0.00226	0.000408	0.00133
Concentration (mg/dscm)	5.18	0.933	3.06
Emission Rate (lb/hr)	0.120	0.0204	0.0703
Emission Rate (ton/yr)	0.527	0.089	0.308
Condensable PM10 Results			
Concentration (grains/dscf)	0.00305	0.00340	0.00322
Concentration (mg/dscm)	6.97	7.79	7.38
Emission Rate (lb/hr)	0.162	0.170	0.166
Emission Rate (ton/yr)	0.709	0.746	0.728
Total PM10 Results			
Concentration (grains/dscf)	0.00531	0.00381	0.00456
Concentration (mg/dscm)	12.2	8.72	10.4
Emission Rate (lb/hr)	0.282	0.191	0.236
Emission Rate (ton/yr)	1.236	0.835	1.036
Total PM > PM10 Results			
Concentration (grains/dscf)	0.00058	0.00025	0.00042
Concentration (mg/dscm)	1.32	0.58	0.95
Emission Rate (lb/hr)	0.031	0.013	0.022
Emission Rate (ton/yr)	0.135	0.056	0.095
Total PM Results			
Concentration (grains/dscf)	0.00589	0.00406	0.00497
Concentration (mg/dscm)	13.5	9.30	11.4
Emission Rate (lb/hr)	0.313	0.203	0.258
Emission Rate (ton/yr)	1.371	0.891	1.131

CONTROLLED EMISSIONS			
Filterable PM2.5 Results			
Concentration (grains/dscf)	0.000530	0.000465	0.000497
Concentration (mg/dscm)	1.21	1.06	1.14
Emission Rate (lb/hr)	0.0284	0.0227	0.0256
Emission Rate (ton/yr)	0.125	0.099	0.112
Condensable PM2.5 Results			
Concentration (grains/dscf)	0.00355	0.00554	0.00454
Concentration (mg/dscm)	8.12	12.7	10.4
Emission Rate (lb/hr)	0.191	0.270	0.230
Emission Rate (ton/yr)	0.835	1.183	1.009
Total PM2.5 Results			
Concentration (grains/dscf)	0.00408	0.00600	0.00504
Concentration (mg/dscm)	9.34	13.7	11.5
Emission Rate (lb/hr)	0.219	0.293	0.256
Emission Rate (ton/yr)	0.959	1.282	1.121
Total PM > PM2.5 Results			
Concentration (grains/dscf)	0.00055	0.00036	0.00045
Concentration (mg/dscm)	1.26	0.818	1.04
Emission Rate (lb/hr)	0.032	0.018	0.025
Emission Rate (ton/yr)	0.140	0.080	0.110
Total PM Results			
Concentration (grains/dscf)	0.00463	0.00636	0.00549
Concentration (mg/dscm)	10.6	14.6	12.6
Emission Rate (lb/hr)	0.251	0.311	0.281
Emission Rate (ton/yr)	1.100	1.362	1.231

UNCONTROLLED EMISSIONS			
PM10 Filterable Control Efficiency (%)	79.5	79.5	79.5
PM10 Condensable Control Efficiency (%)	0	0	0
PM10 - PM15 Control Efficiency (%)	93	93	93
Hours per Year	8760	8760	8760
<PM10 Filterable Emission (ton/yr)	2.570	0.436	1.503
PM10 Condensable Emission (ton/yr)	0.709	0.746	0.728
PM10 Emissions Total (ton/yr)	3.279	1.182	2.231
>PM10 Filterable Emissions (ton/yr)	1.924	0.798	1.361
Total PM Emissions (ton/yr)	5.203	1.980	3.592

UNCONTROLLED EMISSIONS			
PM2.5 Filterable Control Efficiency (%)	51	51	51
PM2.5 Condensable Control Efficiency (%)	0	0	0
PM2.5 - PM15 Control Efficiency (%)	88.5	88.5	88.5
Hours per Year	8760	8760	8760
<PM2.5 Filterable Emission (ton/yr)	0.254	0.203	0.228
PM2.5 Condensable Emission (ton/yr)	0.835	1.183	1.009
PM2.5 Emissions Total (ton/yr)	1.089	1.385	1.237
>PM2.5 Filterable Emissions (ton/yr)	1.219	0.695	0.957
Total PM Emissions (ton/yr)	2.308	2.080	2.194

TOTAL FOR 2 FERMENTERS			
<PM10 Filterable Emission (ton/yr)	5.140	0.872	3.006
PM10 Condensable Emission (ton/yr)	1.419	1.492	1.455
PM10 Emissions Total (ton/yr)	6.558	2.364	4.461
>PM10 Filterable Emissions (ton/yr)	3.848	1.596	2.722
Total PM Emissions (ton/yr)	10.407	3.960	7.184

TOTAL FOR 2 FERMENTERS			
<PM2.5 Filterable Emission (ton/yr)	0.509	0.405	0.457
PM2.5 Condensable Emission (ton/yr)	1.670	2.365	2.017
PM2.5 Emissions Total (ton/yr)	2.178	2.770	2.474
>PM2.5 Filterable Emissions (ton/yr)	2.438	1.390	1.914
Total PM Emissions (ton/yr)	4.616	4.160	4.388

PARTICULATE EMISSION ANALYSIS FOR FERMENTER ADDITION PROJECT - UNCONTROLLED AND ACTUAL

CLINTON LABORATORIES FERMENTATION PARTICULATE RESULTS , SEPTEMBER 29 AND 30, 2011


(Results Shown Are For 2 Proposed Fermenters Combined)

Actual Emissions for 2 fermenters (Tons/yr, as measured)

	Run1	Run2	Run3	Run4
PM2.5 Filterable		0.25		0.20
PM2.5 Condensable		1.67		2.37
PM2.5 Total		1.92		2.56
PM10 Condensable	1.42		1.49	
PM10 Filterable	1.05		0.18	
PM10 Total	2.47		1.67	
PM Total	2.74	2.20	1.78	2.72

Operating Parameter (per fermenter)

Normal Process Rate:	5000-6000	SCFM
Actual Process Rate:	6000	SCFM

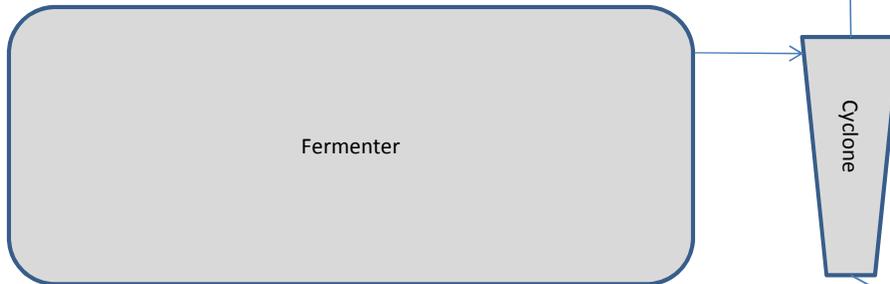

Cyclone Control Efficiency

PM2.5 Filterable:	51	%
PM2.5 Condensable:	0	%
PM2.5 - PM15 Filterable	88.5	%
PM10 Filterable:	79.5	%
PM10 Condensable:	0	%
PM10 - PM15 Filterable	93	%

Thresholds

	Minor NSR	PSD
PM2.5	=>5	>10
PM10	=>5	>15
PMTotal	=>5	>25

Uncontrolled for 2 Fermenters (Tons/yr, Calculated)

	Run 1	Run 2	Run 3	Run 4
PM2.5:		2.18		2.77
PM10:	6.56		2.36	
PMTotal:	10.41	4.62	3.96	4.16

Scrubbed Watery Waste

CO2 Calculation from Fermenters for Project PTE		
Value	Units	Description
2,500	Kmol/Lot	Max Expected based on Measurements
20	days/lot	Length of a lot
365	days/yr	days per year for PTE
44	g/mol	CO2 molecular weight
2	fermenters/project	number of fermenters for PTE
1,000	mol/Kmol	conversion
1,000	g/kg	conversion
2,000	lb/ton (short)	conversion
2.205	lb/kg	conversion
Value	Units	Calculation Description
2,500	kmol/lot	Max Expected based on Measurements
2,500,000	mol/lot	2500kmol/lot * 1000mol/Kmol
125,000	mol/day	2500000mol/lot / 20days/lot
45,625,000	mol/yr	125000mol/day * 365days/yr
2,007,500	kg/yr	45625000mol/yr * 44g/mol / 1000g/kg
4,426,538	lb/yr	2007500kg/yr * 2.205lb/kg
2,213	ton/yr	4426538lb/yr / 2000lb/ton (short)
4,426	PTE for project	2213ton/yr * 2fermenters/project



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

SENT VIA U.S. MAIL: CONFIRMED DELIVERY AND SIGNATURE REQUESTED

TO: Don Blair
Eli Lilly and Company – Clinton Laboratories
10500 South State Road 63
Clinton, IN 47842

DATE: January 24, 2012

FROM: Matt Stuckey, Branch Chief
Permits Branch
Office of Air Quality

SUBJECT: Final Decision
Minor Source Modification
165-31344-00009

Enclosed is the final decision and supporting materials for the air permit application referenced above. Please note that this packet contains the original, signed, permit documents.

The final decision is being sent to you because our records indicate that you are the contact person for this application. However, if you are not the appropriate person within your company to receive this document, please forward it to the correct person.

A copy of the final decision and supporting materials has also been sent via standard mail to:
Veronica Johnson, Responsible Official
OAQ Permits Branch Interested Parties List

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit. If you think you have received this document in error, please contact Joanne Smiddie-Brush of my staff at 1-800-451-6027 (ext 3-0185), or via e-mail at jbrush@idem.IN.gov.

Final Applicant Cover letter.dot 11/30/07

Mail Code 61-53

IDEM Staff	DPABST 1/24/2012 Eli Lilly and Company-Clinton Labs 165-31344-00009 (Final)			AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender	▶	Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: CERTIFICATE OF MAILING ONLY	

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee Remarks
1		Don Blair Eli Lilly and Company-Clinton Labs 10500 S SR 63 Clinton IN 47840-0099 (Source CAATS) (CONFIRM DELIVERY)									
2		Veronica Johnson GM Eli Lilly and Company-Clinton Labs 10500 S SR 63 Clinton IN 47840-0099 (RO CAATS)									
3		Clinton City Council and Mayors Office 259 Vine Street Clinton IN 47842 (Local Official)									
4		Vermillion County Health Department 257 Walnut Street Clinton IN 47842-2342 (Health Department)									
5		Vermillion County Commissioners P.O. Box 190 Newport IN 47966 (Local Official)									
6		J.P. Roehm PO Box 303 Clinton IN 47842 (Affected Party)									
7		Mark Zeltwanger 26545 CR 52 Nappanee IN 46550 (Affected Party)									
8											
9											
10											
11											
12											
13											
14											
15											

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is \$50,000 per piece subject to a limit of \$50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is \$500. The maximum indemnity payable is \$25,000 for registered mail, sent with optional postal insurance. See Domestic Mail Manual R900, S913, and S921 for limitations of coverage on inured and COD mail. See International Mail Manual for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
---	--	--	--