INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • Fax (317) 233-6647 • www.idem.IN.gov

Mike Braun
Governor

Clint Woods
Commissioner

To:	Interested Parties
Date:	September 25, 2026
From:	Jenny Acker, Chief Permits Branch Office of Air Quality
Source Name:	Life Cycle Power
Permit Level:	TV Administrative Permit
Permit Number:	011-50087-00094
Source Location:	3602 W SR 32, Lebanon, IN 46052
Type of Action Taken:	Initial Permit

Notice of Decision: Approval - Effective Immediately

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the matter referenced above.

The final decision is available on the IDEM website at: https://www.in.gov/apps/idem/caats/. To view the document, choose Search Option by **Permit Number**, then enter permit 50087

The final decision is also available via IDEM's Virtual File Cabinet (VFC) located at https://www.in.gov/idem/legal/public-records/virtual-file-cabinet/. Click on the Virtual File Cabinet button. Click on the "Search" dropdown menu in the upper left corner and select "OAQ Permit" from the list of options. Select "Public" in the "Security group" dropdown menu. Type the five-digit permit number 50087 in the Permit # search field, select "Final" in the "Permit Type" dropdown menu, then click the search button at the top or bottom of the webpage. The search will return the final issued permit and any applicable mailing list.

If you would like to request a paper copy of the permit document, please contact IDEM's Office of Records Management:

IDEM - Office of Records Management
Indiana Government Center North
100 North Senate Avenue
Indianapolis, IN 46204-2251
Phone: (317) 232-8667
Fax: (317) 233-6647
Email: IDEMFILEROOM@idem.in.gov

Pursuant to IC 13-15-5-3, this permit is effective immediately, unless a petition for stay of effectiveness is filed and granted according to IC 13-15-6-3, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

If you wish to challenge this decision, IC 4-21.5-3-7 and IC 13-15-6-1(b) or IC 13-15-6-1(a) require that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Indiana Office of Administrative Law Proceedings, 100 N. Senate Avenue Suite N802, Indianapolis, IN 46204.

For an **initial Title V Operating Permit**, a petition for administrative review must be submitted to the Office of Administrative Law Proceedings (OALP) within **thirty (30)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(b).

For a **Title V Operating Permit renewal**, a petition for administrative review must be submitted to the Office of Administrative Law Proceedings (OALP) within **fifteen (15)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(a).

The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

(1) the date the document is delivered to the Indiana Office of Administrative Law Proceedings (OALP); or
(2) the date of the postmark on the envelope containing the document, if the document is mailed to OALP by U.S. mail; or
(3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OALP by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

(1) the name and address of the person making the request;
(2) the interest of the person making the request;
(3) identification of any persons represented by the person making the request;
(4) the reasons, with particularity, for the request;
(5) the issues, with particularity, proposed for considerations at any hearing; and
(6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

Pursuant to 326 IAC 2-7-18(d), any person may petition the U.S. EPA to object to the issuance of an initial Title V operating permit, permit renewal, or permit modification within sixty (60) days of the end of the forty-five (45) day EPA review period. Such an objection must be based only on issues that were raised with reasonable specificity during the public comment period, unless the petitioner demonstrates that it was impractible to raise such issues, or if the grounds for such objection arose after the comment period.

The EPA requests that you file title V petitions electronically through the Central Data Exchange. To do so, please go to: https://cdx.epa.gov/ .

EPA 45 Day Review Concurrent Review Start Date: June 30, 2026
EPA 45 Day Review Concurrent End Date: August 14, 2026

EPA 45 Day Review Sequential Review Start Date: September 22, 2026
EPA 45 Day Review Sequential End Date: September 24, 2026

If you tried but you are unable to use the Central Data Exchange to file your petition, the EPA requests that you send your petition and associated attachments via email to: titleVpetitions@epa.gov.

If you have made every effort to electronically submit your petition but are simply unable to successfully do so, please submit a hardcopy of your petition to the following address:

US EPA
Office of Air Quality Planning and Standards
Air Quality Policy Division
Operating Permits Group Leader
109 T.W. Alexander Dr. (C-504-01)
Research Triangle Park, NC 27711

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • Fax (317) 233-6647 • www.idem.IN.gov

Mike Braun
Governor

Clint Woods
Commissioner

Part 70 Administrative Operating Permit
OFFICE OF AIR QUALITY

Life Cycle Power
3602 West SR 32
Lebanon, Indiana 46052

(herein known as the Permittee) is hereby authorized to construct and operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this permit.

The Permittee must comply with all conditions of this permit. Noncompliance with any provisions of this permit is grounds for enforcement action; permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Noncompliance with any provision of this permit, except any provision specifically designated as not federally enforceable, constitutes a violation of the Clean Air Act. It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

This permit is issued in accordance with 326 IAC 2 and 40 CFR Part 70 Appendix A and contains the conditions and provisions specified in 326 IAC 2-7 as required by 42 U.S.C. 7401, et. seq. (Clean Air Act as amended by the 1990 Clean Air Act Amendments), 40 CFR Part 70.6, IC 13-15 and IC 13-17.

Operation Permit No.: T 011-50087-00094 Master Agency Interest ID: 136349	
Issued by: Heath Hartley, Section Chief Permits Branch Office of Air Quality	Issuance Date: September 25, 2026 Expiration Date: September 25, 2031

Visit on.IN.gov/survey or scan the QR code to provide feedback.
We appreciate your input!

TABLE OF CONTENTS

SECTION A SOURCE SUMMARY 5

A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(14)][326 IAC 2-7-1(20)]
A.2 Part 70 Source Definition [326 IAC 2-7-1(22)]
A.3 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)][326 IAC 2-7-5(14)]
A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

SECTION B GENERAL CONDITIONS 7

B.1 Definitions [326 IAC 2-7-1]
B.2 Revocation of Permits [326 IAC 2-1.1-9(5)]
B.3 Affidavit of Construction [326 IAC 2-5.1-3(h)] [326 IAC 2-5.1-4]
B.4 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]
B.5 Term of Conditions [326 IAC 2-1.1-9.5]
B.6 Enforceability [326 IAC 2-7-7] [IC 13-17-12]
B.7 Severability [326 IAC 2-7-5(5)]
B.8 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]
B.9 Duty to Provide Information [326 IAC 2-7-5(6)(E)]
B.10 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]
B.11 Annual Compliance Certification [326 IAC 2-7-6(5)]
B.12 Preventive Maintenance Plan [326 IAC 2-7-5(12)][326 IAC 1-6-3]
B.13 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]
B.14 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]
B.15 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]
B.16 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]
B.17 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]
B.18 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]
B.19 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)][326 IAC 2-7-12(b)(2)]
B.20 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]
B.21 Source Modification Requirement [326 IAC 2-7-10.5]
B.22 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]
B.23 Transfer of Ownership or Operational Control [326 IAC 2-7-11]
B.24 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]
B.25 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

SECTION C SOURCE OPERATION CONDITIONS 17

Emission Limitations and Standards [326 IAC 2-7-5(1)] 17

C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]
C.2 Opacity [326 IAC 5-1]
C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]
C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]
C.5 Fugitive Dust Emissions [326 IAC 6-4]
C.6 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

Testing Requirements [326 IAC 2-7-6(1)] 19

C.7 Performance Testing [326 IAC 3-6]

Compliance Requirements [326 IAC 2-1.1-11] 19

C.8 Compliance Requirements [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)] 19
C.9 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]
C.10 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6] 20
C.11 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]
C.12 Risk Management Plan [326 IAC 2-7-5(11)] [40 CFR 68]
C.13 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]
C.14 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19] 22
C.15 Malfunctions Report [326 IAC 1-6-2]
C.16 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]
C.17 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]
C.18 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11]

Stratospheric Ozone Protection 24
C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS 25

Emission Limitations and Standards [326 IAC 2-7-5(1)] 25
D.1.1 NOx, VOC, and CO PSD Minor Limits [326 IAC 2-2]
D.1.2 Preventive Maintenance Plan [326 IAC 2-7-5(12)]

Compliance Determination Requirements [326 IAC 2-7-5(1)] 25
D.1.3 NOx Emissions
D.1.4 VOC Emissions
D.1.5 CO Emissions
D.1.6 NOx, VOC, and CO Control
D.1.7 Testing Requirements [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)] 27
D.1.8 Emissions Control System - Temperature Monitoring
D.1.9 Emissions Control System - Urea Treatment

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19] 28
D.1.10 Record Keeping Requirement
D.1.11 Reporting Requirements

SECTION D.2 EMISSIONS UNIT OPERATION CONDITIONS 30

Emission Limitations and Standards [326 IAC 2-7-5(1)] 30
D.2.1 Particulate Emission Limits [326 IAC 6-2]
D.2.2 Preventive Maintenance Plan [326 IAC 2-7-5(12)]

SECTION E.1 NSPS 31

New Source Performance Standards (NSPS) Requirements [326 IAC 2-7-5(1)] 31
E.1.1 General Provisions Relating to New Source Performance Standards [326 IAC 12-1] [40 CFR Part 60, Subpart A]
E.1.2 Stationary Spark Ignition Internal Combustion Engines NSPS [326 IAC 12] [40 CFR Part 60, Subpart JJJJ]

SECTION E.2 NESHAP 33

National Emission Standards for Hazardous Air Pollutants (NESHAP) Requirements [326 IAC 2-7-5(1)] 33
E.2.1 General Provisions Relating to National Emission Standards for Hazardous Air Pollutants under 40 CFR Part 63 [326 IAC 20-1] [40 CFR Part 63, Subpart A]

E.2.2 Stationary Reciprocating Internal Combustion Engines NESHAP [40 CFR Part 63, Subpart ZZZZ] [326 IAC 20-82]

SECTION E.3 NESHAP 35

National Emission Standards for Hazardous Air Pollutants (NESHAP) Requirements [326 IAC 2-7-5(1)] 35

E.3.1 General Provisions Relating to National Emission Standards for Hazardous Air Pollutants under 40 CFR Part 63 [326 IAC 20-1] [40 CFR Part 63, Subpart A]

E.3.2 Major Sources: Industrial, Commercial, and Institutional Boilers and Process Heaters NESHAP [40 CFR Part 63, Subpart DDDDD] [326 IAC 20-95]

CERTIFICATION 37

MALFUNCTION REPORT 38

Part 70 Quarterly Report 40

Part 70 Quarterly Report 41

Part 70 Quarterly Report 42

QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT 43

Affidavit of Construction 45

Attachment A: 40 CFR 60, Subpart JJJJ, NSPS for Stationary Spark Ignition Internal Combustion Engines

Attachment B: 40 CFR 63, Subpart ZZZZ, NESHAP for Stationary Reciprocating Internal Combustion Engines

Attachment C: 40 CFR 63, Subpart DDDDD, NESHAP for Major Sources: Industrial, Commercial, and Institutional Boilers and Process Heaters

SECTION A SOURCE SUMMARY

This permit is based on information requested by the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ). The information describing the source contained in conditions A.1 through A.4 is descriptive information and does not constitute enforceable conditions. However, the Permittee should be aware that a physical change or a change in the method of operation that may render this descriptive information obsolete or inaccurate may trigger requirements for the Permittee to obtain additional permits or seek modification of this permit pursuant to 326 IAC 2, or change other applicable requirements presented in the permit application.

A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(14)][326 IAC 2-7-1(20)]

The Permittee owns and operates a stationary greenfield power generating facility.

Source Address:	3602 West SR 32, Lebanon, Indiana 46052
General Source Phone Number:	(361) 555-6023
SIC Code:	4911 (Electric Services)
County Location:	Boone
Source Location Status:	Attainment for all criteria pollutants
Source Status:	Part 70 Operating Permit Program Minor Source, under PSD and Emission Offset Rules Major Source, Section 112 of the Clean Air Act Not 1 of 28 Source Categories

A.2 Part 70 Source Definition [326 IAC 2-7-1(22)]

The source consists of two (2) plants:

(a) Orla, LLC (011-00093), 3062 West SR 32, Lebanon, IN 46052 - This source owns and operates a stationary Data Center.

(b) Life Cycle Power (011-00094), 3602 West SR 32, Lebanon, IN 46052 - This source is a stationary greenfield power generating facility.

IDEM has determined that Orla, LLC and Life Cycle Power are considered one source because they are located on the same property, are under common control, and have a support facility relationship.

A separate Part 70 permit has been issued to Life Cycle Power, solely for administrative purposes.

A.3 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)][326 IAC 2-7-5(14)]

This stationary source consists of the following emission units and pollution control devices:

(a) Sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, approved in 2026 for construction, each with a rated maximum capacity of 2,763 horsepower, using selective catalytic reduction (SCR) and oxidation catalysts as controls for NOx and CO respectively, and exhausting outdoors.

Under NSPS 40 CFR 60, Subpart JJJJ, these generators are affected sources.
Under NESHAP 40 CFR 63, Subpart ZZZZ, these generators are affected sources.

(b) Two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, approved in 2026 for construction, each with a rated maximum heat index capacity of 5.4 MMBtu/hr, and exhausting outdoors.

Under NESHAP 40 CFR 63, Subpart DDDDD, these regasification boilers are affected sources.

A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

This stationary source is required to have a Part 70 permit by 326 IAC 2-7-2 (Applicability) because:

(a) It is a major source, as defined in 326 IAC 2-7-1(20);

(b) It is a source in a source category designated by the United States Environmental Protection Agency (U.S. EPA) under 40 CFR 70.3 (Part 70 - Applicability).

SECTION B GENERAL CONDITIONS

B.1 Definitions [326 IAC 2-7-1]

Terms in this permit shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-7) shall prevail.

B.2 Revocation of Permits [326 IAC 2-1.1-9(5)]

Pursuant to 326 IAC 2-1.1-9(5)(Revocation of Permits), the Commissioner may revoke this permit if construction is not commenced within eighteen (18) months after receipt of this approval or if construction is suspended for a continuous period of one (1) year or more.

B.3 Affidavit of Construction [326 IAC 2-5.1-3(h)] [326 IAC 2-5.1-4]

This document shall also become the approval to operate pursuant to 326 IAC 2-5.1-4 when prior to the start of operation, the following requirements are met:

(a) The attached Affidavit of Construction shall be submitted to the Office of Air Quality (OAQ), verifying that the emission units were constructed as proposed in the application or the permit. The emission units covered in this permit may begin operating on the date the Affidavit of Construction is postmarked or hand delivered to IDEM if constructed as proposed.

(b) If actual construction of the emission units differs from the construction proposed in the application, the source may not begin operation until the permit has been revised pursuant to 326 IAC 2 and an Operation Permit Validation Letter is issued.

(c) The Permittee shall attach the Operation Permit Validation Letter received from the Office of Air Quality (OAQ) to this permit.

B.4 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]

(a) This permit, T 011-50087-00094, is issued for a fixed term of five (5) years from the issuance date of this permit, as determined in accordance with IC 4-21.5-3-5(f) and IC 13-15-5-3. Subsequent revisions, modifications, or amendments of this permit do not affect the expiration date of this permit.

(b) If IDEM, OAQ, upon receiving a timely and complete renewal permit application, fails to issue or deny the permit renewal prior to the expiration date of this permit, this existing permit shall not expire and all terms and conditions shall continue in effect, including any permit shield provided in 326 IAC 2-7-15, until the renewal permit has been issued or denied.

B.5 Term of Conditions [326 IAC 2-1.1-9.5]

Notwithstanding the permit term of a permit to construct, a permit to operate, or a permit modification, any condition established in a permit issued pursuant to a permitting program approved in the state implementation plan shall remain in effect until:

(a) the condition is modified in a subsequent permit action pursuant to Title I of the Clean Air Act; or

(b) the emission unit to which the condition pertains permanently ceases operation.

B.6 Enforceability [326 IAC 2-7-7] [IC 13-17-12]

Unless otherwise stated, all terms and conditions in this permit, including any provisions designed to limit the source's potential to emit, are enforceable by IDEM, the United States Environmental Protection Agency (U.S. EPA) and by citizens in accordance with the Clean Air Act.

B.7 Severability [326 IAC 2-7-5(5)]

The provisions of this permit are severable; a determination that any portion of this permit is invalid shall not affect the validity of the remainder of the permit.

B.8 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]

This permit does not convey any property rights of any sort or any exclusive privilege.

B.9 Duty to Provide Information [326 IAC 2-7-5(6)(E)]

(a) The Permittee shall furnish to IDEM, OAQ, within a reasonable time, any information that IDEM, OAQ may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. Upon request, the Permittee shall also furnish to IDEM, OAQ copies of records required to be kept by this permit.

(b) For information furnished by the Permittee to IDEM, OAQ, the Permittee may include a claim of confidentiality in accordance with 326 IAC 17.1. When furnishing copies of requested records directly to U. S. EPA, the Permittee may assert a claim of confidentiality in accordance with 40 CFR 2, Subpart B.

B.10 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]

(a) A certification required by this permit meets the requirements of 326 IAC 2-7-6(1) if:

(1) it contains a certification by a "responsible official" as defined by 326 IAC 2-7-1(33), and

(2) the certification states that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

(b) The Permittee may use the attached Certification Form, or its equivalent with each submittal requiring certification. One (1) certification may cover multiple forms in one (1) submittal.

(c) A "responsible official" is defined at 326 IAC 2-7-1(33).

B.11 Annual Compliance Certification [326 IAC 2-7-6(5)]

(a) The Permittee shall annually submit a compliance certification report which addresses the status of the source’s compliance with the terms and conditions contained in this permit, including emission limitations, standards, or work practices. The initial certification shall cover the time period from the date of final permit issuance through December 31 of the same year. All subsequent certifications shall cover the time period from January 1 to December 31 of the previous year, and shall be submitted no later than July 1 of each year to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region 5
Air and Radiation Division, Air Enforcement Branch - Indiana (AE-17J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

(b) The annual compliance certification report required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ, on or before the date it is due.

(c) The annual compliance certification report shall include the following:

(1) The appropriate identification of each term or condition of this permit that is the basis of the certification;

(2) The compliance status;

(3) Whether compliance was continuous or intermittent;

(4) The methods used for determining the compliance status of the source, currently and over the reporting period consistent with 326 IAC 2-7-5(3); and

(5) Such other facts, as specified in Sections D of this permit, as IDEM, OAQ may require to determine the compliance status of the source.

The submittal by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

B.12 Preventive Maintenance Plan [326 IAC 2-7-5(12)][326 IAC 1-6-3]

(a) If required by specific condition(s) in Section D of this permit, the Permittee shall prepare and maintain Preventive Maintenance Plans (PMPs) no later than ninety (90) days after issuance of this permit or ninety (90) days after initial start-up, whichever is later, including the following information on each facility:

(1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;

(2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and

(3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

If, due to circumstances beyond the Permittee’s control, the PMPs cannot be prepared and maintained within the above time frame, the Permittee may extend the date an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

The PMP extension notification does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

The Permittee shall implement the PMPs.

(b) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Permittee to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions. The PMPs and their submittal do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(c) To the extent the Permittee is required by 40 CFR Part 60/63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

B.13 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]

(a) Pursuant to 326 IAC 2-7-15, the Permittee has been granted a permit shield. The permit shield provides that compliance with the conditions of this permit shall be deemed compliance with any applicable requirements as of the date of permit issuance, provided that either the applicable requirements are included and specifically identified in this permit or the permit contains an explicit determination or concise summary of a determination that other specifically identified requirements are not applicable. The Indiana statutes from IC 13 and rules from 326 IAC, referenced in conditions in this permit, are those applicable at the time the permit was issued. The issuance or possession of this permit shall not alone constitute a defense against an alleged violation of any law, regulation or standard, except for the requirement to obtain a Part 70 permit under 326 IAC 2-7 or for applicable requirements for which a permit shield has been granted.

This permit shield does not extend to applicable requirements which are promulgated after the date of issuance of this permit unless this permit has been modified to reflect such new requirements.

(b) If, after issuance of this permit, it is determined that the permit is in nonconformance with an applicable requirement that applied to the source on the date of permit issuance, IDEM, OAQ shall immediately take steps to reopen and revise this permit and issue a compliance order to the Permittee to ensure expeditious compliance with the applicable requirement until the permit is reissued. The permit shield shall continue in effect so long as the Permittee is in compliance with the compliance order.

(c) No permit shield shall apply to any permit term or condition that is determined after issuance of this permit to have been based on erroneous information supplied in the permit application. Erroneous information means information that the Permittee knew to be false, or in the exercise of reasonable care should have been known to be false, at the time the information was submitted.

(d) Nothing in 326 IAC 2-7-15 or in this permit shall alter or affect the following:

(1) The provisions of Section 303 of the Clean Air Act (emergency orders), including the authority of the U.S. EPA under Section 303 of the Clean Air Act;

(2) The liability of the Permittee for any violation of applicable requirements prior to or at the time of this permit's issuance;

(3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act; and

(4) The ability of U.S. EPA to obtain information from the Permittee under Section 114 of the Clean Air Act.

(e) This permit shield is not applicable to any change made under 326 IAC 2-7-20(b)(2) (Sections 502(b)(10) of the Clean Air Act changes) and 326 IAC 2-7-20(c)(2) (trading based on State Implementation Plan (SIP) provisions).

(f) This permit shield is not applicable to modifications eligible for group processing until after IDEM, OAQ, has issued the modifications. [326 IAC 2-7-12(c)(7)]

(g) This permit shield is not applicable to minor Part 70 permit modifications until after IDEM, OAQ, has issued the modification. [326 IAC 2-7-12(b)(8)]

B.14 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]

(a) All terms and conditions of permits established prior to T 011-50087-00094 and issued pursuant to permitting programs approved into the state implementation plan have been either:

(1) incorporated as originally stated,

(2) revised under 326 IAC 2-7-10.5, or

(3) deleted under 326 IAC 2-7-10.5.

(b) Provided that all terms and conditions are accurately reflected in this combined permit, all previous registrations and permits are superseded by this combined new source review and part 70 operating permit.

B.15 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]

The Permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least nine (9) months prior to the date of expiration of the source's existing permit, consistent with 326 IAC 2-7-3 and 326 IAC 2-7-4(a).

B.16 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]

(a) This permit may be modified, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a Part 70 Operating Permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any condition of this permit. [326 IAC 2-7-5(6)(C)] The notification by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(b) This permit shall be reopened and revised under any of the circumstances listed in IC 13-15-7-2 or if IDEM, OAQ determines any of the following:

(1) That this permit contains a material mistake.

(2) That inaccurate statements were made in establishing the emissions standards or other terms or conditions.

(3) That this permit must be revised or revoked to assure compliance with an applicable requirement. [326 IAC 2-7-9(a)(3)]

(c) Proceedings by IDEM, OAQ to reopen and revise this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening and revision shall be made as expeditiously as practicable. [326 IAC 2-7-9(b)]

(d) The reopening and revision of this permit, under 326 IAC 2-7-9(a), shall not be initiated before notice of such intent is provided to the Permittee by IDEM, OAQ at least thirty (30) days in advance of the date this permit is to be reopened, except that IDEM, OAQ may provide a shorter time period in the case of an emergency. [326 IAC 2-7-9(c)]

B.17 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]

(a) The application for renewal shall be submitted using the application form or forms prescribed by IDEM, OAQ and shall include the information specified in 326 IAC 2-7-4. Such information shall be included in the application for each emission unit at this source, except those emission units included on the trivial or insignificant activities list contained in 326 IAC 2-7-1(19) and 326 IAC 2-7-1(39). The renewal application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

Request for renewal shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

(b) A timely renewal application is one that is:

(1) Submitted at least nine (9) months prior to the date of the expiration of this permit; and

(2) If the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(c) If the Permittee submits a timely and complete application for renewal of this permit, the source's failure to have a permit is not a violation of 326 IAC 2-7 until IDEM, OAQ takes final action on the renewal application, except that this protection shall cease to apply if, subsequent to the completeness determination, the Permittee fails to submit by the deadline specified, pursuant to 326 IAC 2-7-4(a)(2)(D), in writing by IDEM, OAQ any additional information identified as being needed to process the application.

B.18 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]

(a) Permit amendments and modifications are governed by the requirements of 326 IAC 2-7-11 or 326 IAC 2-7-12 whenever the Permittee seeks to amend or modify this permit.

(b) Any application requesting an amendment or modification of this permit shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.19 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)][326 IAC 2-7-12(b)(2)]

(a) No Part 70 permit revision or notice shall be required under any approved economic incentives, marketable Part 70 permits, emissions trading, and other similar programs or processes for changes that are provided for in a Part 70 permit.

(b) Notwithstanding 326 IAC 2-7-12(b)(1) and 326 IAC 2-7-12(c)(1), minor Part 70 permit modification procedures may be used for Part 70 modifications involving the use of economic incentives, marketable Part 70 permits, emissions trading, and other similar approaches to the extent that such minor Part 70 permit modification procedures are explicitly provided for in the applicable State Implementation Plan (SIP) or in applicable requirements promulgated or approved by the U.S. EPA.

B.20 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]

(a) The Permittee may make any change or changes at the source that are described in 326 IAC 2-7-20(b) or (c) without a prior permit revision, if each of the following conditions is met:

(1) The changes are not modifications under any provision of Title I of the Clean Air Act;

(2) Any preconstruction approval required by 326 IAC 2-7-10.5 has been obtained;

(3) The changes do not result in emissions which exceed the limitations provided in this permit (whether expressed herein as a rate of emissions or in terms of total emissions);

(4) The Permittee notifies the:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region 5
Air and Radiation Division, Regulation Development Branch - Indiana (AR-18J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

in advance of the change by written notification at least ten (10) days in advance of the proposed change. The Permittee shall attach every such notice to the Permittee's copy of this permit; and

(5) The Permittee maintains records on-site, on a rolling five (5) year basis, which document all such changes and emission trades that are subject to 326 IAC 2-7-20(b)(1) and (c)(1). The Permittee shall make such records available, upon reasonable request, for public review.

Such records shall consist of all information required to be submitted to IDEM, OAQ in the notices specified in 326 IAC 2-7-20(b)(1) and (c)(1).

(b) The Permittee may make Section 502(b)(10) of the Clean Air Act changes (this term is defined at 326 IAC 2-7-1(35)) without a permit revision, subject to the constraint of 326 IAC 2-7-20(a). For each such Section 502(b)(10) of the Clean Air Act change, the required written notification shall include the following:

(1) A brief description of the change within the source;

(2) The date on which the change will occur;

(3) Any change in emissions; and

(4) Any permit term or condition that is no longer applicable as a result of the change.

The notification which shall be submitted is not considered an application form, report or compliance certification. Therefore, the notification by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(c) Emission Trades [326 IAC 2-7-20(c)]
The Permittee may trade emissions increases and decreases at the source, where the applicable SIP provides for such emission trades without requiring a permit revision, subject to the constraints of Section (a) of this condition and those in 326 IAC 2-7-20(c).

(d) Alternative Operating Scenarios [326 IAC 2-7-20(d)]
The Permittee may make changes at the source within the range of alternative operating scenarios that are described in the terms and conditions of this permit in accordance with 326 IAC 2-7-5(9). No prior notification of IDEM, OAQ or U.S. EPA is required.

(e) Backup fuel switches specifically addressed in, and limited under, Section D of this permit shall not be considered alternative operating scenarios. Therefore, the notification requirements of part (a) of this condition do not apply.

B.21 Source Modification Requirement [326 IAC 2-7-10.5]

A modification, construction, or reconstruction is governed by the requirements of 326 IAC 2.

B.22 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]

Upon presentation of proper identification cards, credentials, and other documents as may be required by law, and subject to the Permittee's right under all applicable laws and regulations to assert that the information collected by the agency is confidential and entitled to be treated as such, the Permittee shall allow IDEM, OAQ, U.S. EPA, or an authorized representative to perform the following:

(a) Enter upon the Permittee's premises where a Part 70 source is located, or emissions related activity is conducted, or where records must be kept under the conditions of this permit;

(b) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, have access to and copy any records that must be kept under the conditions of this permit;

(c) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, inspect any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit;

(d) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, sample or monitor substances or parameters for the purpose of assuring compliance with this permit or applicable requirements; and

(e) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, utilize any photographic, recording, testing, monitoring, or other equipment for the purpose of assuring compliance with this permit or applicable requirements.

B.23 Transfer of Ownership or Operational Control [326 IAC 2-7-11]

(a) The Permittee must comply with the requirements of 326 IAC 2-7-11 whenever the Permittee seeks to change the ownership or operational control of the source and no other change in the permit is necessary.

(b) Any application requesting a change in the ownership or operational control of the source shall contain a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new Permittee. The application shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.24 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]

(a) The Permittee shall pay annual fees to IDEM, OAQ within thirty (30) calendar days of receipt of a billing. Pursuant to 326 IAC 2-7-19(b), if the Permittee does not receive a bill from IDEM, OAQ the applicable fee is due April 1 of each year.

(b) Except as provided in 326 IAC 2-7-19(e), failure to pay may result in administrative enforcement action or revocation of this permit.

(c) The Permittee may call the following telephone numbers: 1-800-451-6027 or 317-233-8590 (ask for OAQ, Billing, Licensing, and Training Section), to determine the appropriate permit fee.

B.25 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

For the purpose of submitting compliance certifications or establishing whether or not the Permittee has violated or is in violation of any condition of this permit, nothing in this permit shall preclude the use, including the exclusive use, of any credible evidence or information relevant to whether the Permittee would have been in compliance with the condition of this permit if the appropriate performance or compliance test or procedure had been performed.

SECTION C SOURCE OPERATION CONDITIONS

Entire Source

Emission Limitations and Standards [326 IAC 2-7-5(1)]

C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2(e)(2), particulate emissions from any process not exempt under 326 IAC 6-3-1(b) or (c) which has a maximum process weight rate less than 100 pounds per hour and the methods in 326 IAC 6-3-2(b) through (d) do not apply shall not exceed 0.551 pounds per hour.

C.2 Opacity [326 IAC 5-1]

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-1 (Applicability) and 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

(a) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.

(b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]

The Permittee shall not operate an incinerator except as provided in 326 IAC 4-2 or in this permit. The Permittee shall not operate a refuse incinerator or refuse burning equipment except as provided in 326 IAC 9-1-2 or in this permit.

C.5 Fugitive Dust Emissions [326 IAC 6-4]

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions). 326 IAC 6-4-2(4) is not federally enforceable.

C.6 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

(a) Notification requirements apply to each owner or operator. If the combined amount of regulated asbestos containing material (RACM) to be stripped, removed or disturbed is at least 260 linear feet on pipes or 160 square feet on other facility components, or at least thirty-five (35) cubic feet on all facility components, then the notification requirements of 326 IAC 14-10-3 are mandatory. All demolition projects require notification whether or not asbestos is present.

(b) The Permittee shall ensure that a written notification is sent on a form provided by the Commissioner at least ten (10) working days before asbestos stripping or removal work or before demolition begins, per 326 IAC 14-10-3, and shall update such notice as necessary, including, but not limited to the following:

(1) When the amount of affected asbestos containing material increases or decreases by at least twenty percent (20%); or

(2) If there is a change in the following:

(A) Asbestos removal or demolition start date;

(B) Removal or demolition contractor; or

(C) Waste disposal site.

(c) The Permittee shall ensure that the notice is postmarked or delivered according to the guidelines set forth in 326 IAC 14-10-3(c).

(d) The notice to be submitted shall include the information enumerated in 326 IAC 14-10-3(d).

All required notifications shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

The notice shall include a signed certification from the owner or operator that the information provided in this notification is correct and that only Indiana licensed workers and project supervisors will be used to implement the asbestos removal project. The notifications do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(e) Procedures for Asbestos Emission Control
The Permittee shall comply with the applicable emission control procedures in 326 IAC 14-10-4 and 40 CFR 61.145(c). Per 326 IAC 14-10-1, emission control requirements are applicable for any removal or disturbance of RACM greater than three (3) linear feet on pipes or three (3) square feet on any other facility components or a total of at least 0.75 cubic feet on all facility components.

(f) Demolition and Renovation
The Permittee shall thoroughly inspect the affected facility or part of the facility where the demolition or renovation will occur for the presence of asbestos pursuant to 40 CFR 61.145(a).

(g) Indiana Licensed Asbestos Inspector
The Permittee shall comply with 326 IAC 14-10-1(a) that requires the owner or operator, prior to a renovation/demolition, to use an Indiana Licensed Asbestos Inspector to thoroughly inspect the affected portion of the facility for the presence of asbestos. The requirement to use an Indiana Licensed Asbestos inspector is not federally enforceable.

Testing Requirements [326 IAC 2-7-6(1)]

C.7 Performance Testing [326 IAC 3-6]

(a) For performance testing required by this permit, a test protocol, except as provided elsewhere in this permit, shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

no later than thirty-five (35) days prior to the intended test date. The protocol submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(b) The Permittee shall notify IDEM, OAQ of the actual test date at least fourteen (14) days prior to the actual test date. The notification submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(c) Pursuant to 326 IAC 3-6-4(b), all test reports must be received by IDEM, OAQ not later than forty-five (45) days after the completion of the testing. An extension may be granted by IDEM, OAQ if the Permittee submits to IDEM, OAQ a reasonable written explanation not later than five (5) days prior to the end of the initial forty-five (45) day period.

Compliance Requirements [326 IAC 2-1.1-11]

C.8 Compliance Requirements [326 IAC 2-1.1-11]

The commissioner may require stack testing, monitoring, or reporting at any time to assure compliance with all applicable requirements by issuing an order under 326 IAC 2-1.1-11. Any monitoring or testing shall be performed in accordance with 326 IAC 3 or other methods approved by the commissioner or the U. S. EPA.

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

C.9 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]

(a) For new units:
Unless otherwise specified in the approval for the new emission unit(s), compliance monitoring for new emission units shall be implemented on and after the date of initial start-up.

(b) For existing units:
Unless otherwise specified in this permit, for all monitoring requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance to begin such monitoring. If, due to circumstances beyond the Permittee's control, any monitoring equipment required by this permit cannot be installed and operated no later than ninety (90) days after permit issuance, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification which shall be submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

C.10 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

(a) When required by any condition of this permit, an analog instrument used to measure a parameter related to the operation of an air pollution control device shall have a scale such that the expected maximum reading for the normal range shall be no less than twenty percent (20%) of full scale. The analog instrument shall be capable of measuring values outside of the normal range.

(b) The Permittee may request that the IDEM, OAQ approve the use of an instrument that does not meet the above specifications provided the Permittee can demonstrate that an alternative instrument specification will adequately ensure compliance with permit conditions requiring the measurement of the parameters.

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]

C.11 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]

Pursuant to 326 IAC 1-5-2 (Emergency Reduction Plans; Submission):

(a) The Permittee shall prepare written emergency reduction plans (ERPs) consistent with safe operating procedures.

(b) These ERPs shall be submitted for approval to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

no later than 180 days from the date on which this source commences operation.

The ERP does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

(c) If the ERP is disapproved by IDEM, OAQ, the Permittee shall have an additional thirty (30) days to resolve the differences and submit an approvable ERP.

(d) These ERPs shall state those actions that will be taken, when each episode level is declared, to reduce or eliminate emissions of the appropriate air pollutants.

(e) Said ERPs shall also identify the sources of air pollutants, the approximate amount of reduction of the pollutants, and a brief description of the manner in which the reduction will be achieved.

(f) Upon direct notification by IDEM, OAQ that a specific air pollution episode level is in effect, the Permittee shall immediately put into effect the actions stipulated in the approved ERP for the appropriate episode level. [326 IAC 1-5-3]

C.12 Risk Management Plan [326 IAC 2-7-5(11)] [40 CFR 68]

If a regulated substance, as defined in 40 CFR 68, is present at a source in more than a threshold quantity, the Permittee must comply with the applicable requirements of 40 CFR 68.

C.13 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]

Upon detecting an excursion where a response step is required by the D Section or an exceedance of a limitation in this permit:

(a) The Permittee shall take reasonable response steps to restore operation of the emissions unit (including any control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing excess emissions.

(b) The response shall include minimizing the period of any startup, shutdown or malfunction. The response may include, but is not limited to, the following:

(1) initial inspection and evaluation;

(2) recording that operations returned or are returning to normal without operator action (such as through response by a computerized distribution control system); or

(3) any necessary follow-up actions to return operation to normal or usual manner of operation.

(c) A determination of whether the Permittee has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include, but is not limited to, the following:

(1) monitoring results;

(2) review of operation and maintenance procedures and records; and/or

(3) inspection of the control device, associated capture system, and the process.

(d) Failure to take reasonable response steps shall be considered a deviation from the permit.

(e) The Permittee shall record the reasonable response steps taken.

C.14 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]

(a) When the results of a stack test performed in conformance with Section C - Performance Testing, of this permit exceed the level specified in any condition of this permit, the Permittee shall submit a description of its response actions to IDEM, OAQ no later than seventy-five (75) days after the date of the test.

(b) A retest to demonstrate compliance shall be performed no later than one hundred eighty (180) days after the date of the test. Should the Permittee demonstrate to IDEM, OAQ that retesting in one hundred eighty (180) days is not practicable, IDEM, OAQ may extend the retesting deadline.

(c) IDEM, OAQ reserves the authority to take any actions allowed under law in response to noncompliant stack tests.

The response action documents submitted pursuant to this condition do require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

C.15 Malfunctions Report [326 IAC 1-6-2]

Pursuant to 326 IAC 1-6-2 (Records; Notice of Malfunction):

(a) A record of all malfunctions, startups, or shutdowns of any emission unit or emission control equipment, that result in violations of applicable air pollution control regulations or applicable emission limitations must be kept and retained for a period of three (3) years and shall be made available to the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ) or appointed representative upon request.

(b) When a malfunction of any emission unit or emission control equipment: 1) results in violations of applicable air pollution control regulations or applicable emissions limitations and 2) lasts more than one (1) hour, the condition shall be reported to OAQ, using the Malfunction Report Forms (2 pages) or its equivalent. Notification must be made by telephone or other electronic means, as soon as practicable, but in no event later than four (4) daytime business hours after the beginning of the occurrence.

(c) Failure to report a malfunction under subsection (b) of this condition of any emission unit or emission control equipment shall constitute a violation of 326 IAC 1-6, and any other applicable rules. Information of the scope and expected duration of the malfunction must be provided, including the items specified in 326 IAC 1-6-2(c)(3)(A) through (E).

(d) Malfunction is defined as any sudden, unavoidable failure of any air pollution control equipment, process, or combustion or process equipment to operate in a normal and usual manner. [326 IAC 1-2-39]

C.16 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]

Pursuant to 326 IAC 2-6-3(b)(2), starting in 2005 and every three (3) years thereafter, the Permittee shall submit by July 1 an emission statement covering the previous calendar year. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4(c) and shall meet the following requirements:

(1) Indicate estimated actual emissions of all pollutants listed in 326 IAC 2-6-4(a);

(2) Indicate estimated actual emissions of regulated pollutants as defined by 326 IAC 2-7-1(31) (“Regulated pollutant, which is used only for purposes of Section 19 of this rule”) from the source, for purpose of fee assessment.

The statement must be submitted to:

Indiana Department of Environmental Management
Technical Support and Modeling Section, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

The emission statement does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33).

C.17 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]

(a) Records of all required monitoring data, reports and support information required by this permit shall be retained for a period of at least five (5) years from the date of monitoring sample, measurement, report, or application. Support information includes the following, where applicable:

(AA) All calibration and maintenance records.
(BB) All original strip chart recordings for continuous monitoring instrumentation.
(CC) Copies of all reports required by the Part 70 permit.

Records of required monitoring information include the following, where applicable:

(AA) The date, place, as defined in this permit, and time of sampling or measurements.
(BB) The dates analyses were performed.
(CC) The company or entity that performed the analyses.
(DD) The analytical techniques or methods used.
(EE) The results of such analyses.
(FF) The operating conditions as existing at the time of sampling or measurement.

These records shall be physically present or electronically accessible at the source location for a minimum of three (3) years. The records may be stored elsewhere for the remaining two (2) years as long as they are available upon request. If the Commissioner makes a request for records to the Permittee, the Permittee shall furnish the records to the Commissioner within a reasonable time.

(b) Unless otherwise specified in this permit, for all record keeping requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or the date of initial start-up, whichever is later, to begin such record keeping.

C.18 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11]

(a) The Permittee shall submit the attached Quarterly Deviation and Compliance Monitoring Report or its equivalent. Proper notice submittal under Section C - Malfunctions Report satisfies the reporting requirements of this paragraph. Any deviation from permit requirements, the date(s) of each deviation, the cause of the deviation, and the response steps taken must be reported except that a deviation required to be reported pursuant to an applicable requirement that exists independent of this permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. This report shall be submitted not later than thirty (30) days after the end of the reporting period. The Quarterly Deviation and Compliance Monitoring Report shall include a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(33). A deviation is an exceedance of a permit limitation or a failure to comply with a requirement of the permit.

(b) The address for report submittal is:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

(c) Unless otherwise specified in this permit, any notice, report, or other submission required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or

before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(d) The first report shall cover the period commencing on the date of issuance of this permit or the date of initial start-up, whichever is later, and ending on the last day of the reporting period. Reporting periods are based on calendar years, unless otherwise specified in this permit. For the purpose of this permit, "calendar year" means the twelve (12) month period from January 1 to December 31 inclusive.

Stratospheric Ozone Protection

C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

Pursuant to 40 CFR 82 (Protection of Stratospheric Ozone), Subpart F, except as provided for motor vehicle air conditioners in Subpart B, the Permittee shall comply with applicable standards for recycling and emissions reduction.

SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

(a) Sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, approved in 2026 for construction, each with a rated maximum capacity of 2,763 horsepower, using selective catalytic reduction (SCR) and oxidation catalysts as controls for NOx and CO respectively, and exhausting outdoors.

Under NSPS 40 CFR 60, Subpart JJJJ, these generators are affected sources.
Under NESHAP 40 CFR 63, Subpart ZZZZ, these generators are affected sources.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.1.1 NOx, VOC, and CO PSD Minor Limits [326 IAC 2-2]

In order to render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable, the Permittee shall comply with the following:

(a) The total NOx emissions from the generators (GEN1 through GEN65) shall not exceed 121 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

(b) The total VOC emissions from the generators (GEN1 through GEN65) shall not exceed 155 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

(c) The total CO emissions from the generators (GEN1 through GEN65) shall not exceed 155 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

Compliance with these limits, combined with the potential to emit NOx, VOC, and CO from all other emission units at this source, shall limit the source-wide total potential to emit of NOx, VOC, and CO to less than 250 tons per twelve (12) consecutive month period, each, and shall render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable to the construction of this source.

D.1.2 Preventive Maintenance Plan [326 IAC 2-7-5(12)]

A Preventive Maintenance Plan is required for these facilities and any associated control devices. Section B - Preventive Maintenance Plan contains the Permittee's obligation with regard to the preventive maintenance plan required by this condition.

Compliance Determination Requirements [326 IAC 2-7-5(1)]

D.1.3 NOx Emissions

In order to comply with Condition D.1.1(a), the total monthly NOx emissions shall be determined using the following equation for GEN1 to GEN65:

$$NE = \text{Uncontrolled NOx} + \text{Controlled NOx}$$
$$= [(NGLOAD_U \times OP_u)(NEF_U) + (NGLOAD_C \times OP_C)(NEF_C)] / 454 \text{ g/lb} /$$

2,000 lbs/ton

Where:

NE = Total NOx Emissions, tons per month
= Uncontrolled NOx emissions + Controlled NOx emissions

$NGLOAD_U$ = Total Uncontrolled Engine Operating Load, bhp per month
OP_U = Total Uncontrolled Engine Operating Hours, hours per month
NEF_U = Uncontrolled Emission Factors for NOx
= 1.0 grams per bhp-hr, or a value determined from the latest stack test.

NOx emissions are considered uncontrolled until the SCR reaches an operating temperature of 572°F.

$NGLOAD_C$ = Total Controlled Engine Operating Load, bhp per month
OP_C = Total Controlled Engine Operating Hours, hours per month
NEF_C = Controlled Emission Factors for NOx,
= 0.07 grams per bhp-hr or a value determined from the latest stack test.

NOx emissions are considered controlled after the SCR of the emissions control system reaches a minimum operating temperature of 572°F.

D.1.4 VOC Emissions

In order to comply with Condition D.1.1(b), the total monthly VOC emissions shall be determined using the following equation for GEN1 to GEN65:

VE = $[(NGLOAD_U \times OP_u)(VEF_U) + (NGLOAD_C \times OP_C)(VEF_C)]$ / 454 g/lb / 2,000 lbs/ton

Where:

VE = Uncontrolled VOC Emissions + Controlled VOC Emissions, tons per month

$NGLOAD_U$ = Total Uncontrolled Engine Operating Load, bhp per month
OP_U = Total Uncontrolled Engine Operating Hours, hours per month
VEF_U = Uncontrolled Emission Factors for VOC
= 0.7 grams per bhp-hr or a value determined from the latest stack test.

VOC emissions are considered uncontrolled when the Oxidation Catalyst is not operational.

$NGLOAD_C$ = Total Controlled Engine Operating Load, bhp per month
OP_C = Total Controlled Engine Operating Hours, hours per month
VEF_C = Controlled Emission Factors for VOC
= 0.09 grams per bhp-hr or a value determined from the latest stack test.

D.1.5 CO Emissions

In order to comply with Condition D.1.1(c), the total monthly CO emissions shall be determined using the following equation for GEN1 to GEN65:

CE = $[(NGLOAD_U \times OP_u)(CEF_U) + (NGLOAD_C \times OP_C)(CEF_C)]$ / 454 g/lb /2,000 lbs/ton

Where:

CE = Uncontrolled CO Emissions + Controlled CO Emissions, tons per

month

$NGLOAD_U$ = Total Uncontrolled Engine Operating Load, bhp per month
OP_U = Total Uncontrolled Engine Operating Hours, hours per month
CEF_U = Uncontrolled Emission Factors for CO
= 2.0 grams per bhp-hr or a value determined from the latest stack test

CO emissions are considered uncontrolled when the Oxidation Catalyst is not operational.

$NGLOAD_C$ = Total Controlled Engine Operating Load, bhp per month
OP_C = Total Controlled Engine Operating Hours, hours per month
CEF_C = Controlled Emission Factors for CO
= 0.09 grams per bhp-hr or a value determined from the latest stack test

D.1.6 NOx, VOC, and CO Control

(a) NOx
In order to assure compliance with Conditions D.1.1(a) and D.1.3, and for the Permittee to consider the NOx emissions to be after control, the associated emissions control systems for each of the generators (GEN1 to GEN65) shall be in operation and control NOx emissions from each of the generators (GEN1 to GEN65) at all times any of the generators (GEN1 to GEN65) are in operation and the catalyst bed exhaust temperature of the SCR reaches a minimum temperature of 572°F.

(b) VOC and CO
In order to assure compliance with Conditions D.1.1(b) and (c), D.1.4, and D.1.5, the associated emissions control system for each of the generators (GEN1 to GEN65) shall be in operation and control CO and VOC emissions from each of the generators (GEN1 to GEN65) at all times any of the generators (GEN1 to GEN65) are in operation.

D.1.7 Testing Requirements [326 IAC 2-1.1-11]

In order to determine compliance with Conditions D.1.1(a), D.1.1(b), and D.1.1(c), the Permittee shall perform NOx, VOC, and CO testing on a representative sample of ten (10) emissions control systems no later than 180 days after initial startup of ten (10) natural gas-fired generators.

The Permittee shall demonstrate the control system's capability to achieve a temperature of 572°F at the catalyst bed exhaust during each stack test that demonstrates compliance with the limits in Condition D.1.1(a).

These tests shall be repeated at least once every five (5) years from the date of the most recent valid compliance demonstration. Repeat testing shall be done for a representative sample of ten (10) natural gas-fired generators that have not previously been tested until all units have been tested.

These tests shall be conducted utilizing methods as approved by the Commissioner. Testing shall be conducted in accordance with the provisions of 326 IAC 3-6 (Source Sampling Procedures). Section C - Performance Testing contains the Permittee's obligations with regard to the performance testing required by this condition.

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

D.1.8 Emissions Control System - Temperature Monitoring

(a) A continuous monitoring system shall be calibrated, maintained, and operated on the emissions control systems for measuring the catalyst bed exhaust temperature and correlated to run date, engine load/kilowatt output, and engine operating hours. For

purposes of this condition, continuous means no less often than once per fifteen (15) minutes.

From the date of startup until the stack test results are available, the Permittee shall operate the emissions control systems at or above a temperature of 572°F at the catalyst bed exhaust.

(b) On and after the date the most recent compliant stack test results are available, the Permittee shall operate the emissions control systems at or above a temperature of 572°F at the catalyst bed exhaust, except during periods of start-up or shutdown or during routine maintenance or repairs.

(c) If the catalyst bed exhaust temperature falls below the above mentioned temperature, the Permittee shall take a reasonable response. Section C - Response to Excursions or Exceedances contains the Permittee's obligation with regard to the reasonable response steps required by this condition. A catalyst bed exhaust temperature reading below the above mentioned temperature is not a deviation from this permit. Failure to response steps shall be considered a deviation from this permit.

D.1.9 Emissions Control System - Urea Treatment

(a) The engine exhaust gas shall be treated with urea when the catalyst bed reaches an exhaust temperature of 572°F or more.

A continuous monitoring system shall be calibrated, maintained, and operated on the emissions control systems for detecting the urea injection status and shall be equipped with a mechanism to detect parameters which exceed manufacturer’s recommended thresholds and trigger an alarm to operators when the emissions control systems are not operating within the manufacturer’s recommended conditions.

(b) If no urea injection status reading is observed when the catalyst bed is equal to or greater than an exhaust temperature of 572°F, the Permittee shall take a reasonable response. Section C – Response to Excursions and Exceedances contains the Permittee’s obligation with regard to the reasonable response steps required by this condition.

No urea injection status reading is not a deviation from this permit. Failure to take response steps shall be considered a deviation from this permit.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.1.10 Record Keeping Requirement

(a) To document the compliance status with Conditions D.1.1(a), D.1.1(b), D.1.1(c), D.1.3, D.1.4, and D.1.5, the Permittee shall maintain records in accordance with (1) through (5) below. Records shall be taken monthly and shall be complete and sufficient to establish compliance:

(1) The total amount of natural gas used for GEN1 through GEN65 when the SCR is operating below 572°F.

(2) The total amount of natural gas used for GEN1 through GEN65 when the SCR is operating above 572°F.

(3) The calculated total NOx emissions from GEN1 through GEN65, as determined in Condition D.1.3, for each month and each compliance period.

(4) The calculated total VOC emissions from GEN1 through GEN65, as determined in Condition D.1.4, for each month and each compliance period.

(5) The calculated total CO emissions from GEN1 through GEN65, as determined in Condition D.1.5, for each month and each compliance period.

(b) To document the compliance status with Condition D.1.8, the Permittee shall maintain continuous temperature records for the emissions control systems and the catalyst bed exhaust temperature achieved to demonstrate compliance during the most recent compliant stack test.

The Permittee shall include in its daily record when a catalyst bed exhaust temperature reading is not taken and the reason for the lack of a catalyst bed exhaust temperature record (e.g., the process did not operate that day).

(c) To document the compliance status with Condition D.1.9, the Permittee shall maintain continuous records of the urea injection status readings of the emissions control systems.

The Permittee shall include in its daily record when an urea injection status reading is not taken and the reason for the lack of the record (e.g., the process did not operate that day).

(d) Section C - General Record Keeping Requirements contains the Permittee's obligations with regard to the records required by this condition.

D.1.11 Reporting Requirements

(a) A quarterly summary of the information to document the compliance status with Conditions D.1.1(a), D.1.1(b), and D.1.1(c) shall be submitted, using the reporting forms located at the end of this permit, or their equivalent, not later than thirty (30) days following the end of each calendar quarter. The report submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a “responsible official” as defined by 326 IAC 2-7-1(33).

(b) Section C - General Reporting Requirements contains the Permittee's obligations with regard to the reporting required by this condition.

SECTION D.2 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

(b) Two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, approved in 2026 for construction, each with a rated maximum heat index capacity of 5.4 MMBtu/hr, and exhausting outdoors.

Under NESHAP 40 CFR 63, Subpart DDDDD, these regasification boilers are affected sources.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.2.1 Particulate Emission Limits [326 IAC 6-2]

(a) Pursuant to 326 IAC 6-2-4 (Particulate Emission Limitations for Sources of Indirect Heating), the particulate matter (PM) emissions from the following units shall be limited to Pt pounds per MMBtu heat input, as follows:

Emission Unit	Pt (lb/MMBtu)
Boiler #1	0.6
Boiler #2	0.6

D.2.2 Preventive Maintenance Plan [326 IAC 2-7-5(12)]

A Preventive Maintenance Plan is required for these facilities and any control devices. Section B - Preventive Maintenance Plan contains the Permittee's obligation with regard to the preventive maintenance plan required by this condition.

SECTION E.1 NSPS

Emissions Unit Description:

(a) Sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, approved in 2026 for construction, each with a rated maximum capacity of 2,763 horsepower, using selective catalytic reduction (SCR) and oxidation catalysts as controls for NOx and CO respectively, and exhausting outdoors.

Under NSPS 40 CFR 60, Subpart JJJJ, these generators are affected sources because these units are stationary spark ignition internal combustion engines with a maximum engine power greater than 500 hp and were manufactured after July 1, 2007.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

New Source Performance Standards (NSPS) Requirements [326 IAC 2-7-5(1)]

E.1.1 General Provisions Relating to New Source Performance Standards [326 IAC 12-1] [40 CFR Part 60, Subpart A]

(a) Pursuant to 40 CFR 60.1, the Permittee shall comply with the provisions of 40 CFR Part 60, Subpart A – General Provisions, which are incorporated by reference as 326 IAC 12-1, for the emission unit(s) listed above, except as otherwise specified in 40 CFR Part 60, Subpart JJJJ.

(b) Pursuant to 40 CFR 60.4, the Permittee shall submit all required notifications and reports to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

E.1.2 Stationary Spark Ignition Internal Combustion Engines NSPS [326 IAC 12] [40 CFR Part 60, Subpart JJJJ]

The Permittee shall comply with the following provisions of 40 CFR Part 60, Subpart JJJJ (included as Attachment A to the operating permit), which are incorporated by reference as 326 IAC 12, for the emission unit(s) listed above:

60.4230 (a)(4)(i) and (6)	Am I subject to this subpart?
60.4233 (e)	What emission standards must I meet if I am an owner or operator of a stationary SI internal combustion engine?
60.4234	How long must I meet the emission standards if I am an owner or operator of a stationary SI internal combustion engine?
60.4236	What is the deadline for importing or installing stationary SI ICE produced in previous model years?
60.4243 (b)(1)	What are my compliance requirements if I am an owner or operator of a stationary SI internal combustion engine?
60.4244	What test methods and other procedures must I

	use if I am an owner or operator of a stationary SI internal combustion engine?
60.4245 (a), (c through j)	What are my notification, reporting, and recordkeeping requirements if I am an owner or operator of a stationary SI internal combustion engine?
60.4246	What General Provisions and confidential information provisions apply to me?
60.4248	What definitions apply to this subpart?
Tables to Subpart JJJJ of Part 60	
Table 1	NO_X, CO, and VOC Emission Standards for Stationary Non-Emergency SI Engines ≥100 HP (Except Gasoline and Rich Burn LPG), Stationary SI Landfill/Digester Gas Engines, and Stationary Emergency Engines >25 HP
Table 2	Requirements for Performance Tests
Table 3	Applicability of General Provisions to Subpart JJJJ

SECTION E.2 NESHAP

Emissions Unit Description:

(a) Sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, approved in 2026 for construction, each with a rated maximum capacity of 2,763 horsepower, using selective catalytic reduction (SCR) and oxidation catalysts as controls for NOx and CO respectively, and exhausting outdoors.

Under NESHAP 40 CFR 63, Subpart ZZZZ, these generators are affected sources because these units are stationary internal combustion engines, manufactured after December 19, 2002, and located at a major source of HAP emissions.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

National Emission Standards for Hazardous Air Pollutants (NESHAP) Requirements [326 IAC 2-7-5(1)]

E.2.1 General Provisions Relating to National Emission Standards for Hazardous Air Pollutants under 40 CFR Part 63 [326 IAC 20-1] [40 CFR Part 63, Subpart A]

(a) Pursuant to 40 CFR 63.1 the Permittee shall comply with the provisions of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated by reference as 326 IAC 20-1, for the emission unit(s) listed above, except as otherwise specified in 40 CFR Part 63, Subpart ZZZZ.

(b) Pursuant to 40 CFR 63.10, the Permittee shall submit all required notifications and reports to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

E.2.2 Stationary Reciprocating Internal Combustion Engines NESHAP [40 CFR Part 63, Subpart ZZZZ] [326 IAC 20-82]

The Permittee shall comply with the following provisions of 40 CFR Part 63, Subpart ZZZZ (included as Attachment B to the operating permit), which are incorporated by reference as 326 IAC 20-82 for the emission unit(s) listed above:

63.6580	What is the purpose of subpart ZZZZ?
63.6585 (a) and (b)	Am I subject to this subpart?
63.6590 (a)(2)(i)	What parts of my plant does this subpart cover?
63.6595 (a)(3) and (c)	When do I have to comply with this subpart?
63.6600 (b)	What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?
63.6605	What are my general requirements for complying with this subpart?
63.6610 (a)	By what date must I conduct the initial performance tests or other initial compliance

	demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?
63.6615	When must I conduct subsequent performance tests?
63.6620 (a), (b)(2), (d), (e), (i), and (j)	What performance tests and other procedures must I use?
63.6625 (b) and (h)	What are my monitoring, installation, collection, operation, and maintenance requirements?
63.6630 (a), (b), and (c)	How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?
63.6635	How do I monitor and collect data to demonstrate continuous compliance?
63.6640 (a), (b), (d), and (e)	How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?
63.6645 (a)(4), (c), (g), and (h)	What notifications must I submit and when?
63.6650 (a through f) and (i)	What reports must I submit and when?
63.6655 (a), (b), and (d)	What records must I keep?
63.6660	In what form and how long must I keep my records?
63.6665	What parts of the General Provisions apply to me?
63.6670	Who implements and enforces this subpart?
63.6675	What definitions apply to this subpart?
Tables to Subpart ZZZZ of Part 63	
Table 2a	Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions
Table 2b	Operating Limitations for New and Reconstructed 2SLB and CI Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions, Existing CI Stationary RICE >500 HP
Table 3	Subsequent Performance Tests
Table 4	Requirements for Performance Tests
Table 5	Initial Compliance With Emission Limitations, Operating Limitations, and Other Requirements
Table 6	Continuous Compliance With Emission Limitations, and Other Requirements
Table 7	Requirements for Reports
Table 8	Applicability of General Provisions to Subpart ZZZZ

SECTION E.3 NESHAP

Emissions Unit Description:

(b) Two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, approved in 2026 for construction, each with a rated maximum heat index capacity of 5.4 MMBtu/hr, and exhausting outdoors.

Under NESHAP 40 CFR 63, Subpart DDDDD, these regasification boilers are affected sources because these emission units are boilers, located at a major source of HAPs, and constructed after June 4, 2010.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

National Emission Standards for Hazardous Air Pollutants (NESHAP) Requirements [326 IAC 2-7-5(1)]

E.3.1 General Provisions Relating to National Emission Standards for Hazardous Air Pollutants under 40 CFR Part 63 [326 IAC 20-1] [40 CFR Part 63, Subpart A]

(a) Pursuant to 40 CFR 63.1 the Permittee shall comply with the provisions of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated by reference as 326 IAC 20-1, for the emission unit(s) listed above, except as otherwise specified in 40 CFR Part 63, Subpart DDDDD.

(b) Pursuant to 40 CFR 63.10, the Permittee shall submit all required notifications and reports to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

E.3.2 Major Sources: Industrial, Commercial, and Institutional Boilers and Process Heaters NESHAP [40 CFR Part 63, Subpart DDDDD] [326 IAC 20-95]

The Permittee shall comply with the following provisions of 40 CFR Part 63, Subpart DDDDD (included as Attachment C to the operating permit), which are incorporated by reference as 326 IAC 20-95, for the emission unit(s) listed above:

63.7480	What is the purpose of this subpart?
63.7485	Am I subject to this subpart?
63.7490 (a) and (b)	What is the affected source of this subpart?
63.7495 (a) and (d)	When do I have to comply with this subpart?
63.7499 (l)	What are the subcategories of boilers and process heaters?
63.7500 (a), (b), and (e)	What emission limitations, work practice standards, and operating limits must I meet?
63.7505 (a)	What are my general requirements for complying with this subpart?
63.7510 (g)	What are my initial compliance requirements and by what date must I conduct them?
63.7515 (d)	When must I conduct subsequent performance tests, fuel analyses, or tune-ups?

63.7540 (a)(11)	How do I demonstrate continuous compliance with the emission limitations, fuel specifications and work practice standards?
63.7545 (a) and (c)	What notifications must I submit and when?
63.7550 (a), (b), (c)(1), (c)(5)(i-iv), (c)(5)(xi), (c)(5)(xiii - xiv), (c)(5)(xvii), and (h)(3)	What reports must I submit and when?
63.7555 (a)(1)	What records must I keep?
63.7560	In what form and how long must I keep my records?
63.7565	What parts of the General Provisions apply to me?
63.7570	Who implements and enforces this subpart?
63.7575	What definitions apply to this subpart?
Tables to Subpart DDDDD of Part 63	
Table 3, Subcategory 2	Work Practice Standards
Table 9	Reporting Requirements
Table 10	Applicability of General Provisions to Subpart DDDDD

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
PART 70 OPERATING PERMIT
CERTIFICATION

Source Name: Life Cycle Power
Source Address: 3602 West SR 32, Lebanon, Indiana 46052
Part 70 Permit No.: T 011-50087-00094

This certification shall be included when submitting monitoring, testing reports/results or other documents as required by this permit.

Please check what document is being certified:

☐ Annual Compliance Certification Letter

☐ Test Result (specify) _____

☐ Report (specify) _____

☐ Notification (specify) _____

☐ Affidavit (specify) _____

☐ Other (specify) _____

I certify that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.	
Signature:	
Printed Name:	
Title/Position:	
Email Address:	Phone:
Date:	

MALFUNCTION REPORT

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
FAX NUMBER: (317) 233-6865
EMAIL: AirCompl@idem.in.gov

Source Name: Life Cycle Power
Source Address: 3602 West SR 32, Lebanon, Indiana 46052
Part 70 Permit No.: T 011-50087-00094

For any malfunction lasting one (1) hour or longer, the Permittee must submit this form to the Office of Air Quality (OAQ), within four (4) daytime business hours of malfunction start.

If any of the following are not applicable, mark N/A. This form consists of two (2) pages.

Page 1 of 2

This malfunction resulted in a violation of the following Indiana Administrative Code, permit condition, and/or permit limit and meets the definition of "malfunction" as listed on reverse side (e.g., 326 IAC 5-1, Permit Condition D.1.1, 40 CFR 60.62, etc.):

Describe affected facility/equipment/operation (e.g., Coating Line #2, Boiler D, Diesel engine, No. 3 smelter, etc.):
Control equipment (e.g., Baghouse B4, Thermal oxidizer for Paint Line #1, etc.):
Description of the malfunction and cause:

When the malfunction started:	Date (MM/DD/YYYY):
	Time (HH:MM):
When the malfunction was corrected or is expected to be corrected:	Date (MM/DD/YYYY):
	Time (HH:MM):

Type of pollutant(s) emitted (e.g., PM, PM10, PM2.5, VOC, etc.):
Estimated amount of pollutant(s) emitted during malfunction (e.g., VOC at 35 lbs/hr, 5 tons of PM, etc.):
Describe the corrective actions and interim control measures taken to minimize emissions (e.g., shut coating line down, isolated failing baghouse compartment, idled furnace operations until repairs completed, etc.):

Form completed by: _____

Title/position: _____

Signature:_____

Date:_____

Phone: _____

Email: _____

326 IAC 1-6-1 Applicability of rule

Sec. 1. This rule applies to the owner or operator of any facility required to obtain a permit under 326 IAC 2-5.1, 326 IAC 2-6.1, 326 IAC 2-7, or 326 IAC 2-8.

326 IAC 1-2-39 "Malfunction" definition

Sec. 39. Any sudden, unavoidable failure of any air pollution control equipment, process, or combustion or process equipment to operate in a normal and usual manner.

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH

Part 70 Quarterly Report

Source Name: Life Cycle Power
Source Address: 3602 West SR 32, Lebanon, Indiana 46052
Part 70 Permit No.: T 011-50087-00094
Facility: Natural gas-fired Caterpillar G3516H generators (GEN1 through GEN65)
Parameter: Total NOx Emissions
Limit: Shall not exceed 121 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

QUARTER:_____ YEAR:_____

Month	Column 1	Column 2	Column 1 + Column 2
	(*NOx Emissions*) (*tons*)	(*NOx Emissions*) (*tons*)	(*NOx Emissions*) (*tons*)
	This Month	Previous 11 Months	12 Month Total

☐ No deviation occurred in this quarter.
☐ Deviation/s occurred in this quarter.
Deviation has been reported on: _____

Submitted by: _____

Title / Position: _____

Signature: _____

Date: _____

Phone:_____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH

Part 70 Quarterly Report

Source Name: Life Cycle Power
Source Address: 3602 West SR 32, Lebanon, Indiana 46052
Part 70 Permit No.: T 011-50087-00094
Facility: Natural gas-fired Caterpillar G3516H generators (GEN1 through GEN65)
Parameter: Total VOC Emissions
Limit: Shall not exceed 155 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

QUARTER:_____ YEAR:_____

Month	Column 1	Column 2	Column 1 + Column 2
	(*VOC Emissions*) (*tons*)	(*VOC Emissions*) (*tons*)	(*VOC Emissions*) (*tons*)
	This Month	Previous 11 Months	12 Month Total

☐ No deviation occurred in this quarter.
☐ Deviation/s occurred in this quarter.
Deviation has been reported on: _____

Submitted by: _____

Title / Position: _____

Signature: _____

Date: _____

Phone:_____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH

Part 70 Quarterly Report

Source Name: Life Cycle Power
Source Address: 3602 West SR 32, Lebanon, Indiana 46052
Part 70 Permit No.: T 011-50087-00094
Facility: Natural gas-fired Caterpillar G3516H generators (GEN1 through GEN65)
Parameter: Total CO Emissions
Limit: Shall not exceed 155 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

QUARTER:_____ YEAR:_____

Month	Column 1	Column 2	Column 1 + Column 2
	(*CO Emissions*) (*tons*)	(*CO Emissions*) (*tons*)	(*CO Emissions*) (*tons*)
	This Month	Previous 11 Months	12 Month Total

☐ No deviation occurred in this quarter.
☐ Deviation/s occurred in this quarter.
Deviation has been reported on: _____

Submitted by: _____

Title / Position: _____

Signature: _____

Date: _____

Phone:_____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
PART 70 OPERATING PERMIT
QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT

Source Name: Life Cycle Power
Source Address: 3602 West SR 32, Lebanon, Indiana 46052
Part 70 Permit No.: T 011-50087-00094

Months: _____ to _____ Year: _____

This report shall be submitted quarterly based on a calendar year. Proper notice submittal under Section C - Malfunctions Report satisfies the reporting requirements of paragraph (a) of Section C - General Reporting. Any deviation from the requirements of this permit, the date(s) of each deviation, the probable cause of the deviation, and the response steps taken must be reported. A deviation required to be reported pursuant to an applicable requirement that exists independent of the permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. Additional pages may be attached if necessary. If no deviations occurred, please specify in the box marked "No deviations occurred this reporting period".

□ NO DEVIATIONS OCCURRED THIS REPORTING PERIOD.

□ THE FOLLOWING DEVIATIONS OCCURRED THIS REPORTING PERIOD

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Form Completed by:_____

Title / Position: _____

Date:_____

Phone: _____

Mail to: Permit Administration and Support Section
Office of Air Quality
Indiana Government Center North
100 North Senate Avenue, Room 13W
Indianapolis, Indiana 46204-2251

Life Cycle Power
3602 West SR 32
Lebanon, Indiana 46052

Affidavit of Construction

I, _____, being duly sworn upon my oath, depose and say:
(Name of the Authorized Representative)

1. I live in _____ County, Indiana and being of sound mind and over twenty-one (21) years of age, I am competent to give this affidavit.

2. I hold the position of _____ for _____.
(Title) (Company Name)

3. By virtue of my position with _____, I have personal
(Company Name)
knowledge of the representations contained in this affidavit and am authorized to make these representations on behalf of _____.
(Company Name)

4. I hereby certify that Life Cycle Power, 3602 West SR 32, Lebanon, Indiana 46052, completed construction of the greenfield power generating facility on _____ in conformity with the requirements and intent of the construction permit application received by the Office of Air Quality on ***February 20, 2026*** and as permitted pursuant to New Source Construction Permit and Part 70 Operating Permit No. T 011-50087-00094, Plant ID No. 011-00094 issued on _____.

5. **Permittee, please cross out the following statement if it does not apply:** Additional (operations/facilities) were constructed/substituted as described in the attachment to this document and were not made in accordance with the construction permit.

Further Affiant said not.

I affirm under penalties of perjury that the representations contained in this affidavit are true, to the best of my information and belief.

Signature_____
Date_____

STATE OF INDIANA)
)SS
COUNTY OF _____)

Subscribed and sworn to me, a notary public in and for _____ County and State of Indiana on this _____ day of _____, 20_____. My Commission expires: _____.

Signature_____
Name_____ (typed or printed)

If the source location has been given an Enhanced 911 service address that is different than the source location address specified in the current permit, please provide the Enhanced 911 service address in the space below and please submit a permit application to modify the permit to specify the Enhanced 911 service address.

_____	_____	_____	_____
(Location Address*)*	*(City)*	*(State)*	*(ZIP Code)*

Attachment A

Part 70 Administrative Operating Permit No: T 011-50087-00094

[Downloaded from the eCFR on September 5, 2024]

Electronic Code of Federal Regulations

Title 40: Protection of Environment

PART 60—STANDARDS OF PERFORMANCE FOR NEW STATIONARY SOURCES

Subpart JJJJ—Standards of Performance for Stationary Spark Ignition Internal Combustion Engines

SOURCE: 73 FR 3591, Jan. 18, 2008, unless otherwise noted.

What This Subpart Covers

§ 60.4230 Am I subject to this subpart?

(a) The provisions of this subpart are applicable to manufacturers, owners, and operators of stationary spark ignition (SI) internal combustion engines (ICE) as specified in paragraphs (a)(1) through (6) of this section. For the purposes of this subpart, the date that construction commences is the date the engine is ordered by the owner or operator.

(1) Manufacturers of stationary SI ICE with a maximum engine power less than or equal to 19 kilowatt (KW) (25 horsepower (HP)) that are manufactured on or after July 1, 2008.

(2) Manufacturers of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) that are gasoline fueled or that are rich burn engines fueled by liquefied petroleum gas (LPG), where the date of manufacture is:

(i) On or after July 1, 2008; or

(ii) On or after January 1, 2009, for emergency engines.

(3) Manufacturers of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) that are not gasoline fueled and are not rich burn engines fueled by LPG, where the manufacturer participates in the voluntary manufacturer certification program described in this subpart and where the date of manufacture is:

(i) On or after July 1, 2007, for engines with a maximum engine power greater than or equal to 500 HP (except lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP);

(ii) On or after January 1, 2008, for lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP;

(iii) On or after July 1, 2008, for engines with a maximum engine power less than 500 HP; or

(iv) On or after January 1, 2009, for emergency engines.

(4) Owners and operators of stationary SI ICE that commence construction after June 12, 2006, where the stationary SI ICE are manufactured:

(i) On or after July 1, 2007, for engines with a maximum engine power greater than or equal to 500 HP (except lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP);

(ii) on or after January 1, 2008, for lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP;

(iii) on or after July 1, 2008, for engines with a maximum engine power less than 500 HP; or

(iv) on or after January 1, 2009, for emergency engines with a maximum engine power greater than 19 KW (25 HP).

(5) Owners and operators of stationary SI ICE that are modified or reconstructed after June 12, 2006, and any person that modifies or reconstructs any stationary SI ICE after June 12, 2006.

(6) The provisions of § 60.4236 of this subpart are applicable to all owners and operators of stationary SI ICE that commence construction after June 12, 2006.

(b) The provisions of this subpart are not applicable to stationary SI ICE being tested at an engine test cell/stand.

(c) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or 40 CFR part 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

(d) For the purposes of this subpart, stationary SI ICE using alcohol-based fuels are considered gasoline engines.

(e) Stationary SI ICE may be eligible for exemption from the requirements of this subpart as described in 40 CFR part 1068, subpart C (or the exemptions described in 40 CFR parts 1048 and 1054, for engines that would need to be certified to standards in those parts), except that owners and operators, as well as manufacturers, may be eligible to request an exemption for national security.

(f) Owners and operators of facilities with internal combustion engines that are acting as temporary replacement units and that are located at a stationary source for less than 1 year and that have been properly certified as meeting the standards that would be applicable to such engine under the appropriate nonroad engine provisions, are not required to meet any other provisions under this subpart with regard to such engines.

[73 FR 3591, Jan. 18, 2008, as amended at 76 FR 37972, June 28, 2011; 86 FR 34360, June 29, 2021]

Emission Standards for Manufacturers

§ 60.4231 What emission standards must I meet if I am a manufacturer of stationary SI internal combustion engines or equipment containing such engines?

(a) Stationary SI internal combustion engine manufacturers must certify their stationary SI ICE with a maximum engine power less than or equal to 19 KW (25 HP) manufactured on or after July 1, 2008 to the certification emission standards and other requirements for new nonroad SI engines in 40 CFR part 1054, as follows:

If engine displacement is . . .	and manufacturing dates are . . .	the engine must meet the following non-handheld emission standards identified in 40 CFR part 1054 and related requirements:
(1) Below 225 cc	July 1, 2008 to December 31, 2011	Phase 2.
(2) Below 225 cc	January 1, 2012 or later	Phase 3.
(3) At or above 225 cc	July 1, 2008 to December 31, 2010	Phase 2.
(4) At or above 225 cc	January 1, 2011 or later	Phase 3.

(b) Stationary SI internal combustion engine manufacturers must certify their stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) (except emergency stationary ICE with a maximum engine power greater than 25 HP and less than 130 HP) that use gasoline and that are manufactured on or after the applicable date in § 60.4230(a)(2), or manufactured on or after the applicable date in § 60.4230(a)(4) for emergency stationary ICE with a maximum engine power greater than or equal to 130 HP, to the certification emission standards and other requirements for new nonroad SI engines in 40 CFR part 1048. Stationary SI internal combustion engine manufacturers must certify their emergency stationary SI ICE with a maximum engine power greater than 25 HP and less than 130 HP that use gasoline and that are manufactured on or after the applicable date in § 60.4230(a)(4) to the Phase 1 emission standards in 40 CFR part 1054, appendix I, applicable to class II engines, and other requirements for new nonroad SI engines in 40 CFR part 1054. Stationary SI internal combustion engine manufacturers may certify their stationary SI ICE with a maximum engine power less than or equal to 30 KW (40 HP) with a total displacement less than or equal to 1,000 cubic centimeters (cc) that use gasoline to the certification emission standards and other requirements as appropriate for new nonroad SI engines in 40 CFR part 1054.

(c) Stationary SI internal combustion engine manufacturers must certify their stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) (except emergency stationary ICE with a maximum engine power greater than 25 HP and less than 130 HP) that are rich burn engines that use LPG and that are manufactured on or after the applicable date in § 60.4230(a)(2), or manufactured on or after the applicable date in § 60.4230(a)(4) for emergency stationary ICE with a maximum engine power greater than or equal to 130 HP, to the certification emission standards and other requirements for new nonroad SI engines in 40 CFR part 1048. Stationary SI internal combustion engine manufacturers must certify their emergency stationary SI ICE greater than 25 HP and less than 130 HP that are rich burn engines that use LPG and that are manufactured on or after the applicable date in § 60.4230(a)(4) to the Phase 1 emission standards in 40 CFR part 1054, appendix I, applicable to class II engines, and other requirements for new nonroad SI engines in 40 CFR part 1054. Stationary SI internal combustion engine manufacturers may certify their stationary SI ICE with a maximum engine power less than or equal to 30 KW (40 HP) with a total displacement less than or equal to 1,000 cc that are rich burn engines that use LPG to the certification emission standards and other requirements as appropriate for new nonroad SI engines in 40 CFR part 1054.

(d) Stationary SI internal combustion engine manufacturers who choose to certify their stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) and less than 75 KW (100 HP) (except gasoline and rich burn engines that use LPG and emergency stationary ICE with a maximum engine power greater than 25 HP and less than 130 HP) under the voluntary manufacturer certification program described in this subpart must certify those engines to the certification emission standards for new nonroad SI engines in 40 CFR part 1048. Stationary SI internal combustion engine manufacturers who choose to certify their emergency stationary SI ICE greater than 25 HP and less than 130 HP (except gasoline and rich burn engines that use LPG), must certify those engines to the Phase 1 emission standards in 40 CFR part 1054, appendix I, applicable to class II engines, for new nonroad SI engines in 40 CFR part 1054. Stationary SI internal combustion engine manufacturers may certify their stationary SI ICE with a maximum engine power less than or equal to 30 KW (40 HP) with a total displacement less than or equal to 1,000 cc (except gasoline and rich burn engines that use LPG) to the certification emission standards and other requirements as appropriate for new nonroad SI engines in 40 CFR part 1054. For stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) and less than 75 KW (100 HP) (except gasoline and rich burn engines that use LPG and emergency stationary ICE with a maximum engine power greater than 25 HP and less than 130 HP) manufactured prior to January 1, 2011, manufacturers may choose to certify these engines to the standards in Table 1 to this subpart applicable to engines with a maximum engine power greater than or equal to 100 HP and less than 500 HP.

(e) Stationary SI internal combustion engine manufacturers who choose to certify their stationary SI ICE with a maximum engine power greater than or equal to 75 KW (100 HP) (except gasoline and rich burn engines that use LPG) under the voluntary manufacturer certification program described in this subpart must certify those engines to the emission standards in Table 1 to this subpart. Stationary SI internal combustion engine manufacturers may certify their stationary SI ICE with a maximum engine power greater than or equal to 75 KW (100 HP) that are lean burn engines that use LPG to the certification emission standards for new nonroad SI engines in 40 CFR part 1048. For stationary SI ICE with a maximum engine power greater than or equal to 100 HP (75 KW) and less than 500 HP (373 KW) manufactured prior to January 1, 2011, and for stationary SI ICE with a maximum engine power greater than or equal to 500 HP (373 KW) manufactured prior to July 1, 2010, manufacturers may choose to certify these engines to the certification emission standards for new nonroad SI engines in 40 CFR part 1048 applicable to engines that are not severe duty engines.

(f) Manufacturers of equipment containing stationary SI internal combustion engines meeting the provisions of 40 CFR part 1054 must meet the provisions of 40 CFR part 1060, to the extent they apply to equipment manufacturers.

(g) Notwithstanding the requirements in paragraphs (a) through (c) of this section, stationary SI internal combustion engine manufacturers are not required to certify reconstructed engines; however manufacturers may elect to do so. The reconstructed engine must be certified to the emission standards specified in paragraphs (a) through (e) of this section that are applicable to the model year, maximum engine power and displacement of the reconstructed stationary SI ICE.

[73 FR 3591, Jan. 18, 2008, as amended at 73 FR 59175, Oct. 8, 2008; 76 FR 37973, June 28, 2011; 78 FR 6697, Jan. 30, 2013; 86 FR 34360, June 29, 2021]

§ 60.4232 How long must my engines meet the emission standards if I am a manufacturer of stationary SI internal combustion engines?

Engines manufactured by stationary SI internal combustion engine manufacturers must meet the emission standards as required in § 60.4231 during the certified emissions life of the engines.

Emission Standards for Owners and Operators

§ 60.4233 What emission standards must I meet if I am an owner or operator of a stationary SI internal combustion engine?

(a) Owners and operators of stationary SI ICE with a maximum engine power less than or equal to 19 KW (25 HP) manufactured on or after July 1, 2008, must comply with the emission standards in § 60.4231(a) for their stationary SI ICE.

(b) Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) manufactured on or after the applicable date in § 60.4230(a)(4) that use gasoline must comply with the emission standards in § 60.4231(b) for their stationary SI ICE.

(c) Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) manufactured on or after the applicable date in § 60.4230(a)(4) that are rich burn engines that use LPG must comply with the emission standards in § 60.4231(c) for their stationary SI ICE.

(d) Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) and less than 75 KW (100 HP) (except gasoline and rich burn engines that use LPG) must comply with the emission standards for field testing in 40 CFR 1048.101(c) for their non-emergency stationary SI ICE and with the emission standards in Table 1 to this subpart for their emergency stationary SI ICE. Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) and less than 75 KW (100 HP) manufactured prior to January 1, 2011, that were certified to the standards in Table 1 to this subpart applicable to engines with a maximum engine power greater than or equal to 100 HP and less than 500 HP, may optionally choose to meet those standards.

(e) Owners and operators of stationary SI ICE with a maximum engine power greater than or equal to 75 KW (100 HP) (except gasoline and rich burn engines that use LPG) must comply with the emission standards in Table 1 to this subpart for their stationary SI ICE. For owners and operators of stationary SI ICE with a maximum engine power greater than or equal to 100 HP (except gasoline and rich burn engines that use LPG) manufactured prior to January 1, 2011 that were certified to the certification emission standards in 40 CFR part 1048 applicable to engines that are not severe duty engines, if such stationary SI ICE was certified to a carbon monoxide (CO) standard above the standard in Table 1 to this subpart, then the owners and operators may meet the CO certification (not field testing) standard for which the engine was certified.

(f) Owners and operators of any modified or reconstructed stationary SI ICE subject to this subpart must meet the requirements as specified in paragraphs (f)(1) through (5) of this section.

(1) Owners and operators of stationary SI ICE with a maximum engine power less than or equal to 19 KW (25 HP), that are modified or reconstructed after June 12, 2006, must comply with emission standards in § 60.4231(a) for their stationary SI ICE. Engines with a date of manufacture prior to July 1, 2008 must comply with the emission standards specified in § 60.4231(a) applicable to engines manufactured on July 1, 2008.

(2) Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) that are gasoline engines and are modified or reconstructed after June 12, 2006, must comply with the emission standards in § 60.4231(b) for their stationary SI ICE. Engines with a date of manufacture prior to July 1, 2008 (or January 1, 2009 for emergency engines) must comply with the emission standards specified in § 60.4231(b) applicable to engines manufactured on July 1, 2008 (or January 1, 2009 for emergency engines).

(3) Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) that are rich burn engines that use LPG, that are modified or reconstructed after June 12, 2006, must comply with the same emission standards as those specified in § 60.4231(c). Engines with a date of manufacture prior to July 1, 2008 (or January 1, 2009 for emergency engines) must comply with the emission standards specified in § 60.4231(c) applicable to engines manufactured on July 1, 2008 (or January 1, 2009 for emergency engines).

(4) Owners and operators of stationary SI natural gas and lean burn LPG engines with a maximum engine power greater than 19 KW (25 HP), that are modified or reconstructed after June 12, 2006, must comply with the same emission standards as those specified in paragraph (d) or (e) of this section, except that such owners and operators of non-emergency engines and emergency engines greater than or equal to 130 HP must meet a nitrogen oxides (NO_X) emission standard of 3.0 grams per HP-hour (g/HP-hr), a CO emission standard of 4.0 g/HP-hr (5.0 g/HP-hr for non-emergency engines less than 100 HP), and a volatile organic compounds (VOC) emission standard of 1.0 g/HP-hr, or a NO_X emission standard of 250 ppmvd at 15 percent oxygen (O_2), a CO emission standard 540 ppmvd at 15 percent O_2 (675 ppmvd at 15 percent O_2 for non-emergency engines less than 100 HP), and a VOC emission standard of 86 ppmvd at 15 percent O_2, where the date of manufacture of the engine is:

(i) Prior to July 1, 2007, for non-emergency engines with a maximum engine power greater than or equal to 500 HP (except lean burn natural gas engines and LPG engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP);

(ii) Prior to July 1, 2008, for non-emergency engines with a maximum engine power less than 500 HP;

(iii) Prior to January 1, 2009, for emergency engines;

(iv) Prior to January 1, 2008, for non-emergency lean burn natural gas engines and LPG engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP.

(5) Owners and operators of stationary SI landfill/digester gas ICE engines with a maximum engine power greater than 19 KW (25 HP), that are modified or reconstructed after June 12, 2006, must comply with the same emission standards as those specified in paragraph (e) of this section for stationary landfill/digester gas engines. Engines with maximum engine power less than 500 HP and a date of manufacture prior to July 1, 2008 must comply with the emission standards specified in paragraph (e) of this section for stationary landfill/digester gas ICE with a maximum engine power less than 500 HP manufactured on July 1, 2008. Engines with a maximum engine power greater than or equal to 500 HP (except lean burn engines greater than or equal to 500 HP and less than 1,350 HP) and a date of manufacture prior to July 1, 2007 must comply with the emission standards

specified in paragraph (e) of this section for stationary landfill/digester gas ICE with a maximum engine power greater than or equal to 500 HP (except lean burn engines greater than or equal to 500 HP and less than 1,350 HP) manufactured on July 1, 2007. Lean burn engines greater than or equal to 500 HP and less than 1,350 HP with a date of manufacture prior to January 1, 2008 must comply with the emission standards specified in paragraph (e) of this section for stationary landfill/digester gas ICE that are lean burn engines greater than or equal to 500 HP and less than 1,350 HP and manufactured on January 1, 2008.

(g) Owners and operators of stationary SI wellhead gas ICE engines may petition the Administrator for approval on a case-by-case basis to meet emission standards no less stringent than the emission standards that apply to stationary emergency SI engines greater than 25 HP and less than 130 HP due to the presence of high sulfur levels in the fuel, as specified in Table 1 to this subpart. The request must, at a minimum, demonstrate that the fuel has high sulfur levels that prevent the use of aftertreatment controls and also that the owner has reasonably made all attempts possible to obtain an engine that will meet the standards without the use of aftertreatment controls. The petition must request the most stringent standards reasonably applicable to the engine using the fuel.

(h) Owners and operators of stationary SI ICE that are required to meet standards that reference 40 CFR 1048.101 must, if testing their engines in use, meet the standards in that section applicable to field testing, except as indicated in paragraph (e) of this section.

[73 FR 3591, Jan. 18, 2008, as amended at 76 FR 37973, June 28, 2011]

§ 60.4234 How long must I meet the emission standards if I am an owner or operator of a stationary SI internal combustion engine?

Owners and operators of stationary SI ICE must operate and maintain stationary SI ICE that achieve the emission standards as required in § 60.4233 over the entire life of the engine.

Other Requirements for Owners and Operators

§ 60.4235 What fuel requirements must I meet if I am an owner or operator of a stationary SI gasoline fired internal combustion engine subject to this subpart?

Owners and operators of stationary SI ICE subject to this subpart that use gasoline must use gasoline that meets the per gallon sulfur limit in 40 CFR 1090.205.

[73 FR 3591, Jan. 18, 2008, as amended at 85 FR 78463, Dec. 4, 2020]

§ 60.4236 What is the deadline for importing or installing stationary SI ICE produced in previous model years?

(a) After July 1, 2010, owners and operators may not install stationary SI ICE with a maximum engine power of less than 500 HP that do not meet the applicable requirements in § 60.4233.

(b) After July 1, 2009, owners and operators may not install stationary SI ICE with a maximum engine power of greater than or equal to 500 HP that do not meet the applicable requirements in § 60.4233, except that lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP that do not meet the applicable requirements in § 60.4233 may not be installed after January 1, 2010.

(c) For emergency stationary SI ICE with a maximum engine power of greater than 19 KW (25 HP), owners and operators may not install engines that do not meet the applicable requirements in § 60.4233 after January 1, 2011.

(d) In addition to the requirements specified in §§ 60.4231 and 60.4233, it is prohibited to import stationary SI ICE less than or equal to 19 KW (25 HP), stationary rich burn LPG SI ICE, and stationary gasoline SI ICE that do not meet the applicable requirements specified in paragraphs (a), (b), and (c) of this section, after the date specified in paragraph (a), (b), and (c) of this section.

(e) The requirements of this section do not apply to owners and operators of stationary SI ICE that have been modified or reconstructed, and they do not apply to engines that were removed from one existing location and reinstalled at a new location.

§ 60.4237 What are the monitoring requirements if I am an owner or operator of an emergency stationary SI internal combustion engine?

(a) Starting on July 1, 2010, if the emergency stationary SI internal combustion engine that is greater than or equal to 500 HP that was built on or after July 1, 2010, does not meet the standards applicable to non-emergency engines, the owner or operator must install a non-resettable hour meter.

(b) Starting on January 1, 2011, if the emergency stationary SI internal combustion engine that is greater than or equal to 130 HP and less than 500 HP that was built on or after January 1, 2011, does not meet the standards applicable to non-emergency engines, the owner or operator must install a non-resettable hour meter.

(c) If you are an owner or operator of an emergency stationary SI internal combustion engine that is less than 130 HP, was built on or after July 1, 2008, and does not meet the standards applicable to non-emergency engines, you must install a non-resettable hour meter upon startup of your emergency engine.

Compliance Requirements for Manufacturers

§ 60.4238 What are my compliance requirements if I am a manufacturer of stationary SI internal combustion engines ≤19 KW (25 HP) or a manufacturer of equipment containing such engines?

Stationary SI internal combustion engine manufacturers who are subject to the emission standards specified in § 60.4231(a) must certify their stationary SI ICE using the certification and testing procedures required in 40 CFR part 1054, subparts C and F. Manufacturers of equipment containing stationary SI internal combustion engines meeting the provisions of 40 CFR part 1054 must meet the provisions of 40 CFR part 1060, subpart C, to the extent they apply to equipment manufacturers.

[86 FR 34361, June 29, 2021]

§ 60.4239 What are my compliance requirements if I am a manufacturer of stationary SI internal combustion engines >19 KW (25 HP) that use gasoline or a manufacturer of equipment containing such engines?

Stationary SI internal combustion engine manufacturers who are subject to the emission standards specified in § 60.4231(b) must certify their stationary SI ICE using the certification procedures required in 40 CFR part 1048, subpart C, and must test their engines as specified in that part. Stationary SI internal combustion engine manufacturers who certify their stationary SI ICE with a maximum engine power less than or equal to 30 KW (40 HP) with a total displacement less than or equal to 1,000 cc to the certification emission standards and other requirements for new nonroad SI engines in 40 CFR part 1054, and manufacturers of stationary SI emergency engines that are greater than 25 HP and less than 130 HP who meet the Phase 1 emission standards in 40 CFR part 1054, appendix I, applicable to class II engines, must certify their stationary SI ICE using the certification and testing procedures required in 40 CFR part 1054, subparts C and F. Manufacturers of equipment containing stationary SI internal combustion engines meeting the provisions of 40 CFR part 1054 must meet the provisions of 40 CFR part 1060, subpart C, to the extent they apply to equipment manufacturers.

[86 FR 34361, June 29, 2021]

§ 60.4240 What are my compliance requirements if I am a manufacturer of stationary SI internal combustion engines >19 KW (25 HP) that are rich burn engines that use LPG or a manufacturer of equipment containing such engines?

Stationary SI internal combustion engine manufacturers who are subject to the emission standards specified in § 60.4231(c) must certify their stationary SI ICE using the certification procedures required in 40 CFR part 1048, subpart C, and must test their engines as specified in that part. Stationary SI internal combustion engine manufacturers who certify their stationary SI ICE with a maximum engine power less than or equal to 30 KW (40 HP) with a total displacement less than or equal to 1,000 cc to the certification emission standards and other requirements

for new nonroad SI engines in 40 CFR part 1054, and manufacturers of stationary SI emergency engines that are greater than 25 HP and less than 130 HP who meet the Phase 1 emission standards in 40 CFR part 1054, appendix I, applicable to class II engines, must certify their stationary SI ICE using the certification and testing procedures required in 40 CFR part 1054, subparts C and F. Manufacturers of equipment containing stationary SI internal combustion engines meeting the provisions of 40 CFR part 1054 must meet the provisions of 40 CFR part 1060, subpart C, to the extent they apply to equipment manufacturers.

[86 FR 34361, June 29, 2021]

§ 60.4241 What are my compliance requirements if I am a manufacturer of stationary SI internal combustion engines participating in the voluntary certification program or a manufacturer of equipment containing such engines?

(a) Manufacturers of stationary SI internal combustion engines with a maximum engine power greater than 19 KW (25 HP) that do not use gasoline and are not rich burn engines that use LPG can choose to certify their engines to the emission standards in § 60.4231(d) or (e), as applicable, under the voluntary certification program described in this subpart. Manufacturers who certify their engines under the voluntary certification program must meet the requirements as specified in paragraphs (b) through (g) of this section. In addition, manufacturers of stationary SI internal combustion engines who choose to certify their engines under the voluntary certification program, must also meet the requirements as specified in § 60.4247. Manufacturers of stationary SI internal combustion engines who choose not to certify their engines under this section must notify the ultimate purchaser that testing requirements apply as described in § 60.4243(b)(2); manufacturers must keep a copy of this notification for five years after shipping each engine and make those documents available to EPA upon request.

(b) Manufacturers of engines other than those certified to standards in 40 CFR part 1054 must certify their stationary SI ICE using the certification procedures required in 40 CFR part 1048, subpart C, and must follow the same test procedures that apply to Large SI nonroad engines under 40 CFR part 1048, but must use the D-1 cycle of International Organization for Standardization 8178-4: 1996(E) (incorporated by reference, see § 60.17) or the test cycle requirements specified in Table 3 to 40 CFR 1048.505, except that Table 3 of 40 CFR 1048.505 applies to high load engines only. Manufacturers of any size may certify their stationary emergency engines at or above 130 hp using assigned deterioration factors established by EPA, consistent with 40 CFR 1048.240. Stationary SI internal combustion engine manufacturers who certify their stationary SI ICE with a maximum engine power less than or equal to 30 KW (40 HP) with a total displacement less than or equal to 1,000 cc to the certification emission standards and other requirements for new nonroad SI engines in 40 CFR part 1054, and manufacturers of emergency engines that are greater than 25 HP and less than 130 HP who meet the Phase 1 standards in 40 CFR part 1054, appendix I, applicable to class II engines, must certify their stationary SI ICE using the certification and testing procedures required in 40 CFR part 1054, subparts C and F. Manufacturers of equipment containing stationary SI internal combustion engines meeting the provisions of 40 CFR part 1054 must meet the provisions of 40 CFR part 1060, subpart C, to the extent they apply to equipment manufacturers.

(c) Certification of stationary SI ICE to the emission standards specified in § 60.4231(d) or (e), as applicable, is voluntary, but manufacturers who decide to certify are subject to all of the requirements indicated in this subpart with regard to the engines included in their certification. Manufacturers must clearly label their stationary SI engines as certified or non-certified engines.

(d) Manufacturers of natural gas fired stationary SI ICE who conduct voluntary certification of stationary SI ICE to the emission standards specified in § 60.4231(d) or (e), as applicable, must certify their engines for operation using fuel that meets the definition of pipeline-quality natural gas. The fuel used for certifying stationary SI natural gas engines must meet the definition of pipeline-quality natural gas as described in § 60.4248. In addition, the manufacturer must provide information to the owner and operator of the certified stationary SI engine including the specifications of the pipeline-quality natural gas to which the engine is certified and what adjustments the owner or operator must make to the engine when installed in the field to ensure compliance with the emission standards.

(e) Manufacturers of stationary SI ICE that are lean burn engines fueled by LPG who conduct voluntary certification of stationary SI ICE to the emission standards specified in § 60.4231(d) or (e), as applicable, must certify their engines for operation using fuel that meets the specifications in 40 CFR 1065.720.

(f) Manufacturers may certify their engines for operation using gaseous fuels in addition to pipeline-quality natural gas; however, the manufacturer must specify the properties of that fuel and provide testing information showing

that the engine will meet the emission standards specified in § 60.4231(d) or (e), as applicable, when operating on that fuel. The manufacturer must also provide instructions for configuring the stationary engine to meet the emission standards on fuels that do not meet the pipeline-quality natural gas definition. The manufacturer must also provide information to the owner and operator of the certified stationary SI engine regarding the configuration that is most conducive to reduced emissions where the engine will be operated on gaseous fuels with different quality than the fuel that it was certified to.

(g) A stationary SI engine manufacturer may certify an engine family solely to the standards applicable to landfill/digester gas engines as specified in § 60.4231(d) or (e), as applicable, but must certify their engines for operation using landfill/digester gas and must add a permanent label stating that the engine is for use only in landfill/digester gas applications. The label must be added according to the labeling requirements specified in 40 CFR 1048.135(b).

(h) For purposes of this subpart, when calculating emissions of volatile organic compounds, emissions of formaldehyde should not be included.

(i) For engines being certified to the voluntary certification standards in Table 1 of this subpart, the VOC measurement shall be made by following the procedures in 40 CFR part 1065, subpart C, to determine the total NMHC emissions. As an alternative, manufacturers may measure ethane, as well as methane, for excluding such levels from the total VOC measurement.

[73 FR 3591, Jan. 18, 2008, as amended at 73 FR 59176, Oct. 8, 2008; 76 FR 37974, June 28, 2011; 86 FR 34361, June 29, 2021]

§ 60.4242 What other requirements must I meet if I am a manufacturer of stationary SI internal combustion engines or equipment containing stationary SI internal combustion engines or a manufacturer of equipment containing such engines?

(a) Stationary SI internal combustion engine manufacturers must meet the provisions of 40 CFR parts 1048, 1054, and 1068, as applicable, except that engines certified pursuant to the voluntary certification procedures in § 60.4241 are subject only to the provisions indicated in § 60.4247 and are permitted to provide instructions to owners and operators allowing for deviations from certified configurations, if such deviations are consistent with the provisions of § 60.4241(c) through (f). Manufacturers of equipment containing stationary SI internal combustion engines meeting the provisions of 40 CFR part 1054 must meet the provisions of 40 CFR part 1060, as applicable. Labels on engines certified to 40 CFR part 1048 must refer to stationary engines, rather than or in addition to nonroad engines, as appropriate.

(b) An engine manufacturer certifying an engine family or families to standards under this subpart that are identical to standards identified in 40 CFR part 1048 or 1054 for that model year may certify any such family that contains both nonroad and stationary engines as a single engine family and/or may include any such family containing stationary engines in the averaging, banking and trading provisions applicable for such engines under those parts. This paragraph (b) also applies to equipment or component manufacturers certifying to standards under 40 CFR part 1060.

(c) Manufacturers of engine families certified to 40 CFR part 1048 may meet the labeling requirements referred to in paragraph (a) of this section for stationary SI ICE by either adding a separate label containing the information required in paragraph (a) of this section or by adding the words “and stationary” after the word “nonroad” to the label.

(d) For all engines manufactured on or after January 1, 2011, and for all engines with a maximum engine power greater than 25 HP and less than 130 HP manufactured on or after July 1, 2008, a stationary SI engine manufacturer that certifies an engine family solely to the standards applicable to emergency engines must add a permanent label stating that the engines in that family are for emergency use only. The label must be added according to the labeling requirements specified in 40 CFR 1048.135(b).

(e) All stationary SI engines subject to mandatory certification that do not meet the requirements of this subpart must be labeled and exported according to 40 CFR 1068.230. Manufacturers of stationary engines with a maximum engine power greater than 25 HP that are not certified to standards and other requirements under 40 CFR part 1048 are subject to the labeling provisions of 40 CFR 1048.20 pertaining to excluded stationary engines.

(f) For manufacturers of gaseous-fueled stationary engines required to meet the warranty provisions in 40 CFR 1054.120, we may establish an hour-based warranty period equal to at least the certified emissions life of the engines (in engine operating hours) if we determine that these engines are likely to operate for a number of hours greater than the applicable useful life within 24 months. We will not approve an alternate warranty under this paragraph (f) for nonroad engines. An alternate warranty period approved under this paragraph (f) will be the specified number of engine operating hours or two years, whichever comes first. The engine manufacturer shall request this alternate warranty period in its application for certification or in an earlier submission. We may approve an alternate warranty period for an engine family subject to the following conditions:

(1) The engines must be equipped with non-resettable hour meters.

(2) The engines must be designed to operate for a number of hours substantially greater than the applicable certified emissions life.

(3) The emission-related warranty for the engines may not be shorter than any published warranty offered by the manufacturer without charge for the engines. Similarly, the emission-related warranty for any component shall not be shorter than any published warranty offered by the manufacturer without charge for that component.

[86 FR 34362, June 29, 2021]

Compliance Requirements for Owners and Operators

§ 60.4243 What are my compliance requirements if I am an owner or operator of a stationary SI internal combustion engine?

(a) If you are an owner or operator of a stationary SI internal combustion engine that is manufactured after July 1, 2008, and must comply with the emission standards specified in § 60.4233(a) through (c), you must comply by purchasing an engine certified to the emission standards in § 60.4231(a) through (c), as applicable, for the same engine class and maximum engine power. In addition, you must meet one of the requirements specified in (a)(1) and (2) of this section.

(1) If you operate and maintain the certified stationary SI internal combustion engine and control device according to the manufacturer's emission-related written instructions, you must keep records of conducted maintenance to demonstrate compliance, but no performance testing is required if you are an owner or operator. You must also meet the requirements as specified in 40 CFR part 1068, subparts A through D, as they apply to you. If you adjust engine settings according to and consistent with the manufacturer's instructions, your stationary SI internal combustion engine will not be considered out of compliance.

(2) If you do not operate and maintain the certified stationary SI internal combustion engine and control device according to the manufacturer's emission-related written instructions, your engine will be considered a non-certified engine, and you must demonstrate compliance according to (a)(2)(i) through (iii) of this section, as appropriate.

(i) If you are an owner or operator of a stationary SI internal combustion engine less than 100 HP, you must keep a maintenance plan and records of conducted maintenance to demonstrate compliance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions, but no performance testing is required if you are an owner or operator.

(ii) If you are an owner or operator of a stationary SI internal combustion engine greater than or equal to 100 HP and less than or equal to 500 HP, you must keep a maintenance plan and records of conducted maintenance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, you must conduct an initial performance test within 1 year of engine startup to demonstrate compliance.

(iii) If you are an owner or operator of a stationary SI internal combustion engine greater than 500 HP, you must keep a maintenance plan and records of conducted maintenance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, you must conduct an initial performance test within 1 year of engine startup and

conduct subsequent performance testing every 8,760 hours or 3 years, whichever comes first, thereafter to demonstrate compliance.

(b) If you are an owner or operator of a stationary SI internal combustion engine and must comply with the emission standards specified in § 60.4233(d) or (e), you must demonstrate compliance according to one of the methods specified in paragraphs (b)(1) and (2) of this section.

(1) Purchasing an engine certified according to procedures specified in this subpart, for the same model year and demonstrating compliance according to one of the methods specified in paragraph (a) of this section.

(2) Purchasing a non-certified engine and demonstrating compliance with the emission standards specified in § 60.4233(d) or (e) and according to the requirements specified in § 60.4244, as applicable, and according to paragraphs (b)(2)(i) and (ii) of this section.

(i) If you are an owner or operator of a stationary SI internal combustion engine greater than 25 HP and less than or equal to 500 HP, you must keep a maintenance plan and records of conducted maintenance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, you must conduct an initial performance test to demonstrate compliance.

(ii) If you are an owner or operator of a stationary SI internal combustion engine greater than 500 HP, you must keep a maintenance plan and records of conducted maintenance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, you must conduct an initial performance test and conduct subsequent performance testing every 8,760 hours or 3 years, whichever comes first, thereafter to demonstrate compliance.

(c) If you are an owner or operator of a stationary SI internal combustion engine that must comply with the emission standards specified in § 60.4233(f), you must demonstrate compliance according paragraph (b)(2)(i) or (ii) of this section, except that if you comply according to paragraph (b)(2)(i) of this section, you demonstrate that your non-certified engine complies with the emission standards specified in § 60.4233(f).

(d) If you own or operate an emergency stationary ICE, you must operate the emergency stationary ICE according to the requirements in paragraphs (d)(1) through (3) of this section. In order for the engine to be considered an emergency stationary ICE under this subpart, any operation other than emergency operation, maintenance and testing, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (d)(1) through (3), is prohibited. If you do not operate the engine according to the requirements in paragraphs (d)(1) through (3), the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.

(1) There is no time limit on the use of emergency stationary ICE in emergency situations.

(2) You may operate your emergency stationary ICE for the purpose specified in paragraph (d)(2)(i) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraph (d)(3) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (d)(2).

(i) Emergency stationary ICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency ICE beyond 100 hours per calendar year.

(ii)-(iii) [Reserved]

(3) Emergency stationary ICE may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per

calendar year for maintenance and testing provided in paragraph (d)(2) of this section. Except as provided in paragraph (d)(3)(i) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(i) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:

(A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator;

(B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.

(C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.

(D) The power is provided only to the facility itself or to support the local transmission and distribution system.

(E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.

(ii) [Reserved]

(e) Owners and operators of stationary SI natural gas fired engines may operate their engines using propane for a maximum of 100 hours per year as an alternative fuel solely during emergency operations, but must keep records of such use. If propane is used for more than 100 hours per year in an engine that is not certified to the emission standards when using propane, the owners and operators are required to conduct a performance test to demonstrate compliance with the emission standards of § 60.4233.

(f) If you are an owner or operator of a stationary SI internal combustion engine that is less than or equal to 500 HP and you purchase a non-certified engine or you do not operate and maintain your certified stationary SI internal combustion engine and control device according to the manufacturer's written emission-related instructions, you are required to perform initial performance testing as indicated in this section, but you are not required to conduct subsequent performance testing unless the stationary engine undergoes rebuild, major repair or maintenance. Engine rebuilding means to overhaul an engine or to otherwise perform extensive service on the engine (or on a portion of the engine or engine system). For the purpose of this paragraph (f), perform extensive service means to disassemble the engine (or portion of the engine or engine system), inspect and/or replace many of the parts, and reassemble the engine (or portion of the engine or engine system) in such a manner that significantly increases the service life of the resultant engine.

(g) It is expected that air-to-fuel ratio controllers will be used with the operation of three-way catalysts/non-selective catalytic reduction. The AFR controller must be maintained and operated appropriately in order to ensure proper operation of the engine and control device to minimize emissions at all times.

(h) If you are an owner/operator of an stationary SI internal combustion engine with maximum engine power greater than or equal to 500 HP that is manufactured after July 1, 2007 and before July 1, 2008, and must comply with the emission standards specified in sections 60.4233(b) or (c), you must comply by one of the methods specified in paragraphs (h)(1) through (h)(4) of this section.

(1) Purchasing an engine certified according to 40 CFR part 1048. The engine must be installed and configured according to the manufacturer's specifications.

(2) Keeping records of performance test results for each pollutant for a test conducted on a similar engine. The test must have been conducted using the same methods specified in this subpart and these methods must have been followed correctly.

(3) Keeping records of engine manufacturer data indicating compliance with the standards.

(4) Keeping records of control device vendor data indicating compliance with the standards.

(i) If you are an owner or operator of a modified or reconstructed stationary SI internal combustion engine and must comply with the emission standards specified in § 60.4233(f), you must demonstrate compliance according to one of the methods specified in paragraphs (i)(1) or (2) of this section.

(1) Purchasing, or otherwise owning or operating, an engine certified to the emission standards in § 60.4233(f), as applicable.

(2) Conducting a performance test to demonstrate initial compliance with the emission standards according to the requirements specified in § 60.4244. The test must be conducted within 60 days after the engine commences operation after the modification or reconstruction.

[73 FR 3591, Jan. 18, 2008, as amended at 76 FR 37974, June 28, 2011; 78 FR 6697, Jan. 30, 2013; 86 FR 34362, June 29, 2021; 87 FR 48606, Aug. 10, 2022]

Testing Requirements for Owners and Operators

§ 60.4244 What test methods and other procedures must I use if I am an owner or operator of a stationary SI internal combustion engine?

Owners and operators of stationary SI ICE who conduct performance tests must follow the procedures in paragraphs (a) through (f) of this section.

(a) Each performance test must be conducted within 10 percent of 100 percent peak (or the highest achievable) load and according to the requirements in § 60.8 and under the specific conditions that are specified by Table 2 to this subpart.

(b) You may not conduct performance tests during periods of startup, shutdown, or malfunction, as specified in § 60.8(c). If your stationary SI internal combustion engine is non-operational, you do not need to startup the engine solely to conduct a performance test; however, you must conduct the performance test immediately upon startup of the engine.

(c) You must conduct three separate test runs for each performance test required in this section, as specified in § 60.8(f). Each test run must be conducted within 10 percent of 100 percent peak (or the highest achievable) load and last at least 1 hour.

(d) To determine compliance with the NO_X mass per unit output emission limitation, convert the concentration of NO_X in the engine exhaust using Equation 1 of this section:

$$ER = \frac{C_d \times 1.912 \times 10^{-3} \times Q \times T}{HP - hr} \qquad \text{(Eq. 1)}$$

Where:

ER = Emission rate of NO_X in g/HP-hr.

C_d = Measured NO_X concentration in parts per million by volume (ppmv).

1.912×10^{-3} = Conversion constant for ppm NO_X to grams per standard cubic meter at 20 degrees Celsius.

Q = Stack gas volumetric flow rate, in standard cubic meter per hour, dry basis.

T = Time of test run, in hours.

HP-hr = Brake work of the engine, horsepower-hour (HP-hr).

(e) To determine compliance with the CO mass per unit output emission limitation, convert the concentration of CO in the engine exhaust using Equation 2 of this section:

$$ER = \frac{C_d \times 1.164 \times 10^{-3} \times Q \times T}{HP - hr} \qquad \text{(Eq. 2)}$$

Where:

ER = Emission rate of CO in g/HP-hr.

C_d = Measured CO concentration in ppmv.

1.164×10^{-3} = Conversion constant for ppm CO to grams per standard cubic meter at 20 degrees Celsius.

Q = Stack gas volumetric flow rate, in standard cubic meters per hour, dry basis.

T = Time of test run, in hours.

HP-hr = Brake work of the engine, in HP-hr.

(f) For purposes of this subpart, when calculating emissions of VOC, emissions of formaldehyde should not be included. To determine compliance with the VOC mass per unit output emission limitation, convert the concentration of VOC in the engine exhaust using Equation 3 of this section:

$$ER = \frac{C_d \times 1.833 \times 10^{-3} \times Q \times T}{HP - hr} \qquad \text{(Eq. 3)}$$

Where:

ER = Emission rate of VOC in g/HP-hr.

C_d = VOC concentration measured as propane in ppmv.

1.833×10^{-3} = Conversion constant for ppm VOC measured as propane, to grams per standard cubic meter at 20 degrees Celsius.

Q = Stack gas volumetric flow rate, in standard cubic meters per hour, dry basis.

T = Time of test run, in hours.

HP-hr = Brake work of the engine, in HP-hr.

(g) If the owner/operator chooses to measure VOC emissions using either Method 18 of 40 CFR part 60, appendix A, or Method 320 of 40 CFR part 63, appendix A, then it has the option of correcting the measured VOC emissions to account for the potential differences in measured values between these methods and Method 25A. The results from Method 18 and Method 320 can be corrected for response factor differences using Equations 4 and 5 of this section. The corrected VOC concentration can then be placed on a propane basis using Equation 6 of this section.

$$RF_i = \frac{C_{Mi}}{C_{Ai}} \qquad \text{(Eq. 4)}$$

Where:

RF_i = Response factor of compound i when measured with EPA Method 25A.

C_{Mi} = Measured concentration of compound i in ppmv as carbon.

C_{Ai} = True concentration of compound i in ppmv as carbon.

$$C_{icorr} = RF_i \times C_{imeas} \qquad \text{(Eq. 5)}$$

Where:

C_{icorr} = Concentration of compound i corrected to the value that would have been measured by EPA Method 25A, ppmv as carbon.

C_{imeas} = Concentration of compound i measured by EPA Method 320, ppmv as carbon.

$$C_{Peq} = 0.6098 \times C_{icorr} \qquad \text{(Eq. 6)}$$

Where:

C_{Peq} = Concentration of compound i in mg of propane equivalent per DSCM.

Notification, Reports, and Records for Owners and Operators

§ 60.4245 What are my notification, reporting, and recordkeeping requirements if I am an owner or operator of a stationary SI internal combustion engine?

Owners or operators of stationary SI ICE must meet the following notification, reporting and recordkeeping requirements.

(a) Owners and operators of all stationary SI ICE must keep records of the information in paragraphs (a)(1) through (4) of this section.

(1) All notifications submitted to comply with this subpart and all documentation supporting any notification.

(2) Maintenance conducted on the engine.

(3) If the stationary SI internal combustion engine is a certified engine, documentation from the manufacturer that the engine is certified to meet the emission standards and information as required in 40 CFR parts 1048, 1054, and 1060, as applicable.

(4) If the stationary SI internal combustion engine is not a certified engine or is a certified engine operating in a non-certified manner and subject to § 60.4243(a)(2), documentation that the engine meets the emission standards.

(b) For all stationary SI emergency ICE greater than or equal to 500 HP manufactured on or after July 1, 2010, that do not meet the standards applicable to non-emergency engines, the owner or operator of must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. For all stationary SI emergency ICE greater than or equal to 130 HP and less than 500 HP manufactured on or after July 1, 2011 that do not meet the standards applicable to non-emergency engines, the owner or operator of must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. For all stationary SI emergency ICE greater than 25 HP and less than 130 HP manufactured on or after July 1, 2008, that do not meet the standards applicable to non-emergency engines, the owner or operator of must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation.

(c) Owners and operators of stationary SI ICE greater than or equal to 500 HP that have not been certified by an engine manufacturer to meet the emission standards in § 60.4231 must submit an initial notification as required in § 60.7(a)(1). The notification must include the information in paragraphs (c)(1) through (5) of this section. Beginning on February 26, 2025 submit the notification electronically according to paragraph (g) of this section.

(1) Name and address of the owner or operator;

(2) The address of the affected source;

(3) Engine information including make, model, engine family, serial number, model year, maximum engine power, and engine displacement;

(4) Emission control equipment; and

(5) Fuel used.

(d) Owners and operators of stationary SI ICE that are subject to performance testing must submit a copy of each performance test as conducted in § 60.4244 within 60 days after the test has been completed. Performance test reports using EPA Method 18, EPA Method 320, or ASTM D6348-03 (incorporated by reference—see 40 CFR 60.17) to measure VOC require reporting of all QA/QC data. For Method 18, report results from sections 8.4 and 11.1.1.4; for Method 320, report results from sections 8.6.2, 9.0, and 13.0; and for ASTM D6348-03 report results of all QA/QC procedures in Annexes 1-7. Beginning on February 26, 2025, performance tests must be reported electronically according to paragraph (f) of this section.

(e) If you own or operate an emergency stationary SI ICE with a maximum engine power more than 100 HP that operates for the purpose specified in § 60.4243(d)(3)(i), you must submit an annual report according to the requirements in paragraphs (e)(1) through (3) of this section.

(1) The report must contain the following information:

(i) Company name and address where the engine is located.

(ii) Date of the report and beginning and ending dates of the reporting period.

(iii) Engine site rating and model year.

(iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.

(v)-(vi) [Reserved]

(vii) Hours spent for operation for the purposes specified in § 60.4243(d)(3)(i), including the date, start time, and end time for engine operation for the purposes specified in § 60.4243(d)(3)(i). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.

(2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.

(3) The annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (*https://cdx.epa.gov/*). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in § 60.4. Beginning on February 26, 2025, submit annual report electronically according to paragraph (g) of this section.

(f) Beginning on February 26, 2025, within 60 days after the date of completing each performance test, you must submit the results following the procedures specified in paragraph (g) of this section. Data collected using test methods that are supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT website (*https://www.epa.gov/electronic-reporting-air-emissions/electronic-reporting-tool-ert*) at the time of the test must be submitted in a file format generated using the EPA's ERT. Alternatively, you may submit an electronic file consistent with the extensible markup language (XML) schema listed on the EPA's ERT website. Data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT website at the time of the test must be included as an attachment in the ERT or an alternate electronic file.

(g) If you are required to submit notifications or reports following the procedure specified in this paragraph (g), you must submit notifications or reports to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI), which can be accessed through the EPA's Central Data Exchange (CDX) (*https://cdx.epa.gov/*). The EPA will make all the information submitted through CEDRI available to the public without further notice to you. Do not use CEDRI to submit information you claim as CBI. Although we do not expect persons to assert a claim of CBI, if you wish to assert a CBI claim for some of the information in the report or notification, you must submit a complete file in the format specified in this subpart, including information claimed to be CBI, to the EPA following the procedures in paragraphs (g)(1) and (2) of this section. Clearly mark the part or all of the information that you claim to be CBI. Information not marked as CBI may be authorized for public release without prior notice. Information marked as CBI will not be disclosed except in accordance with procedures set forth in 40 CFR part 2. All CBI claims must be asserted at the time of submission. Anything submitted using CEDRI cannot later be claimed CBI. Furthermore, under CAA section 114(c), emissions data is not entitled to confidential treatment, and the EPA is required to make emissions data available to the public. Thus, emissions data will not be protected as CBI and will be made publicly available. You must submit the same file submitted to the CBI office with the CBI omitted to the EPA via the EPA's CDX as described earlier in this paragraph (g).

(1) The preferred method to receive CBI is for it to be transmitted electronically using email attachments, File Transfer Protocol, or other online file sharing services. Electronic submissions must be transmitted directly to the OAQPS CBI Office at the email address *oaqpscbi@epa.gov,* and as described in paragraph (g) of this section, should include clear CBI markings. ERT files should be flagged to the attention of the Group Leader, Measurement Policy Group; all other files should be flagged to the attention of the Stationary Spark Ignition Internal Combustion Engine Sector Lead. If assistance is needed with submitting large electronic files that exceed the file size limit for email attachments, and if you do not have your own file sharing service, please email *oaqpscbi@epa.gov* to request a file transfer link.

(2) If you cannot transmit the file electronically, you may send CBI information through the postal service to the following address: OAQPS Document Control Officer (C404-02), OAQPS, U.S. Environmental Protection Agency, 109 T.W. Alexander Drive, P.O. Box 12055, Research Triangle Park, North Carolina 27711. ERT files should be sent to the attention of the Group Leader, Measurement Policy Group, and all other files should be sent to the attention of the Stationary Spark Ignition Internal Combustion Engine Sector Lead. The mailed CBI material should be double wrapped and clearly marked. Any CBI markings should not show through the outer envelope.

(h) If you are required to electronically submit a report through CEDRI in the EPA's CDX, you may assert a claim of EPA system outage for failure to timely comply with that reporting requirement. To assert a claim of EPA system outage, you must meet the requirements outlined in paragraphs (h)(1) through (7) of this section.

(1) You must have been or will be precluded from accessing CEDRI and submitting a required report within the time prescribed due to an outage of either the EPA's CEDRI or CDX systems.

(2) The outage must have occurred within the period of time beginning five business days prior to the date that the submission is due.

(3) The outage may be planned or unplanned.

(4) You must submit notification to the Administrator in writing as soon as possible following the date you first knew, or through due diligence should have known, that the event may cause or has caused a delay in reporting.

(5) You must provide to the Administrator a written description identifying:

(i) The date(s) and time(s) when CDX or CEDRI was accessed and the system was unavailable;

(ii) A rationale for attributing the delay in reporting beyond the regulatory deadline to EPA system outage;

(iii) A description of measures taken or to be taken to minimize the delay in reporting; and

(iv) The date by which you propose to report, or if you have already met the reporting requirement at the time of the notification, the date you reported.

(6) The decision to accept the claim of EPA system outage and allow an extension to the reporting deadline is solely within the discretion of the Administrator.

(7) In any circumstance, the report must be submitted electronically as soon as possible after the outage is resolved.

(i) If you are required to electronically submit a report through CEDRI in the EPA's CDX, you may assert a claim of force majeure for failure to timely comply with that reporting requirement. To assert a claim of force majeure, you must meet the requirements outlined in paragraphs (i)(1) through (5) of this section.

(1) You may submit a claim if a force majeure event is about to occur, occurs, or has occurred or there are lingering effects from such an event within the period of time beginning five business days prior to the date the submission is due. For the purposes of this section, a force majeure event is defined as an event that will be or has been caused by circumstances beyond the control of the affected facility, its contractors, or any entity controlled by the affected facility that prevents you from complying with the requirement to submit a report electronically within the time period prescribed. Examples of such events are acts of nature (*e.g.,* hurricanes, earthquakes, or floods), acts of war or terrorism, or equipment failure or safety hazard beyond the control of the affected facility (*e.g.,* large scale power outage).

(2) You must submit notification to the Administrator in writing as soon as possible following the date you first knew, or through due diligence should have known, that the event may cause or has caused a delay in reporting.

(3) You must provide to the Administrator:

(i) A written description of the force majeure event;

(ii) A rationale for attributing the delay in reporting beyond the regulatory deadline to the force majeure event;

(iii) A description of measures taken or to be taken to minimize the delay in reporting; and

(iv) The date by which you propose to report, or if you have already met the reporting requirement at the time of the notification, the date you reported.

(4) The decision to accept the claim of force majeure and allow an extension to the reporting deadline is solely within the discretion of the Administrator.

(5) In any circumstance, the reporting must occur as soon as possible after the force majeure event occurs.

(j) Any records required to be maintained by this subpart that are submitted electronically via the EPA's CEDRI may be maintained in electronic format. This ability to maintain electronic copies does not affect the requirement for facilities to make records, data, and reports available upon request to a delegated air agency or the EPA as part of an on-site compliance evaluation.

[73 FR 3591, Jan. 18, 2008, as amended at 73 FR 59177, Oct. 8, 2008; 78 FR 6697, Jan. 30, 2013; 81 FR 59809, Aug. 30, 2016; 86 FR 34362, June 29, 2021; 87 FR 48606, Aug. 10, 2022; 89 FR 70514, Aug. 30, 2024]

General Provisions

§ 60.4246 What General Provisions and confidential information provisions apply to me?

(a) Table 3 to this subpart shows which parts of the General Provisions in §§ 60.1 through 60.19 apply to you.

(b) The provisions of 40 CFR 1068.10 and 1068.11 apply for engine manufacturers. For others, the general confidential business information (CBI) provisions apply as described in 40 CFR part 2.

[88 FR 4471, Jan. 24, 2023]

Mobile Source Provisions

§ 60.4247 What parts of the mobile source provisions apply to me if I am a manufacturer of stationary SI internal combustion engines or a manufacturer of equipment containing such engines?

(a) Manufacturers certifying to emission standards in 40 CFR part 1054 must meet the provisions of 40 CFR part 1054. Note that 40 CFR part 1054, appendix I, describes various provisions that do not apply for engines meeting Phase 1 standards in 40 CFR part 1054. Manufacturers of equipment containing stationary SI internal combustion engines meeting the provisions of 40 CFR part 1054 must meet the provisions of 40 CFR part 1060 to the extent they apply to equipment manufacturers.

(b) Manufacturers required to certify to emission standards in 40 CFR part 1048 must meet the provisions of 40 CFR part 1048. Manufacturers certifying to emission standards in 40 CFR part 1048 pursuant to the voluntary certification program must meet the requirements in Table 4 to this subpart as well as the standards in 40 CFR 1048.101.

(c) For manufacturers of stationary SI internal combustion engines participating in the voluntary certification program and certifying engines to Table 1 to this subpart, Table 4 to this subpart shows which parts of the mobile source provisions in 40 CFR parts 1048, 1065, and 1068 apply to you. Compliance with the deterioration factor provisions under 40 CFR 1048.205(n) and 1048.240 will be required for engines built new on and after January 1, 2010. Prior to January 1, 2010, manufacturers of stationary internal combustion engines participating in the voluntary certification program have the option to develop their own deterioration factors based on an engineering analysis.

[73 FR 3591, Jan. 18, 2008, as amended at 73 FR 59177, Oct. 8, 2008; 86 FR 34362, June 29, 2021]

Definitions

§ 60.4248 What definitions apply to this subpart?

As used in this subpart, all terms not defined herein shall have the meaning given them in the CAA and in subpart A of this part.

Certified emissions life means the period during which the engine is designed to properly function in terms of reliability and fuel consumption, without being remanufactured, specified as a number of hours of operation or calendar years, whichever comes first. The values for certified emissions life for stationary SI ICE with a maximum engine power less than or equal to 19 KW (25 HP) are given in 40 CFR 1054.107 and 1060.101, as appropriate. The values for certified emissions life for stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) certified to 40 CFR part 1048 are given in 40 CFR 1048.101(g). The certified emissions life for stationary SI ICE with a maximum engine power greater than 75 KW (100 HP) certified under the voluntary manufacturer certification program of this subpart is 5,000 hours or 7 years, whichever comes first. You may request in your application for certification that we approve a shorter certified emissions life for an engine family. We may approve a shorter certified emissions life, in hours of engine operation but not in years, if we determine that these engines will rarely operate longer than the shorter certified emissions life. If engines identical to those in the engine family have already been produced and are in use, your demonstration must include documentation from such in-use engines. In other cases, your demonstration must include an engineering analysis of information equivalent to such in-use data, such as data from research engines or similar engine models that are already in production. Your demonstration must also include any overhaul interval that you recommend, any mechanical warranty that you offer for the engine or its components, and any relevant customer design specifications. Your demonstration may include any other relevant information. The certified emissions life value may not be shorter than any of the following:

(1) 1,000 hours of operation.

(2) Your recommended overhaul interval.

(3) Your mechanical warranty for the engine.

Certified stationary internal combustion engine means an engine that belongs to an engine family that has a certificate of conformity that complies with the emission standards and requirements in this part, or of 40 CFR part 1048 or 1054, as appropriate.

Combustion turbine means all equipment, including but not limited to the turbine, the fuel, air, lubrication and exhaust gas systems, control systems (except emissions control equipment), and any ancillary components and sub-components comprising any simple cycle combustion turbine, any regenerative/recuperative cycle combustion turbine, the combustion turbine portion of any cogeneration cycle combustion system, or the combustion turbine portion of any combined cycle steam/electric generating system.

Compression ignition means relating to a type of stationary internal combustion engine that is not a spark ignition engine.

Date of manufacture means one of the following things:

(1) For freshly manufactured engines and modified engines, date of manufacture means the date the engine is originally produced.

(2) For reconstructed engines, date of manufacture means the date the engine was originally produced, except as specified in paragraph (3) of this definition.

(3) Reconstructed engines are assigned a new date of manufacture if the fixed capital cost of the new and refurbished components exceeds 75 percent of the fixed capital cost of a comparable entirely new facility. An engine that is produced from a previously used engine block does not retain the date of manufacture of the engine in which the engine block was previously used if the engine is produced using all new components except

for the engine block. In these cases, the date of manufacture is the date of reconstruction or the date the new engine is produced.

Diesel fuel means any liquid obtained from the distillation of petroleum with a boiling point of approximately 150 to 360 degrees Celsius. One commonly used form is number 2 distillate oil.

Digester gas means any gaseous by-product of wastewater treatment typically formed through the anaerobic decomposition of organic waste materials and composed principally of methane and carbon dioxide (CO_2).

Emergency stationary internal combustion engine means any stationary reciprocating internal combustion engine that meets all of the criteria in paragraphs (1) through (3) of this definition. All emergency stationary ICE must comply with the requirements specified in § 60.4243(d) in order to be considered emergency stationary ICE. If the engine does not comply with the requirements specified in § 60.4243(d), then it is not considered to be an emergency stationary ICE under this subpart.

(1) The stationary ICE is operated to provide electrical power or mechanical work during an emergency situation. Examples include stationary ICE used to produce power for critical networks or equipment (including power supplied to portions of a facility) when electric power from the local utility (or the normal power source, if the facility runs on its own power production) is interrupted, or stationary ICE used to pump water in the case of fire or flood, etc.

(2) The stationary ICE is operated under limited circumstances for situations not included in paragraph (1) of this definition, as specified in § 60.4243(d).

(3) The stationary ICE operates as part of a financial arrangement with another entity in situations not included in paragraph (1) of this definition only as allowed in § 60.4243(d)(3)(i).

Engine manufacturer means the manufacturer of the engine. See the definition of “manufacturer” in this section.

Four-stroke engine means any type of engine which completes the power cycle in two crankshaft revolutions, with intake and compression strokes in the first revolution and power and exhaust strokes in the second revolution.

Freshly manufactured engine means an engine that has not been placed into service. An engine becomes freshly manufactured when it is originally produced.

Gasoline means any fuel sold in any State for use in motor vehicles and motor vehicle engines, or nonroad or stationary engines, and commonly or commercially known or sold as gasoline.

Installed means the engine is placed and secured at the location where it is intended to be operated.

Landfill gas means a gaseous by-product of the land application of municipal refuse typically formed through the anaerobic decomposition of waste materials and composed principally of methane and CO_2.

Lean burn engine means any two-stroke or four-stroke spark ignited engine that does not meet the definition of a rich burn engine.

Liquefied petroleum gas means any liquefied hydrocarbon gas obtained as a by-product in petroleum refining or natural gas production.

Manufacturer has the meaning given in section 216(1) of the Clean Air Act. In general, this term includes any person who manufactures a stationary engine for sale in the United States or otherwise introduces a new stationary engine into commerce in the United States. This includes importers who import stationary engines for resale.

Maximum engine power means maximum engine power as defined in 40 CFR 1048.801.

Model year means the calendar year in which an engine is manufactured (see “date of manufacture”), except as follows:

(1) Model year means the annual new model production period of the engine manufacturer in which an engine is manufactured (see “date of manufacture”), if the annual new model production period is different than the calendar year and includes January 1 of the calendar year for which the model year is named. It may not begin before January 2 of the previous calendar year and it must end by December 31 of the named calendar year.

(2) For an engine that is converted to a stationary engine after being placed into service as a nonroad or other non-stationary engine, model year means the calendar year or new model production period in which the engine was manufactured (see “date of manufacture”).

Natural gas means a naturally occurring mixture of hydrocarbon and non-hydrocarbon gases found in geologic formations beneath the Earth's surface, of which the principal constituent is methane. Natural gas may be field or pipeline quality.

Other internal combustion engine means any internal combustion engine, except combustion turbines, which is not a reciprocating internal combustion engine or rotary internal combustion engine.

Pipeline-quality natural gas means a naturally occurring fluid mixture of hydrocarbons (e.g., methane, ethane, or propane) produced in geological formations beneath the Earth's surface that maintains a gaseous state at standard atmospheric temperature and pressure under ordinary conditions, and which is provided by a supplier through a pipeline. Pipeline-quality natural gas must either be composed of at least 70 percent methane by volume or have a gross calorific value between 950 and 1,100 British thermal units per standard cubic foot.

Rich burn engine means any four-stroke spark ignited engine where the manufacturer's recommended operating air/fuel ratio divided by the stoichiometric air/fuel ratio at full load conditions is less than or equal to 1.1. Engines originally manufactured as rich burn engines, but modified prior to June 12, 2006, with passive emission control technology for NO_X (such as pre-combustion chambers) will be considered lean burn engines. Also, existing engines where there are no manufacturer's recommendations regarding air/fuel ratio will be considered a rich burn engine if the excess oxygen content of the exhaust at full load conditions is less than or equal to 2 percent.

Rotary internal combustion engine means any internal combustion engine which uses rotary motion to convert heat energy into mechanical work.

Spark ignition means relating to either: a gasoline-fueled engine; or any other type of engine with a spark plug (or other sparking device) and with operating characteristics significantly similar to the theoretical Otto combustion cycle. Spark ignition engines usually use a throttle to regulate intake air flow to control power during normal operation. Dual-fuel engines in which a liquid fuel (typically diesel fuel) is used for compression ignition and gaseous fuel (typically natural gas) is used as the primary fuel at an annual average ratio of less than 2 parts diesel fuel to 100 parts total fuel on an energy equivalent basis are spark ignition engines.

Stationary internal combustion engine means any internal combustion engine, except combustion turbines, that converts heat energy into mechanical work and is not mobile. Stationary ICE differ from mobile ICE in that a stationary internal combustion engine is not a nonroad engine as defined at 40 CFR 1068.30 (excluding paragraph (2)(ii) of that definition), and is not used to propel a motor vehicle, aircraft, or a vehicle used solely for competition. Stationary ICE include reciprocating ICE, rotary ICE, and other ICE, except combustion turbines.

Stationary internal combustion engine test cell/stand means an engine test cell/stand, as defined in 40 CFR part 63, subpart PPPPP, that tests stationary ICE.

Stoichiometric means the theoretical air-to-fuel ratio required for complete combustion.

Subpart means 40 CFR part 60, subpart JJJJ.

Two-stroke engine means a type of engine which completes the power cycle in single crankshaft revolution by combining the intake and compression operations into one stroke and the power and exhaust operations into a second stroke. This system requires auxiliary scavenging and inherently runs lean of stoichiometric.

Volatile organic compounds means volatile organic compounds as defined in 40 CFR 51.100(s).

Voluntary certification program means an optional engine certification program that manufacturers of stationary SI internal combustion engines with a maximum engine power greater than 19 KW (25 HP) that do not use gasoline and are not rich burn engines that use LPG can choose to participate in to certify their engines to the emission standards in § 60.4231(d) or (e), as applicable.

[73 FR 3591, Jan. 18, 2008, as amended at 73 FR 59177, Oct. 8, 2008; 76 FR 37974, June 28, 2011; 78 FR 6698, Jan. 30, 2013; 86 FR 34363, June 29, 2021; 87 FR 48606, Aug. 10, 2022]

Table 1 to Subpart JJJJ of Part 60—NO_X, CO, and VOC Emission Standards for Stationary Non-Emergency SI Engines ≥100 HP (Except Gasoline and Rich Burn LPG), Stationary SI Landfill/Digester Gas Engines, and Stationary Emergency Engines >25 HP

Engine type and fuel	Maximum engine power	Manufacture date	Emission standards[a]					
			g/HP-hr			ppmvd at 15% O_2		
			NO_X	CO	VOC[d]	NO_X	CO	VOC[d]
Non-Emergency SI Natural Gas[b] and Non-Emergency SI Lean Burn LPG[b]	100≤HP<500	7/1/2008	2.0	4.0	1.0	160	540	86
		1/1/2011	1.0	2.0	0.7	82	270	60
Non-Emergency SI Lean Burn Natural Gas and LPG	500≤HP<1,350	1/1/2008	2.0	4.0	1.0	160	540	86
		7/1/2010	1.0	2.0	0.7	82	270	60
Non-Emergency SI Natural Gas and Non-Emergency SI Lean Burn LPG (except lean burn 500≤HP<1,350)	HP≥500	7/1/2007	2.0	4.0	1.0	160	540	86
	HP≥500	7/1/2010	1.0	2.0	0.7	82	270	60
Landfill/Digester Gas (except lean burn 500≤HP<1,350)	HP<500	7/1/2008	3.0	5.0	1.0	220	610	80
		1/1/2011	2.0	5.0	1.0	150	610	80
	HP≥500	7/1/2007	3.0	5.0	1.0	220	610	80
		7/1/2010	2.0	5.0	1.0	150	610	80
Landfill/Digester Gas Lean Burn	500≤HP<1,350	1/1/2008	3.0	5.0	1.0	220	610	80
		7/1/2010	2.0	5.0	1.0	150	610	80
Emergency	25<HP<130	1/1/2009	[c]10	387	N/A	N/A	N/A	N/A
	HP≥130		2.0	4.0	1.0	160	540	86

[a]Owners and operators of stationary non-certified SI engines may choose to comply with the emission standards in units of either g/HP-hr or ppmvd at 15 percent O_2.

[b]Owners and operators of new or reconstructed non-emergency lean burn SI stationary engines with a site rating of greater than or equal to 250 brake HP located at a major source that are meeting the requirements of 40 CFR part 63, subpart ZZZZ, Table 2a do not have to comply with the CO emission standards of Table 1 of this subpart.

[c]The emission standards applicable to emergency engines between 25 HP and 130 HP are in terms of NO_X + HC.

[d]For purposes of this subpart, when calculating emissions of volatile organic compounds, emissions of formaldehyde should not be included.

[76 FR 37975, June 28, 2011]

Table 2 to Subpart JJJJ of Part 60—Requirements for Performance Tests

As stated in §60.4244, you must comply with the following requirements for performance tests within 10 percent of 100 percent peak (or the highest achievable) load].

For each	Complying with the requirement to	You must	Using	According to the following requirements
1. Stationary SI internal combustion engine demonstrating compliance according to §60.4244	a. Limit the concentration of NO_X in the stationary SI internal combustion engine exhaust	i. Select the sampling port location and the number/location of traverse points at the exhaust of the stationary internal combustion engine;	(1) Method 1 or 1A of 40 CFR part 60, appendix A-1, if measuring flow rate	(a) Alternatively, for NO_X, O_2, and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line (`3-point long line'). If the duct is >12 inches in diameter *and* the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, Appendix A, the duct may be sampled at `3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, Appendix A.
		ii. Determine the O_2 concentration of the stationary internal combustion engine exhaust at the sampling port location;	(2) Method 3, 3A, or 3B[b] of 40 CFR part 60, appendix A-2 or ASTM Method D6522-00 (Reapproved 2005)[ad]	(b) Measurements to determine O_2 concentration must be made at the same time as the measurements for NO_X concentration.
		iii. If necessary, determine the exhaust flowrate of the stationary internal combustion engine exhaust;	(3) Method 2 or 2C of 40 CFR part 60, appendix A-1 or Method 19 of 40 CFR part 60, appendix A-7	(c) Measurements to determine the exhaust flowrate must be made (1) at the same time as the measurement for NO_X concentration or, alternatively (2) according to the option in Section 11.1.2 of Method 1A of 40 CFR part 60, Appendix A-1, if applicable.
		iv. If necessary, measure moisture content of the stationary internal combustion engine exhaust at the sampling port location; and	(4) Method 4 of 40 CFR part 60, appendix A-3, Method 320 of 40 CFR part 63, appendix A,[e] or ASTM Method D6348-03[de]	(d) Measurements to determine moisture must be made at the same time as the measurement for NO_X concentration.

For each	Complying with the requirement to	You must	Using	According to the following requirements
		v. Measure NO_X at the exhaust of the stationary internal combustion engine; if using a control device, the sampling site must be located at the outlet of the control device	(5) Method 7E of 40 CFR part 60, appendix A-4, ASTM Method D6522-00 (Reapproved 2005),[ad] Method 320 of 40 CFR part 63, appendix A,[e] or ASTM Method D6348-03[de]	(e) Results of this test consist of the average of the three 1-hour or longer runs.
	b. Limit the concentration of CO in the stationary SI internal combustion engine exhaust	i. Select the sampling port location and the number/location of traverse points at the exhaust of the stationary internal combustion engine;	(1) Method 1 or 1A of 40 CFR part 60, appendix A-1, if measuring flow rate	(a) Alternatively, for CO, O_2, and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line (`3-point long line'). If the duct is >12 inches in diameter *and* the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, Appendix A, the duct may be sampled at `3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, Appendix A.
		ii. Determine the O_2 concentration of the stationary internal combustion engine exhaust at the sampling port location;	(2) Method 3, 3A, or 3B[b] of 40 CFR part 60, appendix A-2 or ASTM Method D6522-00 (Reapproved 2005)[ad]	(b) Measurements to determine O_2 concentration must be made at the same time as the measurements for CO concentration.
		iii. If necessary, determine the exhaust flowrate of the stationary internal combustion engine exhaust;	(3) Method 2 or 2C of 40 CFR 60, appendix A-1 or Method 19 of 40 CFR part 60, appendix A-7	(c) Measurements to determine the exhaust flowrate must be made (1) at the same time as the measurement for CO concentration or, alternatively (2) according to the option in Section 11.1.2 of Method 1A of 40 CFR part 60, Appendix A-1, if applicable.
		iv. If necessary, measure moisture content of the stationary internal combustion engine exhaust at the sampling port location; and	(4) Method 4 of 40 CFR part 60, appendix A-3, Method 320 of 40 CFR part 63, appendix A,[e] or ASTM Method D6348-03[de]	(d) Measurements to determine moisture must be made at the same time as the measurement for CO concentration.

For each	Complying with the requirement to	You must	Using	According to the following requirements
		v. Measure CO at the exhaust of the stationary internal combustion engine; if using a control device, the sampling site must be located at the outlet of the control device	(5) Method 10 of 40 CFR part 60, appendix A4, ASTM Method D6522-00 (Reapproved 2005),[ade] Method 320 of 40 CFR part 63, appendix A,[e] or ASTM Method D6348-03[de]	(e) Results of this test consist of the average of the three 1-hour or longer runs.
	c. Limit the concentration of VOC in the stationary SI internal combustion engine exhaust	i. Select the sampling port location and the number/location of traverse points at the exhaust of the stationary internal combustion engine;	(1) Method 1 or 1A of 40 CFR part 60, appendix A-1, if measuring flow rate	(a) Alternatively, for VOC, O_2, and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line (`3-point long line'). If the duct is >12 inches in diameter *and* the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, Appendix A, the duct may be sampled at `3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, Appendix A.
		ii. Determine the O_2 concentration of the stationary internal combustion engine exhaust at the sampling port location;	(2) Method 3, 3A, or 3B[b] of 40 CFR part 60, appendix A-2 or ASTM Method D6522-00 (Reapproved 2005)[ad]	(b) Measurements to determine O_2 concentration must be made at the same time as the measurements for VOC concentration.
		iii. If necessary, determine the exhaust flowrate of the stationary internal combustion engine exhaust;	(3) Method 2 or 2C of 40 CFR 60, appendix A-1 or Method 19 of 40 CFR part 60, appendix A-7	(c) Measurements to determine the exhaust flowrate must be made (1) at the same time as the measurement for VOC concentration or, alternatively (2) according to the option in Section 11.1.2 of Method 1A of 40 CFR part 60, Appendix A-1, if applicable.
		iv. If necessary, measure moisture content of the stationary internal combustion engine exhaust at the sampling port location; and	(4) Method 4 of 40 CFR part 60, appendix A-3, Method 320 of 40 CFR part 63, appendix A,[e] or ASTM Method D6348-03[de]	(d) Measurements to determine moisture must be made at the same time as the measurement for VOC concentration.

For each	Complying with the requirement to	You must	Using	According to the following requirements
		v. Measure VOC at the exhaust of the stationary internal combustion engine; if using a control device, the sampling site must be located at the outlet of the control device	(5) Methods 25A and 18 of 40 CFR part 60, appendices A-6 and A-7, Method 25A with the use of a hydrocarbon cutter as described in 40 CFR 1065.265, Method 18 of 40 CFR part 60, appendix A-6,[ce] Method 320 of 40 CFR part 63, appendix A,[e] or ASTM Method D6348-03[de]	(e) Results of this test consist of the average of the three 1-hour or longer runs.

[a]Also, you may petition the Administrator for approval to use alternative methods for portable analyzer.

[b]You may use ASME PTC 19.10-1981, Flue and Exhaust Gas Analyses, for measuring the O_2 content of the exhaust gas as an alternative to EPA Method 3B. AMSE PTC 19.10-1981 incorporated by reference, see 40 CFR 60.17

[c]You may use EPA Method 18 of 40 CFR part 60, appendix A-6, provided that you conduct an adequate pre-survey test prior to the emissions test, such as the one described in OTM 11 on EPA's website (*http://www.epa.gov/ttn/emc/prelim/otm11.pdf*).

[d]Incorporated by reference; see 40 CFR 60.17.

[e]You must meet the requirements in §60.4245(d).

[85 FR 63408, Oct. 7, 2020]

Table 3 to Subpart JJJJ of Part 60—Applicability of General Provisions to Subpart JJJJ

[As stated in §60.4246, you must comply with the following applicable General Provisions]

General provisions citation	Subject of citation	Applies to subpart	Explanation
§60.1	General applicability of the General Provisions	Yes	
§60.2	Definitions	Yes	Additional terms defined in §60.4248.
§60.3	Units and abbreviations	Yes	
§60.4	Address	Yes	
§60.5	Determination of construction or modification	Yes	
§60.6	Review of plans	Yes	
§60.7	Notification and Recordkeeping	Yes	Except that §60.7 only applies as specified in §60.4245.

General provisions citation	Subject of citation	Applies to subpart	Explanation
§60.8	Performance tests	Yes	Except that §60.8 only applies to owners and operators who are subject to performance testing in subpart JJJJ.
§60.9	Availability of information	Yes	
§60.10	State Authority	Yes	
§60.11	Compliance with standards and maintenance requirements	Yes	Requirements are specified in subpart JJJJ.
§60.12	Circumvention	Yes	
§60.13	Monitoring requirements	No	
§60.14	Modification	Yes	
§60.15	Reconstruction	Yes	
§60.16	Priority list	Yes	
§60.17	Incorporations by reference	Yes	
§60.18	General control device requirements	No	
§60.19	General notification and reporting requirements	Yes	

Table 4 to Subpart JJJJ of Part 60—Applicability of Mobile Source Provisions for Manufacturers Participating in the Voluntary Certification Program and Certifying Stationary SI ICE to Emission Standards in Table 1 of Subpart JJJJ

[As stated in §60.4247, you must comply with the following applicable mobile source provisions if you are a manufacturer participating in the voluntary certification program and certifying stationary SI ICE to emission standards in Table 1 of subpart JJJJ]

Mobile source provisions citation	Subject of citation	Applies to subpart	Explanation
1048 subpart A	Overview and Applicability	Yes	
1048 subpart B	Emission Standards and Related Requirements	Yes	Except for the specific sections below.
1048.101	Exhaust Emission Standards	No	
1048.105	Evaporative Emission Standards	No	
1048.110	Diagnosing Malfunctions	No	
1048.140	Certifying Blue Sky Series Engines	No	
1048.145	Interim Provisions	No	
1048 subpart C	Certifying Engine Families	Yes	Except for the specific sections below.
1048.205(b)	AECD reporting	Yes	
1048.205(c)	OBD Requirements	No	

Mobile source provisions citation	Subject of citation	Applies to subpart	Explanation
1048.205(n)	Deterioration Factors	Yes	Except as indicated in 60.4247(c).
1048.205(p)(1)	Deterioration Factor Discussion	Yes	
1048.205(p)(2)	Liquid Fuels as they require	No	
1048.240(b)(c)(d)	Deterioration Factors	Yes	
1048 subpart D	Testing Production-Line Engines	Yes	
1048 subpart E	Testing In-Use Engines	No	
1048 subpart F	Test Procedures	Yes	
1065.5(a)(4)	Raw sampling (refers reader back to the specific emissions regulation for guidance)	Yes	
1048 subpart G	Compliance Provisions	Yes	
1048 subpart H	Reserved		
1048 subpart I	Definitions and Other Reference Information	Yes	
1048 appendix I and II	Yes		
1065 (all subparts)	Engine Testing Procedures	Yes	Except for the specific section below.
1065.715	Test Fuel Specifications for Natural Gas	No	
1068 (all subparts)	General Compliance Provisions for Nonroad Programs	Yes	Except for the specific sections below.
1068.245	Hardship Provisions for Unusual Circumstances	No	
1068.250	Hardship Provisions for Small-Volume Manufacturers	No	
1068.255	Hardship Provisions for Equipment Manufacturers and Secondary Engine Manufacturers	No	

Attachment B

Part 70 Administrative Operating Permit No: T 011-50087-00094

[Downloaded from the eCFR on September 5, 2024]

Electronic Code of Federal Regulations

Title 40: Protection of Environment

PART 63—NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES

Subpart ZZZZ—National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

Source:69 FR 33506, June 15, 2004, unless otherwise noted.

What This Subpart Covers

§ 63.6580 What is the purpose of subpart ZZZZ?

Subpart ZZZZ establishes national emission limitations and operating limitations for hazardous air pollutants (HAP) emitted from stationary reciprocating internal combustion engines (RICE) located at major and area sources of HAP emissions. This subpart also establishes requirements to demonstrate initial and continuous compliance with the emission limitations and operating limitations.

[73 FR 3603, Jan. 18, 2008]

§ 63.6585 Am I subject to this subpart?

You are subject to this subpart if you own or operate a stationary RICE at a major or area source of HAP emissions, except if the stationary RICE is being tested at a stationary RICE test cell/stand.

(a) A stationary RICE is any internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

(b) A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site.

(c) An area source of HAP emissions is a source that is not a major source.

(d) If you are an owner or operator of an area source subject to this subpart, your status as an entity subject to a standard or other requirements under this subpart does not subject you to the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

(e) If you are an owner or operator of a stationary RICE used for national security purposes, you may be eligible to request an exemption from the requirements of this subpart as described in 40 CFR part 1068, subpart C.

(f) The emergency stationary RICE listed in paragraphs (f)(1) through (3) of this section are not subject to this subpart. The stationary RICE must meet the definition of an emergency stationary RICE in § 63.6675, which includes operating according to the provisions specified in § 63.6640(f).

(1) Existing residential emergency stationary RICE located at an area source of HAP emissions that do not operate for the purpose specified in § 63.6640(f)(4)(ii).

(2) Existing commercial emergency stationary RICE located at an area source of HAP emissions that do not operate for the purpose specified in § 63.6640(f)(4)(ii).

(3) Existing institutional emergency stationary RICE located at an area source of HAP emissions that do not operate for the purpose specified in § 63.6640(f)(4)(ii).

[69 FR 33506, June 15, 2004, as amended at 73 FR 3603, Jan. 18, 2008; 78 FR 6700, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022]

§ 63.6590 What parts of my plant does this subpart cover?

This subpart applies to each affected source.

(a) ***Affected source.*** An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.

(1) ***Existing stationary RICE.***

(i) For stationary RICE with a site rating of more than 500 brake horsepower (HP) located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before December 19, 2002.

(ii) For stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.

(2) ***New stationary RICE.***

(i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(3) ***Reconstructed stationary RICE.***

(i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in § 63.2 and reconstruction is commenced on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in § 63.2 and reconstruction is commenced on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is reconstructed if you meet the definition of reconstruction in § 63.2 and reconstruction is commenced on or after June 12, 2006.

(b) ***Stationary RICE subject to limited requirements.***

(1) An affected source which meets either of the criteria in paragraphs (b)(1)(i) through (ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of § 63.6645(f).

(i) The stationary RICE is a new or reconstructed emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(ii) The stationary RICE is a new or reconstructed limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(2) A new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis must meet the initial notification requirements of § 63.6645(f) and the requirements of §§ 63.6625(c), 63.6650(g), and 63.6655(c). These stationary RICE do not have to meet the emission limitations and operating limitations of this subpart.

(3) The following stationary RICE do not have to meet the requirements of this subpart and of subpart A of this part, including initial notification requirements:

(i) Existing spark ignition 2 stroke lean burn (2SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(ii) Existing spark ignition 4 stroke lean burn (4SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(iii) Existing emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(iv) Existing limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(v) Existing stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;

(c) ***Stationary RICE subject to Regulations under 40 CFR Part 60.*** An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines. No further requirements apply for such engines under this part.

(1) A new or reconstructed stationary RICE located at an area source;

(2) A new or reconstructed 2SLB stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;

(3) A new or reconstructed 4SLB stationary RICE with a site rating of less than 250 brake HP located at a major source of HAP emissions;

(4) A new or reconstructed spark ignition 4 stroke rich burn (4SRB) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;

(5) A new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;

(6) A new or reconstructed emergency or limited use stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;

(7) A new or reconstructed compression ignition (CI) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9674, Mar. 3, 2010; 75 FR 37733, June 30, 2010; 75 FR 51588, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022]

§ 63.6595 When do I have to comply with this subpart?

(a) ***Affected sources.***

(1) If you have an existing stationary RICE, excluding existing non-emergency CI stationary RICE, with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the applicable emission limitations, operating limitations and other requirements no later than June 15, 2007. If you have an existing non-emergency CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, an existing stationary CI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary CI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations, operating limitations, and other requirements no later than May 3, 2013. If you have an existing stationary SI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary SI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations, operating limitations, and other requirements no later than October 19, 2013.

(2) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart no later than August 16, 2004.

(3) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions after August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(4) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(5) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(6) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(7) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(b) ***Area sources that become major sources.*** If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, the compliance dates in paragraphs (b)(1) and (2) of this section apply to you.

(1) Any stationary RICE for which construction or reconstruction is commenced after the date when your area source becomes a major source of HAP must be in compliance with this subpart upon startup of your affected source.

(2) Any stationary RICE for which construction or reconstruction is commenced before your area source becomes a major source of HAP must be in compliance with the provisions of this subpart that are applicable to RICE located at major sources within 3 years after your area source becomes a major source of HAP.

(c) If you own or operate an affected source, you must meet the applicable notification requirements in § 63.6645 and in 40 CFR part 63, subpart A.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 78 FR 6701, Jan. 30, 2013]

Emission and Operating Limitations

§ 63.6600 What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in § 63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing, new, or reconstructed spark ignition 4SRB stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 1a to this subpart and the operating limitations in Table 1b to this subpart which apply to you.

(b) If you own or operate a new or reconstructed 2SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, a new or reconstructed 4SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, or a new or reconstructed CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

(c) If you own or operate any of the following stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the emission limitations in Tables 1a, 2a, 2c, and 2d to this subpart or operating limitations in Tables 1b and 2b to this subpart: an existing 2SLB stationary RICE; an existing 4SLB stationary RICE; a stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis; an emergency stationary RICE; or a limited use stationary RICE.

(d) If you own or operate an existing non-emergency stationary CI RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2c to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010]

§ 63.6601 What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in § 63.6620 and Table 4 to this subpart. If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250

and less than or equal to 500 brake HP located at major source of HAP emissions manufactured on or after January 1, 2008, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010]

§ 63.6602 What emission limitations and other requirements must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?

If you own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations and other requirements in Table 2c to this subpart which apply to you. Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in § 63.6620 and Table 4 to this subpart.

[78 FR 6701, Jan. 30, 2013]

§ 63.6603 What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in § 63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, you must comply with the requirements in Table 2d to this subpart and the operating limitations in Table 2b to this subpart that apply to you.

(b) If you own or operate an existing stationary non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP that meets either paragraph (b)(1) or (2) of this section, you do not have to meet the numerical CO emission limitations specified in Table 2d of this subpart. Existing stationary non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP that meet either paragraph (b)(1) or (2) of this section must meet the management practices that are shown for stationary non-emergency CI RICE with a site rating of less than or equal to 300 HP in Table 2d of this subpart.

(1) The area source is located in an area of Alaska that is not accessible by the Federal Aid Highway System (FAHS).

(2) The stationary RICE is located at an area source that meets paragraphs (b)(2)(i), (ii), and (iii) of this section.

(i) The only connection to the FAHS is through the Alaska Marine Highway System (AMHS), or the stationary RICE operation is within an isolated grid in Alaska that is not connected to the statewide electrical grid referred to as the Alaska Railbelt Grid.

(ii) At least 10 percent of the power generated by the stationary RICE on an annual basis is used for residential purposes.

(iii) The generating capacity of the area source is less than 12 megawatts, or the stationary RICE is used exclusively for backup power for renewable energy.

(c) If you own or operate an existing stationary non-emergency CI RICE with a site rating of more than 300 HP located on an offshore vessel that is an area source of HAP and is a nonroad vehicle that is an Outer Continental Shelf (OCS) source as defined in 40 CFR 55.2, you do not have to meet the numerical CO emission limitations specified in Table 2d of this subpart. You must meet all of the following management practices:

(1) Change oil every 1,000 hours of operation or within 1 year + 30 days of the previous change, whichever comes first. Sources have the option to utilize an oil analysis program as described in § 63.6625(i) in order to extend the specified oil change requirement.

(2) Inspect and clean air filters every 750 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary.

(3) Inspect fuel filters and belts, if installed, every 750 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary.

(4) Inspect all flexible hoses every 1,000 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary.

(d) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 1 or Tier 2 emission standards in Table 1 of 40 CFR 89.112 and that is subject to an enforceable state or local standard that requires the engine to be replaced no later than June 1, 2018, you may until January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018, choose to comply with the management practices that are shown for stationary non-emergency CI RICE with a site rating of less than or equal to 300 HP in Table 2d of this subpart instead of the applicable emission limitations in Table 2d, operating limitations in Table 2b, and crankcase ventilation system requirements in § 63.6625(g). You must comply with the emission limitations in Table 2d and operating limitations in Table 2b that apply for non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions by January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018. You must also comply with the crankcase ventilation system requirements in § 63.6625(g) by January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018.

(e) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 3 (Tier 2 for engines above 560 kilowatt (kW)) emission standards in Table 1 of 40 CFR 89.112, you may comply with the requirements under this part by meeting the requirements for Tier 3 engines (Tier 2 for engines above 560 kW) in 40 CFR part 60 subpart IIII instead of the emission limitations and other requirements that would otherwise apply under this part for existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions.

(f) An existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP must meet the definition of remote stationary RICE in § 63.6675 on the initial compliance date for the engine, October 19, 2013, in order to be considered a remote stationary RICE under this subpart. Owners and operators of existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP that meet the definition of remote stationary RICE in § 63.6675 of this subpart as of October 19, 2013 must evaluate the status of their stationary RICE every 12 months. Owners and operators must keep records of the initial and annual evaluation of the status of the engine. If the evaluation indicates that the stationary RICE no longer meets the definition of remote stationary RICE in § 63.6675 of this subpart, the owner or operator must comply with all of the requirements for existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP that are not remote stationary RICE within 1 year of the evaluation.

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6701, Jan. 30, 2013; 89 FR 70515, Aug. 30, 2024]

§ 63.6604 What fuel requirements must I meet if I own or operate a stationary CI RICE?

(a) If you own or operate an existing non-emergency, non-black start CI stationary RICE with a site rating of more than 300 brake HP with a displacement of less than 30 liters per cylinder that uses diesel fuel, you must use diesel fuel that meets the requirements in 40 CFR 1090.305 for nonroad diesel fuel.

(b) Beginning January 1, 2015, if you own or operate an existing emergency CI stationary RICE with a site rating of more than 100 brake HP and a displacement of less than 30 liters per cylinder that uses diesel fuel and operates for the purpose specified in § 63.6640(f)(4)(ii), you must use diesel fuel that meets the requirements in 40 CFR

1090.305 for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.

(c) [Reserved]

(d) Existing CI stationary RICE located in Guam, American Samoa, the Commonwealth of the Northern Mariana Islands, at area sources in areas of Alaska that meet either § 63.6603(b)(1) or § 63.6603(b)(2), or are on offshore vessels that meet § 63.6603(c) are exempt from the requirements of this section.

[78 FR 6702, Jan. 30, 2013, as amended at 85 FR 78463, Dec. 4, 2020; 87 FR 48607, Aug. 10, 2022]

General Compliance Requirements

§ 63.6605 What are my general requirements for complying with this subpart?

(a) You must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times.

(b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010, as amended at 78 FR 6702, Jan. 30, 2013]

Testing and Initial Compliance Requirements

§ 63.6610 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

If you own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions you are subject to the requirements of this section.

(a) You must conduct the initial performance test or other initial compliance demonstrations in Table 4 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in § 63.6595 and according to the provisions in § 63.7(a)(2).

(b) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must demonstrate initial compliance with either the proposed emission limitations or the promulgated emission limitations no later than February 10, 2005 or no later than 180 days after startup of the source, whichever is later, according to § 63.7(a)(2)(ix).

(c) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, and you chose to comply with the proposed emission limitations when demonstrating initial compliance, you must conduct a second performance test to demonstrate compliance with the promulgated emission limitations by December 13, 2007 or after startup of the source, whichever is later, according to § 63.7(a)(2)(ix).

(d) An owner or operator is not required to conduct an initial performance test on units for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (d)(1) through (5) of this section.

(1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.

(2) The test must not be older than 2 years.

(3) The test must be reviewed and accepted by the Administrator.

(4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.

(5) The test must be conducted at any load condition within plus or minus 10 percent of 100 percent load.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3605, Jan. 18, 2008]

§ 63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?

If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must conduct an initial performance test within 240 days after the compliance date that is specified for your stationary RICE in § 63.6595 and according to the provisions specified in Table 4 to this subpart, as appropriate.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 51589, Aug. 20, 2010]

§ 63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?

If you own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions you are subject to the requirements of this section.

(a) You must conduct any initial performance test or other initial compliance demonstration according to Tables 4 and 5 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in § 63.6595 and according to the provisions in § 63.7(a)(2).

(b) An owner or operator is not required to conduct an initial performance test on a unit for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (b)(1) through (4) of this section.

(1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.

(2) The test must not be older than 2 years.

(3) The test must be reviewed and accepted by the Administrator.

(4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.

[75 FR 9676, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010]

§ 63.6615 When must I conduct subsequent performance tests?

If you must comply with the emission limitations and operating limitations, you must conduct subsequent performance tests as specified in Table 3 of this subpart.

§ 63.6620 What performance tests and other procedures must I use?

(a) You must conduct each performance test in Tables 3 and 4 of this subpart that applies to you.

(b) Each performance test must be conducted according to the requirements that this subpart specifies in Table 4 to this subpart. If you own or operate a non-operational stationary RICE that is subject to performance testing, you do not need to start up the engine solely to conduct the performance test. Owners and operators of a non-operational engine can conduct the performance test when the engine is started up again. The test must be conducted at any load condition within plus or minus 10 percent of 100 percent load for the stationary RICE listed in paragraphs (b)(1) through (4) of this section.

(1) Non-emergency 4SRB stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(2) New non-emergency 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP located at a major source of HAP emissions.

(3) New non-emergency 2SLB stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(4) New non-emergency CI stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(c) [Reserved]

(d) You must conduct three separate test runs for each performance test required in this section, as specified in § 63.7(e)(3). Each test run must last at least 1 hour, unless otherwise specified in this subpart.

(e)

(1) You must use Equation 1 of this section to determine compliance with the percent reduction requirement:

$$\frac{C_i - C_o}{C_i} \times 100 = R \quad (Eq.\ 1)$$

Where:

C_i = concentration of carbon monoxide (CO), total hydrocarbons (THC), or formaldehyde at the control device inlet,

C_o = concentration of CO, THC, or formaldehyde at the control device outlet, and

R = percent reduction of CO, THC, or formaldehyde emissions.

(2) You must normalize the CO, THC, or formaldehyde concentrations at the inlet and outlet of the control device to a dry basis and to 15 percent oxygen, or an equivalent percent carbon dioxide (CO_2). If pollutant concentrations are to be corrected to 15 percent oxygen and CO_2 concentration is measured in lieu of oxygen concentration measurement, a CO_2 correction factor is needed. Calculate the CO_2 correction factor as described in paragraphs (e)(2)(i) through (iii) of this section.

(i) Calculate the fuel-specific F_o value for the fuel burned during the test using values obtained from Method 19, Section 5.2, and the following equation:

$$F_O = \frac{0.209\ F_d}{F_C} \quad (Eq.\ 2)$$

Where:

F_o = Fuel factor based on the ratio of oxygen volume to the ultimate CO_2 volume produced by the fuel at zero percent excess air.

0.209 = Fraction of air that is oxygen, percent/100.

F_d = Ratio of the volume of dry effluent gas to the gross calorific value of the fuel from Method 19, dsm^3/J ($dscf/10^6$ Btu).

F_c = Ratio of the volume of CO_2 produced to the gross calorific value of the fuel from Method 19, dsm^3/J ($dscf/10^6$ Btu)

(ii) Calculate the CO_2 correction factor for correcting measurement data to 15 percent O_2, as follows:

$$X_{CO2} = \frac{5.9}{F_O} \quad (Eq.\ 3)$$

Where:

X_{CO2} = CO_2 correction factor, percent.

5.9 = 20.9 percent O_2—15 percent O_2, the defined O_2 correction value, percent.

(iii) Calculate the CO, THC, and formaldehyde gas concentrations adjusted to 15 percent O_2 using CO_2 as follows:

$$C_{adj} = C_d \frac{X_{CO2}}{\%CO_2} \quad (Eq.\ 4)$$

Where:

C_{adj} = Calculated concentration of CO, THC, or formaldehyde adjusted to 15 percent O_2.

C_d = Measured concentration of CO, THC, or formaldehyde, uncorrected.

X_{CO2} = CO_2 correction factor, percent.

$\%CO_2$ = Measured CO_2 concentration measured, dry basis, percent.

(f) If you comply with the emission limitation to reduce CO and you are not using an oxidation catalyst, if you comply with the emission limitation to reduce formaldehyde and you are not using NSCR, or if you comply with the emission limitation to limit the concentration of formaldehyde in the stationary RICE exhaust and you are not using an oxidation catalyst or NSCR, you must petition the Administrator for operating limitations to be established during the initial performance test and continuously monitored thereafter; or for approval of no operating limitations. You must not conduct the initial performance test until after the petition has been approved by the Administrator.

(g) If you petition the Administrator for approval of operating limitations, your petition must include the information described in paragraphs (g)(1) through (5) of this section.

(1) Identification of the specific parameters you propose to use as operating limitations;

(2) A discussion of the relationship between these parameters and HAP emissions, identifying how HAP emissions change with changes in these parameters, and how limitations on these parameters will serve to limit HAP emissions;

(3) A discussion of how you will establish the upper and/or lower values for these parameters which will establish the limits on these parameters in the operating limitations;

(4) A discussion identifying the methods you will use to measure and the instruments you will use to monitor these parameters, as well as the relative accuracy and precision of these methods and instruments; and

(5) A discussion identifying the frequency and methods for recalibrating the instruments you will use for monitoring these parameters.

(h) If you petition the Administrator for approval of no operating limitations, your petition must include the information described in paragraphs (h)(1) through (7) of this section.

(1) Identification of the parameters associated with operation of the stationary RICE and any emission control device which could change intentionally (*e.g.,* operator adjustment, automatic controller adjustment, etc.) or unintentionally (*e.g.,* wear and tear, error, etc.) on a routine basis or over time;

(2) A discussion of the relationship, if any, between changes in the parameters and changes in HAP emissions;

(3) For the parameters which could change in such a way as to increase HAP emissions, a discussion of whether establishing limitations on the parameters would serve to limit HAP emissions;

(4) For the parameters which could change in such a way as to increase HAP emissions, a discussion of how you could establish upper and/or lower values for the parameters which would establish limits on the parameters in operating limitations;

(5) For the parameters, a discussion identifying the methods you could use to measure them and the instruments you could use to monitor them, as well as the relative accuracy and precision of the methods and instruments;

(6) For the parameters, a discussion identifying the frequency and methods for recalibrating the instruments you could use to monitor them; and

(7) A discussion of why, from your point of view, it is infeasible or unreasonable to adopt the parameters as operating limitations.

(i) The engine percent load during a performance test must be determined by documenting the calculations, assumptions, and measurement devices used to measure or estimate the percent load in a specific application. A written report of the average percent load determination must be included in the notification of compliance status. The following information must be included in the written report: the engine model number, the engine manufacturer, the year of purchase, the manufacturer's site-rated brake horsepower, the ambient temperature, pressure, and humidity during the performance test, and all assumptions that were made to estimate or calculate percent load during the performance test must be clearly explained. If measurement devices such as flow meters,

kilowatt meters, beta analyzers, stain gauges, etc. are used, the model number of the measurement device, and an estimate of its accurate in percentage of true value must be provided.

(j) Beginning on February 26, 2025, within 60 days after the date of completing each performance test required by this subpart, you must submit the results of the performance test following the procedure specified in § 63.9(k). Data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT website (*https://www.epa.gov/electronic-reporting-air-emissions/electronic-reporting-tool-ert*) at the time of the test must be submitted in a file format generated using the EPA's ERT. Alternatively, you may submit an electronic file consistent with the extensible markup language (XML) schema listed on the EPA's ERT website. Data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT website at the time of the test must be included as an attachment in the ERT or alternate electronic file.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9676, Mar. 3, 2010; 78 FR 6702, Jan. 30, 2013; 89 FR 70516, Aug. 30, 2024]

§ 63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?

(a) If you elect to install a CEMS as specified in Table 5 of this subpart, you must install, operate, and maintain a CEMS to monitor CO and either O_2 or CO_2 according to the requirements in paragraphs (a)(1) through (4) of this section. If you are meeting a requirement to reduce CO emissions, the CEMS must be installed at both the inlet and outlet of the control device. If you are meeting a requirement to limit the concentration of CO, the CEMS must be installed at the outlet of the control device.

(1) Each CEMS must be installed, operated, and maintained according to the applicable performance specifications of 40 CFR part 60, appendix B.

(2) You must conduct an initial performance evaluation and an annual relative accuracy test audit (RATA) of each CEMS according to the requirements in § 63.8 and according to the applicable performance specifications of 40 CFR part 60, appendix B as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.

(3) As specified in § 63.8(c)(4)(ii), each CEMS must complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period. You must have at least two data points, with each representing a different 15-minute period, to have a valid hour of data.

(4) The CEMS data must be reduced as specified in § 63.8(g)(2) and recorded in parts per million or parts per billion (as appropriate for the applicable limitation) at 15 percent oxygen or the equivalent CO_2 concentration.

(5) Beginning on February 26, 2025, within 60 days after the date of completing each continuous emissions monitoring system (CEMS) performance evaluation (as defined in § 63.2) that includes a relative accuracy test audit (RATA), you must submit the results of the performance evaluation following the procedures specified in § 63.9(k). The results of performance evaluations of CEMS measuring RATA pollutants that are supported by the EPA's ERT as listed on the EPA's ERT website at the time of the evaluation must be submitted in a file format generated using the EPA's ERT. Alternatively, you may submit an electronic file consistent with the XML schema listed on the EPA's ERT website. The results of performance evaluations of CEMS measuring RATA pollutants that are not supported by the EPA's ERT as listed on the EPA's ERT website at the time of the evaluation must be included as an attachment in the ERT or alternate electronic file.

(b) If you are required to install a continuous parameter monitoring system (CPMS) as specified in Table 5 of this subpart, you must install, operate, and maintain each CPMS according to the requirements in paragraphs (b)(1) through (6) of this section. For an affected source that is complying with the emission limitations and operating limitations on March 9, 2011, the requirements in paragraph (b) of this section are applicable September 6, 2011.

(1) You must prepare a site-specific monitoring plan that addresses the monitoring system design, data collection, and the quality assurance and quality control elements outlined in paragraphs (b)(1)(i) through (v) of this section and in § 63.8(d). As specified in § 63.8(f)(4), you may request approval of monitoring system quality assurance and quality control procedures alternative to those specified in paragraphs (b)(1) through (5) of this section in your site-specific monitoring plan.

(i) The performance criteria and design specifications for the monitoring system equipment, including the sample interface, detector signal analyzer, and data acquisition and calculations;

(ii) Sampling interface (*e.g.,* thermocouple) location such that the monitoring system will provide representative measurements;

(iii) Equipment performance evaluations, system accuracy audits, or other audit procedures;

(iv) Ongoing operation and maintenance procedures in accordance with provisions in § 63.8(c)(1)(ii) and (c)(3); and

(v) Ongoing reporting and recordkeeping procedures in accordance with provisions in § 63.10(c), (e)(1), and (e)(2)(i).

(2) You must install, operate, and maintain each CPMS in continuous operation according to the procedures in your site-specific monitoring plan.

(3) The CPMS must collect data at least once every 15 minutes (see also § 63.6635).

(4) For a CPMS for measuring temperature range, the temperature sensor must have a minimum tolerance of 2.8 degrees Celsius (5 degrees Fahrenheit) or 1 percent of the measurement range, whichever is larger.

(5) You must conduct the CPMS equipment performance evaluation, system accuracy audits, or other audit procedures specified in your site-specific monitoring plan at least annually.

(6) You must conduct a performance evaluation of each CPMS in accordance with your site-specific monitoring plan.

(c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must monitor and record your fuel usage daily with separate fuel meters to measure the volumetric flow rate of each fuel. In addition, you must operate your stationary RICE in a manner which reasonably minimizes HAP emissions.

(d) If you are operating a new or reconstructed emergency 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must install a non-resettable hour meter prior to the startup of the engine.

(e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

(1) An existing stationary RICE with a site rating of less than 100 HP located at a major source of HAP emissions;

(2) An existing emergency or black start stationary RICE with a site rating of less than or equal to 500 HP located at a major source of HAP emissions;

(3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;

(4) An existing non-emergency, non-black start stationary CI RICE with a site rating less than or equal to 300 HP located at an area source of HAP emissions;

(5) An existing non-emergency, non-black start 2SLB stationary RICE located at an area source of HAP emissions;

(6) An existing non-emergency, non-black start stationary RICE located at an area source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis.

(7) An existing non-emergency, non-black start 4SLB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;

(8) An existing non-emergency, non-black start 4SRB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;

(9) An existing, non-emergency, non-black start 4SLB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year; and

(10) An existing, non-emergency, non-black start 4SRB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year.

(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.

(g) If you own or operate an existing non-emergency, non-black start CI engine greater than or equal to 300 HP that is not equipped with a closed crankcase ventilation system, you must comply with either paragraph (g)(1) or paragraph (2) of this section. Owners and operators must follow the manufacturer's specified maintenance requirements for operating and maintaining the open or closed crankcase ventilation systems and replacing the crankcase filters, or can request the Administrator to approve different maintenance requirements that are as protective as manufacturer requirements. Existing CI engines located at area sources in areas of Alaska that meet either § 63.6603(b)(1) or § 63.6603(b)(2) do not have to meet the requirements of this paragraph (g). Existing CI engines located on offshore vessels that meet § 63.6603(c) do not have to meet the requirements of this paragraph (g).

(1) Install a closed crankcase ventilation system that prevents crankcase emissions from being emitted to the atmosphere, or

(2) Install an open crankcase filtration emission control system that reduces emissions from the crankcase by filtering the exhaust stream to remove oil mist, particulates and metals.

(h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply.

(i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of table 2c to this subpart or in items 1 or 4 of table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil and filter change requirement in tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil and filter in table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil and filter. If any of the limits are exceeded, the engine owner or operator must change the oil and filter within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil and filter within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil and filter changes for the engine. The analysis program must be part of the maintenance plan for the engine.

(j) If you own or operate a stationary SI engine that is subject to the work, operation or management practices in items 6, 7, or 8 of table 2c to this subpart or in items 5, 6, 7, 8, 10, 11, or 13 of table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil and filter change requirement in tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil and filter in table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Acid Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Acid Number increases by more than 3.0 milligrams of potassium hydroxide (KOH) per gram from Total Acid Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil and filter. If any of the limits are exceeded, the engine owner or operator must change the oil and filter within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil and filter within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil and filter changes for the engine. The analysis program must be part of the maintenance plan for the engine.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6703, Jan. 30, 2013; 89 FR 70516, Aug. 30, 2024]

§ 63.6630 How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate initial compliance with each emission limitation, operating limitation, and other requirement that applies to you according to Table 5 of this subpart.

(b) During the initial performance test, you must establish each operating limitation in Tables 1b and 2b of this subpart that applies to you.

(c) You must submit the Notification of Compliance Status containing the results of the initial compliance demonstration according to the requirements in § 63.6645.

(d) Non-emergency 4SRB stationary RICE complying with the requirement to reduce formaldehyde emissions by 76 percent or more can demonstrate initial compliance with the formaldehyde emission limit by testing for THC instead of formaldehyde. The testing must be conducted according to the requirements in Table 4 of this subpart. The average reduction of emissions of THC determined from the performance test must be equal to or greater than 30 percent.

(e) The initial compliance demonstration required for existing non-emergency 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year must be conducted according to the following requirements:

(1) The compliance demonstration must consist of at least three test runs.

(2) Each test run must be of at least 15 minute duration, except that each test conducted using the method in appendix A to this subpart must consist of at least one measurement cycle and include at least 2 minutes of test data phase measurement.

(3) If you are demonstrating compliance with the CO concentration or CO percent reduction requirement, you must measure CO emissions using one of the CO measurement methods specified in Table 4 of this subpart, or using appendix A to this subpart.

(4) If you are demonstrating compliance with the THC percent reduction requirement, you must measure THC emissions using Method 25A, reported as propane, of 40 CFR part 60, appendix A.

(5) You must measure O_2 using one of the O_2 measurement methods specified in Table 4 of this subpart. Measurements to determine O_2 concentration must be made at the same time as the measurements for CO or THC concentration.

(6) If you are demonstrating compliance with the CO or THC percent reduction requirement, you must measure CO or THC emissions and O_2 emissions simultaneously at the inlet and outlet of the control device.

[69 FR 33506, June 15, 2004, as amended at 78 FR 6704, Jan. 30, 2013]

Continuous Compliance Requirements

§ 63.6635 How do I monitor and collect data to demonstrate continuous compliance?

(a) If you must comply with emission and operating limitations, you must monitor and collect data according to this section.

(b) Except for monitor malfunctions, associated repairs, required performance evaluations, and required quality assurance or control activities, you must monitor continuously at all times that the stationary RICE is operating. A monitoring malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring to provide valid data. Monitoring failures that are caused in part by poor maintenance or careless operation are not malfunctions.

(c) You may not use data recorded during monitoring malfunctions, associated repairs, and required quality assurance or control activities in data averages and calculations used to report emission or operating levels. You must, however, use all the valid data collected during all other periods.

[69 FR 33506, June 15, 2004, as amended at 76 FR 12867, Mar. 9, 2011]

§ 63.6640 How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate continuous compliance with each emission limitation, operating limitation, and other requirements in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart.

(b) You must report each instance in which you did not meet each emission limitation or operating limitation in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you. These instances are deviations from the emission and operating limitations in this subpart. These deviations must be reported according to the requirements in § 63.6650. If you change your catalyst, you must reestablish the values of the operating parameters measured during the initial performance test. When you reestablish the values of your operating parameters, you must also conduct a performance test to demonstrate that you are meeting the required emission limitation applicable to your stationary RICE.

(c) The annual compliance demonstration required for existing non-emergency 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year must be conducted according to the following requirements:

(1) The compliance demonstration must consist of at least one test run.

(2) Each test run must be of at least 15 minute duration, except that each test conducted using the method in appendix A to this subpart must consist of at least one measurement cycle and include at least 2 minutes of test data phase measurement.

(3) If you are demonstrating compliance with the CO concentration or CO percent reduction requirement, you must measure CO emissions using one of the CO measurement methods specified in Table 4 of this subpart, or using appendix A to this subpart.

(4) If you are demonstrating compliance with the THC percent reduction requirement, you must measure THC emissions using Method 25A, reported as propane, of 40 CFR part 60, appendix A.

(5) You must measure O_2 using one of the O_2 measurement methods specified in Table 4 of this subpart. Measurements to determine O_2 concentration must be made at the same time as the measurements for CO or THC concentration.

(6) If you are demonstrating compliance with the CO or THC percent reduction requirement, you must measure CO or THC emissions and O_2 emissions simultaneously at the inlet and outlet of the control device.

(7) If the results of the annual compliance demonstration show that the emissions exceed the levels specified in Table 6 of this subpart, the stationary RICE must be shut down as soon as safely possible, and appropriate corrective action must be taken (e.g., repairs, catalyst cleaning, catalyst replacement). The stationary RICE must be retested within 7 days of being restarted and the emissions must meet the levels specified in Table 6 of this subpart. If the retest shows that the emissions continue to exceed the specified levels, the stationary RICE must again be shut down as soon as safely possible, and the stationary RICE may not operate, except for purposes of startup and testing, until the owner/operator demonstrates through testing that the emissions do not exceed the levels specified in Table 6 of this subpart.

(d) For new, reconstructed, and rebuilt stationary RICE, deviations from the emission or operating limitations that occur during the first 200 hours of operation from engine startup (engine burn-in period) are not violations. Rebuilt stationary RICE means a stationary RICE that has been rebuilt as that term is defined in 40 CFR 94.11(a).

(e) You must also report each instance in which you did not meet the requirements in Table 8 to this subpart that apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing emergency stationary RICE, an existing limited use stationary RICE, or an existing stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart, except for the initial notification requirements: a new or reconstructed stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new or reconstructed emergency stationary RICE, or a new or reconstructed limited use stationary RICE.

(f) If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4), is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4), the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.

(1) There is no time limit on the use of emergency stationary RICE in emergency situations.

(2) You may operate your emergency stationary RICE for the purpose specified in paragraph (f)(2)(i) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).

(i) Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.

(ii)-(iii) [Reserved]

(3) Emergency stationary RICE located at major sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing provided in paragraph (f)(2) of this section. The 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to supply power to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(4) Emergency stationary RICE located at area sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing provided in paragraph (f)(2) of this section. Except as provided in paragraphs (f)(4)(i) and (ii) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(i) Prior to May 3, 2014, the 50 hours per year for non-emergency situations can be used for peak shaving or non-emergency demand response to generate income for a facility, or to otherwise supply power as part of a financial arrangement with another entity if the engine is operated as part of a peak shaving (load management program) with the local distribution system operator and the power is provided only to the facility itself or to support the local distribution system.

(ii) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:

(A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator.

(B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.

(C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.

(D) The power is provided only to the facility itself or to support the local transmission and distribution system.

(E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6704, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022]

Notifications, Reports, and Records

§ 63.6645 What notifications must I submit and when?

(a) You must submit all of the notifications in §§ 63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), and (g) and (h) that apply to you by the dates specified if you own or operate any of the following;

(1) An existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

(2) An existing stationary RICE located at an area source of HAP emissions.

(3) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(4) A new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 HP located at a major source of HAP emissions.

(5) This requirement does not apply if you own or operate an existing stationary RICE less than 100 HP, an existing stationary emergency RICE, or an existing stationary RICE that is not subject to any numerical emission standards.

(b) As specified in § 63.9(b)(2), if you start up your stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart, you must submit an initial notification not later than December 13, 2004, or no later than 120 days after the source becomes subject to this subpart, whichever is later. Beginning on February 26, 2025, submit the notification electronically in portable document format (PDF) consistent with § 63.9(k).

(c) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions on or after August 16, 2004, you must submit an initial notification not later than 120 days after you become subject to this subpart. Beginning on February 26, 2025, submit the notification electronically in PDF consistent with § 63.9(k).

(d) As specified in § 63.9(b)(2), if you start up your stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart and you are required to submit an initial notification, you must submit an initial notification not later than July 16, 2008, or no later than 120 days after the source becomes subject to this subpart, whichever is later. Beginning on February 26, 2025, submit the notification electronically in PDF consistent with § 63.9(k).

(e) If you start up your new or reconstructed stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions on or after March 18, 2008, and you are required to submit an initial notification, you must submit an initial notification not later than 120 days after you become subject to this subpart. Beginning on February 26, 2025, submit the notification electronically in PDF consistent with § 63.9(k).

(f) If you are required to submit an Initial Notification but are otherwise not affected by the requirements of this subpart, in accordance with § 63.6590(b), your notification should include the information in § 63.9(b)(2)(i) through (v), and a statement that your stationary RICE has no additional requirements and explain the basis of the exclusion (for example, that it operates exclusively as an emergency stationary RICE if it has a site rating of more than 500 brake HP located at a major source of HAP emissions).

(g) If you are required to conduct a performance test, you must submit a Notification of Intent to conduct a performance test at least 60 days before the performance test is scheduled to begin as required in § 63.7(b)(1).

(h) If you are required to conduct a performance test or other initial compliance demonstration as specified in Tables 4 and 5 to this subpart, you must submit a Notification of Compliance Status according to § 63.9(h)(2)(ii).

(1) For each initial compliance demonstration required in Table 5 to this subpart that does not include a performance test, you must submit the Notification of Compliance Status before the close of business on the 30th day following the completion of the initial compliance demonstration.

(2) Before February 26, 2025, for each initial compliance demonstration required in table 5 to this subpart that includes a performance test conducted according to the requirements in table 3 to this subpart, you must submit the Notification of Compliance Status, including the performance test results, before the close of business on the 60th day following the completion of the performance test according to § 63.10(d)(2). Beginning on February 26, 2025, for each initial compliance demonstration required in table 5 to this subpart that includes a performance test conducted according to the requirements in table 3 to this subpart, you must submit the Notification of Compliance Status, including a summary of the performance test results, in PDF to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI), before the close of business on the 60th day following the completion of the performance test following the procedure specified in § 63.9(k), except any Confidential Business Information (CBI) is to be submitted according to paragraphs (h)(2)(i) and (ii) of this section. Do not use CEDRI to submit information you claim as CBI. Although we do not expect persons to assert a claim of CBI, if you wish to assert a CBI claim for some of the information in the report, you must submit a complete file, including information claimed to be CBI, to the EPA following the procedures in paragraphs (h)(2)(i) and (ii) of this section. Clearly mark the part or all of the information that you claim to be CBI. Information not marked as

CBI may be authorized for public release without prior notice. Information marked as CBI will not be disclosed except in accordance with procedures set forth in 40 CFR part 2. All CBI claims must be asserted at the time of submission. Anything submitted using CEDRI cannot later be claimed CBI. Furthermore, under CAA section 114(c), emissions data is not entitled to confidential treatment, and the EPA is required to make emissions data available to the public. Thus, emissions data will not be protected as CBI and will be made publicly available. You must submit the same file submitted to the CBI office with the CBI omitted to the EPA via the EPA's CDX as described earlier in this paragraph (h)(2).

(i) The preferred method to receive CBI is for it to be transmitted electronically using email attachments, File Transfer Protocol, or other online file sharing services. Electronic submissions must be transmitted directly to the OAQPS CBI Office at the email address *oaqpscbi@epa.gov,* and as described in paragraph (h)(2) of this section, should include clear CBI markings and be flagged to the attention of the Reciprocating Internal Combustion Engine Sector Lead. If assistance is needed with submitting large electronic files that exceed the file size limit for email attachments, and if you do not have your own file sharing service, please email *oaqpscbi@epa.gov* to request a file transfer link.

(ii) If you cannot transmit the file electronically, you may send CBI information through the postal service to the following address: OAQPS Document Control Officer (C404-02), OAQPS, U.S. Environmental Protection Agency, 109 T.W. Alexander Drive, P.O. Box 12055, Research Triangle Park, North Carolina 27711, Attention Reciprocating Internal Combustion Engine Sector Lead. The mailed CBI material should be double wrapped and clearly marked. Any CBI markings should not show through the outer envelope.

(i) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 1 or Tier 2 emission standards in Table 1 of 40 CFR 89.112 and subject to an enforceable state or local standard requiring engine replacement and you intend to meet management practices rather than emission limits, as specified in § 63.6603(d), you must submit a notification by March 3, 2013, stating that you intend to use the provision in § 63.6603(d) and identifying the state or local regulation that the engine is subject to.

[73 FR 3606, Jan. 18, 2008, as amended at 75 FR 9677, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6705, Jan. 30, 2013; 85 FR 73912, Nov. 19, 2020; 89 FR 70516, Aug. 30, 2024]

§ 63.6650 What reports must I submit and when?

(a) You must submit each report in Table 7 of this subpart that applies to you.

(b) Unless the Administrator has approved a different schedule for submission of reports under § 63.10(a), you must submit each report by the date in Table 7 of this subpart and according to the requirements in paragraphs (b)(1) through (b)(9) of this section.

(1) For semiannual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in § 63.6595 and ending on June 30 or December 31, whichever date is the first date following the end of the first calendar half after the compliance date that is specified for your source in § 63.6595.

(2) For semiannual Compliance reports, the first Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date follows the end of the first calendar half after the compliance date that is specified for your affected source in § 63.6595.

(3) For semiannual Compliance reports, each subsequent Compliance report must cover the semiannual reporting period from January 1 through June 30 or the semiannual reporting period from July 1 through December 31.

(4) For semiannual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date is the first date following the end of the semiannual reporting period.

(5) For each stationary RICE that is subject to permitting regulations pursuant to 40 CFR part 70 or 71, and if the permitting authority has established dates for submitting semiannual reports pursuant to 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6 (a)(3)(iii)(A), you may submit the first and subsequent Compliance reports according to the dates the permitting authority has established instead of according to the dates in paragraphs (b)(1) through (b)(4) of this section.

(6) For annual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in § 63.6595 and ending on December 31.

(7) For annual Compliance reports, the first Compliance report must be postmarked or delivered no later than January 31 following the end of the first calendar year after the compliance date that is specified for your affected source in § 63.6595.

(8) For annual Compliance reports, each subsequent Compliance report must cover the annual reporting period from January 1 through December 31.

(9) For annual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than January 31.

(c) The Compliance report must contain the information in paragraphs (c)(1) through (8) of this section.

(1) Company name and address.

(2) Statement by a responsible official, with that official's name, title, and signature, certifying the accuracy of the content of the report.

(3) Date of report and beginning and ending dates of the reporting period.

(4) If you had a malfunction during the reporting period, the compliance report must include the starting and ending date and time, the duration (in hours), and a brief description for each malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report must also include a description of actions taken by an owner or operator during a malfunction of an affected source to minimize emissions in accordance with § 63.6605(b), including actions taken to correct a malfunction.

(5) If there are no deviations from any emission or operating limitations that apply to you, a statement that there were no deviations from the emission or operating limitations during the reporting period.

(6) If there were no periods during which the continuous monitoring system (CMS), including CEMS and CPMS, was out-of-control, as specified in § 63.8(c)(7), a statement that there were no periods during which the CMS was out-of-control during the reporting period.

(7) Engine site rating in brake HP, year construction of the engine commenced (as defined in § 63.2, where the exact year is not known, provide the best estimate), and type of engine (CI, SI 2SLB, SI 4SLB, or SI 4SRB).

(8) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.

(9) An engine can be claimed as exempt from reporting coordinates (latitude/longitude) via CEDRI if:

(i) During the reporting period, the engine will be owned by, or operated by or for, an agency of the Federal Government responsible for national defense; and

(ii) The agency determines that disclosing the coordinates to the general public would be a threat to national security.

(d) For each deviation from an emission or operating limitation that occurs for a stationary RICE where you are not using a CMS to comply with the emission or operating limitations in this subpart, the Compliance report must contain the information in paragraphs (c)(1) through (8) of this section and the information in paragraphs (d)(1) and (2) of this section.

(1) The total operating time (in hours) of the stationary RICE at which the deviation occurred during the reporting period.

(2) Information on the number, duration (in hours), and cause of deviations (including unknown cause, if applicable), as applicable, and the corrective action taken.

(3) A description of any changes in processes, or controls since the last reporting period.

(e) For each deviation from an emission or operating limitation occurring for a stationary RICE where you are using a CMS to comply with the emission and operating limitations in this subpart, you must include information in paragraphs (c)(1) through (8) and (e)(1) through (13) of this section.

(1) The date and time that each malfunction started and stopped.

(2) The start and end date and time and the duration (in hours) that each CMS was inoperative, except for zero (low-level) and high-level checks.

(3) The start and end date and time and the duration (in hours) that each CMS was out-of-control, including the information in § 63.8(c)(8).

(4) The date and time that each deviation started and stopped, and whether each deviation occurred during a period of malfunction or during another period.

(5) A summary of the total duration (in hours) of the deviation during the reporting period, and the total duration as a percent of the total source operating time during that reporting period.

(6) A breakdown of the total duration (in hours) of the deviations during the reporting period into those that are due to control equipment problems, process problems, other known causes, and other unknown causes.

(7) A summary of the total duration (in hours) of CMS downtime during the reporting period, and the total duration of CMS downtime as a percent of the total operating time of the stationary RICE at which the CMS downtime occurred during that reporting period.

(8) An identification of each parameter and pollutant (CO or formaldehyde) that was monitored at the stationary RICE.

(9) [Reserved]

(10) A brief description of the CMS.

(11) The date of the latest CMS certification or audit.

(12) A description of any changes in CMS, processes, or controls since the last reporting period.

(13) The total operating time of the stationary RICE at which the deviation occurred during the reporting period.

(f) Each affected source that has obtained a title V operating permit pursuant to 40 CFR part 70 or 71 must report all deviations as defined in this subpart in the semiannual monitoring report required by 40 CFR 70.6 (a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A). If an affected source submits a Compliance report pursuant to table 7 of this subpart along with, or as part of, the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), and the Compliance report includes all required information concerning deviations from any

emission or operating limitation in this subpart, submission of the Compliance report shall be deemed to satisfy any obligation to report the same deviations in the semiannual monitoring report. However, submission of a Compliance report shall not otherwise affect any obligation the affected source may have to report deviations from permit requirements to the permit authority. Beginning on February 26, 2025, the semiannual and annual compliance report required in table 7 of this subpart must be submitted according to paragraph (i) of this section. Only those elements required under this subpart are required to be submitted according to paragraph (i) of this section.

(g) If you are operating as a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must submit an annual report according to Table 7 of this subpart by the date specified unless the Administrator has approved a different schedule, according to the information described in paragraphs (b)(1) through (b)(5) of this section. You must report the data specified in (g)(1) through (g)(3) of this section.

(1) Fuel flow rate of each fuel and the heating values that were used in your calculations. You must also demonstrate that the percentage of heat input provided by landfill gas or digester gas is equivalent to 10 percent or more of the total fuel consumption on an annual basis.

(2) The operating limits provided in your federally enforceable permit, and any deviations from these limits.

(3) Any problems or errors suspected with the meters.

(h) If you own or operate an emergency stationary RICE with a site rating of more than 100 brake HP that operates for the purpose specified in § 63.6640(f)(4)(ii), you must submit an annual report according to the requirements in paragraphs (h)(1) through (3) of this section.

(1) The report must contain the following information:

(i) Company name and address where the engine is located.

(ii) Date of the report and beginning and ending dates of the reporting period.

(iii) Engine site rating in brake HP, year construction of the engine commenced (as defined in § 63.2, where the exact year is not known, provide the best estimate), and type of engine (CI, SI 2SLB, SI 4SLB, or SI 4SRB).

(iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.

(v)-(vi) [Reserved]

(vii) Hours spent for operation for the purpose specified in § 63.6640(f)(4)(ii), including the date, start time, and end time for engine operation for the purposes specified in § 63.6640(f)(4)(ii). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.

(viii) If there were no deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), a statement that there were no deviations from the fuel requirements during the reporting period.

(ix) If there were deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), information on the number, duration (in hours), and cause of deviations, and the corrective action taken.

(2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.

(3) Before February 26, 2025, the annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (*https://cdx.epa.gov/*). However, if the reporting form specific to this subpart

is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in § 63.13. Beginning on February 26, 2025, the annual report must be submitted according to paragraph (i) of this section.

(i) Beginning on February 26, 2025 for the annual report specified in § 63.6650(h) and February 26, 2025 or one year after the report becomes available in CEDRI, whichever is later for all other semiannual or annual reports, submit all semiannual and annual subsequent compliance reports using the appropriate electronic report template on the CEDRI website (*https://www.epa.gov/electronic-reporting-air-emissions/cedri*) for this subpart and following the procedure specified in § 63.9(k), except any CBI must be submitted according to the procedures in § 63.6645(h). The date report templates become available will be listed on the CEDRI website. Unless the Administrator or delegated state agency or other authority has approved a different schedule for submission of reports, the report must be submitted by the deadline specified in this subpart, regardless of the method in which the report is submitted.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9677, Mar. 3, 2010; 78 FR 6705, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022; 89 FR 70517, Aug. 30, 2024]

§ 63.6655 What records must I keep?

(a) If you must comply with the emission and operating limitations, you must keep the records described in paragraphs (a)(1) through (a)(5), (b)(1) through (b)(3) and (c) of this section.

(1) A copy of each notification and report that you submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted, according to the requirement in § 63.10(b)(2)(xiv).

(2) Records of the occurrence and duration (in hours) of each malfunction of operation (*i.e.,* process equipment) or the air pollution control and monitoring equipment.

(3) Records of performance tests and performance evaluations as required in § 63.10(b)(2)(viii).

(4) Records of all required maintenance performed on the air pollution control and monitoring equipment.

(5) Records of actions taken during periods of malfunction to minimize emissions in accordance with § 63.6605(b), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation.

(b) For each CEMS or CPMS, you must keep the records listed in paragraphs (b)(1) through (3) of this section.

(1) Records described in § 63.10(b)(2)(vi) through (xi).

(2) Previous (*i.e.,* superseded) versions of the performance evaluation plan as required in § 63.8(d)(3).

(3) Requests for alternatives to the relative accuracy test for CEMS or CPMS as required in § 63.8(f)(6)(i), if applicable.

(c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must keep the records of your daily fuel usage monitors.

(d) You must keep the records required in Table 6 of this subpart to show continuous compliance with each emission or operating limitation that applies to you.

(e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;

(1) An existing stationary RICE with a site rating of less than 100 brake HP located at a major source of HAP emissions.

(2) An existing stationary emergency RICE.

(3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.

(f) If you own or operate any of the stationary RICE in paragraphs (f)(1) through (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. If the engine is used for the purpose specified in § 63.6640(f)(4)(ii), the owner or operator must keep records of the notification of the emergency situation, and the date, start time, and end time of engine operation for these purposes.

(1) An existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions that does not meet the standards applicable to non-emergency engines.

(2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 78 FR 6706, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022; 89 FR 70518, Aug. 30, 2024]

§ 63.6660 In what form and how long must I keep my records?

(a) Your records must be in a form suitable and readily available for expeditious review according to § 63.10(b)(1).

(b) As specified in § 63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.

(c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to § 63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

Other Requirements and Information

§ 63.6665 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§ 63.1 through 63.15 apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with any of the requirements of the General Provisions specified in Table 8: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing stationary RICE that combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, an existing emergency stationary RICE, or an existing limited use stationary RICE. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in the General Provisions specified in Table 8 except for the initial notification requirements: A new stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new emergency stationary RICE, or a new limited use stationary RICE.

[75 FR 9678, Mar. 3, 2010]

§ 63.6670 Who implements and enforces this subpart?

(a) This subpart is implemented and enforced by the U.S. EPA, or a delegated authority such as your State, local, or tribal agency. If the U.S. EPA Administrator has delegated authority to your State, local, or tribal agency, then that agency (as well as the U.S. EPA) has the authority to implement and enforce this subpart. You should contact your U.S. EPA Regional Office to find out whether this subpart is delegated to your State, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or tribal agency under 40 CFR part 63, subpart E, the authorities contained in paragraph (c) of this section are retained by the Administrator of the U.S. EPA and are not transferred to the State, local, or tribal agency.

(c) The authorities that will not be delegated to State, local, or tribal agencies are:

(1) Approval of alternatives to the non-opacity emission limitations and operating limitations in § 63.6600 under § 63.6(g).

(2) Approval of major alternatives to test methods under § 63.7(e)(2)(ii) and (f) and as defined in § 63.90.

(3) Approval of major alternatives to monitoring under § 63.8(f) and as defined in § 63.90.

(4) Approval of major alternatives to recordkeeping and reporting under § 63.10(f) and as defined in § 63.90.

(5) Approval of a performance test which was conducted prior to the effective date of the rule, as specified in § 63.6610(b).

(6) Approval of an alternative to any electronic reporting to the EPA required by this subpart.

[69 FR 33506, June 15, 2004, as amended at 89 FR 70518, Aug. 30, 2024]

§ 63.6675 What definitions apply to this subpart?

Terms used in this subpart are defined in the Clean Air Act (CAA); in 40 CFR 63.2, the General Provisions of this part; and in this section as follows:

Alaska Railbelt Grid means the service areas of the six regulated public utilities that extend from Fairbanks to Anchorage and the Kenai Peninsula. These utilities are Golden Valley Electric Association; Chugach Electric Association; Matanuska Electric Association; Homer Electric Association; Anchorage Municipal Light & Power; and the City of Seward Electric System.

Area source means any stationary source of HAP that is not a major source as defined in part 63.

Associated equipment as used in this subpart and as referred to in section 112(n)(4) of the CAA, means equipment associated with an oil or natural gas exploration or production well, and includes all equipment from the well bore to the point of custody transfer, except glycol dehydration units, storage vessels with potential for flash emissions, combustion turbines, and stationary RICE.

Backup power for renewable energy means an engine that provides backup power to a facility that generates electricity from renewable energy resources, as that term is defined in Alaska Statute 42.45.045(l)(5) (incorporated by reference, see § 63.14).

Black start engine means an engine whose only purpose is to start up a combustion turbine.

CAA means the Clean Air Act (42 U.S.C. 7401 *et seq.,* as amended by Public Law 101-549, 104 Stat. 2399).

Commercial emergency stationary RICE means an emergency stationary RICE used in commercial establishments such as office buildings, hotels, stores, telecommunications facilities, restaurants, financial institutions such as banks, doctor's offices, and sports and performing arts facilities.

Compression ignition means relating to a type of stationary internal combustion engine that is not a spark ignition engine.

Custody transfer means the transfer of hydrocarbon liquids or natural gas: After processing and/or treatment in the producing operations, or from storage vessels or automatic transfer facilities or other such equipment, including product loading racks, to pipelines or any other forms of transportation. For the purposes of this subpart, the point at which such liquids or natural gas enters a natural gas processing plant is a point of custody transfer.

Deviation means any instance in which an affected source subject to this subpart, or an owner or operator of such a source:

(1) Fails to meet any requirement or obligation established by this subpart, including but not limited to any emission limitation or operating limitation;

(2) Fails to meet any term or condition that is adopted to implement an applicable requirement in this subpart and that is included in the operating permit for any affected source required to obtain such a permit; or

(3) Fails to meet any emission limitation or operating limitation in this subpart during malfunction, regardless or whether or not such failure is permitted by this subpart.

(4) Fails to satisfy the general duty to minimize emissions established by § 63.6(e)(1)(i).

Diesel engine means any stationary RICE in which a high boiling point liquid fuel injected into the combustion chamber ignites when the air charge has been compressed to a temperature sufficiently high for auto-ignition. This process is also known as compression ignition.

Diesel fuel means any liquid obtained from the distillation of petroleum with a boiling point of approximately 150 to 360 degrees Celsius. One commonly used form is fuel oil number 2. Diesel fuel also includes any non-distillate fuel with comparable physical and chemical properties (*e.g.* biodiesel) that is suitable for use in compression ignition engines.

Digester gas means any gaseous by-product of wastewater treatment typically formed through the anaerobic decomposition of organic waste materials and composed principally of methane and CO_2.

Dual-fuel engine means any stationary RICE in which a liquid fuel (typically diesel fuel) is used for compression ignition and gaseous fuel (typically natural gas) is used as the primary fuel.

Emergency stationary RICE means any stationary reciprocating internal combustion engine that meets all of the criteria in paragraphs (1) through (3) of this definition. All emergency stationary RICE must comply with the requirements specified in § 63.6640(f) in order to be considered emergency stationary RICE. If the engine does not comply with the requirements specified in § 63.6640(f), then it is not considered to be an emergency stationary RICE under this subpart.

(1) The stationary RICE is operated to provide electrical power or mechanical work during an emergency situation. Examples include stationary RICE used to produce power for critical networks or equipment (including power supplied to portions of a facility) when electric power from the local utility (or the normal power source, if the facility runs on its own power production) is interrupted, or stationary RICE used to pump water in the case of fire or flood, etc.

(2) The stationary RICE is operated under limited circumstances for situations not included in paragraph (1) of this definition, as specified in § 63.6640(f).

(3) The stationary RICE operates as part of a financial arrangement with another entity in situations not included in paragraph (1) of this definition only as allowed in § 63.6640(f)(4)(i) or (ii).

Engine startup means the time from initial start until applied load and engine and associated equipment reaches steady state or normal operation. For stationary engine with catalytic controls, engine startup means the time from initial start until applied load and engine and associated equipment, including the catalyst, reaches steady state or normal operation.

Four-stroke engine means any type of engine which completes the power cycle in two crankshaft revolutions, with intake and compression strokes in the first revolution and power and exhaust strokes in the second revolution.

Gaseous fuel means a material used for combustion which is in the gaseous state at standard atmospheric temperature and pressure conditions.

Gasoline means any fuel sold in any State for use in motor vehicles and motor vehicle engines, or nonroad or stationary engines, and commonly or commercially known or sold as gasoline.

Glycol dehydration unit means a device in which a liquid glycol (including, but not limited to, ethylene glycol, diethylene glycol, or triethylene glycol) absorbent directly contacts a natural gas stream and absorbs water in a contact tower or absorption column (absorber). The glycol contacts and absorbs water vapor and other gas stream constituents from the natural gas and becomes “rich” glycol. This glycol is then regenerated in the glycol dehydration unit reboiler. The “lean” glycol is then recycled.

Hazardous air pollutants (HAP) means any air pollutants listed in or pursuant to section 112(b) of the CAA.

Institutional emergency stationary RICE means an emergency stationary RICE used in institutional establishments such as medical centers, nursing homes, research centers, institutions of higher education, correctional facilities, elementary and secondary schools, libraries, religious establishments, police stations, and fire stations.

ISO standard day conditions means 288 degrees Kelvin (15 degrees Celsius), 60 percent relative humidity and 101.3 kilopascals pressure.

Landfill gas means a gaseous by-product of the land application of municipal refuse typically formed through the anaerobic decomposition of waste materials and composed principally of methane and CO_2.

Lean burn engine means any two-stroke or four-stroke spark ignited engine that does not meet the definition of a rich burn engine.

Limited use stationary RICE means any stationary RICE that operates less than 100 hours per year.

Liquefied petroleum gas means any liquefied hydrocarbon gas obtained as a by-product in petroleum refining of natural gas production.

Liquid fuel means any fuel in liquid form at standard temperature and pressure, including but not limited to diesel, residual/crude oil, kerosene/naphtha (jet fuel), and gasoline.

Major Source, as used in this subpart, shall have the same meaning as in § 63.2, except that:

(1) Emissions from any oil or gas exploration or production well (with its associated equipment (as defined in this section)) and emissions from any pipeline compressor station or pump station shall not be aggregated with emissions from other similar units, to determine whether such emission points or stations are major sources, even when emission points are in a contiguous area or under common control;

(2) For oil and gas production facilities, emissions from processes, operations, or equipment that are not part of the same oil and gas production facility, as defined in § 63.1271 of subpart HHH of this part, shall not be aggregated;

(3) For production field facilities, only HAP emissions from glycol dehydration units, storage vessel with the potential for flash emissions, combustion turbines and reciprocating internal combustion engines shall be aggregated for a major source determination; and

(4) Emissions from processes, operations, and equipment that are not part of the same natural gas transmission and storage facility, as defined in § 63.1271 of subpart HHH of this part, shall not be aggregated.

Malfunction means any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner which causes, or has the potential to cause, the emission limitations in an applicable standard to be exceeded. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.

Natural gas means a naturally occurring mixture of hydrocarbon and non-hydrocarbon gases found in geologic formations beneath the Earth's surface, of which the principal constituent is methane. Natural gas may be field or pipeline quality.

Non-selective catalytic reduction (NSCR) means an add-on catalytic nitrogen oxides (NO_X) control device for rich burn engines that, in a two-step reaction, promotes the conversion of excess oxygen, NO_X, CO, and volatile organic compounds (VOC) into CO_2, nitrogen, and water.

Oil and gas production facility as used in this subpart means any grouping of equipment where hydrocarbon liquids are processed, upgraded (*i.e.,* remove impurities or other constituents to meet contract specifications), or stored prior to the point of custody transfer; or where natural gas is processed, upgraded, or stored prior to entering the natural gas transmission and storage source category. For purposes of a major source determination, facility (including a building, structure, or installation) means oil and natural gas production and processing equipment that is located within the boundaries of an individual surface site as defined in this section. Equipment that is part of a facility will typically be located within close proximity to other equipment located at the same facility. Pieces of production equipment or groupings of equipment located on different oil and gas leases, mineral fee tracts, lease tracts, subsurface or surface unit areas, surface fee tracts, surface lease tracts, or separate surface sites, whether or not connected by a road, waterway, power line or pipeline, shall not be considered part of the same facility. Examples of facilities in the oil and natural gas production source category include, but are not limited to, well sites, satellite tank batteries, central tank batteries, a compressor station that transports natural gas to a natural gas processing plant, and natural gas processing plants.

Oxidation catalyst means an add-on catalytic control device that controls CO and VOC by oxidation.

Peaking unit or engine means any standby engine intended for use during periods of high demand that are not emergencies.

Percent load means the fractional power of an engine compared to its maximum manufacturer's design capacity at engine site conditions. Percent load may range between 0 percent to above 100 percent.

Potential to emit means the maximum capacity of a stationary source to emit a pollutant under its physical and operational design. Any physical or operational limitation on the capacity of the stationary source to emit a pollutant, including air pollution control equipment and restrictions on hours of operation or on the type or amount of material combusted, stored, or processed, shall be treated as part of its design if the limitation or the effect it would have on emissions is federally enforceable. For oil and natural gas production facilities subject to subpart HH of this part, the potential to emit provisions in § 63.760(a) may be used. For natural gas transmission and storage facilities subject to subpart HHH of this part, the maximum annual facility gas throughput for storage facilities may be determined according to § 63.1270(a)(1) and the maximum annual throughput for transmission facilities may be determined according to § 63.1270(a)(2).

Production field facility means those oil and gas production facilities located prior to the point of custody transfer.

Production well means any hole drilled in the earth from which crude oil, condensate, or field natural gas is extracted.

Propane means a colorless gas derived from petroleum and natural gas, with the molecular structure C_3H_8.

Remote stationary RICE means stationary RICE meeting any of the following criteria:

(1) Stationary RICE located in an offshore area that is beyond the line of ordinary low water along that portion of the coast of the United States that is in direct contact with the open seas and beyond the line marking the seaward limit of inland waters.

(2) Stationary RICE located on a pipeline segment that meets both of the criteria in paragraphs (2)(i) and (ii) of this definition.

(i) A pipeline segment with 10 or fewer buildings intended for human occupancy and no buildings with four or more stories within 220 yards (200 meters) on either side of the centerline of any continuous 1-mile (1.6 kilometers) length of pipeline. Each separate dwelling unit in a multiple dwelling unit building is counted as a separate building intended for human occupancy.

(ii) The pipeline segment does not lie within 100 yards (91 meters) of either a building or a small, well-defined outside area (such as a playground, recreation area, outdoor theater, or other place of public assembly) that is occupied by 20 or more persons on at least 5 days a week for 10 weeks in any 12-month period. The days and weeks need not be consecutive. The building or area is considered occupied for a full day if it is occupied for any portion of the day.

(iii) For purposes of this paragraph (2), the term pipeline segment means all parts of those physical facilities through which gas moves in transportation, including but not limited to pipe, valves, and other appurtenance attached to pipe, compressor units, metering stations, regulator stations, delivery stations, holders, and fabricated assemblies. Stationary RICE located within 50 yards (46 meters) of the pipeline segment providing power for equipment on a pipeline segment are part of the pipeline segment. Transportation of gas means the gathering, transmission, or distribution of gas by pipeline, or the storage of gas. A building is intended for human occupancy if its primary use is for a purpose involving the presence of humans.

(3) Stationary RICE that are not located on gas pipelines and that have 5 or fewer buildings intended for human occupancy and no buildings with four or more stories within a 0.25 mile radius around the engine. A building is intended for human occupancy if its primary use is for a purpose involving the presence of humans.

Residential emergency stationary RICE means an emergency stationary RICE used in residential establishments such as homes or apartment buildings.

Responsible official means responsible official as defined in 40 CFR 70.2.

Rich burn engine means any four-stroke spark ignited engine where the manufacturer's recommended operating air/fuel ratio divided by the stoichiometric air/fuel ratio at full load conditions is less than or equal to 1.1. Engines originally manufactured as rich burn engines, but modified prior to December 19, 2002 with passive emission control technology for NO_X (such as pre-combustion chambers) will be considered lean burn engines. Also, existing engines where there are no manufacturer's recommendations regarding air/fuel ratio will be considered a rich burn engine if the excess oxygen content of the exhaust at full load conditions is less than or equal to 2 percent.

Site-rated HP means the maximum manufacturer's design capacity at engine site conditions.

Spark ignition means relating to either: A gasoline-fueled engine; or any other type of engine with a spark plug (or other sparking device) and with operating characteristics significantly similar to the theoretical Otto combustion cycle. Spark ignition engines usually use a throttle to regulate intake air flow to control power during normal operation. Dual-fuel engines in which a liquid fuel (typically diesel fuel) is used for CI and gaseous fuel (typically natural gas) is used as the primary fuel at an annual average ratio of less than 2 parts diesel fuel to 100 parts total fuel on an energy equivalent basis are spark ignition engines.

Stationary reciprocating internal combustion engine (RICE) means any reciprocating internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

Stationary RICE test cell/stand means an engine test cell/stand, as defined in subpart PPPPP of this part, that tests stationary RICE.

Stoichiometric means the theoretical air-to-fuel ratio required for complete combustion.

Storage vessel with the potential for flash emissions means any storage vessel that contains a hydrocarbon liquid with a stock tank gas-to-oil ratio equal to or greater than 0.31 cubic meters per liter and an American Petroleum Institute gravity equal to or greater than 40 degrees and an actual annual average hydrocarbon liquid throughput equal to or greater than 79,500 liters per day. Flash emissions occur when dissolved hydrocarbons in the fluid evolve from solution when the fluid pressure is reduced.

Subpart means 40 CFR part 63, subpart ZZZZ.

Surface site means any combination of one or more graded pad sites, gravel pad sites, foundations, platforms, or the immediate physical location upon which equipment is physically affixed.

Two-stroke engine means a type of engine which completes the power cycle in single crankshaft revolution by combining the intake and compression operations into one stroke and the power and exhaust operations into a second stroke. This system requires auxiliary scavenging and inherently runs lean of stoichiometric.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3607, Jan. 18, 2008; 75 FR 9679, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 76 FR 12867, Mar. 9, 2011; 78 FR 6706, Jan. 30, 2013; 87 FR 48608, Aug. 10, 2022]

Table 1a to Subpart ZZZZ of Part 63—Emission Limitations for Existing, New, and Reconstructed Spark Ignition, 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions

As stated in §§ 63.6600 and 63.6640, you must comply with the following emission limitations at 100 percent load plus or minus 10 percent for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .
1. 4SRB stationary RICE	a. Reduce formaldehyde emissions by 76 percent or more. If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004, you may reduce formaldehyde emissions by 75 percent or more until June 15, 2007 or	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.[1]
	b. Limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O_2	
[1] Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.		

[75 FR 9679, Mar. 3, 2010, as amended at 75 FR 51592, Aug. 20, 2010]

Table 1b to Subpart ZZZZ of Part 63—Operating Limitations for Existing, New, and Reconstructed SI 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions

As stated in §§ 63.6600, 63.6603, 63.6630 and 63.6640, you must comply with the following operating limitations for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following operating limitation, except during periods of startup . . .
1. existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75 percent or more, if applicable) and using NSCR; or existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O_2 and using NSCR;	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst measured during the initial performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 750 °F and less than or equal to 1250 °F.[1]
2. existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75 percent or more, if applicable) and not using NSCR; or	Comply with any operating limitations approved by the Administrator.
existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O_2 and not using NSCR.	
[1] Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.8(f) for a different temperature range.	

[78 FR 6706, Jan. 30, 2013]

Table 2a to Subpart ZZZZ of Part 63—Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions

As stated in §§ 63.6600 and 63.6640, you must comply with the following emission limitations for new and reconstructed lean burn and new and reconstructed compression ignition stationary RICE at 100 percent load plus or minus 10 percent:

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .
1. 2SLB stationary RICE	a. Reduce CO emissions by 58 percent or more; or b. Limit concentration of formaldehyde in the stationary RICE exhaust to 12 ppmvd or less at 15 percent O_2. If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004, you may limit concentration of formaldehyde to 17 ppmvd or less at 15 percent O_2 until June 15, 2007	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.[1]
2. 4SLB stationary RICE	a. Reduce CO emissions by 93 percent or more; or	
	b. Limit concentration of formaldehyde in the stationary RICE exhaust to 14 ppmvd or less at 15 percent O_2	

3. CI stationary RICE	a. Reduce CO emissions by 70 percent or more; or	
	b. Limit concentration of formaldehyde in the stationary RICE exhaust to 580 ppbvd or less at 15 percent O_2	
[1] Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.		

[75 FR 9680, Mar. 3, 2010]

Table 2b to Subpart ZZZZ of Part 63—Operating Limitations for New and Reconstructed 2SLB and CI Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions, Existing CI Stationary RICE >500 HP

As stated in §§ 63.6600, 63.6601, 63.6603, 63.6630, and 63.6640, you must comply with the following operating limitations for new and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions; new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions; and existing CI stationary RICE >500 HP:

For each . . .	**You must meet the following operating limitation, except during periods of startup . . .**
1. New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to reduce CO emissions and using an oxidation catalyst; and New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and using an oxidation catalyst.	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst that was measured during the initial performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 450 °F and less than or equal to 1350 °F.[1]
2. Existing CI stationary RICE >500 HP complying with the requirement to limit or reduce the concentration of CO in the stationary RICE exhaust and using an oxidation catalyst	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water from the pressure drop across the catalyst that was measured during the initial performance test; and
	b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 450 °F and less than or equal to 1350 °F.[1]
3. New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to reduce CO emissions and not using an oxidation catalyst; and	Comply with any operating limitations approved by the Administrator.
New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and not using an oxidation catalyst; and	

existing CI stationary RICE >500 HP complying with the requirement to limit or reduce the concentration of CO in the stationary RICE exhaust and not using an oxidation catalyst.	
[1] Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.8(f) for a different temperature range.	

[78 FR 6707, Jan. 30, 2013]

Table 2c to Subpart ZZZZ of Part 63—Requirements for Existing Compression Ignition Stationary RICE Located at a Major Source of HAP Emissions and Existing Spark Ignition Stationary RICE ≤500 HP Located at a Major Source of HAP Emissions

As stated in §§ 63.6600, 63.6602, and 63.6640, you must comply with the following requirements for existing compression ignition stationary RICE located at a major source of HAP emissions and existing spark ignition stationary RICE ≤500 HP located at a major source of HAP emissions

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
1. Emergency stationary CI RICE and black start stationary CI RICE[1]	a. Change oil and filter every 500 hours of operation or within 1 year + 30 days of the previous change, whichever comes first[2]. b. Inspect air cleaner every 1,000 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary;	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.[3]
	c. Inspect all hoses and belts every 500 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary[3]	
2. Non-Emergency, non-black start stationary CI RICE <100 HP	a. Change oil and filter every 1,000 hours of operation or within 1 year + 30 days of the previous change, whichever comes first[2].	
	b. Inspect air cleaner every 1,000 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary;	
	c. Inspect all hoses and belts every 500 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary[3]	
3. Non-Emergency, non-black start CI stationary RICE 100≤HP≤300 HP	Limit concentration of CO in the stationary RICE exhaust to 230 ppmvd or less at 15 percent O_2	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
4. Non-Emergency, non-black start CI stationary RICE 300<HP≤500	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd or less at 15 percent O_2; or	
	b. Reduce CO emissions by 70 percent or more	
5. Non-Emergency, non-black start stationary CI RICE >500 HP	a. Limit concentration of CO in the stationary RICE exhaust to 23 ppmvd or less at 15 percent O_2; or	
	b. Reduce CO emissions by 70 percent or more	
6. Emergency stationary SI RICE and black start stationary SI RICE.[1]	a. Change oil and filter every 500 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[2]	
	b. Inspect spark plugs every 1,000 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary;	
	c. Inspect all hoses and belts every 500 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary[3]	
7. Non-Emergency, non-black start stationary SI RICE <100 HP that are not 2SLB stationary RICE	a. Change oil and filter every 1,440 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[2]	
	b. Inspect spark plugs every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
	c. Inspect all hoses and belts every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary[3]	
8. Non-Emergency, non-black start 2SLB stationary SI RICE <100 HP	a. Change oil and filter every 4,320 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[2]	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
	b. Inspect spark plugs every 4,320 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary;	
	c. Inspect all hoses and belts every 4,320 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary[3]	
9. Non-emergency, non-black start 2SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 225 ppmvd or less at 15 percent O_2	
10. Non-emergency, non-black start 4SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 47 ppmvd or less at 15 percent O_2	
11. Non-emergency, non-black start 4SRB stationary RICE 100≤HP≤500	Limit concentration of formaldehyde in the stationary RICE exhaust to 10.3 ppmvd or less at 15 percent O_2	
12. Non-emergency, non-black start stationary RICE 100≤HP≤500 which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	Limit concentration of CO in the stationary RICE exhaust to 177 ppmvd or less at 15 percent O_2	

[1] If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the work practice requirements on the schedule required in table 2c of this subpart, or if performing the work practice on the required schedule would otherwise pose an unacceptable risk under Federal, state, or local law, the work practice can be delayed until the emergency is over or the unacceptable risk under Federal, state, or local law has abated. The work practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under Federal, state, or local law has abated. Sources must report any failure to perform the work practice on the schedule required and the Federal, state or local law under which the risk was deemed unacceptable.

[2] Sources have the option to utilize an oil analysis program as described in § 63.6625(i) or (j) in order to extend the specified oil change requirement in table 2c of this subpart.

[3] Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[89 FR 70518, Aug. 30, 2024]

Table 2d to Subpart ZZZZ of Part 63—Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions

As stated in §§ 63.6603 and 63.6640, you must comply with the following requirements for existing stationary RICE located at area sources of HAP emissions:

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
1. Non-Emergency, non-black start CI stationary RICE ≤300 HP	a. Change oil and filter every 1,000 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1] b. Inspect air cleaner every 1,000 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary;	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.
	c. Inspect all hoses and belts every 500 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
2. Non-Emergency, non-black start CI stationary RICE 300<HP≤500	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd at 15 percent O_2; or	
	b. Reduce CO emissions by 70 percent or more	
3. Non-Emergency, non-black start CI stationary RICE >500 HP	a. Limit concentration of CO in the stationary RICE exhaust to 23 ppmvd at 15 percent O_2; or	
	b. Reduce CO emissions by 70 percent or more	
4. Emergency stationary CI RICE and black start stationary CI RICE.[2]	a. Change oil and filter every 500 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1]	
	b. Inspect air cleaner every 1,000 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 500 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
5. Emergency stationary SI RICE; black start stationary SI RICE; non-emergency, non-black start 4SLB stationary RICE >500 HP that operate 24 hours or less per calendar year; non-emergency, non-black start 4SRB stationary RICE >500 HP that operate 24 hours or less per calendar year.[2]	a. Change oil and filter every 500 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1] b. Inspect spark plugs every 1,000 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 500 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
6. Non-emergency, non-black start 2SLB stationary RICE	a. Change oil and filter every 4,320 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1]	
	b. Inspect spark plugs every 4,320 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 4,320 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
7. Non-emergency, non-black start 4SLB stationary RICE ≤500 HP	a. Change oil and filter every 1,440 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1]	
	b. Inspect spark plugs every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
	c. Inspect all hoses and belts every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
8. Non-emergency, non-black start 4SLB remote stationary RICE >500 HP	a. Change oil and filter every 2,160 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1]	
	b. Inspect spark plugs every 2,160 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 2,160 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
9. Non-emergency, non-black start 4SLB stationary RICE >500 HP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Install an oxidation catalyst to reduce HAP emissions from the stationary RICE	
10. Non-emergency, non-black start 4SRB stationary RICE ≤500 HP	a. Change oil and filter every 1,440 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1]	
	b. Inspect spark plugs every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
11. Non-emergency, non-black start 4SRB remote stationary RICE >500 HP	a. Change oil and filter every 2,160 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1]	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
	b. Inspect spark plugs every 2,160 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 2,160 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	
12. Non-emergency, non-black start 4SRB stationary RICE >500 HP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Install NSCR to reduce HAP emissions from the stationary RICE	
13. Non-emergency, non-black start stationary RICE which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	a. Change oil and filter every 1,440 hours of operation or within 1 year + 30 days of the previous change, whichever comes first;[1] b. Inspect spark plugs every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or within 1 year + 30 days of the previous inspection, whichever comes first, and replace as necessary	

[1] Sources have the option to utilize an oil analysis program as described in § 63.6625(i) or (j) in order to extend the specified oil change requirement in table 2d of this subpart.

[2] If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in table 2d of this subpart, or if performing the management practice on the required schedule would otherwise pose an unacceptable risk under Federal, state, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under Federal, state, or local law has abated. The management practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under Federal, state, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the Federal, state or local law under which the risk was deemed unacceptable.

[89 FR 70520, Aug. 30, 2024]

Table 3 to Subpart ZZZZ of Part 63—Subsequent Performance Tests

As stated in §§ 63.6615 and 63.6620, you must comply with the following subsequent performance test requirements:

For each . . .	Complying with the requirement to . . .	You must . . .
1. New or reconstructed 2SLB stationary RICE >500 HP located at major sources; new or reconstructed 4SLB stationary RICE ≥250 HP located at major sources; and new or reconstructed CI stationary RICE >500 HP located at major sources	Reduce CO emissions and not using a CEMS	Conduct subsequent performance tests semiannually.[1]
2. 4SRB stationary RICE ≥5,000 HP located at major sources	Reduce formaldehyde emissions	Conduct subsequent performance tests semiannually.[1]
3. Stationary RICE >500 HP located at major sources and new or reconstructed 4SLB stationary RICE 250≤HP≤500 located at major sources	Limit the concentration of formaldehyde in the stationary RICE exhaust	Conduct subsequent performance tests semiannually.[1]
4. Existing non-emergency, non-black start CI stationary RICE >500 HP that are not limited use stationary RICE	Limit or reduce CO emissions and not using a CEMS	Conduct subsequent performance tests every 8,760 hours or 3 years, whichever comes first.
5. Existing non-emergency, non-black start CI stationary RICE >500 HP that are limited use stationary RICE	Limit or reduce CO emissions and not using a CEMS	Conduct subsequent performance tests every 8,760 hours or 5 years, whichever comes first.
[1] After you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.		

[78 FR 6711, Jan. 30, 2013]

Table 4 to Subpart ZZZZ of Part 63—Requirements for Performance Tests

As stated in §§ 63.6610, 63.6611, 63.6620, and 63.6640, you must comply with the following requirements for performance tests for stationary RICE:

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
1. 2SLB, 4SLB, and CI stationary RICE	a. Reduce CO emissions	i. Select the sampling port location and the number/location of traverse points at the inlet and outlet of the control device; and		(a) For CO, O_2, and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line ('3-point long line'). If the duct is >12 inches in diameter *and* the sampling port location meets the two and half-diameter criterion of section 11.1.1 of method 1 of 40 CFR part 60, appendix A-1, the duct may be sampled at `3-point long line'; otherwise, conduct the stratification testing and select sampling points according to section 8.1.2 of method 7E of 40 CFR part 60, appendix A-4.
		ii. Measure the O_2 at the inlet and outlet of the control device; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM D6522-00 (Reapproved 2005)[13] (heated probe not necessary)	(b) Measurements to determine O_2 must be made at the same time as the measurements for CO concentration.
		iii. Measure the CO at the inlet and the outlet of the control device; and	(2) ASTM D6522-00 (Reapproved 2005)[123] (heated probe not necessary) or method 10 of 40 CFR part 60, appendix A-4	(c) The CO concentration must be at 15 percent O_2, dry basis.
		iv. Measure moisture content at the inlet and outlet of the control device as needed to determine CO and O_2 concentrations on a dry basis	(3) Method 4 of 40 CFR part 60, appendix A-3, or method 320 of 40 CFR part 63, appendix A, or ASTM D6348-03[13]	(d) Measurements to determine moisture content must be made at the same time and location as the measurements for CO concentration.

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
2. 4SRB stationary RICE	a. Reduce formaldehyde or THC emissions	i. Select the sampling port location and the number/location of traverse points at the inlet and outlet of the control device; and		(a) For formaldehyde, THC, O_2, and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line (`3-point long line'). If the duct is >12 inches in diameter *and* the sampling port location meets the two and half-diameter criterion of section 11.1.1 of method 1 of 40 CFR part 60, appendix A, the duct may be sampled at `3-point long line'; otherwise, conduct the stratification testing and select sampling points according to section 8.1.2 of method 7E of 40 CFR part 60, appendix A.
		ii. Measure O_2 at the inlet and outlet of the control device; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM D6522-00 (Reapproved 2005)[13] (heated probe not necessary)	(b) Measurements to determine O_2 concentration must be made at the same time as the measurements for formaldehyde or THC concentration.
		iii. Measure moisture content at the inlet and outlet of the control device as needed to determine formaldehyde or THC and O_2 concentrations on a dry basis; and	(2) Method 4 of 40 CFR part 60, appendix A-3, or method 320 of 40 CFR part 63, appendix A, or ASTM D6348-03[13]	(c) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde or THC concentration.
		iv. If demonstrating compliance with the formaldehyde percent reduction requirement, measure formaldehyde at the inlet and the outlet of the control device	(3) Method 320 or 323 of 40 CFR part 63, appendix A; or ASTM D6348-03,[13] provided in ASTM D6348-03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	(d) Formaldehyde concentration must be at 15 percent O_2, dry basis. Results of this test consist of the average of the three 1-hour or longer runs.

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
		v. If demonstrating compliance with the THC percent reduction requirement, measure THC at the inlet and the outlet of the control device	(4) (1) Method 25A, reported as propane, of 40 CFR part 60, appendix A-7	(e) THC concentration must be at 15 percent O_2, dry basis. Results of this test consist of the average of the three 1-hour or longer runs.
3. Stationary RICE	a. Limit the concentration of formaldehyde or CO in the stationary RICE exhaust	i. Select the sampling port location and the number/location of traverse points at the exhaust of the stationary RICE; and		(a) For formaldehyde, CO, O_2, and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line (`3-point long line'). If the duct is >12 inches in diameter *and* the sampling port location meets the two and half-diameter criterion of section 11.1.1 of method 1 of 40 CFR part 60, appendix A, the duct may be sampled at `3-point long line'; otherwise, conduct the stratification testing and select sampling points according to section 8.1.2 of method 7E of 40 CFR part 60, appendix A. If using a control device, the sampling site must be located at the outlet of the control device.
		ii. Determine the O_2 concentration of the stationary RICE exhaust at the sampling port location; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM D6522-00 (Reapproved 2005)[13] (heated probe not necessary)	(b) Measurements to determine O_2 concentration must be made at the same time and location as the measurements for formaldehyde or CO concentration.
		iii. Measure moisture content of the stationary RICE exhaust at the sampling port location as needed to determine formaldehyde or CO and O_2 concentrations on a dry basis; and	(2) Method 4 of 40 CFR part 60, appendix A-3, or method 320 of 40 CFR part 63, appendix A, or ASTM D6348-03[13]	(c) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde or CO concentration.

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
		iv. Measure formaldehyde at the exhaust of the stationary RICE; or	(3) Method 320 or 323 of 40 CFR part 63, appendix A; or ASTM D6348-03,[13] provided in ASTM D6348-03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	(d) Formaldehyde concentration must be at 15 percent O_2, dry basis. Results of this test consist of the average of the three 1-hour or longer runs.
		v. Measure CO at the exhaust of the stationary RICE	(4) Method 10 of 40 CFR part 60, appendix A-4, ASTM D6522-00 (2005),[13] method 320 of 40 CFR part 63, appendix A, or ASTM D6348-03[13]	(e) CO concentration must be at 15 percent O_2, dry basis. Results of this test consist of the average of the three 1-hour or longer runs.

[1] You may also use methods 3A and 10 as options to ASTM-D6522-00 (2005).

[2] You may obtain a copy of ASTM-D6348-03 from at least one of the following addresses: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, or University Microfilms International, 300 North Zeeb Road, Ann Arbor, MI 48106.

[3] Incorporated by reference, see § 63.14.

[88 FR 18413, Mar. 29, 2023]

Table 5 to Subpart ZZZZ of Part 63—Initial Compliance With Emission Limitations, Operating Limitations, and Other Requirements

As stated in §§ 63.6612, 63.6625 and 63.6630, you must initially comply with the emission and operating limitations as required by the following:

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions and using oxidation catalyst, and using a CPMS	i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in § 63.6625(b); and iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
2. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, using oxidation catalyst, and using a CPMS	i. The average CO concentration determined from the initial performance test is less than or equal to the CO emission limitation; and

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in § 63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
3. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions and not using oxidation catalyst	i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in § 63.6625(b); and iii. You have recorded the approved operating parameters (if any) during the initial performance test.
4. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, and not using oxidation catalyst	i. The average CO concentration determined from the initial performance test is less than or equal to the CO emission limitation; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in § 63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
5. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions, and using a CEMS	i. You have installed a CEMS to continuously monitor CO and either O_2 or CO_2 at both the inlet and outlet of the oxidation catalyst according to the requirements in § 63.6625(a); and ii. You have conducted a performance evaluation of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B; and
		iii. The average reduction of CO calculated using § 63.6620 equals or exceeds the required percent reduction. The initial test comprises the first 4-hour period after successful validation of the CEMS. Compliance is based on the average percent reduction achieved during the 4-hour period.

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
6. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, and using a CEMS	i. You have installed a CEMS to continuously monitor CO and either O_2 or CO_2 at the outlet of the oxidation catalyst according to the requirements in § 63.6625(a); and
		ii. You have conducted a performance evaluation of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B; and
		iii. The average concentration of CO calculated using § 63.6620 is less than or equal to the CO emission limitation. The initial test comprises the first 4-hour period after successful validation of the CEMS. Compliance is based on the average concentration measured during the 4-hour period.
7. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and using NSCR	i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction, or the average reduction of emissions of THC determined from the initial performance test is equal to or greater than 30 percent; and
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in § 63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
8. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and not using NSCR	i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction or the average reduction of emissions of THC determined from the initial performance test is equal to or greater than 30 percent; and
		ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in § 63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
9. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or NSCR	i. The average formaldehyde concentration, corrected to 15 percent O_2, dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in § 63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
10. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. The average formaldehyde concentration, corrected to 15 percent O_2, dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in § 63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
11. Existing non-emergency stationary RICE 100≤HP≤500 located at a major source of HAP, and existing non-emergency stationary CI RICE 300<HP≤500 located at an area source of HAP	a. Reduce CO emissions	i. The average reduction of emissions of CO or formaldehyde, as applicable determined from the initial performance test is equal to or greater than the required CO or formaldehyde, as applicable, percent reduction.
12. Existing non-emergency stationary RICE 100≤HP≤500 located at a major source of HAP, and existing non-emergency stationary CI RICE 300<HP≤500 located at an area source of HAP	a. Limit the concentration of formaldehyde or CO in the stationary RICE exhaust	i. The average formaldehyde or CO concentration, as applicable, corrected to 15 percent O_2, dry basis, from the three test runs is less than or equal to the formaldehyde or CO emission limitation, as applicable.
13. Existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install an oxidation catalyst	i. You have conducted an initial compliance demonstration as specified in § 63.6630(e) to show that the average reduction of emissions of CO is 93 percent or more, or the average CO concentration is less than or equal to 47 ppmvd at 15 percent O_2;
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in § 63.6625(b), or you have installed equipment to automatically shut down the engine if the catalyst inlet temperature exceeds 1350 °F.

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
14. Existing non-emergency 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install NSCR	i. You have conducted an initial compliance demonstration as specified in § 63.6630(e) to show that the average reduction of emissions of CO is 75 percent or more, the average CO concentration is less than or equal to 270 ppmvd at 15 percent O_2, or the average reduction of emissions of THC is 30 percent or more;
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in § 63.6625(b), or you have installed equipment to automatically shut down the engine if the catalyst inlet temperature exceeds 1250 °F.

[78 FR 6712, Jan. 30, 2013]

Table 6 to Subpart ZZZZ of Part 63—Continuous Compliance With Emission Limitations, and Other Requirements

As stated in § 63.6640, you must continuously comply with the emissions and operating limitations and work or management practices as required by the following:

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and using an oxidation catalyst, and using a CPMS	i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved[a]; and ii. Collecting the catalyst inlet temperature data according to § 63.6625(b); and iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
2. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and not using an oxidation catalyst, and using a CPMS	i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved[a]; and ii. Collecting the approved operating parameter (if any) data according to § 63.6625(b); and iii. Reducing these data to 4-hour rolling averages; and

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
3. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, new or reconstructed non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and using a CEMS	i. Collecting the monitoring data according to § 63.6625(a), reducing the measurements to 1-hour averages, calculating the percent reduction or concentration of CO emissions according to § 63.6620; and ii. Demonstrating that the catalyst achieves the required percent reduction of CO emissions over the 4-hour averaging period, or that the emission remain at or below the CO concentration limit; and
		iii. Conducting an annual RATA of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B, as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.
4. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and using NSCR	i. Collecting the catalyst inlet temperature data according to § 63.6625(b); and
		ii. Reducing these data to 4-hour rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		iv. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
5. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and not using NSCR	i. Collecting the approved operating parameter (if any) data according to § 63.6625(b); and
		ii. Reducing these data to 4-hour rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
6. Non-emergency 4SRB stationary RICE with a brake HP ≥5,000 located at a major source of HAP	a. Reduce formaldehyde emissions	Conducting semiannual performance tests for formaldehyde to demonstrate that the required formaldehyde percent reduction is achieved, or to demonstrate that the average reduction of emissions of THC determined from the performance test is equal to or greater than 30 percent.[a]

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
7. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit[a]; and ii. Collecting the catalyst inlet temperature data according to § 63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
8. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit[a]; and ii. Collecting the approved operating parameter (if any) data according to § 63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
9. Existing emergency and black start stationary RICE ≤500 HP located at a major source of HAP, existing non-emergency stationary RICE <100 HP located at a major source of HAP, existing emergency and black start stationary RICE located at an area source of HAP, existing non-emergency stationary CI RICE ≤300 HP located at an area source of HAP, existing non-emergency 2SLB stationary RICE located at an area source of HAP, existing non-emergency stationary SI RICE located at an area source of HAP which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, existing non-emergency 4SLB and 4SRB stationary RICE ≤500 HP located at an area source of HAP, existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that operate 24 hours or less per calendar year, and existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are remote stationary RICE	a. Work or Management practices	i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.
10. Existing stationary CI RICE >500 HP that are not limited use stationary RICE	a. Reduce CO emissions, or limit the concentration of CO in the stationary RICE exhaust, and using oxidation catalyst	i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the catalyst inlet temperature data according to § 63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
11. Existing stationary CI RICE >500 HP that are not limited use stationary RICE	a. Reduce CO emissions, or limit the concentration of CO in the stationary RICE exhaust, and not using oxidation catalyst	i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the approved operating parameter (if any) data according to § 63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
12. Existing limited use CI stationary RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and using an oxidation catalyst	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the catalyst inlet temperature data according to § 63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
13. Existing limited use CI stationary RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and not using an oxidation catalyst	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the approved operating parameter (if any) data according to § 63.6625(b); and

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
14. Existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install an oxidation catalyst	i. Conducting annual compliance demonstrations as specified in § 63.6640(c) to show that the average reduction of emissions of CO is 93 percent or more, or the average CO concentration is less than or equal to 47 ppmvd at 15 percent O_2; and either ii. Collecting the catalyst inlet temperature data according to § 63.6625(b), reducing these data to 4-hour rolling averages; and maintaining the 4-hour rolling averages within the limitation of greater than 450 °F and less than or equal to 1350 °F for the catalyst inlet temperature; or iii. Immediately shutting down the engine if the catalyst inlet temperature exceeds 1350 °F.
15. Existing non-emergency 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install NSCR	i. Conducting annual compliance demonstrations as specified in § 63.6640(c) to show that the average reduction of emissions of CO is 75 percent or more, the average CO concentration is less than or equal to 270 ppmvd at 15 percent O_2, or the average reduction of emissions of THC is 30 percent or more; and either ii. Collecting the catalyst inlet temperature data according to § 63.6625(b), reducing these data to 4-hour rolling averages; and maintaining the 4-hour rolling averages within the limitation of greater than or equal to 750 °F and less than or equal to 1250 °F for the catalyst inlet temperature; or iii. Immediately shutting down the engine if the catalyst inlet temperature exceeds 1250 °F.
[a] After you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.		

[78 FR 6715, Jan. 30, 2013]

Table 7 to Subpart ZZZZ of Part 63—Requirements for Reports

As stated in § 63.6650, you must comply with the following requirements for reports:

For each . . .	You must submit a . . .	The report must contain . . .	You must submit the report . . .
1. Existing non-emergency, non-black start stationary RICE 100≤HP≤500 located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE >500 HP located at a major source of HAP; existing non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE >300 HP located at an area source of HAP; new or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP; and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP	Compliance report	a. If there are no deviations from any emission limitations or operating limitations that apply to you, a statement that there were no deviations from the emission limitations or operating limitations during the reporting period. If there were no periods during which the CMS, including CEMS and CPMS, was out-of-control, as specified in § 63.8(c)(7), a statement that there were not periods during which the CMS was out-of-control during the reporting period; or b. If you had a deviation from any emission limitation or operating limitation during the reporting period, the information in § 63.6650(d). If there were periods during which the CMS, including CEMS and CPMS, was out-of-control, as specified in § 63.8(c)(7), the information in § 63.6650(e); or	i. Semiannually according to the requirements in § 63.6650(b)(1)-(5) and (i) for engines that are not limited use stationary RICE subject to numerical emission limitations; and ii. Annually according to the requirements in § 63.6650(b)(6)-(9) and (i) for engines that are limited use stationary RICE subject to numerical emission limitations. i. Semiannually according to the requirements in § 63.6650(b) and (i).
		c. If you had a malfunction during the reporting period, the information in § 63.6650(c)(4)	i. Semiannually according to the requirements in § 63.6650(b) and (i).
2. New or reconstructed non-emergency stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	Report	a. The fuel flow rate of each fuel and the heating values that were used in your calculations, and you must demonstrate that the percentage of heat input provided by landfill gas or digester gas, is equivalent to 10 percent or more of the gross heat input on an annual basis; and	i. Annually, according to the requirements in § 63.6650.
		b. The operating limits provided in your federally enforceable permit, and any deviations from these limits; and	i. See item 2.a.i.
		c. Any problems or errors suspected with the meters	i. See item 2.a.i.

For each . . .	You must submit a . . .	The report must contain . . .	You must submit the report . . .
3. Existing non-emergency, non-black start 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Compliance report	a. The results of the annual compliance demonstration, if conducted during the reporting period	i. Semiannually according to the requirements in § 63.6650(b)(1)-(5) and (i).
4. Emergency stationary RICE that operate for the purposes specified in § 63.6640(f)(4)(ii)	Report	a. The information in § 63.6650(h)(1)	i. Annually according to the requirements in § 63.6650(h)(2)-(3) and (i).

[89 FR 70522, Aug. 30, 2024]

Table 8 to Subpart ZZZZ of Part 63—Applicability of General Provisions to Subpart ZZZZ

As stated in § 63.6665, you must comply with the following applicable general provisions.

General provisions citation	Subject of citation	Applies to subpart	Explanation
§ 63.1	General applicability of the General Provisions	Yes	
§ 63.2	Definitions	Yes	Additional terms defined in § 63.6675.
§ 63.3	Units and abbreviations	Yes	
§ 63.4	Prohibited activities and circumvention	Yes	
§ 63.5	Construction and reconstruction	Yes	
§ 63.6(a)	Applicability	Yes	
§ 63.6(b)(1)-(4)	Compliance dates for new and reconstructed sources	Yes	
§ 63.6(b)(5)	Notification	Yes	
§ 63.6(b)(6)	[Reserved]		
§ 63.6(b)(7)	Compliance dates for new and reconstructed area sources that become major sources	Yes	
§ 63.6(c)(1)-(2)	Compliance dates for existing sources	Yes	
§ 63.6(c)(3)-(4)	[Reserved]		
§ 63.6(c)(5)	Compliance dates for existing area sources that become major sources	Yes	
§ 63.6(d)	[Reserved]		
§ 63.6(e)	Operation and maintenance	No	
§ 63.6(f)(1)	Applicability of standards	No	
§ 63.6(f)(2)	Methods for determining compliance	Yes	
§ 63.6(f)(3)	Finding of compliance	Yes	

General provisions citation	Subject of citation	Applies to subpart	Explanation
§ 63.6(g)(1)-(3)	Use of alternate standard	Yes	
§ 63.6(h)	Opacity and visible emission standards	No	Subpart ZZZZ does not contain opacity or visible emission standards.
§ 63.6(i)	Compliance extension procedures and criteria	Yes	
§ 63.6(j)	Presidential compliance exemption	Yes	
§ 63.7(a)(1)-(2)	Performance test dates	Yes	Subpart ZZZZ contains performance test dates at §§ 63.6610, 63.6611, and 63.6612.
§ 63.7(a)(3)	CAA section 114 authority	Yes	
§ 63.7(b)(1)	Notification of performance test	Yes	Except that § 63.7(b)(1) only applies as specified in § 63.6645.
§ 63.7(b)(2)	Notification of rescheduling	Yes	Except that § 63.7(b)(2) only applies as specified in § 63.6645.
§ 63.7(c)	Quality assurance/test plan	Yes	Except that § 63.7(c) only applies as specified in § 63.6645.
§ 63.7(d)	Testing facilities	Yes	
§ 63.7(e)(1)	Conditions for conducting performance tests	No	Subpart ZZZZ specifies conditions for conducting performance tests at § 63.6620.
§ 63.7(e)(2)	Conduct of performance tests and reduction of data	Yes	Subpart ZZZZ specifies test methods at § 63.6620.
§ 63.7(e)(3)	Test run duration	Yes	
§ 63.7(e)(4)	Administrator may require other testing under section 114 of the CAA	Yes	
§ 63.7(f)	Alternative test method provisions	Yes	
§ 63.7(g)	Performance test data analysis, recordkeeping, and reporting	Yes	
§ 63.7(h)	Waiver of tests	Yes	
§ 63.8(a)(1)	Applicability of monitoring requirements	Yes	Subpart ZZZZ contains specific requirements for monitoring at § 63.6625.
§ 63.8(a)(2)	Performance specifications	Yes	
§ 63.8(a)(3)	[Reserved]		
§ 63.8(a)(4)	Monitoring for control devices	No	
§ 63.8(b)(1)	Monitoring	Yes	
§ 63.8(b)(2)-(3)	Multiple effluents and multiple monitoring systems	Yes	
§ 63.8(c)(1)	Monitoring system operation and maintenance	Yes	
§ 63.8(c)(1)(i)	Routine and predictable SSM	No	

General provisions citation	Subject of citation	Applies to subpart	Explanation
§ 63.8(c)(1)(ii)	SSM not in Startup Shutdown Malfunction Plan	Yes	
§ 63.8(c)(1)(iii)	Compliance with operation and maintenance requirements	No	
§ 63.8(c)(2)-(3)	Monitoring system installation	Yes	
§ 63.8(c)(4)	Continuous monitoring system (CMS) requirements	Yes	Except that subpart ZZZZ does not require Continuous Opacity Monitoring System (COMS).
§ 63.8(c)(5)	COMS minimum procedures	No	Subpart ZZZZ does not require COMS.
§ 63.8(c)(6)-(8)	CMS requirements	Yes	Except that subpart ZZZZ does not require COMS.
§ 63.8(d)	CMS quality control	Yes	
§ 63.8(e)	CMS performance evaluation	Yes	Except for § 63.8(e)(5)(ii), which applies to COMS.
			Except that § 63.8(e) only applies as specified in § 63.6645.
§ 63.8(f)(1)-(5)	Alternative monitoring method	Yes	Except that § 63.8(f)(4) only applies as specified in § 63.6645.
§ 63.8(f)(6)	Alternative to relative accuracy test	Yes	Except that § 63.8(f)(6) only applies as specified in § 63.6645.
§ 63.8(g)	Data reduction	Yes	Except that provisions for COMS are not applicable. Averaging periods for demonstrating compliance are specified at §§ 63.6635 and 63.6640.
§ 63.9(a)	Applicability and State delegation of notification requirements	Yes	
§ 63.9(b)(1)-(5)	Initial notifications	Yes	Except that § 63.9(b)(3) is reserved.
			Except that § 63.9(b) only applies as specified in § 63.6645.
§ 63.9(c)	Request for compliance extension	Yes	Except that § 63.9(c) only applies as specified in § 63.6645.
§ 63.9(d)	Notification of special compliance requirements for new sources	Yes	Except that § 63.9(d) only applies as specified in § 63.6645.
§ 63.9(e)	Notification of performance test	Yes	Except that § 63.9(e) only applies as specified in § 63.6645.
§ 63.9(f)	Notification of visible emission (VE)/opacity test	No	Subpart ZZZZ does not contain opacity or VE standards.
§ 63.9(g)(1)	Notification of performance evaluation	Yes	Except that § 63.9(g) only applies as specified in § 63.6645.
§ 63.9(g)(2)	Notification of use of COMS data	No	Subpart ZZZZ does not contain opacity or VE standards.
§ 63.9(g)(3)	Notification that criterion for alternative to RATA is exceeded	Yes	If alternative is in use. Except that § 63.9(g) only applies as specified in § 63.6645.

General provisions citation	Subject of citation	Applies to subpart	Explanation
§ 63.9(h)(1)-(6)	Notification of compliance status	Yes	Except that notifications for sources using a CEMS are due 30 days after completion of performance evaluations. § 63.9(h)(4) is reserved.
			Except that § 63.9(h) only applies as specified in § 63.6645.
§ 63.9(i)	Adjustment of submittal deadlines	Yes	
§ 63.9(j)	Change in previous information	Yes	
§ 63.9(k)	Electronic reporting procedures	Yes	Only as specified in §§ 63.9(j), 63.6620, 63.6625, 63.6645, and 63.6650.
§ 63.10(a)	Administrative provisions for recordkeeping/reporting	Yes	
§ 63.10(b)(1)	Record retention	Yes	Except that the most recent 2 years of data do not have to be retained on site.
§ 63.10(b)(2)(i)-(v)	Records related to SSM	No	
§ 63.10(b)(2)(vi)-(xi)	Records	Yes	
§ 63.10(b)(2)(xii)	Record when under waiver	Yes	
§ 63.10(b)(2)(xiii)	Records when using alternative to RATA	Yes	For CO standard if using RATA alternative.
§ 63.10(b)(2)(xiv)	Records of supporting documentation	Yes	
§ 63.10(b)(3)	Records of applicability determination	Yes	
§ 63.10(c)	Additional records for sources using CEMS	Yes	Except that § 63.10(c)(2)-(4) and (9) are reserved.
§ 63.10(d)(1)	General reporting requirements	Yes	
§ 63.10(d)(2)	Report of performance test results	Yes	
§ 63.10(d)(3)	Reporting opacity or VE observations	No	Subpart ZZZZ does not contain opacity or VE standards.
§ 63.10(d)(4)	Progress reports	Yes	
§ 63.10(d)(5)	Startup, shutdown, and malfunction reports	No	
§ 63.10(e)(1) and (2)(i)	Additional CMS Reports	Yes	
§ 63.10(e)(2)(ii)	COMS-related report	No	Subpart ZZZZ does not require COMS.
§ 63.10(e)(3)	Excess emission and parameter exceedances reports	No	Excess emissions and exceedance reporting is specified in § 63.6650.
§ 63.10(e)(4)	Reporting COMS data	No	Subpart ZZZZ does not require COMS.
§ 63.10(f)	Waiver for recordkeeping/reporting	Yes	
§ 63.11	Flares	No	

General provisions citation	Subject of citation	Applies to subpart	Explanation
§ 63.12	State authority and delegations	Yes	
§ 63.13	Addresses	Yes	
§ 63.14	Incorporation by reference	Yes	
§ 63.15	Availability of information	Yes	

[89 FR 70522, Aug. 30, 2024]

Appendix A to Subpart ZZZZ of Part 63—Protocol for Using an Electrochemical Analyzer to Determine Oxygen and Carbon Monoxide Concentrations From Certain Engines

1.0 Scope and Application. What is this Protocol?

This protocol is a procedure for using portable electrochemical (EC) cells for measuring carbon monoxide (CO) and oxygen (O_2) concentrations in controlled and uncontrolled emissions from existing stationary 4-stroke lean burn and 4-stroke rich burn reciprocating internal combustion engines as specified in the applicable rule.

1.1 Analytes. What does this protocol determine?

This protocol measures the engine exhaust gas concentrations of carbon monoxide (CO) and oxygen (O_2).

Analyte	CAS No.	Sensitivity
Carbon monoxide (CO)	630-08-0	Minimum detectable limit should be 2 percent of the nominal range or 1 ppm, whichever is less restrictive.
Oxygen (O_2)	*7782-44-7*	

1.2 Applicability. When is this protocol acceptable?

This protocol is applicable to 40 CFR part 63, subpart ZZZZ. Because of inherent cross sensitivities of EC cells, you must not apply this protocol to other emissions sources without specific instruction to that effect.

1.3 Data Quality Objectives. How good must my collected data be?

Refer to Section 13 to verify and document acceptable analyzer performance.

1.4 Range. What is the targeted analytical range for this protocol?

The measurement system and EC cell design(s) conforming to this protocol will determine the analytical range for each gas component. The nominal ranges are defined by choosing up-scale calibration gas concentrations near the maximum anticipated flue gas concentrations for CO and O_2, or no more than twice the permitted CO level.

1.5 Sensitivity. What minimum detectable limit will this protocol yield for a particular gas component?

The minimum detectable limit depends on the nominal range and resolution of the specific EC cell used, and the signal to noise ratio of the measurement system. The minimum detectable limit should be 2 percent of the nominal range or 1 ppm, whichever is less restrictive.

2.0 Summary of Protocol

In this protocol, a gas sample is extracted from an engine exhaust system and then conveyed to a portable EC analyzer for measurement of CO and O_2 gas concentrations. This method provides measurement system performance specifications and sampling protocols to ensure reliable data. You may use additions to, or

modifications of vendor supplied measurement systems (e.g., heated or unheated sample lines, thermocouples, flow meters, selective gas scrubbers, etc.) to meet the design specifications of this protocol. Do not make changes to the measurement system from the as-verified configuration (Section 3.12).

3.0 Definitions

3.1 ***Measurement System.*** The total equipment required for the measurement of CO and O_2 concentrations. The measurement system consists of the following major subsystems:

3.1.1 ***Data Recorder.*** A strip chart recorder, computer or digital recorder for logging measurement data from the analyzer output. You may record measurement data from the digital data display manually or electronically.

3.1.2 ***Electrochemical (EC) Cell.*** A device, similar to a fuel cell, used to sense the presence of a specific analyte and generate an electrical current output proportional to the analyte concentration.

3.1.3 ***Interference Gas Scrubber.*** A device used to remove or neutralize chemical compounds that may interfere with the selective operation of an EC cell.

3.1.4 ***Moisture Removal System.*** Any device used to reduce the concentration of moisture in the sample stream so as to protect the EC cells from the damaging effects of condensation and to minimize errors in measurements caused by the scrubbing of soluble gases.

3.1.5 ***Sample Interface.*** The portion of the system used for one or more of the following: sample acquisition; sample transport; sample conditioning or protection of the EC cell from any degrading effects of the engine exhaust effluent; removal of particulate matter and condensed moisture.

3.2 ***Nominal Range.*** The range of analyte concentrations over which each EC cell is operated (normally 25 percent to 150 percent of up-scale calibration gas value). Several nominal ranges can be used for any given cell so long as the calibration and repeatability checks for that range remain within specifications.

3.3 ***Calibration Gas.*** A vendor certified concentration of a specific analyte in an appropriate balance gas.

3.4 ***Zero Calibration Error.*** The analyte concentration output exhibited by the EC cell in response to zero-level calibration gas.

3.5 ***Up-Scale Calibration Error.*** The mean of the difference between the analyte concentration exhibited by the EC cell and the certified concentration of the up-scale calibration gas.

3.6 ***Interference Check.*** A procedure for quantifying analytical interference from components in the engine exhaust gas other than the targeted analytes.

3.7 ***Repeatability Check.*** A protocol for demonstrating that an EC cell operated over a given nominal analyte concentration range provides a stable and consistent response and is not significantly affected by repeated exposure to that gas.

3.8 ***Sample Flow Rate.*** The flow rate of the gas sample as it passes through the EC cell. In some situations, EC cells can experience drift with changes in flow rate. The flow rate must be monitored and documented during all phases of a sampling run.

3.9 ***Sampling Run.*** A timed three-phase event whereby an EC cell's response rises and plateaus in a sample conditioning phase, remains relatively constant during a measurement data phase, then declines during a refresh phase. The sample conditioning phase exposes the EC cell to the gas sample for a length of time sufficient to reach a constant response. The measurement data phase is the time interval during which gas sample measurements can be made that meet the acceptance criteria of this protocol. The refresh phase then purges the EC cells with CO-free air. The refresh phase replenishes requisite O_2 and moisture in the electrolyte reserve and provides a mechanism to de-gas or desorb any interference gas scrubbers or filters so as to enable a stable CO EC cell response. There are four primary types of sampling runs: pre- sampling calibrations; stack gas sampling; post-sampling calibration checks; and measurement system repeatability checks. Stack gas sampling runs can be chained together for extended evaluations, providing all other procedural specifications are met.

3.10 ***Sampling Day.*** A time not to exceed twelve hours from the time of the pre-sampling calibration to the post-sampling calibration check. During this time, stack gas sampling runs can be repeated without repeated recalibrations, providing all other sampling specifications have been met.

3.11 ***Pre-Sampling Calibration/Post-Sampling Calibration Check.*** The protocols executed at the beginning and end of each sampling day to bracket measurement readings with controlled performance checks.

3.12 ***Performance-Established Configuration.*** The EC cell and sampling system configuration that existed at the time that it initially met the performance requirements of this protocol.

4.0 Interferences.

When present in sufficient concentrations, NO and NO_2 are two gas species that have been reported to interfere with CO concentration measurements. In the likelihood of this occurrence, it is the protocol user's responsibility to employ and properly maintain an appropriate CO EC cell filter or scrubber for removal of these gases, as described in Section 6.2.12.

5.0 Safety. [Reserved]

6.0 Equipment and Supplies.

6.1 What equipment do I need for the measurement system?

The system must maintain the gas sample at conditions that will prevent moisture condensation in the sample transport lines, both before and as the sample gas contacts the EC cells. The essential components of the measurement system are described below.

6.2 Measurement System Components.

6.2.1 ***Sample Probe.*** A single extraction-point probe constructed of glass, stainless steel or other non-reactive material, and of length sufficient to reach any designated sampling point. The sample probe must be designed to prevent plugging due to condensation or particulate matter.

6.2.2 ***Sample Line.*** Non-reactive tubing to transport the effluent from the sample probe to the EC cell.

6.2.3 ***Calibration Assembly (optional).*** A three-way valve assembly or equivalent to introduce calibration gases at ambient pressure at the exit end of the sample probe during calibration checks. The assembly must be designed such that only stack gas or calibration gas flows in the sample line and all gases flow through any gas path filters.

6.2.4 ***Particulate Filter (optional).*** Filters before the inlet of the EC cell to prevent accumulation of particulate material in the measurement system and extend the useful life of the components. All filters must be fabricated of materials that are non-reactive to the gas mixtures being sampled.

6.2.5 ***Sample Pump.*** A leak-free pump to provide undiluted sample gas to the system at a flow rate sufficient to minimize the response time of the measurement system. If located upstream of the EC cells, the pump must be constructed of a material that is non-reactive to the gas mixtures being sampled.

6.2.8 ***Sample Flow Rate Monitoring.*** An adjustable rotameter or equivalent device used to adjust and maintain the sample flow rate through the analyzer as prescribed.

6.2.9 ***Sample Gas Manifold (optional).*** A manifold to divert a portion of the sample gas stream to the analyzer and the remainder to a by-pass discharge vent. The sample gas manifold may also include provisions for introducing calibration gases directly to the analyzer. The manifold must be constructed of a material that is non-reactive to the gas mixtures being sampled.

6.2.10 ***EC cell.*** A device containing one or more EC cells to determine the CO and O_2 concentrations in the sample gas stream. The EC cell(s) must meet the applicable performance specifications of Section 13 of this protocol.

6.2.11 ***Data Recorder.*** A strip chart recorder, computer or digital recorder to make a record of analyzer output data. The data recorder resolution (i.e., readability) must be no greater than 1 ppm for CO; 0.1 percent for O_2; and one degree (either °C or °F) for temperature. Alternatively, you may use a digital or analog meter having the same resolution to observe and manually record the analyzer responses.

6.2.12 ***Interference Gas Filter or Scrubber.*** A device to remove interfering compounds upstream of the CO EC cell. Specific interference gas filters or scrubbers used in the performance-established configuration of the analyzer must continue to be used. Such a filter or scrubber must have a means to determine when the removal agent is exhausted. Periodically replace or replenish it in accordance with the manufacturer's recommendations.

7.0 Reagents and Standards. What calibration gases are needed?

7.1 ***Calibration Gases.*** CO calibration gases for the EC cell must be CO in nitrogen or CO in a mixture of nitrogen and O_2. Use CO calibration gases with labeled concentration values certified by the manufacturer to be within ±5 percent of the label value. Dry ambient air (20.9 percent O_2) is acceptable for calibration of the O_2 cell. If needed, any lower percentage O_2 calibration gas must be a mixture of O_2 in nitrogen.

7.1.1 ***Up-Scale CO Calibration Gas Concentration.*** Choose one or more up-scale gas concentrations such that the average of the stack gas measurements for each stack gas sampling run are between 25 and 150 percent of those concentrations. Alternatively, choose an up-scale gas that does not exceed twice the concentration of the applicable outlet standard. If a measured gas value exceeds 150 percent of the up-scale CO calibration gas value at any time during the stack gas sampling run, the run must be discarded and repeated.

7.1.2 ***Up-Scale O_2 Calibration Gas Concentration.***

Select an O_2 gas concentration such that the difference between the gas concentration and the average stack gas measurement or reading for each sample run is less than 15 percent O_2. When the average exhaust gas O_2 readings are above 6 percent, you may use dry ambient air (20.9 percent O_2) for the up-scale O_2 calibration gas.

7.1.3 ***Zero Gas.*** Use an inert gas that contains less than 0.25 percent of the up-scale CO calibration gas concentration. You may use dry air that is free from ambient CO and other combustion gas products (e.g., CO_2).

8.0 Sample Collection and Analysis

8.1 ***Selection of Sampling Sites.***

8.1.1 ***Control Device Inlet.*** Select a sampling site sufficiently downstream of the engine so that the combustion gases should be well mixed. Use a single sampling extraction point near the center of the duct (e.g., within the 10 percent centroidal area), unless instructed otherwise.

8.1.2 ***Exhaust Gas Outlet.*** Select a sampling site located at least two stack diameters downstream of any disturbance (e.g., turbocharger exhaust, crossover junction or recirculation take-off) and at least one-half stack diameter upstream of the gas discharge to the atmosphere. Use a single sampling extraction point near the center of the duct (e.g., within the 10 percent centroidal area), unless instructed otherwise.

8.2 ***Stack Gas Collection and Analysis.*** Prior to the first stack gas sampling run, conduct that the pre-sampling calibration in accordance with Section 10.1. Use Figure 1 to record all data. Zero the analyzer with zero gas. Confirm and record that the scrubber media color is correct and not exhausted. Then position the probe at the sampling point and begin the sampling run at the same flow rate used during the up-scale calibration. Record the start time. Record all EC cell output responses and the flow rate during the “sample conditioning phase” once per minute until constant readings are obtained. Then begin the “measurement data phase” and record readings every 15 seconds for at least two minutes (or eight readings), or as otherwise required to achieve two continuous minutes of data that meet the specification given in Section 13.1. Finally, perform the “refresh phase” by introducing dry air, free from CO and other combustion gases, until several minute-to-minute readings of consistent value have been obtained. For each run use the “measurement data phase” readings to calculate the average stack gas CO and O_2 concentrations.

8.3 ***EC Cell Rate.*** Maintain the EC cell sample flow rate so that it does not vary by more than ±10 percent throughout the pre-sampling calibration, stack gas sampling and post-sampling calibration check. Alternatively, the EC cell sample flow rate can be maintained within a tolerance range that does not affect the gas concentration readings by more than ±3 percent, as instructed by the EC cell manufacturer.

9.0 Quality Control (Reserved)

10.0 Calibration and Standardization

10.1 ***Pre-Sampling Calibration.*** Conduct the following protocol once for each nominal range to be used on each EC cell before performing a stack gas sampling run on each field sampling day. Repeat the calibration if you replace an EC cell before completing all of the sampling runs. There is no prescribed order for calibration of the EC cells; however, each cell must complete the measurement data phase during calibration. Assemble the measurement system by following the manufacturer's recommended protocols including for preparing and preconditioning the EC cell. Assure the measurement system has no leaks and verify the gas scrubbing agent is not depleted. Use Figure 1 to record all data.

10.1.1 ***Zero Calibration.*** For both the O_2 and CO cells, introduce zero gas to the measurement system (e.g., at the calibration assembly) and record the concentration reading every minute until readings are constant for at least two consecutive minutes. Include the time and sample flow rate. Repeat the steps in this section at least once to verify the zero calibration for each component gas.

10.1.2 ***Zero Calibration Tolerance.*** For each zero gas introduction, the zero level output must be less than or equal to ±3 percent of the up-scale gas value or ±1 ppm, whichever is less restrictive, for the CO channel and less than or equal to ±0.3 percent O_2 for the O_2 channel.

10.1.3 ***Up-Scale Calibration.*** Individually introduce each calibration gas to the measurement system (e.g., at the calibration assembly) and record the start time. Record all EC cell output responses and the flow rate during this “sample conditioning phase” once per minute until readings are constant for at least two minutes. Then begin the “measurement data phase” and record readings every 15 seconds for a total of two minutes, or as otherwise required. Finally, perform the “refresh phase” by introducing dry air, free from CO and other combustion gases, until readings are constant for at least two consecutive minutes. Then repeat the steps in this section at least once to verify the calibration for each component gas. Introduce all gases to flow through the entire sample handling system (i.e., at the exit end of the sampling probe or the calibration assembly).

10.1.4 ***Up-Scale Calibration Error.*** The mean of the difference of the “measurement data phase” readings from the reported standard gas value must be less than or equal to ±5 percent or ±1 ppm for CO or ±0.5 percent O_2, whichever is less restrictive, respectively. The maximum allowable deviation from the mean measured value of any single “measurement data phase” reading must be less than or equal to ±2 percent or ±1 ppm for CO or ±0.5 percent O_2, whichever is less restrictive, respectively.

10.2 ***Post-Sampling Calibration Check.*** Conduct a stack gas post-sampling calibration check after the stack gas sampling run or set of runs and within 12 hours of the initial calibration. Conduct up-scale and zero calibration checks using the protocol in Section 10.1. Make no changes to the sampling system or EC cell calibration until all post-sampling calibration checks have been recorded. If either the zero or up-scale calibration error exceeds the respective specification in Sections 10.1.2 and 10.1.4 then all measurement data collected since the previous successful calibrations are invalid and re-calibration and re-sampling are required. If the sampling system is disassembled or the EC cell calibration is adjusted, repeat the calibration check before conducting the next analyzer sampling run.

11.0 Analytical Procedure

The analytical procedure is fully discussed in Section 8.

12.0 Calculations and Data Analysis

Determine the CO and O_2 concentrations for each stack gas sampling run by calculating the mean gas concentrations of the data recorded during the “measurement data phase”.

13.0 Protocol Performance

Use the following protocols to verify consistent analyzer performance during each field sampling day.

13.1 ***Measurement Data Phase Performance Check.*** Calculate the mean of the readings from the "measurement data phase". The maximum allowable deviation from the mean for each of the individual readings is ±2 percent, or ±1 ppm, whichever is less restrictive. Record the mean value and maximum deviation for each gas monitored. Data must conform to Section 10.1.4. The EC cell flow rate must conform to the specification in Section 8.3.

Example:

A measurement data phase is invalid if the maximum deviation of any single reading comprising that mean is greater than ±2 percent *or* ±1 ppm (the default criteria). For example, if the mean = 30 ppm, single readings of below 29 ppm and above 31 ppm are disallowed).

13.2 ***Interference Check.*** Before the initial use of the EC cell and interference gas scrubber in the field, and semi-annually thereafter, challenge the interference gas scrubber with NO and NO_2 gas standards that are generally recognized as representative of diesel-fueled engine NO and NO_2 emission values. Record the responses displayed by the CO EC cell and other pertinent data on Figure 1 or a similar form.

13.2.1 ***Interference Response.*** The combined NO and NO_2 interference response should be less than or equal to ±5 percent of the up-scale CO calibration gas concentration.

13.3 ***Repeatability Check.*** Conduct the following check once for each nominal range that is to be used on the CO EC cell within 5 days prior to each field sampling program. If a field sampling program lasts longer than 5 days, repeat this check every 5 days. Immediately repeat the check if the EC cell is replaced or if the EC cell is exposed to gas concentrations greater than 150 percent of the highest up-scale gas concentration.

13.3.1 ***Repeatability Check Procedure.*** Perform a complete EC cell sampling run (all three phases) by introducing the CO calibration gas to the measurement system and record the response. Follow Section 10.1.3. Use Figure 1 to record all data. Repeat the run three times for a total of four complete runs. During the four repeatability check runs, do not adjust the system except where necessary to achieve the correct calibration gas flow rate at the analyzer.

13.3.2 ***Repeatability Check Calculations.*** Determine the highest and lowest average "measurement data phase" CO concentrations from the four repeatability check runs and record the results on Figure 1 or a similar form. The absolute value of the difference between the maximum and minimum average values recorded must not vary more than ±3 percent or ±1 ppm of the up-scale gas value, whichever is less restrictive.

14.0 Pollution Prevention (Reserved)

15.0 Waste Management (Reserved)

16.0 Alternative Procedures (Reserved)

17.0 References

(1) ***"Development of an Electrochemical Cell Emission Analyzer Test Protocol"*** , Topical Report, Phil Juneau, Emission Monitoring, Inc., July 1997.

(2) ***"Determination of Nitrogen Oxides, Carbon Monoxide, and Oxygen Emissions from Natural Gas-Fired Engines, Boilers, and Process Heaters Using Portable Analyzers"*** , EMC Conditional Test Protocol 30 (CTM-30), Gas Research Institute Protocol GRI-96/0008, Revision 7, October 13, 1997.

(3) ***"ICAC Test Protocol for Periodic Monitoring"*** , EMC Conditional Test Protocol 34 (CTM-034), The Institute of Clean Air Companies, September 8, 1999.

(4) ***"Code of Federal Regulations"*** , Protection of Environment, 40 CFR, Part 60, Appendix A, Methods 1-4; 10.

Table 1: Appendix A—Sampling Run Data.

Facility_____ Engine I.D._____ Date_____

Run Type: (X)	(_) Pre-Sample Calibration				(_) Stack Gas Sample				(_) Post-Sample Cal. Check		(_) Repeatability Check
Run #	1	1	2	2	3	3	4	4	Time	Scrub. OK	Flow- Rate
Gas	O_2	CO	O_2	CO	O_2	CO	O_2	CO			
Sample Cond. Phase											
″											
″											
″											
″											
Measurement Data Phase											
″											
″											
″											
″											
″											
″											
″											
″											
″											
″											
Mean											
Refresh Phase											
″											
″											
″											
″											

[78 FR 6721, Jan. 30, 2013]

Attachment C

Part 70 Administrative Operating Permit No: T 011-50087-00094

[Downloaded from the eCFR on December 7, 2022]

Title 40: Protection of Environment

PART 63—NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES

Subpart DDDDD—National Emission Standards for Hazardous Air Pollutants for Major Sources: Industrial, Commercial, and Institutional Boilers and Process Heaters

Source: 76 FR 15664, Mar. 21, 2011, unless otherwise noted.

What This Subpart Covers

§ 63.7480 What is the purpose of this subpart?

This subpart establishes national emission limitations and work practice standards for hazardous air pollutants (HAP) emitted from industrial, commercial, and institutional boilers and process heaters located at major sources of HAP. This subpart also establishes requirements to demonstrate initial and continuous compliance with the emission limitations and work practice standards.

§ 63.7485 Am I subject to this subpart?

You are subject to this subpart if you own or operate an industrial, commercial, or institutional boiler or process heater as defined in § 63.7575 that is located at, or is part of, a major source of HAP, except as specified in § 63.7491. For purposes of this subpart, a major source of HAP is as defined in § 63.2, except that for oil and natural gas production facilities, a major source of HAP is as defined in § 63.7575.

[78 FR 7162, Jan. 31, 2013]

§ 63.7490 What is the affected source of this subpart?

(a) This subpart applies to new, reconstructed, and existing affected sources as described in paragraphs (a)(1) and (2) of this section.

(1) The affected source of this subpart is the collection at a major source of all existing industrial, commercial, and institutional boilers and process heaters within a subcategory as defined in § 63.7575.

(2) The affected source of this subpart is each new or reconstructed industrial, commercial, or institutional boiler or process heater, as defined in § 63.7575, located at a major source.

(b) A boiler or process heater is new if you commence construction of the boiler or process heater after June 4, 2010, and you meet the applicability criteria at the time you commence construction.

(c) A boiler or process heater is reconstructed if you meet the reconstruction criteria as defined in § 63.2, you commence reconstruction after June 4, 2010, and you meet the applicability criteria at the time you commence reconstruction.

(d) A boiler or process heater is existing if it is not new or reconstructed.

(e) An existing electric utility steam generating unit (EGU) that meets the applicability requirements of this subpart after the effective date of this final rule due to a change (e.g., fuel switch) is considered to be an existing source under this subpart.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7162, Jan. 31, 2013]

§ 63.7491 Are any boilers or process heaters not subject to this subpart?

The types of boilers and process heaters listed in paragraphs (a) through (n) of this section are not subject to this subpart.

(a) An electric utility steam generating unit (EGU) covered by subpart UUUUU of this part or a natural gas-fired EGU as defined in subpart UUUUU of this part firing at least 85 percent natural gas on an annual heat input basis.

(b) A recovery boiler or furnace covered by subpart MM of this part.

(c) A boiler or process heater that is used specifically for research and development, including test steam boilers used to provide steam for testing the propulsion systems on military vessels. This does not include units that provide heat or steam to a process at a research and development facility.

(d) A hot water heater as defined in this subpart.

(e) A refining kettle covered by subpart X of this part.

(f) An ethylene cracking furnace covered by subpart YY of this part.

(g) Blast furnace stoves as described in EPA-453/R-01-005 (incorporated by reference, see § 63.14).

(h) Any boiler or process heater that is part of the affected source subject to another subpart of this part, such as boilers and process heaters used as control devices to comply with subparts JJJ, OOO, PPP, and U of this part.

(i) Any boiler or process heater that is used as a control device to comply with another subpart of this part, or part 60, part 61, or part 65 of this chapter provided that at least 50 percent of the average annual heat input during any 3 consecutive calendar years to the boiler or process heater is provided by regulated gas streams that are subject to another standard.

(j) Temporary boilers and process heaters as defined in this subpart.

(k) Blast furnace gas fuel-fired boilers and process heaters as defined in this subpart.

(l) Any boiler or process heater specifically listed as an affected source in any standard(s) established under section 129 of the Clean Air Act.

(m) A unit that burns hazardous waste covered by Subpart EEE of this part. A unit that is exempt from Subpart EEE as specified in § 63.1200(b) is not covered by Subpart EEE.

(n) Residential boilers as defined in this subpart.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7162, Jan. 31, 2013; 80 FR 72806, Nov. 20, 2015]

§ 63.7495 When do I have to comply with this subpart?

(a) If you have a new or reconstructed boiler or process heater, you must comply with this subpart by April 1, 2013, or upon startup of your boiler or process heater, whichever is later.

(b) If you have an existing boiler or process heater, you must comply with this subpart no later than January 31, 2016, except as provided in § 63.6(i).

(c) If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, paragraphs (c)(1) and (2) of this section apply to you.

(1) Any new or reconstructed boiler or process heater at the existing source must be in compliance with this subpart upon startup.

(2) Any existing boiler or process heater at the existing source must be in compliance with this subpart within 3 years after the source becomes a major source.

(d) You must meet the notification requirements in § 63.7545 according to the schedule in § 63.7545 and in subpart A of this part. Some of the notifications must be submitted before you are required to comply with the emission limits and work practice standards in this subpart.

(e) If you own or operate an industrial, commercial, or institutional boiler or process heater and would be subject to this subpart except for the exemption in § 63.7491(l) for commercial and industrial solid waste incineration units covered by part 60, subpart CCCC or subpart DDDD, and you cease combusting solid waste, you must be in compliance with this subpart and are no longer subject to part 60, subparts CCCC or DDDD beginning on the effective date of the switch as identified under the provisions of § 60.2145(a)(2) and (3) or § 60.2710(a)(2) and (3).

(f) If you own or operate an existing EGU that becomes subject to this subpart after January 31, 2016, you must be in compliance with the applicable existing source provisions of this subpart on the effective date such unit becomes subject to this subpart.

(g) If you own or operate an existing industrial, commercial, or institutional boiler or process heater and would be subject to this subpart except for a exemption in § 63.7491(i) that becomes subject to this subpart after January 31, 2013, you must be in compliance with the applicable existing source provisions of this subpart within 3 years after such unit becomes subject to this subpart.

(h) If you own or operate an existing industrial, commercial, or institutional boiler or process heater and have switched fuels or made a physical change to the boiler or process heater that resulted in the applicability of a different subcategory after the compliance date of this subpart, you must be in compliance with the applicable existing source provisions of this subpart on the effective date of the fuel switch or physical change.

(i) If you own or operate a new industrial, commercial, or institutional boiler or process heater and have switched fuels or made a physical change to the boiler or process heater that resulted in the applicability of a different subcategory, you must be in compliance with the applicable new source provisions of this subpart on the effective date of the fuel switch or physical change.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7162, Jan. 31, 2013; 80 FR 72807, Nov. 20, 2015]

Emission Limitations and Work Practice Standards

§ 63.7499 What are the subcategories of boilers and process heaters?

The subcategories of boilers and process heaters, as defined in § 63.7575 are:

(a) Pulverized coal/solid fossil fuel units.

(b) Stokers designed to burn coal/solid fossil fuel.

(c) Fluidized bed units designed to burn coal/solid fossil fuel.

(d) Stokers/sloped grate/other units designed to burn kiln dried biomass/bio-based solid.

(e) Fluidized bed units designed to burn biomass/bio-based solid.

(f) Suspension burners designed to burn biomass/bio-based solid.

(g) Fuel cells designed to burn biomass/bio-based solid.

(h) Hybrid suspension/grate burners designed to burn wet biomass/bio-based solid.

(i) Stokers/sloped grate/other units designed to burn wet biomass/bio-based solid.

(j) Dutch ovens/pile burners designed to burn biomass/bio-based solid.

(k) Units designed to burn liquid fuel that are non-continental units.

(l) Units designed to burn gas 1 fuels.

(m) Units designed to burn gas 2 (other) gases.

(n) Metal process furnaces.

(o) Limited-use boilers and process heaters.

(p) Units designed to burn solid fuel.

(q) Units designed to burn liquid fuel.

(r) Units designed to burn coal/solid fossil fuel.

(s) Fluidized bed units with an integrated fluidized bed heat exchanger designed to burn coal/solid fossil fuel.

(t) Units designed to burn heavy liquid fuel.

(u) Units designed to burn light liquid fuel.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7163, Jan. 31, 2013]

§ 63.7500 What emission limitations, work practice standards, and operating limits must I meet?

(a) You must meet the requirements in paragraphs (a)(1) through (3) of this section, except as provided in paragraphs (b) through (e) of this section. You must meet these requirements at all times the affected unit is operating, except as provided in paragraph (f) of this section.

(1) You must meet each emission limit and work practice standard in Tables 1 through 3 and 11 through 15 to this subpart that applies to your boiler or process heater, for each boiler or process heater at your source, except as provided under § 63.7522. The output-based emission limits, in units of pounds per million Btu of steam output, in Table 1 or 2 to this subpart are an alternative applicable only to boilers and process heaters that generate either steam, cogenerate steam with electricity, or both. The output-based emission limits, in units of pounds per megawatt-hour, in Table 1 or 2 to this subpart are an alternative applicable only to boilers that

generate only electricity. Boilers that perform multiple functions (cogeneration and electricity generation) or supply steam to common headers would calculate a total steam energy output using Equation 1 of § 63.7575 to demonstrate compliance with the output-based emission limits, in units of pounds per million Btu of steam output, in Table 1 or 2 to this subpart. If you operate a new boiler or process heater, you can choose to comply with alternative limits as discussed in paragraphs (a)(1)(i) through (iv) of this section, but on or after October 6, 2025, you must comply with the emission limits in Table 1 to this subpart. If you operate an existing boiler or process heater, you can choose to comply with alternative limits as discussed in paragraph (a)(1)(v) of this section, but on or after October 6, 2025 you must comply with the emission limits in Table 2 to this subpart.

(i) If your boiler or process heater commenced construction or reconstruction after June 4, 2010, and before May 20, 2011, you may comply with the emission limits in Table 11 or 14 to this subpart until January 31, 2016.

(ii) If your boiler or process heater commenced construction or reconstruction on or after May 20, 2011, and before December 23, 2011, you may comply with the emission limits in Table 12 or 14 to this subpart until January 31, 2016.

(iii) If your boiler or process heater commenced construction or reconstruction on or after December 23, 2011, and before April 1, 2013, you may comply with the emission limits in Table 13 or 14 to this subpart until January 31, 2016.

(iv) If you operate a new boiler or process heater, you must comply with either the emission limits in Table 1 to this subpart or the emission limits in Table 14 to this subpart until you must comply with the emission limits in Table 1.

(v) If you operate an existing boiler or process heater, you must comply with either the emission limits in Table 2 to this subpart or the emission limits in Table 15 to this subpart until you must comply with the emission limits in Table 2.

(2) You must meet each operating limit in Table 4 to this subpart that applies to your boiler or process heater. If you use a control device or combination of control devices not covered in Table 4 to this subpart, or you wish to establish and monitor an alternative operating limit or an alternative monitoring parameter, you must apply to the EPA Administrator for approval of alternative monitoring under § 63.8(f).

(3) At all times, you must operate and maintain any affected source (as defined in § 63.7490), including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator that may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

(b) As provided in § 63.6(g), EPA may approve use of an alternative to the work practice standards in this section.

(c) Limited-use boilers and process heaters must complete a tune-up every 5 years as specified in § 63.7540. They are not subject to the emission limits in Tables 1 and 2 or Tables 11 through 15 to this subpart, the annual tune-up, or the energy assessment requirements in Table 3 to this subpart, or the operating limits in Table 4 to this subpart.

(d) Boilers and process heaters with a heat input capacity of less than or equal to 5 million Btu per hour in the units designed to burn gas 2 (other) fuels subcategory or units designed to burn light liquid fuels subcategory must complete a tune-up every 5 years as specified in § 63.7540.

(e) Boilers and process heaters in the units designed to burn gas 1 fuels subcategory with a heat input capacity of less than or equal to 5 million Btu per hour must complete a tune-up every 5 years as specified in § 63.7540. Boilers and process heaters in the units designed to burn gas 1 fuels subcategory with a heat input capacity greater than 5 million Btu per hour and less than 10 million Btu per hour must complete a tune-up every 2 years as specified in § 63.7540. Boilers and process heaters in the units designed to burn gas 1 fuels subcategory are not subject to the emission limits in Tables 1 and 2 or Tables 11 through 15 to this subpart, or the operating limits in Table 4 to this subpart.

(f) These standards apply at all times the affected unit is operating, except during periods of startup and shutdown during which time you must comply only with items 5 and 6 of Table 3 to this subpart.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7163, Jan. 31, 2013; 80 FR 72807, Nov. 20, 2015; 87 FR 60840, Oct. 6, 2022]

§ 63.7501 [Reserved]

General Compliance Requirements

§ 63.7505 What are my general requirements for complying with this subpart?

(a) You must be in compliance with the emission limits, work practice standards, and operating limits in this subpart. These emission and operating limits apply to you at all times the affected unit is operating except for the periods noted in § 63.7500(f).

(b) [Reserved]

(c) You must demonstrate compliance with all applicable emission limits using performance stack testing, fuel analysis, or continuous monitoring systems (CMS), including a continuous emission monitoring system (CEMS), continuous opacity monitoring system (COMS), continuous parameter monitoring system (CPMS), or particulate matter continuous parameter monitoring system (PM CPMS), where applicable. You may demonstrate compliance with the applicable emission limit for hydrogen chloride (HCl), mercury, or total selected metals (TSM) using fuel analysis if the emission rate calculated according to § 63.7530(c) is less than the applicable emission limit. For gaseous fuels, you may not use fuel analyses to comply with the TSM alternative standard or the HCl standard. Otherwise, you must demonstrate compliance for HCl, mercury, or TSM using performance stack testing, if subject to an applicable emission limit listed in Table 1 or 2 or Tables 11 through 15 to this subpart.

(d) If you demonstrate compliance with any applicable emission limit through performance testing and subsequent compliance with operating limits through the use of CPMS, or with a CEMS or COMS, you must develop a site-specific monitoring plan according to the requirements in paragraphs (d)(1) through (4) of this section for the use of any CEMS, COMS, or CPMS. This requirement also applies to you if you petition the EPA Administrator for alternative monitoring parameters under § 63.8(f).

(1) For each CMS required in this section (including CEMS, COMS, or CPMS), you must develop, and submit to the Administrator for approval upon request, a site-specific monitoring plan that addresses design, data collection, and the quality assurance and quality control elements outlined in § 63.8(d) and the elements described in paragraphs (d)(1)(i) through (iii) of this section. You must submit this site-specific monitoring plan, if requested, at least 60 days before your initial performance evaluation of your CMS. This requirement to develop and submit a site specific monitoring plan does not apply to affected sources with existing CEMS or COMS operated according to the performance specifications under appendix B to part 60 of this chapter and that meet the requirements of § 63.7525. Using the process described in § 63.8(f)(4), you may request approval of alternative monitoring system quality assurance and quality control procedures in place of those specified in this paragraph and, if approved, include the alternatives in your site-specific monitoring plan.

(i) Installation of the CMS sampling probe or other interface at a measurement location relative to each affected process unit such that the measurement is representative of control of the exhaust emissions (e.g., on or downstream of the last control device);

(ii) Performance and equipment specifications for the sample interface, the pollutant concentration or parametric signal analyzer, and the data collection and reduction systems; and

(iii) Performance evaluation procedures and acceptance criteria (e.g., calibrations, accuracy audits, analytical drift).

(2) In your site-specific monitoring plan, you must also address paragraphs (d)(2)(i) through (iii) of this section.

(i) Ongoing operation and maintenance procedures in accordance with the general requirements of § 63.8(c)(1)(ii), (c)(3), and (c)(4)(ii);

(ii) Ongoing data quality assurance procedures in accordance with the general requirements of § 63.8(d); and

(iii) Ongoing recordkeeping and reporting procedures in accordance with the general requirements of § 63.10(c) (as applicable in Table 10 to this subpart), (e)(1), and (e)(2)(i).

(3) You must conduct a performance evaluation of each CMS in accordance with your site-specific monitoring plan.

(4) You must operate and maintain the CMS in continuous operation according to the site-specific monitoring plan.

(e) If you have an applicable emission limit, and you choose to comply using definition (2) of "startup" in § 63.7575, you must develop and implement a written startup and shutdown plan (SSP) according to the requirements in Table 3 to this subpart. The SSP must be maintained onsite and available upon request for public inspection.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7164, Jan. 31, 2013; 80 FR 72807, Nov. 20, 2015; 87 FR 60841, Oct. 6, 2022]

Testing, Fuel Analyses, and Initial Compliance Requirements

§ 63.7510 What are my initial compliance requirements and by what date must I conduct them?

(a) For each boiler or process heater that is required or that you elect to demonstrate compliance with any of the applicable emission limits in Table 1 or 2 or Tables 11 through 15 to this subpart through performance (stack) testing, your initial compliance requirements include all the following:

(1) Conduct performance tests according to § 63.7520 and Table 5 to this subpart.

(2) Conduct a fuel analysis for each type of fuel burned in your boiler or process heater according to § 63.7521 and Table 6 to this subpart, except as specified in paragraphs (a)(2)(i) through (iii) of this section.

(i) For each boiler or process heater that burns a single type of fuel, you are not required to conduct a fuel analysis for each type of fuel burned in your boiler or process heater according to § 63.7521 and Table 6 to this subpart. For purposes of this subpart, units that use a supplemental fuel only for startup, unit shutdown, and transient flame stability purposes still qualify as units that burn a single type of fuel, and the supplemental fuel is not subject to the fuel analysis requirements under § 63.7521 and Table 6 to this subpart.

(ii) When natural gas, refinery gas, or other gas 1 fuels are co-fired with other fuels, you are not required to conduct a fuel analysis of those Gas 1 fuels according to § 63.7521 and Table 6 to this subpart. If gaseous fuels other than natural gas, refinery gas, or other gas 1 fuels are co-fired with other fuels and those non-Gas 1 gaseous fuels are subject to another subpart of this part, part 60, part 61, or part 65, you are not required to conduct a fuel analysis of those non-Gas 1 fuels according to § 63.7521 and Table 6 to this subpart.

(iii) You are not required to conduct a chlorine fuel analysis for any gaseous fuels. You must conduct a fuel analysis for mercury on gaseous fuels unless the fuel is exempted in paragraphs (a)(2)(i) and (ii) of this section.

(3) Establish operating limits according to § 63.7530 and Table 7 to this subpart.

(4) Conduct CMS performance evaluations according to § 63.7525.

(b) For each boiler or process heater that you elect to demonstrate compliance with the applicable emission limits in Table 1 or 2 or Tables 11 through 15 to this subpart for HCl, mercury, or TSM through fuel analysis, your initial compliance requirement is to conduct a fuel analysis for each type of fuel burned in your boiler or process heater according to § 63.7521 and Table 6 to this subpart and establish operating limits according to § 63.7530 and Table 8 to this subpart. The fuels described in paragraphs (a)(2)(i) and (ii) of this section are exempt from these fuel analysis and operating limit requirements. The fuels described in paragraph (a)(2)(ii) of this section are exempt from the chloride fuel analysis and operating limit requirements. Boilers and process heaters that use a CEMS for mercury or HCl are exempt from the performance testing and operating limit requirements specified in paragraph (a) of this section for the HAP for which CEMS are used.

(c) If your boiler or process heater is subject to a carbon monoxide (CO) limit, your initial compliance demonstration for CO is to conduct a performance test for CO according to Table 5 to this subpart or conduct a performance evaluation of your continuous CO monitor, if applicable, according to § 63.7525(a). Boilers and process heaters that use a CO CEMS to comply with the applicable alternative CO CEMS emission standard listed in Table 1 or 2 or Tables 11 through 15 to this subpart, as specified in § 63.7525(a), are exempt from the initial CO performance testing and oxygen concentration operating limit requirements specified in paragraph (a) of this section.

(d) If your boiler or process heater is subject to a PM limit, your initial compliance demonstration for PM is to conduct a performance test in accordance with § 63.7520 and Table 5 to this subpart.

(e) For existing affected sources (as defined in § 63.7490), you must complete the initial compliance demonstrations, as specified in paragraphs (a) through (d) of this section, no later than 180 days after the compliance date that is specified for your source in § 63.7495 and according to the applicable provisions in § 63.7(a)(2) as cited in Table 10 to this subpart, except as specified in paragraph (j) of this section. You must complete an initial tune-up by following the procedures described in § 63.7540(a)(10)(i) through (vi) no later than the compliance date specified in § 63.7495, except as specified in paragraph (j) of this section. You must complete the one-time energy assessment specified in Table 3 to this subpart no later than the compliance date specified in § 63.7495.

(f) For new or reconstructed affected sources (as defined in § 63.7490), you must complete the initial compliance demonstration with the emission limits no later than July 30, 2013, or within 180 days after startup of the source, whichever is later.

(1) If you are demonstrating compliance with an emission limit in Tables 11 through 13 to this subpart that is less stringent than the applicable emission limit in Table 14 to this subpart, you must demonstrate compliance with the applicable emission limit in Table 14 no later than July 29, 2016.

(2) If you are demonstrating compliance with an emission limit in Table 14 to this subpart that is less stringent than the applicable emission limit in Table 1 to this subpart, you must demonstrate compliance with the applicable emission limit in Table 1 no later than October 6, 2025.

(g) For new or reconstructed affected sources (as defined in § 63.7490), you must demonstrate initial compliance with the applicable work practice standards in Table 3 to this subpart within the applicable annual, biennial, or 5-year schedule as specified in § 63.7515(d) following the initial compliance date specified in § 63.7495(a). Thereafter, you are required to complete the applicable annual, biennial, or 5-year tune-up as specified in § 63.7515(d).

(h) For affected sources (as defined in § 63.7490) that ceased burning solid waste consistent with § 63.7495(e) and for which the initial compliance date has passed, you must demonstrate compliance within 60 days of the effective date of the waste-to-fuel switch. If you have not conducted your compliance demonstration for this subpart within the previous 12 months, you must complete all compliance demonstrations for this subpart before you commence or recommence combustion of solid waste.

(i) For an existing EGU that becomes subject after January 31, 2016, you must demonstrate compliance within 180 days after becoming an affected source.

(j) For existing affected sources (as defined in § 63.7490) that have not operated between the effective date of the rule and the compliance date that is specified for your source in § 63.7495, you must complete the initial compliance demonstration, if subject to the emission limits in Table 2 or 14 to this subpart, as applicable, as

specified in paragraphs (a) through (d) of this section, no later than 180 days after the re-start of the affected source and according to the applicable provisions in § 63.7(a)(2) as cited in Table 10 to this subpart. You must complete an initial tune-up by following the procedures described in § 63.7540(a)(10)(i) through (vi) no later than 30 days after the re-start of the affected source and, if applicable, complete the one-time energy assessment specified in Table 3 to this subpart, no later than the compliance date specified in § 63.7495.

(k) For affected sources, as defined in § 63.7490, that switch subcategories consistent with § 63.7545(h) after the initial compliance date, you must demonstrate compliance within 60 days of the effective date of the switch, unless you had previously conducted your compliance demonstration for this subcategory within the previous 12 months.

[78 FR 7164, Jan. 31, 2013, as amended at 80 FR 72808, Nov. 20, 2015; 87 FR 60841, Oct. 6, 2022]

§ 63.7515 When must I conduct subsequent performance tests, fuel analyses, or tune-ups?

(a) You must conduct all applicable performance tests according to § 63.7520 on an annual basis, except as specified in paragraphs (b) through (e), (g), and (h) of this section. Annual performance tests must be completed no more than 13 months after the previous performance test, except as specified in paragraphs (b) through (e), (g), and (h) of this section.

(b) If your performance tests for a given pollutant for at least 2 consecutive years show that your emissions are at or below 75 percent of the emission limit (or, in limited instances as specified in Tables 1 and 2 or 11 through 15 to this subpart, at or below the emission limit) for the pollutant, and if there are no changes in the operation of the individual boiler or process heater or air pollution control equipment that could increase emissions, you may choose to conduct performance tests for the pollutant every third year. Each such performance test must be conducted no more than 37 months after the previous performance test. If you elect to demonstrate compliance using emission averaging under § 63.7522, you must continue to conduct performance tests annually. The requirement to test at maximum chloride input level is waived unless the stack test is conducted for HCl. The requirement to test at maximum mercury input level is waived unless the stack test is conducted for mercury. The requirement to test at maximum TSM input level is waived unless the stack test is conducted for TSM.

(c) If a performance test shows emissions exceeded the emission limit or 75 percent of the emission limit (as specified in Tables 1 and 2 or 11 through 15 to this subpart) for a pollutant, you must conduct annual performance tests for that pollutant until all performance tests over a consecutive 2-year period meet the required level (at or below 75 percent of the emission limit, as specified in Tables 1 and 2 or 11 through 15).

(d) If you are required to meet an applicable tune-up work practice standard, you must conduct an annual, biennial, or 5-year performance tune-up according to § 63.7540(a)(10), (11), or (12), respectively. Each annual tune-up specified in § 63.7540(a)(10) must be no more than 13 months after the previous tune-up. Each biennial tune-up specified in § 63.7540(a)(11) must be conducted no more than 25 months after the previous tune-up. Each 5-year tune-up specified in § 63.7540(a)(12) must be conducted no more than 61 months after the previous tune-up. For a new or reconstructed affected source (as defined in § 63.7490), the first annual, biennial, or 5-year tune-up must be no later than 13 months, 25 months, or 61 months, respectively, after April 1, 2013 or the initial startup of the new or reconstructed affected source, whichever is later.

(e) If you demonstrate compliance with the mercury, HCl, or TSM based on fuel analysis, you must conduct a monthly fuel analysis according to § 63.7521 for each type of fuel burned that is subject to an emission limit in Table 1 or 2 or Tables 11 through 15 to this subpart. You may comply with this monthly requirement by completing the fuel analysis any time within the calendar month as long as the analysis is separated from the previous analysis by at least 14 calendar days. If you burn a new type of fuel, you must conduct a fuel analysis before burning the new type of fuel in your boiler or process heater. You must still meet all applicable continuous compliance requirements in § 63.7540. If each of 12 consecutive monthly fuel analyses demonstrates 75 percent or less of the compliance level, you may decrease the fuel analysis frequency to quarterly for that fuel. If any quarterly sample exceeds 75 percent of the compliance level or you begin burning a new type of fuel, you must return to monthly monitoring for that fuel, until 12 months of fuel analyses are again less than 75 percent of the compliance level. If sampling is conducted on 1 day per month, samples should be no less than 14 days apart, but if multiple samples are taken per month, the 14-day restriction does not apply.

(f) You must report the results of performance tests and the associated fuel analyses within 60 days after the completion of the performance tests. This report must also verify that the operating limits for each boiler or process

heater have not changed or provide documentation of revised operating limits established according to § 63.7530 and Table 7 to this subpart, as applicable. The reports for all subsequent performance tests must include all applicable information required in § 63.7550.

(g) For affected sources (as defined in § 63.7490) that have not operated since the previous compliance demonstration and more than 1 year has passed since the previous compliance demonstration, you must complete the subsequent compliance demonstration, if subject to the emission limits in Table 1 or 2 or Tables 11 through 15 to this subpart, no later than 180 days after the re-start of the affected source and according to the applicable provisions in § 63.7(a)(2) as cited in Table 10 to this subpart. You must complete a subsequent tune-up by following the procedures described in § 63.7540(a)(10)(i) through (vi) and the schedule described in § 63.7540(a)(13) for units that are not operating at the time of their scheduled tune-up.

(h) If your affected boiler or process heater is in the unit designed to burn light liquid subcategory and you combust ultra-low sulfur liquid fuel, you do not need to conduct further performance tests (stack tests or fuel analyses) if the pollutants measured during the initial compliance performance tests meet the emission limits in Tables 1 or 2 of this subpart providing you demonstrate ongoing compliance with the emissions limits by monitoring and recording the type of fuel combusted on a monthly basis. If you intend to use a fuel other than ultra-low sulfur liquid fuel, natural gas, refinery gas, or other gas 1 fuel, you must conduct new performance tests within 60 days of burning the new fuel type.

(i) If you operate a CO CEMS that meets the Performance Specifications outlined in § 63.7525(a)(3) to demonstrate compliance with the applicable alternative CO CEMS emission standard listed in Table 1 or 2 or Tables 11 through 15 to this subpart, you are not required to conduct CO performance tests and are not subject to the oxygen concentration operating limit requirement specified in § 63.7510(a).

[78 FR 7165, Jan. 31, 2013, as amended at 80 FR 72808, Nov. 20, 2015; 87 FR 60842, Oct. 6, 2022]

§ 63.7520 What stack tests and procedures must I use?

(a) You must conduct all performance tests according to § 63.7(c), (d), (f), and (h). You must also develop a site-specific stack test plan according to the requirements in § 63.7(c). You shall conduct all performance tests under such conditions as the Administrator specifies to you based on the representative performance of each boiler or process heater for the period being tested. Upon request, you shall make available to the Administrator such records as may be necessary to determine the conditions of the performance tests.

(b) You must conduct each performance test according to the requirements in Table 5 to this subpart.

(c) You must conduct each performance test under the specific conditions listed in Tables 5 and 7 to this subpart. You must conduct performance tests at representative operating load conditions while burning the type of fuel or mixture of fuels that has the highest content of chlorine and mercury, and TSM if you are opting to comply with the TSM alternative standard and you must demonstrate initial compliance and establish your operating limits based on these performance tests. These requirements could result in the need to conduct more than one performance test. Following each performance test and until the next performance test, you must comply with the operating limit for operating load conditions specified in Table 4 to this subpart.

(d) You must conduct a minimum of three separate test runs for each performance test required in this section, as specified in § 63.7(e)(3). Each test run must comply with the minimum applicable sampling times or volumes specified in Tables 1 and 2 or 11 through 15 to this subpart.

(e) To determine compliance with the emission limits, you must use the F-Factor methodology and equations in sections 12.2 and 12.3 of EPA Method 19 at 40 CFR part 60, appendix A-7 of this chapter to convert the measured particulate matter (PM) concentrations, the measured HCl concentrations, the measured mercury concentrations, and the measured TSM concentrations that result from the performance test to pounds per million Btu heat input emission rates.

(f) Except for a 30-day rolling average based on CEMS (or sorbent trap monitoring system) data, if measurement results for any pollutant are reported as below the method detection level (e.g., laboratory analytical results for one or more sample components are below the method defined analytical detection level), you must use the method

detection level as the measured emissions level for that pollutant in calculating compliance. The measured result for a multiple component analysis (e.g., analytical values for multiple Method 29 fractions both for individual HAP metals and for total HAP metals) may include a combination of method detection level data and analytical data reported above the method detection level.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7166, Jan. 31, 2013; 87 FR 60842, Oct. 6, 2022]

§ 63.7521 What fuel analyses, fuel specification, and procedures must I use?

(a) For solid and liquid fuels, you must conduct fuel analyses for chloride and mercury according to the procedures in paragraphs (b) through (e) of this section and Table 6 to this subpart, as applicable. For solid fuels and liquid fuels, you must also conduct fuel analyses for TSM if you are opting to comply with the TSM alternative standard. For gas 2 (other) fuels, you must conduct fuel analyses for mercury according to the procedures in paragraphs (b) through (e) of this section and Table 6 to this subpart, as applicable. For gaseous fuels, you may not use fuel analyses to comply with the TSM alternative standard or the HCl standard. For purposes of complying with this section, a fuel gas system that consists of multiple gaseous fuels collected and mixed with each other is considered a single fuel type and sampling and analysis is only required on the combined fuel gas system that will feed the boiler or process heater. Sampling and analysis of the individual gaseous streams prior to combining is not required. You are not required to conduct fuel analyses for fuels used for only startup, unit shutdown, and transient flame stability purposes. You are required to conduct fuel analyses only for fuels and units that are subject to emission limits for mercury, HCl, or TSM in Tables 1 and 2 or 11 through 15 to this subpart. Gaseous and liquid fuels are exempt from the sampling requirements in paragraphs (c) and (d) of this section.

(b) You must develop a site-specific fuel monitoring plan according to the following procedures and requirements in paragraphs (b)(1) and (2) of this section, if you are required to conduct fuel analyses as specified in § 63.7510.

(1) If you intend to use an alternative analytical method other than those required by Table 6 to this subpart, you must submit the fuel analysis plan to the Administrator for review and approval no later than 60 days before the date that you intend to conduct the initial compliance demonstration described in § 63.7510.

(2) You must include the information contained in paragraphs (b)(2)(i) through (vi) of this section in your fuel analysis plan.

(i) The identification of all fuel types anticipated to be burned in each boiler or process heater.

(ii) For each anticipated fuel type, the notification of whether you or a fuel supplier will be conducting the fuel analysis.

(iii) For each anticipated fuel type, a detailed description of the sample location and specific procedures to be used for collecting and preparing the composite samples if your procedures are different from paragraph (c) or (d) of this section. Samples should be collected at a location that most accurately represents the fuel type, where possible, at a point prior to mixing with other dissimilar fuel types.

(iv) For each anticipated fuel type, the analytical methods from Table 6, with the expected minimum detection levels, to be used for the measurement of chlorine or mercury.

(v) If you request to use an alternative analytical method other than those required by Table 6 to this subpart, you must also include a detailed description of the methods and procedures that you are proposing to use. Methods in Table 6 shall be used until the requested alternative is approved.

(vi) If you will be using fuel analysis from a fuel supplier in lieu of site-specific sampling and analysis, the fuel supplier must use the analytical methods required by Table 6 to this subpart.

(c) You must obtain composite fuel samples for each fuel type according to the procedures in paragraph (c)(1) or (2) of this section, or the methods listed in Table 6 to this subpart, or use an automated sampling mechanism that provides representative composite fuel samples for each fuel type that includes both coarse and fine material. At a minimum, for demonstrating initial compliance by fuel analysis, you must obtain three composite samples. For monthly fuel analyses, at a minimum, you must obtain a single composite sample. For fuel analyses as part of a

performance stack test, as specified in § 63.7510(a), you must obtain a composite fuel sample during each performance test run.

(1) If sampling from a belt (or screw) feeder, collect fuel samples according to paragraphs (c)(1)(i) and (ii) of this section.

(i) Stop the belt and withdraw a 6-inch wide sample from the full cross-section of the stopped belt to obtain a minimum two pounds of sample. You must collect all the material (fines and coarse) in the full cross-section. You must transfer the sample to a clean plastic bag.

(ii) Each composite sample will consist of a minimum of three samples collected at approximately equal intervals during the testing period for sampling during performance stack testing.

(2) If sampling from a fuel pile or truck, you must collect fuel samples according to paragraphs (c)(2)(i) through (iii) of this section.

(i) For each composite sample, you must select a minimum of five sampling locations uniformly spaced over the surface of the pile.

(ii) At each sampling site, you must dig into the pile to a uniform depth of approximately 18 inches. You must insert a clean shovel into the hole and withdraw a sample, making sure that large pieces do not fall off during sampling; use the same shovel to collect all samples.

(iii) You must transfer all samples to a clean plastic bag for further processing.

(d) You must prepare each composite sample according to the procedures in paragraphs (d)(1) through (7) of this section.

(1) You must thoroughly mix and pour the entire composite sample over a clean plastic sheet.

(2) You must break large sample pieces (e.g., larger than 3 inches) into smaller sizes.

(3) You must make a pie shape with the entire composite sample and subdivide it into four equal parts.

(4) You must separate one of the quarter samples as the first subset.

(5) If this subset is too large for grinding, you must repeat the procedure in paragraph (d)(3) of this section with the quarter sample and obtain a one-quarter subset from this sample.

(6) You must grind the sample in a mill.

(7) You must use the procedure in paragraph (d)(3) of this section to obtain a one-quarter subsample for analysis. If the quarter sample is too large, subdivide it further using the same procedure.

(e) You must determine the concentration of pollutants in the fuel (mercury and/or chlorine and/or TSM) in units of pounds per million Btu of each composite sample for each fuel type according to the procedures in Table 6 to this subpart, for use in Equations 7, 8, and 9 of this subpart.

(f) To demonstrate that a gaseous fuel other than natural gas or refinery gas qualifies as an other gas 1 fuel, as defined in § 63.7575, you must conduct a fuel specification analyses for mercury according to the procedures in paragraphs (g) through (i) of this section and Table 6 to this subpart, as applicable, except as specified in paragraph (f)(1) through (4) of this section, or as an alternative where fuel specification analysis is not practical, you must measure mercury concentration in the exhaust gas when firing only the gaseous fuel to be demonstrated as an other gas 1 fuel in the boiler or process heater according to the procedures in Table 6 to this subpart.

(1) You are not required to conduct the fuel specification analyses in paragraphs (g) through (i) of this section for natural gas or refinery gas.

(2) You are not required to conduct the fuel specification analyses in paragraphs (g) through (i) of this section for gaseous fuels that are subject to another subpart of this part, part 60, part 61, or part 65.

(3) You are not required to conduct the fuel specification analyses in paragraphs (g) through (i) of this section on gaseous fuels for units that are complying with the limits for units designed to burn gas 2 (other) fuels.

(4) You are not required to conduct the fuel specification analyses in paragraphs (g) through (i) of this section for gas streams directly derived from natural gas at natural gas production sites or natural gas plants.

(g) You must develop a site-specific fuel analysis plan for other gas 1 fuels according to the following procedures and requirements in paragraphs (g)(1) and (2) of this section.

(1) If you intend to use an alternative analytical method other than those required by Table 6 to this subpart, you must submit the fuel analysis plan to the Administrator for review and approval no later than 60 days before the date that you intend to conduct the initial compliance demonstration described in § 63.7510.

(2) You must include the information contained in paragraphs (g)(2)(i) through (vi) of this section in your fuel analysis plan.

(i) The identification of all gaseous fuel types other than those exempted from fuel specification analysis under (f)(1) through (3) of this section anticipated to be burned in each boiler or process heater.

(ii) For each anticipated fuel type, the identification of whether you or a fuel supplier will be conducting the fuel specification analysis.

(iii) For each anticipated fuel type, a detailed description of the sample location and specific procedures to be used for collecting and preparing the samples if your procedures are different from the sampling methods contained in Table 6 to this subpart. Samples should be collected at a location that most accurately represents the fuel type, where possible, at a point prior to mixing with other dissimilar fuel types. If multiple boilers or process heaters are fueled by a common fuel stream it is permissible to conduct a single gas specification at the common point of gas distribution.

(iv) For each anticipated fuel type, the analytical methods from Table 6 to this subpart, with the expected minimum detection levels, to be used for the measurement of mercury.

(v) If you request to use an alternative analytical method other than those required by Table 6 to this subpart, you must also include a detailed description of the methods and procedures that you are proposing to use. Methods in Table 6 to this subpart shall be used until the requested alternative is approved.

(vi) If you will be using fuel analysis from a fuel supplier in lieu of site-specific sampling and analysis, the fuel supplier must use the analytical methods required by Table 6 to this subpart. When using a fuel supplier's fuel analysis, the owner or operator is not required to submit the information in § 63.7521(g)(2)(iii).

(h) You must obtain a single fuel sample for each fuel type for fuel specification of gaseous fuels.

(i) You must determine the concentration in the fuel of mercury, in units of microgram per cubic meter, dry basis, of each sample for each other gas 1 fuel type according to the procedures in Table 6 to this subpart.

[78 FR 7167, Jan. 31, 2013, as amended at 80 FR 72808, Nov. 20, 2015; 87 FR 60842, Oct. 6, 2022]

§ 63.7522 Can I use emissions averaging to comply with this subpart?

(a) As an alternative to meeting the requirements of § 63.7500 for PM (or TSM), HCl, or mercury on a boiler or process heater-specific basis, if you have more than one existing boiler or process heater in any subcategories located at your facility, you may demonstrate compliance by emissions averaging, if your averaged emissions are not more than 90 percent of the applicable emission limit, according to the procedures in this section. You may not include new boilers or process heaters in an emissions average.

(b) For a group of two or more existing boilers or process heaters in the same subcategory that each vent to a separate stack, you may average PM (or TSM), HCl, or mercury emissions among existing units to demonstrate compliance with the limits in Table 2 or 15 to this subpart as specified in paragraphs (b)(1) through (3) of this section, if you satisfy the requirements in paragraphs (c) through (g) of this section.

(1) You may average units using a CEMS or PM CPMS for demonstrating compliance.

(2) For mercury and HCl, averaging is allowed as follows:

(i) You may average among units in any of the solid fuel subcategories.

(ii) You may average among units in any of the liquid fuel subcategories.

(iii) You may average among units in a subcategory of units designed to burn gas 2 (other) fuels.

(iv) You may not average across the units designed to burn liquid, units designed to burn solid fuel, and units designed to burn gas 2 (other) subcategories.

(3) For PM (or TSM), averaging is only allowed between units within each of the following subcategories and you may not average across subcategories:

(i) Units designed to burn coal/solid fossil fuel.

(ii) Stokers/sloped grate/other units designed to burn kiln dried biomass/bio-based solids.

(iii) Stokers/sloped grate/other units designed to burn wet biomass/bio-based solids.

(iv) Fluidized bed units designed to burn biomass/bio-based solid.

(v) Suspension burners designed to burn biomass/bio-based solid.

(vi) Dutch ovens/pile burners designed to burn biomass/bio-based solid.

(vii) Fuel Cells designed to burn biomass/bio-based solid.

(viii) Hybrid suspension/grate burners designed to burn wet biomass/bio-based solid.

(ix) Units designed to burn heavy liquid fuel.

(x) Units designed to burn light liquid fuel.

(xi) Units designed to burn liquid fuel that are non-continental units.

(xii) Units designed to burn gas 2 (other) gases.

(c) For each existing boiler or process heater in the averaging group, the emission rate achieved during the initial compliance test for the HAP being averaged must not exceed the emission level that was being achieved on April 1, 2013 or the control technology employed during the initial compliance test must not be less effective for the HAP being averaged than the control technology employed on April 1, 2013.

(d) The averaged emissions rate from the existing boilers and process heaters participating in the emissions averaging option must not exceed 90 percent of the limits in Table 2 or 15 to this subpart at all times the affected units are subject to numeric emission limits following the compliance date specified in § 63.7495.

(e) You must demonstrate initial compliance according to paragraph (e)(1) or (2) of this section using the maximum rated heat input capacity or maximum steam generation capacity of each unit and the results of the initial performance tests or fuel analysis.

(1) You must use Equation 1a or 1b or 1c to this paragraph (e)(1) to demonstrate that the PM (or TSM), HCl, or mercury emissions from all existing units participating in the emissions averaging option for that pollutant do not exceed the emission limits in Table 2 or 15 to this subpart. Use Equation 1a if you are complying with the emission limits on a heat input basis, use Equation 1b if you are complying with the emission limits on a steam generation (output) basis, and use Equation 1c if you are complying with the emission limits on a electric generation (output) basis.

Equation 1a to paragraph (e)(1)

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times Hm) \div \sum_{i=1}^{n} Hm \qquad \text{(Eq. 1a)}$$

Where:

AveWeightedEmissions = Average weighted emissions for PM (or TSM), HCl, or mercury, in units of pounds per million Btu of heat input.

Er = Emission rate (as determined during the initial compliance demonstration) of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per million Btu of heat input. Determine the emission rate for PM (or TSM), HCl, or mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM using the applicable equation in § 63.7530(c).

Hm = Maximum rated heat input capacity of unit, i, in units of million Btu per hour.

n = Number of units participating in the emissions averaging option.

1.1 = Required discount factor.

Equation 1b to paragraph (e)(1)

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times So) \div \sum_{i=1}^{n} So \qquad \text{(Eq. 1b)}$$

Where:

AveWeightedEmissions = Average weighted emissions for PM (or TSM), HCl, or mercury, in units of pounds per million Btu of steam output.

Er = Emission rate (as determined during the initial compliance demonstration) of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per million Btu of steam output. Determine the emission rate for PM (or TSM), HCl, or

mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM using the applicable equation in § 63.7530(c). If you are taking credit for energy conservation measures from a unit according to § 63.7533, use the adjusted emission level for that unit, Eadj, determined according to § 63.7533 for that unit.

So = Maximum steam output capacity of unit, i, in units of million Btu per hour, as defined in § 63.7575.

n = Number of units participating in the emissions averaging option.

1.1 = Required discount factor.

Equation 1c to paragraph (e)(1)

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times Eo) \div \sum_{i=1}^{n} Eo \qquad \text{(Eq. 1c)}$$

Where:

AveWeightedEmissions = Average weighted emissions for PM (or TSM), HCl, or mercury, in units of pounds per megawatt hour.

Er = Emission rate (as determined during the initial compliance demonstration) of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per megawatt hour. Determine the emission rate for PM (or TSM), HCl, or mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM using the applicable equation in § 63.7530(c). If you are taking credit for energy conservation measures from a unit according to § 63.7533, use the adjusted emission level for that unit, Eadj, determined according to § 63.7533 for that unit.

Eo = Maximum electric generating output capacity of unit, i, in units of megawatt hour, as defined in § 63.7575.

n = Number of units participating in the emissions averaging option.

1.1 = Required discount factor.

(2) If you are not capable of determining the maximum rated heat input capacity of one or more boilers that generate steam, you may use Equation 2 to this paragraph (e)(2) as an alternative to using Equation 1a of paragraph (e)(1) of this section to demonstrate that the PM (or TSM), HCl, or mercury emissions from all existing units participating in the emissions averaging option do not exceed the emission limits for that pollutant in Table 2 or 15 to this subpart that are in pounds per million Btu of heat input.

Equation 2 to paragraph (e)(2)

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times Sm \times Cfi) \div \sum_{i=1}^{n} (Sm \times Cfi) \qquad \text{(Eq. 2)}$$

Where:

AveWeightedEmissions = Average weighted emission level for PM (or TSM), HCl, or mercury, in units of pounds per million Btu of heat input.

Er = Emission rate (as determined during the most recent compliance demonstration) of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per million Btu of heat input. Determine the emission rate for PM (or TSM), HCl, or mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM using the applicable equation in § 63.7530(c).

Sm = Maximum steam generation capacity by unit, i, in units of pounds per hour.

Cfi = Conversion factor, calculated from the most recent compliance test, in units of million Btu of heat input per pounds of steam generated for unit, i.

1.1 = Required discount factor.

(f) After the initial compliance demonstration described in paragraph (e) of this section, you must demonstrate compliance on a monthly basis determined at the end of every month (12 times per year) according to paragraphs (f)(1) through (3) of this section. The first monthly period begins on the compliance date specified in § 63.7495. If the affected source elects to collect monthly data for up the 11 months preceding the first monthly period, these additional data points can be used to compute the 12-month rolling average in paragraph (f)(3) of this section.

(1) For each calendar month, you must use Equation 3a or 3b or 3c of this section to calculate the average weighted emission rate for that month. Use Equation 3a and the actual heat input for the month for each existing unit participating in the emissions averaging option if you are complying with emission limits on a heat input basis. Use Equation 3b and the actual steam generation for the month if you are complying with the emission limits on a steam generation (output) basis. Use Equation 3c and the actual electrical generation for the month if you are complying with the emission limits on an electrical generation (output) basis.

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times Hb) \div \sum_{i=1}^{n} Hb \qquad \text{(Eq. 3a)}$$

Where:

AveWeightedEmissions = Average weighted emission level for PM (or TSM), HCl, or mercury, in units of pounds per million Btu of heat input, for that calendar month.

Er = Emission rate (as determined during the most recent compliance demonstration) of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per million Btu of heat input. Determine the emission rate for PM (or TSM), HCl, or mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM according to Table 6 to this subpart.

Hb = The heat input for that calendar month to unit, i, in units of million Btu.

n = Number of units participating in the emissions averaging option.

1.1 = Required discount factor.

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times So) \div \sum_{i=1}^{n} So \qquad \text{(Eq. 3b)}$$

Where:

AveWeightedEmissions = Average weighted emission level for PM (or TSM), HCl, or mercury, in units of pounds per million Btu of steam output, for that calendar month.

Er = Emission rate (as determined during the most recent compliance demonstration) of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per million Btu of steam output. Determine the emission rate for PM (or TSM), HCl, or mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM according to Table 6 to this subpart. If you are taking credit for energy conservation measures from a unit according to § 63.7533, use the adjusted emission level for that unit, E_{adj}, determined according to § 63.7533 for that unit.

So = The steam output for that calendar month from unit, i, in units of million Btu, as defined in § 63.7575.

n = Number of units participating in the emissions averaging option.

1.1 = Required discount factor.

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times Eo) \div \sum_{i=1}^{n} Eo \quad \text{(Eq. 3c)}$$

Where:

AveWeightedEmissions = Average weighted emission level for PM (or TSM), HCl, or mercury, in units of pounds per megawatt hour, for that calendar month.

Er = Emission rate (as determined during the most recent compliance demonstration) of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per megawatt hour. Determine the emission rate for PM (or TSM), HCl, or mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM according to Table 6 to this subpart. If you are taking credit for energy conservation measures from a unit according to § 63.7533, use the adjusted emission level for that unit, E_{adj}, determined according to § 63.7533 for that unit.

Eo = The electric generating output for that calendar month from unit, i, in units of megawatt hour, as defined in § 63.7575.

n = Number of units participating in the emissions averaging option.

1.1 = Required discount factor.

(2) If you are not capable of monitoring heat input, you may use Equation 4 of this section as an alternative to using Equation 3a of this section to calculate the average weighted emission rate using the actual steam generation from the boilers participating in the emissions averaging option.

$$AveWeightedEmissions = 1.1 \times \sum_{i=1}^{n} (Er \times Sa \times Cfi) \div \sum_{i=1}^{n} (Sa \times Cfi) \quad \text{(Eq. 4)}$$

Where:

AveWeightedEmissions = average weighted emission level for PM (or TSM), HCl, or mercury, in units of pounds per million Btu of heat input for that calendar month.

Er = Emission rate (as determined during the most recent compliance demonstration of PM (or TSM), HCl, or mercury from unit, i, in units of pounds per million Btu of heat input. Determine the emission rate for PM (or TSM), HCl, or mercury by performance testing according to Table 5 to this subpart, or by fuel analysis for HCl or mercury or TSM according to Table 6 to this subpart.

Sa = Actual steam generation for that calendar month by boiler, i, in units of pounds.

Cfi = Conversion factor, as calculated during the most recent compliance test, in units of million Btu of heat input per pounds of steam generated for boiler, i.

1.1 = Required discount factor.

(3) Until 12 monthly weighted average emission rates have been accumulated, calculate and report only the average weighted emission rate determined under paragraph (f)(1) or (2) of this section for each calendar month.

After 12 monthly weighted average emission rates have been accumulated, for each subsequent calendar month, use Equation 5 of this section to calculate the 12-month rolling average of the monthly weighted average emission rates for the current calendar month and the previous 11 calendar months.

$$Eavg = \sum_{i=1}^{n} ERi \div 12 \quad (\text{Eq. } 5)$$

Where:

Eavg = 12-month rolling average emission rate, (pounds per million Btu heat input)

ERi = Monthly weighted average, for calendar month "i" (pounds per million Btu heat input), as calculated by paragraph (f)(1) or (2) of this section.

(g) You must develop, and submit upon request to the applicable Administrator for review and approval, an implementation plan for emission averaging according to the following procedures and requirements in paragraphs (g)(1) through (4) of this section.

(1) If requested, you must submit the implementation plan no later than 180 days before the date that the facility intends to demonstrate compliance using the emission averaging option.

(2) You must include the information contained in paragraphs (g)(2)(i) through (vii) of this section in your implementation plan for all emission sources included in an emissions average:

(i) The identification of all existing boilers and process heaters in the averaging group, including for each either the applicable HAP emission level or the control technology installed as of January 31, 2013 and the date on which you are requesting emission averaging to commence;

(ii) The process parameter (heat input or steam generated) that will be monitored for each averaging group;

(iii) The specific control technology or pollution prevention measure to be used for each emission boiler or process heater in the averaging group and the date of its installation or application. If the pollution prevention measure reduces or eliminates emissions from multiple boilers or process heaters, the owner or operator must identify each boiler or process heater;

(iv) The test plan for the measurement of PM (or TSM), HCl, or mercury emissions in accordance with the requirements in § 63.7520;

(v) The operating parameters to be monitored for each control system or device consistent with § 63.7500 and Table 4, and a description of how the operating limits will be determined;

(vi) If you request to monitor an alternative operating parameter pursuant to § 63.7525, you must also include:

(A) A description of the parameter(s) to be monitored and an explanation of the criteria used to select the parameter(s); and

(B) A description of the methods and procedures that will be used to demonstrate that the parameter indicates proper operation of the control device; the frequency and content of monitoring, reporting, and recordkeeping requirements; and a demonstration, to the satisfaction of the Administrator, that the proposed monitoring frequency is sufficient to represent control device operating conditions; and

(vii) A demonstration that compliance with each of the applicable emission limit(s) will be achieved under representative operating load conditions. Following each compliance demonstration and until the next

compliance demonstration, you must comply with the operating limit for operating load conditions specified in Table 4 to this subpart.

(3) If submitted upon request, the Administrator shall review and approve or disapprove the plan according to the following criteria:

(i) Whether the content of the plan includes all of the information specified in paragraph (g)(2) of this section; and

(ii) Whether the plan presents sufficient information to determine that compliance will be achieved and maintained.

(4) The applicable Administrator shall not approve an emission averaging implementation plan containing any of the following provisions:

(i) Any averaging between emissions of differing pollutants or between differing sources; or

(ii) The inclusion of any emission source other than an existing unit in the same subcategories.

(h) For a group of two or more existing affected units, each of which vents through a single common stack, you may average PM (or TSM), HCl, or mercury emissions to demonstrate compliance with the limits for that pollutant in Table 2 or 15 to this subpart if you satisfy the requirements in paragraph (i) or (j) of this section.

(i) For a group of two or more existing units in the same subcategory, each of which vents through a common emissions control system to a common stack, that does not receive emissions from units in other subcategories or categories, you may treat such averaging group as a single existing unit for purposes of this subpart and comply with the requirements of this subpart as if the group were a single unit.

(j) For all other groups of units subject to the common stack requirements of paragraph (h) of this section, including situations where the exhaust of affected units are each individually controlled and then sent to a common stack, the owner or operator may elect to:

(1) Conduct performance tests according to procedures specified in § 63.7520 in the common stack if affected units from other subcategories vent to the common stack. The emission limits that the group must comply with are determined by the use of Equation 6 to this paragraph (j)(1).

Equation 6 to paragraph (j)(1)

$$En = \sum_{i=1}^{n} (ELi \times Hi) \div \sum_{i=1}^{n} Hi \qquad \text{(Eq. 6)}$$

Where:

En = HAP emission limit, pounds per million British thermal units (lb/MMBtu) or parts per million (ppm).

ELi = Appropriate emission limit from Table 2 or 15 to this subpart for unit i, in units of lb/MMBtu or ppm.

Hi = Heat input from unit i, MMBtu.

(2) Conduct performance tests according to procedures specified in § 63.7520 in the common stack. If affected units and non-affected units vent to the common stack, the non-affected units must be shut down or vented to a different stack during the performance test unless the facility determines to demonstrate compliance with the non-affected units venting to the stack; and

(3) Meet the applicable operating limit specified in § 63.7540 and Table 8 to this subpart for each emissions control system (except that, if each unit venting to the common stack has an applicable opacity operating limit, then a single continuous opacity monitoring system may be located in the common stack instead of in each duct to the common stack).

(k) The common stack of a group of two or more existing boilers or process heaters in the same subcategories subject to paragraph (h) of this section may be treated as a separate stack for purposes of paragraph (b) of this section and included in an emissions averaging group subject to paragraph (b) of this section.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7168, Jan. 31, 2013; 80 FR 72809, Nov. 20, 2015; 87 FR 60843, Oct. 6, 2022]

§ 63.7525 What are my monitoring, installation, operation, and maintenance requirements?

(a) If your boiler or process heater is subject to a CO emission limit in Table 1 or 2 or Tables 11 through 15 to this subpart, you must install, operate, and maintain an oxygen analyzer system, as defined in § 63.7575, or install, certify, operate and maintain continuous emission monitoring systems for CO and oxygen (O_2) (or carbon dioxide (CO_2)) according to the procedures in paragraphs (a)(1) through (6) of this section.

(1) Install the CO CEMS including an O_2 (or CO_2) analyzer by the compliance date specified in § 63.7495. The CO and O_2 (or CO_2) levels shall be monitored at the same location at the outlet of the boiler or process heater. An owner or operator may determine compliance with the CO emissions limit using a CO_2 analyzer as the diluent monitor. If a CO_2 analyzer is used as the diluent monitor, EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, for the fuel type(s) being burned in the unit and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to calculate the emissions corrected to 3 percent O_2 using the measured CO_2 percentage, and must also take into account that the 3 percent oxygen correction is to be done on a dry basis. The equations used to calculate the emissions, must also account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. The methodology used to calculate the CO emissions and the methodology used to account for any CO_2 being added to, or removed from the emissions gas stream shall be detailed and approved in the site-specific monitoring plan developed according to § 63.7505(d).

(2) To demonstrate compliance with the applicable alternative CO CEMS emission standard listed in Table 1 or 2 or Tables 11 through 15 to this subpart, you must install, certify, operate, and maintain a CO CEMS and an oxygen analyzer according to the applicable procedures under Performance Specification 4, 4A, or 4B at 40 CFR part 60, appendix B; part 75 of this chapter (if an CO_2 analyzer is used); the site-specific monitoring plan developed according to § 63.7505(d); and the requirements in § 63.7540(a)(8) and this paragraph (a). Any boiler or process heater that has a CO CEMS that is compliant with Performance Specification 4, 4A, or 4B at 40 CFR part 60, appendix B, a site-specific monitoring plan developed according to § 63.7505(d), and the requirements in § 63.7540(a)(8) and this paragraph (a) must use the CO CEMS to comply with the applicable alternative CO CEMS emission standard listed in Table 1 or 2 or Tables 11 through 15 to this subpart.

(i) You must conduct a performance evaluation of each CO CEMS according to the requirements in § 63.8(e) and according to Performance Specification 4, 4A, or 4B at 40 CFR part 60, appendix B.

(ii) During each relative accuracy test run of the CO CEMS, you must collect emission data for CO concurrently using both the CO CEMS and Method 10, 10A, or 10B at 40 CFR part 60, appendix A-4. The relative accuracy testing must be conducted at representative operating conditions.

(iii) You must follow the quality assurance procedures (e.g., quarterly accuracy determinations and daily calibration drift tests) of Procedure 1 of appendix F to part 60. The measurement span value of the CO CEMS must be two times the applicable CO emission limit, expressed as a concentration.

(iv) Any CO CEMS that does not comply with this paragraph (a) cannot be used to meet any requirement in this subpart to demonstrate compliance with a CO emission limit listed in Table 1 or 2 or Tables 11 through 15 to this subpart.

(v) For a new unit, complete the initial performance evaluation no later than July 30, 2013, or 180 days after the date of initial startup, whichever is later. For an existing unit, complete the initial performance evaluation no later than July 29, 2016.

(vi) When CO_2 is used to correct CO emissions and CO_2 is measured on a wet basis, if needed, correct for moisture as follows: Install, operate, maintain, and quality assure a continuous moisture monitoring system for measuring and recording the moisture content of the flue gases, in order to correct the measured hourly volumetric flow rates for moisture when calculating CO concentrations. The following continuous moisture monitoring systems are acceptable: a continuous moisture sensor; an oxygen analyzer (or analyzers) capable of measuring O_2 both on a wet basis and on a dry basis; or a stack temperature sensor and a moisture look-up table, *i.e.,* a psychrometric chart (for saturated gas streams following wet scrubbers or other demonstrably saturated gas streams, only). The moisture monitoring system shall include as a component the automated data acquisition and handling system (DAHS) for recording and reporting both the raw data (e.g., hourly average wet-and dry-basis O_2 values) and the hourly average values of the stack gas moisture content derived from those data. When a moisture look-up table is used, the moisture monitoring system shall be represented as a single component, the certified DAHS, in the monitoring plan for the unit or common stack.

(3) Complete a minimum of one cycle of CO and oxygen (or CO_2) CEMS operation (sampling, analyzing, and data recording) for each successive 15-minute period. Collect CO and oxygen (or CO_2) data concurrently. Collect at least four CO and oxygen (or CO_2) CEMS data values representing the four 15-minute periods in an hour, or at least two 15-minute data values during an hour when CEMS calibration, quality assurance, or maintenance activities are being performed.

(4) Reduce the CO CEMS data as specified in § 63.8(g)(2).

(5) Calculate one-hour arithmetic averages, corrected to 3 percent oxygen (or corrected to an CO_2 percentage determined to be equivalent to 3 percent oxygen) from each hour of CO CEMS data in parts per million CO concentration. The one-hour arithmetic averages required shall be used to calculate the 30-day or 10-day rolling average emissions. Use Equation 19-19 in section 12.4.1 of Method 19 of 40 CFR part 60, appendix A-7 for calculating the average CO concentration from the hourly values.

(6) For purposes of collecting CO data, operate the CO CEMS as specified in § 63.7535(b). You must use all the data collected during all periods in calculating data averages and assessing compliance, except that you must exclude certain data as specified in § 63.7535(c). Periods when CO data are unavailable may constitute monitoring deviations as specified in § 63.7535(d).

(7) Operate an oxygen trim system with the oxygen level set no lower than the lowest hourly average oxygen concentration measured during the most recent CO performance test as the operating limit for oxygen according to Table 7 to this subpart.

(b) If your boiler or process heater is in the unit designed to burn coal/solid fossil fuel subcategory or the unit designed to burn heavy liquid subcategory and has an average annual heat input rate greater than 250 MMBtu per hour from solid fossil fuel and/or heavy liquid, and you demonstrate compliance with the PM limit instead of the alternative TSM limit, you must install, maintain, and operate a PM CPMS monitoring emissions discharged to the atmosphere and record the output of the system as specified in paragraphs (b)(1) through (4) of this section. As an alternative to use of a PM CPMS to demonstrate compliance with the PM limit, you may choose to use a PM CEMS. If you choose to use a PM CEMS to demonstrate compliance with the PM limit instead of the alternative TSM limit, you must install, certify, maintain, and operate a PM CEMS monitoring emissions discharged to the atmosphere and record the output of the system as specified in paragraph (b)(5) through (8) of this section. For other boilers or process heaters, you may elect to use a PM CPMS or PM CEMS operated in accordance with this section in lieu of using other CMS for monitoring PM compliance (*e.g.,* bag leak detectors, ESP secondary power, and PM scrubber pressure). Owners of boilers and process heaters who elect to comply with the alternative TSM limit are not required to install a PM CPMS.

(1) Install, operate, and maintain your PM CPMS according to the procedures in your approved site-specific monitoring plan developed in accordance with § 63.7505(d), the requirements in § 63.7540(a)(9), and paragraphs (b)(1)(i) through (iii) of this section.

(i) The operating principle of the PM CPMS must be based on in-stack or extractive light scatter, light scintillation, beta attenuation, or mass accumulation detection of PM in the exhaust gas or representative exhaust gas sample. The reportable measurement output from the PM CPMS must be expressed as milliamps.

(ii) The PM CPMS must have a cycle time (i.e., period required to complete sampling, measurement, and reporting for each measurement) no longer than 60 minutes.

(iii) The PM CPMS must have a documented detection limit of 0.5 milligram per actual cubic meter, or less.

(2) For a new unit, complete the initial performance evaluation no later than July 30, 2013, or 180 days after the date of initial startup, whichever is later. For an existing unit, complete the initial performance evaluation no later than July 29, 2016.

(3) Collect PM CPMS hourly average output data for all boiler or process heater operating hours except as indicated in § 63.7535(a) through (d). Express the PM CPMS output as milliamps.

(4) Calculate the arithmetic 30-day rolling average of all of the hourly average PM CPMS output data collected during all boiler or process heater operating hours (milliamps).

(5) Install, certify, operate, and maintain your PM CEMS according to the procedures in your approved site-specific monitoring plan developed in accordance with § 63.7505(d), the requirements in § 63.7540(a)(9), and paragraphs (b)(5)(i) through (iv) of this section.

(i) You shall conduct a performance evaluation of the PM CEMS according to the applicable requirements of § 60.8(e), and Performance Specification 11 at 40 CFR part 60, appendix B of this chapter.

(ii) During each PM correlation testing run of the CEMS required by Performance Specification 11 at 40 CFR part 60, appendix B of this chapter, you shall collect PM and oxygen (or carbon dioxide) data concurrently (or within a 30-to 60-minute period) by both the CEMS and conducting performance tests using Method 5 at 40 CFR part 60, appendix A-3 or Method 17 at 40 CFR part 60, appendix A-6 of this chapter.

(iii) You shall perform quarterly accuracy determinations and daily calibration drift tests in accordance with Procedure 2 at 40 CFR part 60, appendix F of this chapter. You must perform Relative Response Audits annually and perform Response Correlation Audits every 3 years.

(iv) Within 60 days after the date of completing each CEMS relative accuracy test audit or performance test conducted to demonstrate compliance with this subpart, you must submit the relative accuracy test audit data and performance test data to the EPA by successfully submitting the data electronically into the EPA's Central Data Exchange by using the Electronic Reporting Tool (see *http://www.epa.gov/ttn/chief/ert/erttool.html/*).

(6) For a new unit, complete the initial performance evaluation no later than July 30, 2013, or 180 days after the date of initial startup, whichever is later. For an existing unit, complete the initial performance evaluation no later than July 29, 2016.

(7) Collect PM CEMS hourly average output data for all boiler or process heater operating hours except as indicated in § 63.7535(a) through (d).

(8) Calculate the arithmetic 30-day rolling average of all of the hourly average PM CEMS output data collected during all boiler or process heater operating hours.

(c) If you have an applicable opacity operating limit in this rule, and are not otherwise required or elect to install and operate a PM CPMS, PM CEMS, or a bag leak detection system, you must install, operate, certify and maintain each COMS according to the procedures in paragraphs (c)(1) through (7) of this section by the compliance date specified in § 63.7495.

(1) Each COMS must be installed, operated, and maintained according to Performance Specification 1 at appendix B to part 60 of this chapter.

(2) You must conduct a performance evaluation of each COMS according to the requirements in § 63.8(e) and according to Performance Specification 1 at appendix B to part 60 of this chapter.

(3) As specified in § 63.8(c)(4)(i), each COMS must complete a minimum of one cycle of sampling and analyzing for each successive 10-second period and one cycle of data recording for each successive 6-minute period.

(4) The COMS data must be reduced as specified in § 63.8(g)(2).

(5) You must include in your site-specific monitoring plan procedures and acceptance criteria for operating and maintaining each COMS according to the requirements in § 63.8(d). At a minimum, the monitoring plan must include a daily calibration drift assessment, a quarterly performance audit, and an annual zero alignment audit of each COMS.

(6) You must operate and maintain each COMS according to the requirements in the monitoring plan and the requirements of § 63.8(e). You must identify periods the COMS is out of control including any periods that the COMS fails to pass a daily calibration drift assessment, a quarterly performance audit, or an annual zero alignment audit. Any 6-minute period for which the monitoring system is out of control and data are not available for a required calculation constitutes a deviation from the monitoring requirements.

(7) You must determine and record all the 6-minute averages (and daily block averages as applicable) collected for periods during which the COMS is not out of control.

(d) If you have an operating limit that requires the use of a CMS other than a PM CPMS or COMS, you must install, operate, and maintain each CMS according to the procedures in paragraphs (d)(1) through (5) of this section by the compliance date specified in § 63.7495.

(1) The CPMS must complete a minimum of one cycle of operation every 15-minutes. You must have a minimum of four successive cycles of operation, one representing each of the four 15-minute periods in an hour, to have a valid hour of data.

(2) You must operate the monitoring system as specified in § 63.7535(b), and comply with the data calculation requirements specified in § 63.7535(c).

(3) Any 15-minute period for which the monitoring system is out-of-control and data are not available for a required calculation constitutes a deviation from the monitoring requirements. Other situations that constitute a monitoring deviation are specified in § 63.7535(d).

(4) You must determine the 30-day rolling average of all recorded readings, except as provided in § 63.7535(c).

(5) You must record the results of each inspection, calibration, and validation check.

(e) If you have an operating limit that requires the use of a flow monitoring system, you must meet the requirements in paragraphs (d) and (e)(1) through (4) of this section.

(1) You must install the flow sensor and other necessary equipment in a position that provides a representative flow.

(2) You must use a flow sensor with a measurement sensitivity of no greater than 2 percent of the design flow rate.

(3) You must minimize, consistent with good engineering practices, the effects of swirling flow or abnormal velocity distributions due to upstream and downstream disturbances.

(4) You must conduct a flow monitoring system performance evaluation in accordance with your monitoring plan at the time of each performance test but no less frequently than annually.

(f) If you have an operating limit that requires the use of a pressure monitoring system, you must meet the requirements in paragraphs (d) and (f)(1) through (6) of this section.

(1) Install the pressure sensor(s) in a position that provides a representative measurement of the pressure (*e.g.*, PM scrubber pressure drop).

(2) Minimize or eliminate pulsating pressure, vibration, and internal and external corrosion consistent with good engineering practices.

(3) Use a pressure sensor with a minimum tolerance of 1.27 centimeters of water or a minimum tolerance of 1 percent of the pressure monitoring system operating range, whichever is less.

(4) Perform checks at least once each process operating day to ensure pressure measurements are not obstructed (*e.g.*, check for pressure tap pluggage daily).

(5) Conduct a performance evaluation of the pressure monitoring system in accordance with your monitoring plan at the time of each performance test but no less frequently than annually.

(6) If at any time the measured pressure exceeds the manufacturer's specified maximum operating pressure range, conduct a performance evaluation of the pressure monitoring system in accordance with your monitoring plan and confirm that the pressure monitoring system continues to meet the performance requirements in you monitoring plan. Alternatively, install and verify the operation of a new pressure sensor.

(g) If you have an operating limit that requires a pH monitoring system, you must meet the requirements in paragraphs (d) and (g)(1) through (4) of this section.

(1) Install the pH sensor in a position that provides a representative measurement of scrubber effluent pH.

(2) Ensure the sample is properly mixed and representative of the fluid to be measured.

(3) Calibrate the pH monitoring system in accordance with your monitoring plan and according to the manufacturer's instructions. Clean the pH probe at least once each process operating day. Maintain on-site documentation that your calibration frequency is sufficient to maintain the specified accuracy of your device.

(4) Conduct a performance evaluation (including a two-point calibration with one of the two buffer solutions having a pH within 1 of the pH of the operating limit) of the pH monitoring system in accordance with your monitoring plan at the time of each performance test but no less frequently than annually.

(h) If you have an operating limit that requires a secondary electric power monitoring system for an electrostatic precipitator (ESP) operated with a wet scrubber, you must meet the requirements in paragraphs (h)(1) and (2) of this section.

(1) Install sensors to measure (secondary) voltage and current to the precipitator collection plates.

(2) Conduct a performance evaluation of the electric power monitoring system in accordance with your monitoring plan at the time of each performance test but no less frequently than annually.

(i) If you have an operating limit that requires the use of a monitoring system to measure sorbent injection rate (e.g., weigh belt, weigh hopper, or hopper flow measurement device), you must meet the requirements in paragraphs (d) and (i)(1) through (2) of this section.

(1) Install the system in a position(s) that provides a representative measurement of the total sorbent injection rate.

(2) Conduct a performance evaluation of the sorbent injection rate monitoring system in accordance with your monitoring plan at the time of each performance test but no less frequently than annually.

(j) If you are not required to use a PM CPMS and elect to use a fabric filter bag leak detection system to comply with the requirements of this subpart, you must install, calibrate, maintain, and continuously operate the bag leak detection system as specified in paragraphs (j)(1) through (6) of this section.

(1) You must install a bag leak detection sensor(s) in a position(s) that will be representative of the relative or absolute PM loadings for each exhaust stack, roof vent, or compartment (e.g., for a positive pressure fabric filter) of the fabric filter.

(2) Conduct a performance evaluation of the bag leak detection system in accordance with your monitoring plan and consistent with the guidance provided in EPA-454/R-98-015 (incorporated by reference, see § 63.14).

(3) Use a bag leak detection system certified by the manufacturer to be capable of detecting PM emissions at concentrations of 10 milligrams per actual cubic meter or less.

(4) Use a bag leak detection system equipped with a device to record continuously the output signal from the sensor.

(5) Use a bag leak detection system equipped with a system that will alert plant operating personnel when an increase in relative PM emissions over a preset level is detected. The alert must easily recognizable (e.g., heard or seen) by plant operating personnel.

(6) Where multiple bag leak detectors are required, the system's instrumentation and alert may be shared among detectors.

(k) For each unit that meets the definition of limited-use boiler or process heater, you must keep fuel use records for the days the boiler or process heater was operating.

(l) For each unit for which you decide to demonstrate compliance with the mercury or HCl emissions limits in Table 1 or 2 or Tables 11 through 15 to this subpart by use of a CEMS for mercury or HCl, you must install, certify, maintain, and operate a CEMS measuring emissions discharged to the atmosphere and record the output of the system as specified in paragraphs (l)(1) through (8) of this section. For HCl, this option for an affected unit takes effect on the date of approval of a site-specific monitoring plan.

(1) Notify the Administrator one month before starting use of the CEMS, and notify the Administrator one month before stopping use of the CEMS.

(2) Each CEMS shall be installed, certified, operated, and maintained according to the requirements in § 63.7540(a)(14) for a mercury CEMS and § 63.7540(a)(15) for a HCl CEMS.

(3) For a new unit, you must complete the initial performance evaluation of the CEMS by the latest of the dates specified in paragraph (l)(3)(i) through (iii) of this section.

(i) No later than July 30, 2013.

(ii) No later 180 days after the date of initial startup.

(iii) No later 180 days after notifying the Administrator before starting to use the CEMS in place of performance testing or fuel analysis to demonstrate compliance.

(4) For an existing unit, you must complete the initial performance evaluation by the latter of the two dates specified in paragraph (l)(4)(i) and (ii) of this section.

(i) No later than July 29, 2016.

(ii) No later 180 days after notifying the Administrator before starting to use the CEMS in place of performance testing or fuel analysis to demonstrate compliance.

(5) Compliance with the applicable emissions limit shall be determined based on the 30-day rolling average of the hourly arithmetic average emissions rates using the continuous monitoring system outlet data. The 30-day rolling arithmetic average emission rate (lb/MMBtu) shall be calculated using the equations in EPA Reference Method 19 at 40 CFR part 60, appendix A-7, but substituting the mercury or HCl concentration for the pollutant concentrations normally used in Method 19.

(6) Collect CEMS hourly averages for all operating hours on a 30-day rolling average basis. Collect at least four CMS data values representing the four 15-minute periods in an hour, or at least two 15-minute data values during an hour when CMS calibration, quality assurance, or maintenance activities are being performed.

(7) The one-hour arithmetic averages required shall be expressed in lb/MMBtu and shall be used to calculate the boiler 30-day and 10-day rolling average emissions.

(8) You are allowed to substitute the use of the PM, mercury or HCl CEMS for the applicable fuel analysis, annual performance test, and operating limits specified in Table 4 to this subpart to demonstrate compliance with the PM, mercury or HCl emissions limit, and if you are using an acid gas wet scrubber or dry sorbent injection control technology to comply with the HCl emission limit, you are allowed to substitute the use of a sulfur dioxide (SO_2) CEMS for the applicable fuel analysis, annual performance test, and operating limits specified in Table 4 to this subpart to demonstrate compliance with HCl emissions limit.

(m) If your unit is subject to a HCl emission limit in Table 1 or 2 or Tables 11 through 15 to this subpart and you have an acid gas wet scrubber or dry sorbent injection control technology and you elect to use an SO_2 CEMS to demonstrate continuous compliance with the HCl emission limit, you must install the monitor at the outlet of the boiler or process heater, downstream of all emission control devices, and you must install, certify, operate, and maintain the CEMS according to either part 60 or part 75 of this chapter.

(1) The SO_2 CEMS must be installed by the compliance date specified in § 63.7495.

(2) For on-going quality assurance (QA), the SO_2 CEMS must meet either the applicable daily and quarterly requirements in Procedure 1 of appendix F of part 60 or the applicable daily, quarterly, and semiannual or annual requirements in sections 2.1 through 2.3 of appendix B to part 75 of this chapter, with the following addition: You must perform the linearity checks required in section 2.2 of appendix B to part 75 of this chapter if the SO_2 CEMS has a span value of 30 ppm or less.

(3) For a new unit, the initial performance evaluation shall be completed no later than July 30, 2013, or 180 days after the date of initial startup, whichever is later. For an existing unit, the initial performance evaluation shall be completed no later than July 29, 2016.

(4) For purposes of collecting SO_2 data, you must operate the SO_2 CEMS as specified in § 63.7535(b). You must use all the data collected during all periods in calculating data averages and assessing compliance, except that you must exclude certain data as specified in § 63.7535(c). Periods when SO_2 data are unavailable may constitute monitoring deviations as specified in § 63.7535(d).

(5) Collect CEMS hourly averages for all operating hours on a 30-day rolling average basis.

(6) Use only unadjusted, quality-assured SO_2 concentration values in the emissions calculations; do not apply bias adjustment factors to the part 75 SO_2 data and do not use part 75 substitute data values.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7171, Jan. 31, 2013; 80 FR 72810, Nov. 20, 2015; 87 FR 60844, Oct. 6, 2022]

§ 63.7530 How do I demonstrate initial compliance with the emission limitations, fuel specifications and work practice standards?

(a) You must demonstrate initial compliance with each emission limit that applies to you by conducting initial performance tests and fuel analyses and establishing operating limits, as applicable, according to § 63.7520, paragraphs (b) and (c) of this section, and Tables 5 and 7 to this subpart. The requirement to conduct a fuel analysis is not applicable for units that burn a single type of fuel, as specified by § 63.7510(a)(2). If applicable, you must also install, operate, and maintain all applicable CMS (including CEMS, COMS, and CPMS) according to § 63.7525.

(b) If you demonstrate compliance through performance stack testing, you must establish each site-specific operating limit in Table 4 to this subpart that applies to you according to the requirements in § 63.7520, Table 7 to this subpart, and paragraph (b)(4) of this section, as applicable. You must also conduct fuel analyses according to § 63.7521 and establish maximum fuel pollutant input levels according to paragraphs (b)(1) through (3) of this section, as applicable, and as specified in § 63.7510(a)(2). (Note that § 63.7510(a)(2) exempts certain fuels from the fuel analysis requirements.) However, if you switch fuel(s) and cannot show that the new fuel(s) does (do) not increase the chlorine, mercury, or TSM input into the unit through the results of fuel analysis, then you must repeat the performance test to demonstrate compliance while burning the new fuel(s).

(1) You must establish the maximum chlorine fuel input (Clinput) during the initial fuel analysis according to the procedures in paragraphs (b)(1)(i) through (iii) of this section.

(i) You must determine the fuel type or fuel mixture that you could burn in your boiler or process heater that has the highest content of chlorine.

(ii) During the fuel analysis for hydrogen chloride, you must determine the fraction of the total heat input for each fuel type burned (Qi) based on the fuel mixture that has the highest content of chlorine, and the average chlorine concentration of each fuel type burned (Ci).

(iii) You must establish a maximum chlorine input level using Equation 7 of this section.

$$Clinput = \sum_{i=1}^{n} (Ci \times Qi) \quad (\text{Eq. } 7)$$

Where:

Clinput = Maximum amount of chlorine entering the boiler or process heater through fuels burned in units of pounds per million Btu.

Ci = Arithmetic average concentration of chlorine in fuel type, i, analyzed according to § 63.7521, in units of pounds per million Btu.

Qi = Fraction of total heat input from fuel type, i, based on the fuel mixture that has the highest content of chlorine during the initial compliance test. If you do not burn multiple fuel types during the performance testing, it is not necessary to determine the value of this term. Insert a value of “1” for Qi. For continuous compliance demonstration, the actual fraction of the fuel burned during the month should be used.

n = Number of different fuel types burned in your boiler or process heater for the mixture that has the highest content of chlorine.

(2) You must establish the maximum mercury fuel input level (Mercuryinput) during the initial fuel analysis using the procedures in paragraphs (b)(2)(i) through (iii) of this section.

(i) You must determine the fuel type or fuel mixture that you could burn in your boiler or process heater that has the highest content of mercury.

(ii) During the compliance demonstration for mercury, you must determine the fraction of total heat input for each fuel burned (Qi) based on the fuel mixture that has the highest content of mercury, and the average mercury concentration of each fuel type burned (HGi).

(iii) You must establish a maximum mercury input level using Equation 8 of this section.

$$Mercuryinput = \sum_{i=1}^{n} (HGi \times Qi) \qquad \text{(Eq. 8)}$$

Where:

Mercuryinput = Maximum amount of mercury entering the boiler or process heater through fuels burned in units of pounds per million Btu.

HGi = Arithmetic average concentration of mercury in fuel type, i, analyzed according to § 63.7521, in units of pounds per million Btu.

Qi = Fraction of total heat input from fuel type, i, based on the fuel mixture that has the highest mercury content during the initial compliance test. If you do not burn multiple fuel types during the performance test, it is not necessary to determine the value of this term. Insert a value of “1” for Qi. For continuous compliance demonstration, the actual fraction of the fuel burned during the month should be used.

n = Number of different fuel types burned in your boiler or process heater for the mixture that has the highest content of mercury.

(3) If you opt to comply with the alternative TSM limit, you must establish the maximum TSM fuel input (TSMinput) for solid or liquid fuels during the initial fuel analysis according to the procedures in paragraphs (b)(3)(i) through (iii) of this section.

(i) You must determine the fuel type or fuel mixture that you could burn in your boiler or process heater that has the highest content of TSM.

(ii) During the fuel analysis for TSM, you must determine the fraction of the total heat input for each fuel type burned (Qi) based on the fuel mixture that has the highest content of TSM, and the average TSM concentration of each fuel type burned (TSMi).

(iii) You must establish a maximum TSM input level using Equation 9 of this section.

$$TSMinput = \sum_{i=1}^{n} (TSMi \times Qi) \qquad \text{(Eq. 9)}$$

Where:

TSMinput = Maximum amount of TSM entering the boiler or process heater through fuels burned in units of pounds per million Btu.

TSMi = Arithmetic average concentration of TSM in fuel type, i, analyzed according to § 63.7521, in units of pounds per million Btu.

Qi = Fraction of total heat input from fuel type, i, based on the fuel mixture that has the highest content of TSM during the initial compliance test. If you do not burn multiple fuel types during the performance testing, it is not necessary to

determine the value of this term. Insert a value of “1” for Qi. For continuous compliance demonstration, the actual fraction of the fuel burned during the month should be used.

n = Number of different fuel types burned in your boiler or process heater for the mixture that has the highest content of TSM.

(4) You must establish parameter operating limits according to paragraphs (b)(4)(i) through (ix) of this section. As indicated in Table 4 to this subpart, you are not required to establish and comply with the operating parameter limits when you are using a CEMS to monitor and demonstrate compliance with the applicable emission limit for that control device parameter.

(i) For a wet acid gas scrubber, you must establish the minimum scrubber effluent pH and liquid flow rate as defined in § 63.7575, as your operating limits during the performance test during which you demonstrate compliance with your applicable limit. If you use a wet scrubber and you conduct separate performance tests for HCl and mercury emissions, you must establish one set of minimum scrubber effluent pH, liquid flow rate, and pressure drop operating limits. The minimum scrubber effluent pH operating limit must be established during the HCl performance test. If you conduct multiple performance tests, you must set the minimum liquid flow rate operating limit at the higher of the minimum values established during the performance tests.

(ii) For any particulate control device (e.g., ESP, particulate wet scrubber, fabric filter) for which you use a PM CPMS, you must establish your PM CPMS operating limit and determine compliance with it according to paragraphs (b)(4)(ii)(A) through (F) of this section.

(A) Determine your operating limit as the average PM CPMS output value recorded during the most recent performance test run demonstrating compliance with the filterable PM emission limit or at the PM CPMS output value corresponding to 75 percent of the emission limit if your PM performance test demonstrates compliance below 75 percent of the emission limit. You must verify an existing or establish a new operating limit after each repeated performance test. You must repeat the performance test annually and reassess and adjust the site-specific operating limit in accordance with the results of the performance test.

(*1*) Your PM CPMS must provide a 4-20 milliamp output and the establishment of its relationship to manual reference method measurements must be determined in units of milliamps.

(*2*) Your PM CPMS operating range must be capable of reading PM concentrations from zero to a level equivalent to at least two times your allowable emission limit. If your PM CPMS is an auto-ranging instrument capable of multiple scales, the primary range of the instrument must be capable of reading PM concentration from zero to a level equivalent to two times your allowable emission limit.

(*3*) During the initial performance test or any such subsequent performance test that demonstrates compliance with the PM limit, record and average all milliamp output values from the PM CPMS for the periods corresponding to the compliance test runs (e.g., average all your PM CPMS output values for three corresponding 2-hour Method 5I test runs).

(B) If the average of your three PM performance test runs are below 75 percent of your PM emission limit, you must calculate an operating limit by establishing a relationship of PM CPMS signal to PM concentration using the PM CPMS instrument zero, the average PM CPMS values corresponding to the three compliance test runs, and the average PM concentration from the Method 5 or performance test with the procedures in paragraphs (b)(4)(ii)(B)(*1*) through (*4*) of this section.

(*1*) Determine your instrument zero output with one of the following procedures:

(*i*) Zero point data for *in-situ* instruments should be obtained by removing the instrument from the stack and monitoring ambient air on a test bench.

(*ii*) Zero point data for *extractive* instruments should be obtained by removing the extractive probe from the stack and drawing in clean ambient air.

(*iii*) The zero point may also be established by performing manual reference method measurements when the flue gas is free of PM emissions or contains very low PM concentrations (e.g., when your process is not operating, but the fans are operating or your source is combusting only natural gas) and plotting these with the compliance data to find the zero intercept.

(*iv*) If none of the steps in paragraphs (b)(4)(ii)(B)(*1*)(*i*) through (*iii*) of this section are possible, you must use a zero output value provided by the manufacturer.

(*2*) Determine your PM CPMS instrument average in milliamps, and the average of your corresponding three PM compliance test runs, using equation 10.

$$\bar{x} = \frac{1}{n}\sum_{t=1}^{n} X_1 \bar{y} = \frac{1}{n}\sum_{t=1}^{n} Y_1 \qquad \text{(Eq. 10)}$$

Where:

X_1 = the PM CPMS data points for the three runs constituting the performance test,

Y_1 = the PM concentration value for the three runs constituting the performance test, and

n = the number of data points.

(*3*) With your instrument zero expressed in milliamps, your three run average PM CPMS milliamp value, and your three run average PM concentration from your three compliance tests, determine a relationship of lb/MMBtu per milliamp with equation 11.

$$R = \frac{Y_1}{(X_1 - z)} \qquad \text{(Eq. 11)}$$

Where:

R = the relative lb/MMBtu per milliamp for your PM CPMS,

Y_1 = the three run average lb/MMBtu PM concentration,

X_1 = the three run average milliamp output from you PM CPMS, and

z = the milliamp equivalent of your instrument zero determined from (B)(i).

(*4*) Determine your source specific 30-day rolling average operating limit using the lb/MMBtu per milliamp value from Equation 11 in equation 12, below. This sets your operating limit at the PM CPMS output value corresponding to 75 percent of your emission limit.

$$O_l = z + \frac{0.75(L)}{R} \qquad \text{(Eq. 12)}$$

Where:

O_l = the operating limit for your PM CPMS on a 30-day rolling average, in milliamps.

L = your source emission limit expressed in lb/MMBtu,

z = your instrument zero in milliamps, determined from (B)(i), and

R = the relative lb/MMBtu per milliamp for your PM CPMS, from Equation 11.

(C) If the average of your three PM compliance test runs is at or above 75 percent of your PM emission limit you must determine your 30-day rolling average operating limit by averaging the PM CPMS milliamp output corresponding to your three PM performance test runs that demonstrate compliance with the emission limit using equation 13 and you must submit all compliance test and PM CPMS data according to the reporting requirements in paragraph (b)(4)(ii)(F) of this section.

$$O_h = \frac{1}{n}\sum_{t=1}^{n} X_1 \qquad \text{(Eq. 13)}$$

Where:

X_1 = the PM CPMS data points for all runs i,

n = the number of data points, and

O_h = your site specific operating limit, in milliamps.

(D) To determine continuous compliance, you must record the PM CPMS output data for all periods when the process is operating and the PM CPMS is not out-of-control. You must demonstrate continuous compliance by using all quality-assured hourly average data collected by the PM CPMS for all operating hours to calculate the arithmetic average operating parameter in units of the operating limit (milliamps) on a 30-day rolling average basis, updated at the end of each new operating hour. Use Equation 14 to determine the 30-day rolling average.

$$30-\text{day} = \frac{\sum_{i=1}^{n} Hpv}{n} \qquad \text{(Eq. 14)}$$

Where:

30-day = 30-day average.

Hpvi = is the hourly parameter value for hour i

n = is the number of valid hourly parameter values collected over the previous 30 operating days.

(E) Use EPA Method 5 of appendix A to part 60 of this chapter to determine PM emissions. For each performance test, conduct three separate runs under the conditions that exist when the affected source is operating at the highest load or capacity level reasonably expected to occur. Conduct each test run to collect a minimum sample volume specified in Table 1 or 2 or Tables 11 through 15 to this subpart, as applicable, for determining compliance with a new source limit or an existing source limit. Calculate the average of the results from three runs to determine compliance. You need not determine the PM collected in the impingers ("back half") of the Method 5 particulate sampling train to demonstrate compliance with the PM standards in this subpart. This shall not preclude the permitting authority from requiring a determination of the "back half" for other purposes.

(F) For PM performance test reports used to set a PM CPMS operating limit, the electronic submission of the test report must also include the make and model of the PM CPMS instrument, serial number of the instrument, analytical principle of the instrument (*e.g.* beta attenuation), span of the instruments primary analytical range, milliamp value equivalent to the instrument zero output, technique by which this zero value was determined, and the average milliamp signals corresponding to each PM compliance test run.

(iii) For a particulate wet scrubber, you must establish the minimum pressure drop and liquid flow rate as defined in § 63.7575, as your operating limits during the three-run performance test during which you demonstrate compliance with your applicable limit. If you use a wet scrubber and you conduct separate performance tests for PM and TSM emissions, you must establish one set of minimum scrubber liquid flow rate and pressure drop operating limits. If you conduct multiple performance tests, you must set the minimum liquid flow rate and pressure drop operating limits at the higher of the minimum values established during the performance tests.

(iv) For an electrostatic precipitator (ESP) operated with a wet scrubber, you must establish the minimum total secondary electric power input, as defined in § 63.7575, as your operating limit during the three-run performance test during which you demonstrate compliance with your applicable limit. (These operating limits do not apply to ESP that are operated as dry controls without a wet scrubber.)

(v) For a dry scrubber, you must establish the minimum sorbent injection rate for each sorbent, as defined in § 63.7575, as your operating limit during the three-run performance test during which you demonstrate compliance with your applicable limit.

(vi) For activated carbon injection, you must establish the minimum activated carbon injection rate, as defined in § 63.7575, as your operating limit during the three-run performance test during which you demonstrate compliance with your applicable limit.

(vii) The operating limit for boilers or process heaters with fabric filters that demonstrate continuous compliance through bag leak detection systems is that a bag leak detection system be installed according to the requirements in § 63.7525, and that each fabric filter must be operated such that the bag leak detection system alert is not activated more than 5 percent of the operating time during a 6-month period.

(viii) For a minimum oxygen level, if you conduct multiple performance tests, you must set the minimum oxygen level at the lower of the minimum values established during the performance tests.

(ix) The operating limit for boilers or process heaters that demonstrate continuous compliance with the HCl emission limit using a SO_2 CEMS is to install and operate the SO_2 according to the requirements in § 63.7525(m) establish a maximum SO_2 emission rate equal to the highest hourly average SO_2 measurement during the most recent three-run performance test for HCl.

(c) If you elect to demonstrate compliance with an applicable emission limit through fuel analysis, you must conduct fuel analyses according to § 63.7521 and follow the procedures in paragraphs (c)(1) through (5) of this section.

(1) If you burn more than one fuel type, you must determine the fuel mixture you could burn in your boiler or process heater that would result in the maximum emission rates of the pollutants that you elect to demonstrate compliance through fuel analysis.

(2) You must determine the 90th percentile confidence level fuel pollutant concentration of the composite samples analyzed for each fuel type using the one-sided t-statistic test described in Equation 15 of this section.

$$P90 = mean + (SD \times t) \qquad \text{(Eq. 15)}$$

Where:

P90 = 90th percentile confidence level pollutant concentration, in pounds per million Btu.

Mean = Arithmetic average of the fuel pollutant concentration in the fuel samples analyzed according to § 63.7521, in units of pounds per million Btu.

SD = Standard deviation of the mean of pollutant concentration in the fuel samples analyzed according to § 63.7521, in units of pounds per million Btu. SD is calculated as the sample standard deviation divided by the square root of the number of samples.

t = t distribution critical value for 90th percentile ($t_{0.1}$) probability for the appropriate degrees of freedom (number of samples minus one) as obtained from a t-Distribution Critical Value Table.

(3) To demonstrate compliance with the applicable emission limit for HCl, the HCl emission rate that you calculate for your boiler or process heater using Equation 16 of this section must not exceed the applicable emission limit for HCl.

$$HCl = \sum_{i=1}^{n} (Ci90 \times Qi \times 1.028) \qquad \text{(Eq. 16)}$$

Where:

HCl = HCl emission rate from the boiler or process heater in units of pounds per million Btu.

Ci90 = 90th percentile confidence level concentration of chlorine in fuel type, i, in units of pounds per million Btu as calculated according to Equation 15 of this section.

Qi = Fraction of total heat input from fuel type, i, based on the fuel mixture that has the highest content of chlorine. If you do not burn multiple fuel types, it is not necessary to determine the value of this term. Insert a value of “1” for Qi. For continuous compliance demonstration, the actual fraction of the fuel burned during the month should be used.

n = Number of different fuel types burned in your boiler or process heater for the mixture that has the highest content of chlorine.

1.028 = Molecular weight ratio of HCl to chlorine.

(4) To demonstrate compliance with the applicable emission limit for mercury, the mercury emission rate that you calculate for your boiler or process heater using Equation 17 of this section must not exceed the applicable emission limit for mercury.

$$Mercury = \sum_{i=1}^{n} (Hgi90 \times Qi) \qquad \text{(Eq. 17)}$$

Where:

Mercury = Mercury emission rate from the boiler or process heater in units of pounds per million Btu.

Hgi90 = 90th percentile confidence level concentration of mercury in fuel, i, in units of pounds per million Btu as calculated according to Equation 15 of this section.

Qi = Fraction of total heat input from fuel type, i, based on the fuel mixture that has the highest mercury content. If you do not burn multiple fuel types, it is not necessary to determine the value of this term. Insert a value of “1” for Qi. For continuous compliance demonstration, the actual fraction of the fuel burned during the month should be used.

n = Number of different fuel types burned in your boiler or process heater for the mixture that has the highest mercury content.

(5) To demonstrate compliance with the applicable emission limit for TSM for solid or liquid fuels, the TSM emission rate that you calculate for your boiler or process heater from solid fuels using Equation 18 of this section must not exceed the applicable emission limit for TSM.

$$Metals = \sum_{i=1}^{n} (TSM90i \times Qi) \qquad \text{(Eq. 18)}$$

Where:

Metals = TSM emission rate from the boiler or process heater in units of pounds per million Btu.

TSMi90 = 90th percentile confidence level concentration of TSM in fuel, i, in units of pounds per million Btu as calculated according to Equation 15 of this section.

Qi = Fraction of total heat input from fuel type, i, based on the fuel mixture that has the highest TSM content. If you do not burn multiple fuel types, it is not necessary to determine the value of this term. Insert a value of “1” for Qi. For continuous compliance demonstration, the actual fraction of the fuel burned during the month should be used.

n = Number of different fuel types burned in your boiler or process heater for the mixture that has the highest TSM content.

(d) [Reserved]

(e) You must include with the Notification of Compliance Status a signed certification that either the energy assessment was completed according to Table 3 to this subpart, and that the assessment is an accurate depiction of your facility at the time of the assessment, or that the maximum number of on-site technical hours specified in the definition of energy assessment applicable to the facility has been expended.

(f) You must submit the Notification of Compliance Status containing the results of the initial compliance demonstration according to the requirements in § 63.7545(e).

(g) If you elect to demonstrate that a gaseous fuel meets the specifications of another gas 1 fuel as defined in § 63.7575, you must conduct an initial fuel specification analyses according to § 63.7521(f) through (i) and according to the frequency listed in § 63.7540(c) and maintain records of the results of the testing as outlined in § 63.7555(g). For samples where the initial mercury specification has not been exceeded, you will include a signed certification with the Notification of Compliance Status that the initial fuel specification test meets the gas specification outlined in the definition of other gas 1 fuels.

(h) If you own or operate a unit subject to emission limits in Table 1 or 2 or Tables 11 through 15 to this subpart, you must meet the work practice standard according to Table 3 to this subpart. During startup and shutdown, you must only follow the work practice standards according to items 5 and 6 of Table 3 to this subpart.

(i) If you opt to comply with the alternative SO_2 CEMS operating limit in Tables 4 and 8 to this subpart, you may do so only if your affected boiler or process heater:

(1) Has a system using wet scrubber or dry sorbent injection and SO_2 CEMS installed on the unit; and

(2) At all times, you operate the wet scrubber or dry sorbent injection for acid gas control on the unit consistent with § 63.7500(a)(3); and

(3) You establish a unit-specific maximum SO_2 operating limit by collecting the maximum hourly SO_2 emission rate on the SO_2 CEMS during the paired 3-run test for HCl. The maximum SO_2 operating limit is equal to the highest hourly average SO_2 concentration measured during the HCl performance test.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7174, Jan. 31, 2013; 80 FR 72811, Nov. 20, 2015; 87 FR 60845, Oct. 6, 2022]

§ 63.7533 Can I use efficiency credits earned from implementation of energy conservation measures to comply with this subpart?

(a) If you elect to comply with the alternative equivalent output-based emission limits, instead of the heat input-based limits listed in Table 2 or 15 to this subpart, and you want to take credit for implementing energy conservation measures identified in an energy assessment, you may demonstrate compliance using efficiency credits according to the procedures in this section. You may use this compliance approach for an existing affected boiler for demonstrating initial compliance according to § 63.7522(e) and for demonstrating monthly compliance according to § 63.7522(f). Owners or operators using this compliance approach must establish an emissions benchmark, calculate and document the efficiency credits, develop an Implementation Plan, comply with the general reporting requirements, and apply the efficiency credit according to the procedures in paragraphs (b) through (f) of this section. You cannot use this compliance approach for a new or reconstructed affected boiler. Additional guidance from the Department of Energy on efficiency credits is available at *https://www.epa.gov/ttn/atw/boiler/boilerpg.html*.

(b) For each existing affected boiler for which you intend to apply emissions credits, establish a benchmark from which emission reduction credits may be generated by determining the actual annual fuel heat input to the affected boiler before initiation of an energy conservation activity to reduce energy demand (*i.e.,* fuel usage) according to paragraphs (b)(1) through (4) of this section. The benchmark shall be expressed in trillion Btu per year heat input.

(1) The benchmark from which efficiency credits may be generated shall be determined by using the most representative, accurate, and reliable process available for the source. The benchmark shall be established for a one-year period before the date that an energy demand reduction occurs, unless it can be demonstrated that a different time period is more representative of historical operations.

(2) Determine the starting point from which to measure progress. Inventory all fuel purchased and generated on-site (off-gases, residues) in physical units (MMBtu, million cubic feet, etc.).

(3) Document all uses of energy from the affected boiler. Use the most recent data available.

(4) Collect non-energy related facility and operational data to normalize, if necessary, the benchmark to current operations, such as building size, operating hours, etc. If possible, use actual data that are current and timely rather than estimated data.

(c) Efficiency credits can be generated if the energy conservation measures were implemented after January 1, 2008 and if sufficient information is available to determine the appropriate value of credits.

(1) The following emission points cannot be used to generate efficiency credits:

(i) Energy conservation measures implemented on or before January 1, 2008, unless the level of energy demand reduction is increased after January 1, 2008, in which case credit will be allowed only for change in demand reduction achieved after January 1, 2008.

(ii) Efficiency credits on shut-down boilers. Boilers that are shut down cannot be used to generate credits unless the facility provides documentation linking the permanent shutdown to energy conservation measures identified in the energy assessment. In this case, the bench established for the affected boiler to which the credits from the shutdown will be applied must be revised to include the benchmark established for the shutdown boiler.

(2) For all points included in calculating emissions credits, the owner or operator shall:

(i) Calculate annual credits for all energy demand points. Use Equation 19 to calculate credits. Energy conservation measures that meet the criteria of paragraph (c)(1) of this section shall not be included, except as specified in paragraph (c)(1)(i) of this section.

(3) Credits are generated by the difference between the benchmark that is established for each affected boiler, and the actual energy demand reductions from energy conservation measures implemented after January 1, 2008. Credits shall be calculated using Equation 19 of this section as follows:

(i) The overall equation for calculating credits is:

$$ECredits = \left(\sum_{i=1}^{n} EIS_{iactual} \right) \div EI_{baseline} \qquad \text{(Eq. 19)}$$

Where:

ECredits = Energy Input Savings for all energy conservation measures implemented for an affected boiler, expressed as a decimal fraction of the baseline energy input.

$EIS_{iactual}$ = Energy Input Savings for each energy conservation measure, i, implemented for an affected boiler, million Btu per year.

$EI_{baseline}$ = Energy Input baseline for the affected boiler, million Btu per year.

n = Number of energy conservation measures included in the efficiency credit for the affected boiler.

(ii) [Reserved]

(d) The owner or operator shall develop, and submit for approval upon request by the Administrator, an Implementation Plan containing all of the information required in this paragraph for all boilers to be included in an efficiency credit approach. The Implementation Plan shall identify all existing affected boilers to be included in applying the efficiency credits. The Implementation Plan shall include a description of the energy conservation measures implemented and the energy savings generated from each measure and an explanation of the criteria

used for determining that savings. If requested, you must submit the implementation plan for efficiency credits to the Administrator for review and approval no later than 180 days before the date on which the facility intends to demonstrate compliance using the efficiency credit approach.

(e) The emissions rate as calculated using Equation 20 in paragraph (f) of this section from each existing boiler participating in the efficiency credit option must be in compliance with the limits in Table 2 or 15 to this subpart at all times the affected unit is subject to numeric emission limits, following the compliance date specified in § 63.7495.

(f) You must use Equation 20 of this paragraph (f) to demonstrate initial compliance by demonstrating that the emissions from the affected boiler participating in the efficiency credit compliance approach do not exceed the emission limits in Table 2 or 15 to this subpart.

Equation 20 to paragraph (f)

$$E_{adj} = E_m \times (1 - ECredits) \quad \text{(Eq. 20)}$$

Where:

E_{adj} = Emission level adjusted by applying the efficiency credits earned, lb per million Btu steam output (or lb per MWh) for the affected boiler.

E_m = Emissions measured during the performance test, lb per million Btu steam output (or lb per MWh) for the affected boiler.

ECredits = Efficiency credits from Equation 19 to paragraph (c)(3)(i) of this section for the affected boiler.

(g) As part of each compliance report submitted as required under § 63.7550, you must include documentation that the energy conservation measures implemented continue to generate the credit for use in demonstrating compliance with the emission limits.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7178, Jan. 31, 2013; 80 FR 72812, Nov. 20, 2015; 87 FR 60845, Oct. 6, 2022]

Continuous Compliance Requirements

§ 63.7535 Is there a minimum amount of monitoring data I must obtain?

(a) You must monitor and collect data according to this section and the site-specific monitoring plan required by § 63.7505(d).

(b) You must operate the monitoring system and collect data at all required intervals at all times that each boiler or process heater is operating and compliance is required, except for periods of monitoring system malfunctions or out of control periods (see § 63.8(c)(7) of this part), and required monitoring system quality assurance or control activities, including, as applicable, calibration checks, required zero and span adjustments, and scheduled CMS maintenance as defined in your site-specific monitoring plan. A monitoring system malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring system to provide valid data. Monitoring system failures that are caused in part by poor maintenance or careless operation are not malfunctions. You are required to complete monitoring system repairs in response to monitoring system malfunctions or out-of-control periods and to return the monitoring system to operation as expeditiously as practicable.

(c) You may not use data recorded during periods of startup and shutdown, monitoring system malfunctions or out-of-control periods, repairs associated with monitoring system malfunctions or out-of-control periods, or required monitoring system quality assurance or control activities in data averages and calculations used to report emissions or operating levels. You must record and make available upon request results of CMS performance audits and dates and duration of periods when the CMS is out of control to completion of the corrective actions necessary to return the CMS to operation consistent with your site-specific monitoring plan. You must use all the data collected during all other periods in assessing compliance and the operation of the control device and associated control system.

(d) Except for periods of monitoring system malfunctions, repairs associated with monitoring system malfunctions, and required monitoring system quality assurance or quality control activities (including, as applicable, system accuracy audits, calibration checks, and required zero and span adjustments), failure to collect required data is a deviation of the monitoring requirements. In calculating monitoring results, do not use any data collected during periods of startup and shutdown, when the monitoring system is out of control as specified in your site-specific monitoring plan, while conducting repairs associated with periods when the monitoring system is out of control, or while conducting required monitoring system quality assurance or quality control activities. You must calculate monitoring results using all other monitoring data collected while the process is operating. You must report all periods when the monitoring system is out of control in your semi-annual report.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7179, Jan. 31, 2013; 80 FR 72812, Nov. 20, 2015]

§ 63.7540 How do I demonstrate continuous compliance with the emission limitations, fuel specifications and work practice standards?

(a) You must demonstrate continuous compliance with each emission limit in Tables 1 and 2 or 11 through 15 to this subpart, the work practice standards in Table 3 to this subpart, and the operating limits in Table 4 to this subpart that applies to you according to the methods specified in Table 8 to this subpart and paragraphs (a)(1) through (19) of this section.

(1) Following the date on which the initial compliance demonstration is completed or is required to be completed under §§ 63.7 and 63.7510, whichever date comes first, operation above the established maximum or below the established minimum operating limits shall constitute a deviation of established operating limits listed in Table 4 of this subpart except during performance tests conducted to determine compliance with the emission limits or to establish new operating limits. Operating limits must be confirmed or reestablished during performance tests.

(2) As specified in § 63.7555(d), you must keep records of the type and amount of all fuels burned in each boiler or process heater during the reporting period to demonstrate that all fuel types and mixtures of fuels burned would result in either of the following:

(i) Equal to or lower emissions of HCl, mercury, and TSM than the applicable emission limit for each pollutant, if you demonstrate compliance through fuel analysis.

(ii) Equal to or lower fuel input of chlorine, mercury, and TSM than the maximum values calculated during the last performance test, if you demonstrate compliance through performance testing.

(3) If you demonstrate compliance with an applicable HCl emission limit through fuel analysis for a solid or liquid fuel and you plan to burn a new type of solid or liquid fuel, you must recalculate the HCl emission rate using Equation 16 of § 63.7530 according to paragraphs (a)(3)(i) through (iii) of this section. You are not required to conduct fuel analyses for the fuels described in § 63.7510(a)(2)(i) through (iii). You may exclude the fuels described in § 63.7510(a)(2)(i) through (iii) when recalculating the HCl emission rate.

(i) You must determine the chlorine concentration for any new fuel type in units of pounds per million Btu, based on supplier data or your own fuel analysis, according to the provisions in your site-specific fuel analysis plan developed according to § 63.7521(b).

(ii) You must determine the new mixture of fuels that will have the highest content of chlorine.

(iii) Recalculate the HCl emission rate from your boiler or process heater under these new conditions using Equation 16 of § 63.7530. The recalculated HCl emission rate must be less than the applicable emission limit.

(4) If you demonstrate compliance with an applicable HCl emission limit through performance testing and you plan to burn a new type of fuel or a new mixture of fuels, you must recalculate the maximum chlorine input using Equation 7 of § 63.7530. If the results of recalculating the maximum chlorine input using Equation 7 of § 63.7530 are greater than the maximum chlorine input level established during the previous performance test, then you must conduct a new performance test within 60 days of burning the new fuel type or fuel mixture according to the procedures in § 63.7520 to demonstrate that the HCl emissions do not exceed the emission limit. You must also establish new operating limits based on this performance test according to the procedures in § 63.7530(b). In recalculating the maximum chlorine input and establishing the new operating limits, you are not required to conduct fuel analyses for and include the fuels described in § 63.7510(a)(2)(i) through (iii).

(5) If you demonstrate compliance with an applicable mercury emission limit through fuel analysis, and you plan to burn a new type of fuel, you must recalculate the mercury emission rate using Equation 17 of § 63.7530 according to the procedures specified in paragraphs (a)(5)(i) through (iii) of this section. You are not required to conduct fuel analyses for the fuels described in § 63.7510(a)(2)(i) through (iii). You may exclude the fuels described in § 63.7510(a)(2)(i) through (iii) when recalculating the mercury emission rate.

(i) You must determine the mercury concentration for any new fuel type in units of pounds per million Btu, based on supplier data or your own fuel analysis, according to the provisions in your site-specific fuel analysis plan developed according to § 63.7521(b).

(ii) You must determine the new mixture of fuels that will have the highest content of mercury.

(iii) Recalculate the mercury emission rate from your boiler or process heater under these new conditions using Equation 17 of § 63.7530. The recalculated mercury emission rate must be less than the applicable emission limit.

(6) If you demonstrate compliance with an applicable mercury emission limit through performance testing, and you plan to burn a new type of fuel or a new mixture of fuels, you must recalculate the maximum mercury input using Equation 8 of § 63.7530. If the results of recalculating the maximum mercury input using Equation 8 of § 63.7530 are higher than the maximum mercury input level established during the previous performance test, then you must conduct a new performance test within 60 days of burning the new fuel type or fuel mixture according to the procedures in § 63.7520 to demonstrate that the mercury emissions do not exceed the emission limit. You must also establish new operating limits based on this performance test according to the procedures in § 63.7530(b). You are not required to conduct fuel analyses for the fuels described in § 63.7510(a)(2)(i) through (iii). You may exclude the fuels described in § 63.7510(a)(2)(i) through (iii) when recalculating the mercury emission rate.

(7) If your unit is controlled with a fabric filter, and you demonstrate continuous compliance using a bag leak detection system, you must initiate corrective action within 1 hour of a bag leak detection system alert and complete corrective actions as soon as practical, and operate and maintain the fabric filter system such that the periods which would cause an alert are no more than 5 percent of the operating time during a 6-month period. You must also keep records of the date, time, and duration of each alert, the time corrective action was initiated and completed, and a brief description of the cause of the alert and the corrective action taken. You must also record the percent of the operating time during each 6-month period that the conditions exist for an alert. In calculating this operating time percentage, if inspection of the fabric filter demonstrates that no corrective action is required, no alert time is counted. If corrective action is required, each alert shall be counted as a minimum of 1 hour. If you take longer than 1 hour to initiate corrective action, the alert time shall be counted as the actual amount of time taken to initiate corrective action.

(8) To demonstrate compliance with the applicable alternative CO CEMS emission limit listed in Table 1 or 2 or Tables 11 through 15 to this subpart, you must meet the requirements in paragraphs (a)(8)(i) through (iv) of this section.

(i) Continuously monitor CO according to §§ 63.7525(a) and 63.7535.

(ii) Maintain a CO emission level below or at your applicable alternative CO CEMS-based standard in Table 1 or 2 or Tables 11 through 15 to this subpart at all times the affected unit is subject to numeric emission limits.

(iii) Keep records of CO levels according to § 63.7555(b).

(iv) You must record and make available upon request results of CO CEMS performance audits, dates and duration of periods when the CO CEMS is out of control to completion of the corrective actions necessary to return the CO CEMS to operation consistent with your site-specific monitoring plan.

(9) The owner or operator of a boiler or process heater using a PM CPMS or a PM CEMS to meet requirements of this subpart shall install, certify (PM CEMS only), operate, and maintain the PM CPMS or PM CEMS in accordance with your site-specific monitoring plan as required in § 63.7505(d).

(10) If your boiler or process heater has a heat input capacity of 10 million Btu per hour or greater, you must conduct an annual tune-up of the boiler or process heater to demonstrate continuous compliance as specified in paragraphs (a)(10)(i) through (vi) of this section. You must conduct the tune-up while burning the type of fuel (or fuels in case of units that routinely burn a mixture) that provided the majority of the heat input to the boiler or process heater over the 12 months prior to the tune-up. This frequency does not apply to limited-use boilers and process heaters, as defined in § 63.7575, or units with continuous oxygen trim systems that maintain an optimum air to fuel ratio.

(i) As applicable, inspect the burner, and clean or replace any components of the burner as necessary (you may perform the burner inspection any time prior to the tune-up or delay the burner inspection until the next scheduled unit shutdown). Units that produce electricity for sale may delay the burner inspection until the first outage, not to exceed 36 months from the previous inspection. At units where entry into a piece of process equipment or into a storage vessel is required to complete the tune-up inspections, inspections are required only during planned entries into the storage vessel or process equipment;

(ii) Inspect the flame pattern, as applicable, and adjust the burner as necessary to optimize the flame pattern. The adjustment should be consistent with the manufacturer's specifications, if available;

(iii) Inspect the system controlling the air-to-fuel ratio, as applicable, and ensure that it is correctly calibrated and functioning properly (you may delay the inspection until the next scheduled unit shutdown). Units that produce electricity for sale may delay the inspection until the first outage, not to exceed 36 months from the previous inspection;

(iv) Optimize total emissions of CO. This optimization should be consistent with the manufacturer's specifications, if available, and with any NO_X requirement to which the unit is subject;

(v) Measure the concentrations in the effluent stream of CO in parts per million, by volume, and oxygen in volume percent, before and after the adjustments are made (measurements may be either on a dry or wet basis, as long as it is the same basis before and after the adjustments are made). Measurements may be taken using a portable CO analyzer; and

(vi) Maintain on-site and submit, if requested by the Administrator, a report containing the information in paragraphs (a)(10)(vi)(A) through (C) of this section,

(A) The concentrations of CO in the effluent stream in parts per million by volume, and oxygen in volume percent, measured at high fire or typical operating load, before and after the tune-up of the boiler or process heater;

(B) A description of any corrective actions taken as a part of the tune-up; and

(C) The type and amount of fuel used over the 12 months prior to the tune-up, but only if the unit was physically and legally capable of using more than one type of fuel during that period. Units sharing a fuel meter may estimate the fuel used by each unit.

(11) If your boiler or process heater has a heat input capacity of less than 10 million Btu per hour (except as specified in paragraph (a)(12) of this section), you must conduct a biennial tune-up of the boiler or process heater as specified in paragraphs (a)(10)(i) through (vi) of this section to demonstrate continuous compliance.

(12) If your boiler or process heater has a continuous oxygen trim system that maintains an optimum air to fuel ratio, or a heat input capacity of less than or equal to 5 million Btu per hour and the unit is in the units designed to burn gas 1; units designed to burn gas 2 (other); or units designed to burn light liquid subcategories, or meets the definition of limited-use boiler or process heater in § 63.7575, you must conduct a tune-up of the boiler or process heater every 5 years as specified in paragraphs (a)(10)(i) through (vi) of this section to demonstrate continuous compliance. You may delay the burner inspection specified in paragraph (a)(10)(i) of this section until the next scheduled or unscheduled unit shutdown, but you must inspect each burner at least once every 72 months. If an oxygen trim system is utilized on a unit without emission standards to reduce the tune-up frequency to once every 5 years, set the oxygen level no lower than the oxygen concentration measured during the most recent tune-up.

(13) If the unit is not operating on the required date for a tune-up, the tune-up must be conducted within 30 calendar days of startup.

(14) If you are using a CEMS measuring mercury emissions to meet requirements of this subpart you must install, certify, operate, and maintain the mercury CEMS as specified in paragraphs (a)(14)(i) and (ii) of this section.

(i) Operate the mercury CEMS in accordance with performance specification 12A of 40 CFR part 60, appendix B or operate a sorbent trap based integrated monitor in accordance with performance specification 12B of 40 CFR part 60, appendix B. The duration of the performance test must be 30 operating days if you specified a 30 operating day basis in § 63.7545(e)(2)(iii) for mercury CEMS or it must be 720 hours if you specified a 720 hour basis in § 63.7545(e)(2)(iii) for mercury CEMS. For each day in which the unit operates, you must obtain hourly mercury concentration data, and stack gas volumetric flow rate data.

(ii) If you are using a mercury CEMS, you must install, operate, calibrate, and maintain an instrument for continuously measuring and recording the mercury mass emissions rate to the atmosphere according to the requirements of performance specifications 6 and 12A of 40 CFR part 60, appendix B, and quality assurance procedure 6 of 40 CFR part 60, appendix F.

(15) If you are using a CEMS to measure HCl emissions to meet requirements of this subpart, you must install, certify, operate, and maintain the HCl CEMS as specified in paragraphs (a)(15)(i) and (ii) of this section. This option for an affected unit takes effect on the date of approval of a site-specific monitoring plan.

(i) Operate the continuous emissions monitoring system in accordance with the applicable performance specification in 40 CFR part 60, appendix B. The duration of the performance test must be 30 operating days if you specified a 30 operating day basis in § 63.7545(e)(2)(iii) for HCl CEMS or it must be 720 hours if you specified a 720 hour basis in § 63.7545(e)(2)(iii) for HCl CEMS. For each day in which the unit operates, you must obtain hourly HCl concentration data, and stack gas volumetric flow rate data.

(ii) If you are using a HCl CEMS, you must install, operate, calibrate, and maintain an instrument for continuously measuring and recording the HCl mass emissions rate to the atmosphere according to the requirements of the applicable performance specification of 40 CFR part 60, appendix B, and the quality assurance procedures of 40 CFR part 60, appendix F.

(16) If you demonstrate compliance with an applicable TSM emission limit through performance testing, and you plan to burn a new type of fuel or a new mixture of fuels, you must recalculate the maximum TSM input using Equation 9 of § 63.7530. If the results of recalculating the maximum TSM input using Equation 9 of § 63.7530 are higher than the maximum total selected input level established during the previous performance test, then you must conduct a new performance test within 60 days of burning the new fuel type or fuel mixture according to the procedures in § 63.7520 to demonstrate that the TSM emissions do not exceed the emission limit. You must also establish new operating limits based on this performance test according to the procedures in § 63.7530(b). You are not required to conduct fuel analyses for the fuels described in § 63.7510(a)(2)(i) through (iii). You may exclude the fuels described in § 63.7510(a)(2)(i) through (iii) when recalculating the TSM emission rate.

(17) If you demonstrate compliance with an applicable TSM emission limit through fuel analysis for solid or liquid fuels, and you plan to burn a new type of fuel, you must recalculate the TSM emission rate using Equation 18 of § 63.7530 according to the procedures specified in paragraphs (a)(5)(i) through (iii) of this section. You are not required to conduct fuel analyses for the fuels described in § 63.7510(a)(2)(i) through (iii). You may exclude the fuels described in § 63.7510(a)(2)(i) through (iii) when recalculating the TSM emission rate.

(i) You must determine the TSM concentration for any new fuel type in units of pounds per million Btu, based on supplier data or your own fuel analysis, according to the provisions in your site-specific fuel analysis plan developed according to § 63.7521(b).

(ii) You must determine the new mixture of fuels that will have the highest content of TSM.

(iii) Recalculate the TSM emission rate from your boiler or process heater under these new conditions using Equation 18 of § 63.7530. The recalculated TSM emission rate must be less than the applicable emission limit.

(18) If you demonstrate continuous PM emissions compliance with a PM CPMS you will use a PM CPMS to establish a site-specific operating limit corresponding to the results of the performance test demonstrating compliance with the PM limit. You will conduct your performance test using the test method criteria in Table 5 of this subpart. You will use the PM CPMS to demonstrate continuous compliance with this operating limit. You must repeat the performance test annually and reassess and adjust the site-specific operating limit in accordance with the results of the performance test.

(i) To determine continuous compliance, you must record the PM CPMS output data for all periods when the process is operating and the PM CPMS is not out-of-control. You must demonstrate continuous compliance by using all quality-assured hourly average data collected by the PM CPMS for all operating hours to calculate the arithmetic average operating parameter in units of the operating limit (milliamps) on a 30-day rolling average basis.

(ii) For any deviation of the 30-day rolling PM CPMS average value from the established operating parameter limit, you must:

(A) Within 48 hours of the deviation, visually inspect the air pollution control device (APCD);

(B) If inspection of the APCD identifies the cause of the deviation, take corrective action as soon as possible and return the PM CPMS measurement to within the established value; and

(C) Within 30 days of the deviation or at the time of the annual compliance test, whichever comes first, conduct a PM emissions compliance test to determine compliance with the PM emissions limit and to verify or re-establish the CPMS operating limit. You are not required to conduct additional testing for any deviations that occur between the time of the original deviation and the PM emissions compliance test required under this paragraph.

(iii) PM CPMS deviations from the operating limit leading to more than four required performance tests in a 12-month operating period constitute a separate violation of this subpart.

(19) If you choose to comply with the PM filterable emissions limit by using PM CEMS you must install, certify, operate, and maintain a PM CEMS and record the output of the PM CEMS as specified in paragraphs (a)(19)(i) through (vii) of this section. The compliance limit will be expressed as a 30-day rolling average of the numerical emissions limit value applicable for your unit in Table 1 or 2 or Tables 11 through 15 to this subpart.

(i) Install and certify your PM CEMS according to the procedures and requirements in Performance Specification 11 - Specifications and Test Procedures for Particulate Matter Continuous Emission Monitoring Systems at Stationary Sources in Appendix B to part 60 of this chapter, using test criteria outlined in Table V of this rule. The reportable measurement output from the PM CEMS must be expressed in units of the applicable emissions limit (e.g., lb/MMBtu, lb/MWh).

(ii) Operate and maintain your PM CEMS according to the procedures and requirements in Procedure 2 - Quality Assurance Requirements for Particulate Matter Continuous Emission Monitoring Systems at Stationary Sources in Appendix F to part 60 of this chapter.

(A) You must conduct the relative response audit (RRA) for your PM CEMS at least once annually.

(B) You must conduct the relative correlation audit (RCA) for your PM CEMS at least once every 3 years.

(iii) Collect PM CEMS hourly average output data for all boiler operating hours except as indicated in paragraph (v) of this section.

(iv) Calculate the arithmetic 30-day rolling average of all of the hourly average PM CEMS output data collected during all nonexempt boiler or process heater operating hours.

(v) You must collect data using the PM CEMS at all times the unit is operating and at the intervals specified this paragraph (a), except for periods of monitoring system malfunctions, repairs associated with monitoring system malfunctions, and required monitoring system quality assurance or quality control activities.

(vi) You must use all the data collected during all boiler or process heater operating hours in assessing the compliance with your operating limit except:

(A) Any data collected during monitoring system malfunctions, repairs associated with monitoring system malfunctions, or required monitoring system quality assurance or control activities conducted during monitoring system malfunctions in calculations and report any such periods in your annual deviation report;

(B) Any data collected during periods when the monitoring system is out of control as specified in your site-specific monitoring plan, repairs associated with periods when the monitoring system is out of control, or required monitoring system quality assurance or control activities conducted during out of control periods in calculations used to report emissions or operating levels and report any such periods in your annual deviation report;

(C) Any data recorded during periods of startup or shutdown.

(vii) You must record and make available upon request results of PM CEMS system performance audits, dates and duration of periods when the PM CEMS is out of control to completion of the corrective actions necessary to return the PM CEMS to operation consistent with your site-specific monitoring plan.

(b) You must report each instance in which you did not meet each emission limit and operating limit in Tables 1 through 4 or 11 through 15 to this subpart that apply to you. These instances are deviations from the emission limits or operating limits, respectively, in this subpart. These deviations must be reported according to the requirements in § 63.7550.

(c) If you elected to demonstrate that the unit meets the specification for mercury for the unit designed to burn gas 1 subcategory, you must follow the sampling frequency specified in paragraphs (c)(1) through (4) of this section and conduct this sampling according to the procedures in § 63.7521(f) through (i).

(1) If the initial mercury constituents in the gaseous fuels are measured to be equal to or less than half of the mercury specification as defined in § 63.7575, you do not need to conduct further sampling.

(2) If the initial mercury constituents are greater than half but equal to or less than 75 percent of the mercury specification as defined in § 63.7575, you will conduct semi-annual sampling. If 6 consecutive semi-annual fuel analyses demonstrate 50 percent or less of the mercury specification, you do not need to conduct further sampling. If any semi-annual sample exceeds 75 percent of the mercury specification, you must return to monthly sampling for that fuel, until 12 months of fuel analyses again are less than 75 percent of the compliance level.

(3) If the initial mercury constituents are greater than 75 percent of the mercury specification as defined in § 63.7575, you will conduct monthly sampling. If 12 consecutive monthly fuel analyses demonstrate 75 percent or less of the mercury specification, you may decrease the fuel analysis frequency to semi-annual for that fuel.

(4) If the initial sample exceeds the mercury specification as defined in § 63.7575, each affected boiler or process heater combusting this fuel is not part of the unit designed to burn gas 1 subcategory and must be in compliance with the emission and operating limits for the appropriate subcategory. You may elect to conduct additional monthly sampling while complying with these emissions and operating limits to demonstrate that the fuel qualifies as another gas 1 fuel. If 12 consecutive monthly fuel analyses samples are at or below the mercury specification as defined in § 63.7575, each affected boiler or process heater combusting the fuel can elect to switch back into the unit designed to burn gas 1 subcategory until the mercury specification is exceeded.

(d) For startup and shutdown, you must meet the work practice standards according to items 5 and 6 of Table 3 of this subpart.

[78 FR 7179, Jan. 31, 2013, as amended at 80 FR 72813, Nov. 20, 2015; 87 FR 60846, Oct. 6, 2022]

§ 63.7541 How do I demonstrate continuous compliance under the emissions averaging provision?

(a) Following the compliance date, the owner or operator must demonstrate compliance with this subpart on a continuous basis by meeting the requirements of paragraphs (a)(1) through (5) of this section.

(1) For each calendar month, demonstrate compliance with the average weighted emissions limit for the existing units participating in the emissions averaging option as determined in § 63.7522(f) and (g).

(2) You must maintain the applicable opacity limit according to paragraphs (a)(2)(i) and (ii) of this section.

(i) For each existing unit participating in the emissions averaging option that is equipped with a dry control system and not vented to a common stack, maintain opacity at or below the applicable limit.

(ii) For each group of units participating in the emissions averaging option where each unit in the group is equipped with a dry control system and vented to a common stack that does not receive emissions from non-affected units, maintain opacity at or below the applicable limit at the common stack.

(3) For each existing unit participating in the emissions averaging option that is equipped with a wet scrubber, maintain the 30-day rolling average parameter values at or above the operating limits established during the most recent performance test.

(4) For each existing unit participating in the emissions averaging option that has an approved alternative operating parameter, maintain the 30-day rolling average parameter values consistent with the approved monitoring plan.

(5) For each existing unit participating in the emissions averaging option venting to a common stack configuration containing affected units from other subcategories, maintain the appropriate operating limit for each unit as specified in Table 4 to this subpart that applies.

(b) Any instance where the owner or operator fails to comply with the continuous monitoring requirements in paragraphs (a)(1) through (5) of this section is a deviation.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7182, Jan. 31, 2013]

Notification, Reports, and Records

§ 63.7545 What notifications must I submit and when?

(a) You must submit to the Administrator all of the notifications in §§ 63.7(b) and (c), 63.8(e), (f)(4) and (6), and 63.9(b) through (h) that apply to you by the dates specified.

(b) As specified in § 63.9(b)(2), if you startup your affected source before January 31, 2013, you must submit an Initial Notification not later than 120 days after January 31, 2013, or no later than 120 days after the source becomes subject to this subpart, whichever is later.

(c) As specified in § 63.9(b)(4) and (5), if you startup your new or reconstructed affected source on or after January 31, 2013, you must submit an Initial Notification not later than 15 days after the actual date of startup of the affected source. For a new or reconstructed affected source that has reclassified to major source status, you must submit an Initial Notification not later 120 days after the source becomes subject to this subpart.

(d) If you are required to conduct a performance test you must submit a Notification of Intent to conduct a performance test at least 60 days before the performance test is scheduled to begin.

(e) If you are required to conduct an initial compliance demonstration as specified in § 63.7530, you must submit a Notification of Compliance Status according to § 63.9(h)(2)(ii). For the initial compliance demonstration for each boiler or process heater, you must submit the Notification of Compliance Status, including all performance test results and fuel analyses, before the close of business on the 60th day following the completion of all performance test and/or other initial compliance demonstrations for all boiler or process heaters at the facility according to § 63.10(d)(2). The Notification of Compliance Status report must contain all the information specified in paragraphs (e)(1) through (8) of this section, as applicable. If you are not required to conduct an initial compliance demonstration as specified in § 63.7530(a), the Notification of Compliance Status must only contain the information specified in paragraphs (e)(1) and (8) of this section and must be submitted within 60 days of the compliance date specified at § 63.7495(b).

(1) A description of the affected unit(s) including identification of which subcategories the unit is in, the design heat input capacity of the unit, a description of the add-on controls used on the unit to comply with this subpart, description of the fuel(s) burned, including whether the fuel(s) were a secondary material determined by you or the EPA through a petition process to be a non-waste under § 241.3 of this chapter, whether the fuel(s) were a secondary material processed from discarded non-hazardous secondary materials within the meaning of § 241.3 of this chapter, and justification for the selection of fuel(s) burned during the compliance demonstration.

(2) Summary of the results of all performance tests and fuel analyses, and calculations conducted to demonstrate initial compliance including all established operating limits, and including:

(i) Identification of whether you are complying with the PM emission limit or the alternative TSM emission limit.

(ii) Identification of whether you are complying with the output-based emission limits or the heat input-based (i.e., lb/MMBtu or ppm) emission limits,

(iii) Identification of whether you are complying the arithmetic mean of all valid hours of data from the previous 30 operating days or of the previous 720 hours. This identification shall be specified separately for each operating parameter.

(3) A summary of the maximum CO emission levels recorded during the performance test to show that you have met any applicable emission standard in Table 1 or 2 or Tables 11 through 15 to this subpart, if you are not using a CO CEMS to demonstrate compliance.

(4) Identification of whether you plan to demonstrate compliance with each applicable emission limit through performance testing, a CEMS, or fuel analysis.

(5) Identification of whether you plan to demonstrate compliance by emissions averaging and identification of whether you plan to demonstrate compliance by using efficiency credits through energy conservation:

(i) If you plan to demonstrate compliance by emission averaging, report the emission level that was being achieved or the control technology employed on January 31, 2013.

(ii) [Reserved]

(6) A signed certification that you have met all applicable emission limits and work practice standards.

(7) If you had a deviation from any emission limit, work practice standard, or operating limit, you must also submit a description of the deviation, the duration of the deviation, and the corrective action taken in the Notification of Compliance Status report.

(8) In addition to the information required in § 63.9(h)(2), your notification of compliance status must include the following certification(s) of compliance, as applicable, and signed by a responsible official:

(i) “This facility completed the required initial tune-up for all of the boilers and process heaters covered by 40 CFR part 63 subpart DDDDD at this site according to the procedures in § 63.7540(a)(10)(i) through (vi).”

(ii) “This facility has had an energy assessment performed according to § 63.7530(e).”

(iii) Except for units that burn only natural gas, refinery gas, or other gas 1 fuel, or units that qualify for a statutory exemption as provided in section 129(g)(1) of the Clean Air Act, include the following: “No secondary materials that are solid waste were combusted in any affected unit.”

(f) If you operate a unit designed to burn natural gas, refinery gas, or other gas 1 fuels that is subject to this subpart, and you intend to use a fuel other than natural gas, refinery gas, gaseous fuel subject to another subpart of this part, part 60, 61, or 65, or other gas 1 fuel to fire the affected unit during a period of natural gas curtailment or supply interruption, as defined in § 63.7575, you must submit a notification of alternative fuel use within 48 hours of the declaration of each period of natural gas curtailment or supply interruption, as defined in § 63.7575. The notification must include the information specified in paragraphs (f)(1) through (5) of this section.

(1) Company name and address.

(2) Identification of the affected unit.

(3) Reason you are unable to use natural gas or equivalent fuel, including the date when the natural gas curtailment was declared or the natural gas supply interruption began.

(4) Type of alternative fuel that you intend to use.

(5) Dates when the alternative fuel use is expected to begin and end.

(g) If you intend to commence or recommence combustion of solid waste, you must provide 30 days prior notice of the date upon which you will commence or recommence combustion of solid waste. The notification must identify:

(1) The name of the owner or operator of the affected source, as defined in § 63.7490, the location of the source, the boiler(s) or process heater(s) that will commence burning solid waste, and the date of the notice.

(2) The currently applicable subcategories under this subpart.

(3) The date on which you became subject to the currently applicable emission limits.

(4) The date upon which you will commence combusting solid waste.

(h) If you have switched fuels or made a physical change to the boiler or process heater and the fuel switch or physical change resulted in the applicability of a different subcategory, you must provide notice of the date upon which you switched fuels or made the physical change within 30 days of the switch/change. The notification must identify:

(1) The name of the owner or operator of the affected source, as defined in § 63.7490, the location of the source, the boiler(s) and process heater(s) that have switched fuels, were physically changed, and the date of the notice.

(2) The currently applicable subcategory under this subpart.

(3) The date upon which the fuel switch or physical change occurred.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7183, Jan. 31, 2013; 80 FR 72814, Nov. 20, 2015; 85 FR 73913, Nov. 19, 2020; 85 FR 84262, Dec. 28, 2020; 87 FR 60846, Oct. 6, 2022]

§ 63.7550 What reports must I submit and when?

(a) You must submit each report in Table 9 to this subpart that applies to you.

(b) Unless the EPA Administrator has approved a different schedule for submission of reports under § 63.10(a), you must submit each report, according to paragraph (h) of this section, by the date in Table 9 to this subpart and according to the requirements in paragraphs (b)(1) through (4) of this section. For units that are subject only to a requirement to conduct subsequent annual, biennial, or 5-year tune-up according to § 63.7540(a)(10), (11), or (12), respectively, and not subject to emission limits or Table 4 operating limits, you may submit only an annual, biennial, or 5-year compliance report, as applicable, as specified in paragraphs (b)(1) through (4) of this section, instead of a semi-annual compliance report.

(1) The first semi-annual compliance report must cover the period beginning on the compliance date that is specified for each boiler or process heater in § 63.7495 and ending on June 30 or December 31, whichever date is the first date that occurs at least 180 days after the compliance date that is specified for your source in § 63.7495. If submitting an annual, biennial, or 5-year compliance report, the first compliance report must cover the period beginning on the compliance date that is specified for each boiler or process heater in § 63.7495 and ending on December 31 within 1, 2, or 5 years, as applicable, after the compliance date that is specified for your source in § 63.7495.

(2) The first semi-annual compliance report must be postmarked or submitted no later than July 31 or January 31, whichever date is the first date following the end of the first calendar half after the compliance date that is specified for each boiler or process heater in § 63.7495. The first annual, biennial, or 5-year compliance report must be postmarked or submitted no later than January 31.

(3) Each subsequent semi-annual compliance report must cover the semiannual reporting period from January 1 through June 30 or the semiannual reporting period from July 1 through December 31. Annual, biennial, and 5-year compliance reports must cover the applicable 1-, 2-, or 5-year periods from January 1 to December 31.

(4) Each subsequent semi-annual compliance report must be postmarked or submitted no later than July 31 or January 31, whichever date is the first date following the end of the semiannual reporting period. Annual, biennial, and 5-year compliance reports must be postmarked or submitted no later than January 31.

(5) For each affected source that is subject to permitting regulations pursuant to part 70 or part 71 of this chapter, and if the permitting authority has established dates for submitting semiannual reports pursuant to 70.6(a)(3)(iii)(A) or 71.6(a)(3)(iii)(A), you may submit the first and subsequent compliance reports according to the dates the permitting authority has established in the permit instead of according to the dates in paragraphs (b)(1) through (4) of this section.

(c) A compliance report must contain the following information depending on how the facility chooses to comply with the limits set in this rule.

(1) If the facility is subject to the requirements of a tune up you must submit a compliance report with the information in paragraphs (c)(5)(i) through (iii) of this section, (xiv) and (xvii) of this section, and paragraph (c)(5)(iv) of this section for limited-use boiler or process heater.

(2) If you are complying with the fuel analysis you must submit a compliance report with the information in paragraphs (c)(5)(i) through (iii), (vi), (x), (xi), (xiii), (xv), (xvii), (xviii) and paragraph (d) of this section.

(3) If you are complying with the applicable emissions limit with performance testing you must submit a compliance report with the information in (c)(5)(i) through (iii), (vi), (vii), (viii), (ix), (xi), (xiii), (xv), (xvii), (xviii) and paragraph (d) of this section.

(4) If you are complying with an emissions limit using a CMS the compliance report must contain the information required in paragraphs (c)(5)(i) through (iii), (v), (vi), (xi) through (xiii), (xv) through (xviii), and paragraph (e) of this section.

(5)

(i) Company and Facility name and address.

(ii) Process unit information, emissions limitations, and operating parameter limitations.

(iii) Date of report and beginning and ending dates of the reporting period.

(iv) The total operating time during the reporting period.

(v) If you use a CMS, including CEMS, COMS, or CPMS, you must include the monitoring equipment manufacturer(s) and model numbers and the date of the last CMS certification or audit.

(vi) The total fuel use by each individual boiler or process heater subject to an emission limit within the reporting period, including, but not limited to, a description of the fuel, whether the fuel has received a non-waste determination by the EPA or your basis for concluding that the fuel is not a waste, and the total fuel usage amount with units of measure.

(vii) If you are conducting performance tests once every 3 years consistent with § 63.7515(b) or (c), the date of the last 2 performance tests and a statement as to whether there have been any operational changes since the last performance test that could increase emissions.

(viii) A statement indicating that you burned no new types of fuel in an individual boiler or process heater subject to an emission limit. Or, if you did burn a new type of fuel and are subject to a HCl emission limit, you must submit the calculation of chlorine input, using Equation 7 of § 63.7530, that demonstrates that your source is still within its maximum chlorine input level established during the previous performance testing (for sources that demonstrate compliance through performance testing) or you must submit the calculation of HCl emission rate using Equation 16 of § 63.7530 that demonstrates that your source is still meeting the emission limit for HCl emissions (for boilers or process heaters that demonstrate compliance through fuel analysis). If you burned a new type of fuel and are subject to a mercury emission limit, you must submit the calculation of mercury input, using Equation 8 of § 63.7530, that demonstrates that your source is still within its maximum mercury input level established during the previous performance testing (for sources that demonstrate compliance through performance testing), or you must submit the calculation of mercury emission rate using Equation 17 of § 63.7530 that demonstrates that your source is still meeting the emission limit for mercury emissions (for boilers or process heaters that demonstrate compliance through fuel analysis). If you burned a new type of fuel and are subject to a TSM emission limit, you must submit the calculation of TSM input, using Equation 9 of § 63.7530, that demonstrates that your source is still within its maximum TSM input level established during the previous performance testing (for sources that demonstrate compliance through performance testing), or you must submit the calculation of TSM emission rate, using Equation 18 of § 63.7530, that demonstrates that your source is still meeting the emission limit for TSM emissions (for boilers or process heaters that demonstrate compliance through fuel analysis).

(ix) If you wish to burn a new type of fuel in an individual boiler or process heater subject to an emission limit and you cannot demonstrate compliance with the maximum chlorine input operating limit using Equation 7 of § 63.7530 or the maximum mercury input operating limit using Equation 8 of § 63.7530, or the maximum TSM input operating limit using Equation 9 of § 63.7530 you must include in the compliance report a statement indicating the intent to conduct a new performance test within 60 days of starting to burn the new fuel.

(x) A summary of any monthly fuel analyses conducted to demonstrate compliance according to §§ 63.7521 and 63.7530 for individual boilers or process heaters subject to emission limits, and any fuel specification analyses conducted according to §§ 63.7521(f) and 63.7530(g).

(xi) If there are no deviations from any emission limits or operating limits in this subpart that apply to you, a statement that there were no deviations from the emission limits or operating limits during the reporting period.

(xii) If there were no deviations from the monitoring requirements including no periods during which the CMSs, including CEMS, COMS, and CPMS, were out of control as specified in § 63.8(c)(7), a statement that there were no deviations and no periods during which the CMS were out of control during the reporting period.

(xiii) If a malfunction occurred during the reporting period, the report must include the number, duration, and a brief description for each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report must also include a description of actions taken by you during a malfunction of a boiler, process heater, or associated air pollution control device or CMS to minimize emissions in accordance with § 63.7500(a)(3), including actions taken to correct the malfunction.

(xiv) Include the date of the most recent tune-up for each unit subject to only the requirement to conduct an annual, biennial, or 5-year tune-up according to § 63.7540(a)(10), (11), or (12) respectively. Include the date of the most recent burner inspection if it was not done annually, biennially, or on a 5-year period and was delayed until the next scheduled or unscheduled unit shutdown.

(xv) If you plan to demonstrate compliance by emission averaging, certify the emission level achieved or the control technology employed is no less stringent than the level or control technology contained in the notification of compliance status in § 63.7545(e)(5)(i).

(xvi) For each reporting period, the compliance reports must include all of the calculated 30 day rolling average values for CEMS (CO, HCl, SO_2, and mercury), 10 day rolling average values for CO CEMS when the limit is expressed as a 10 day instead of 30 day rolling average, and the PM CPMS data.

(xvii) Statement by a responsible official with that official's name, title, and signature, certifying the truth, accuracy, and completeness of the content of the report.

(xviii) For each instance of startup or shutdown include the information required to be monitored, collected, or recorded according to the requirements of § 63.7555(d).

(d) For each deviation from an emission limit or operating limit in this subpart that occurs at an individual boiler or process heater where you are not using a CMS to comply with that emission limit or operating limit, or from the work practice standards for periods if startup and shutdown, the compliance report must additionally contain the information required in paragraphs (d)(1) through (3) of this section.

(1) A description of the deviation and which emission limit, operating limit, or work practice standard from which you deviated.

(2) Information on the number, duration, and cause of deviations (including unknown cause), as applicable, and the corrective action taken.

(3) If the deviation occurred during an annual performance test, provide the date the annual performance test was completed.

(e) For each deviation from an emission limit, operating limit, and monitoring requirement in this subpart occurring at an individual boiler or process heater where you are using a CMS to comply with that emission limit or operating limit, the compliance report must additionally contain the information required in paragraphs (e)(1) through (9) of this section. This includes any deviations from your site-specific monitoring plan as required in § 63.7505(d).

(1) The date and time that each deviation started and stopped and description of the nature of the deviation (i.e., what you deviated from).

(2) The date and time that each CMS was inoperative, except for zero (low-level) and high-level checks.

(3) The date, time, and duration that each CMS was out of control, including the information in § 63.8(c)(8).

(4) The date and time that each deviation started and stopped.

(5) A summary of the total duration of the deviation during the reporting period and the total duration as a percent of the total source operating time during that reporting period.

(6) A characterization of the total duration of the deviations during the reporting period into those that are due to control equipment problems, process problems, other known causes, and other unknown causes.

(7) A summary of the total duration of CMS's downtime during the reporting period and the total duration of CMS downtime as a percent of the total source operating time during that reporting period.

(8) A brief description of the source for which there was a deviation.

(9) A description of any changes in CMSs, processes, or controls since the last reporting period for the source for which there was a deviation.

(f)-(g) [Reserved]

(h) You must submit the reports according to the procedures specified in paragraphs (h)(1) through (3) of this section.

(1) Within 60 days after the date of completing each performance test (as defined in § 63.2) required by this subpart, you must submit the results of the performance tests, including any fuel analyses, following the procedure specified in either paragraph (h)(1)(i) or (ii) of this section.

(i) For data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT Web site (*http://www.epa.gov/ttn/chief/ert/index.html*), you must submit the results of the performance test to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI). (CEDRI can be accessed through the EPA's Central Data Exchange (CDX) (*https://cdx.epa.gov/*).) Performance test data must be submitted in a file format generated through use of the EPA's ERT or an electronic file format consistent with the extensible markup language (XML) schema listed on the EPA's ERT Web site. If you claim that some of the performance test information being submitted is confidential business information (CBI), you must submit a complete file generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT Web site, including information claimed to be CBI, on a compact disc, flash drive, or other commonly used electronic storage media to the EPA. The electronic media must be clearly marked as CBI and mailed to U.S. EPA/OAPQS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same ERT or alternate file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described earlier in this paragraph.

(ii) For data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT Web site at the time of the test, you must submit the results of the performance test to the Administrator at the appropriate address listed in § 63.13.

(2) Within 60 days after the date of completing each CEMS performance evaluation (as defined in 63.2), you must submit the results of the performance evaluation following the procedure specified in either paragraph (h)(2)(i) or (ii) of this section.

(i) For performance evaluations of continuous monitoring systems measuring relative accuracy test audit (RATA) pollutants that are supported by the EPA's ERT as listed on the EPA's ERT Web site at the time of the evaluation, you must submit the results of the performance evaluation to the EPA via the CEDRI. (CEDRI can be accessed through the EPA's CDX.) Performance evaluation data must be submitted in a file format generated through the use of the EPA's ERT or an alternate file format consistent with the XML schema listed on the EPA's ERT Web site. If you claim that some of the performance evaluation information being transmitted is CBI, you must submit a complete file generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT Web site, including information claimed to be CBI, on a compact disc, flash drive, or other commonly used electronic storage media to the EPA. The electronic media must be clearly marked as CBI and mailed to U.S. EPA/OAPQS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same ERT or alternate file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described earlier in this paragraph.

(ii) For any performance evaluations of continuous monitoring systems measuring RATA pollutants that are not supported by the EPA's ERT as listed on the ERT Web site at the time of the evaluation, you must submit the results of the performance evaluation to the Administrator at the appropriate address listed in § 63.13.

(3) You must submit all reports required by Table 9 of this subpart electronically to the EPA via the CEDRI. (CEDRI can be accessed through the EPA's CDX.) You must use the appropriate electronic report in CEDRI for this subpart. Instead of using the electronic report in CEDRI for this subpart, you may submit an alternate electronic file consistent with the XML schema listed on the CEDRI Web site (*http://www.epa.gov/ttn/chief/cedri/index.html*), once the XML schema is available. If the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, you must submit the report to the Administrator at the appropriate address listed in § 63.13. You must begin submitting reports via CEDRI no later than 90 days after the form becomes available in CEDRI.

[78 FR 7183, Jan. 31, 2013, as amended at 80 FR 72814, Nov. 20, 2015]

§ 63.7555 What records must I keep?

(a) You must keep records according to paragraphs (a)(1) and (2) of this section.

(1) A copy of each notification and report that you submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status or semiannual compliance report that you submitted, according to the requirements in § 63.10(b)(2)(xiv).

(2) Records of performance tests, fuel analyses, or other compliance demonstrations and performance evaluations as required in § 63.10(b)(2)(viii).

(3) For units in the limited use subcategory, you must keep a copy of the federally enforceable permit that limits the annual capacity factor to less than or equal to 10 percent and fuel use records for the days the boiler or process heater was operating.

(b) For each CEMS, COMS, and continuous monitoring system you must keep records according to paragraphs (b)(1) through (5) of this section.

(1) Records described in § 63.10(b)(2)(vii) through (xi).

(2) Monitoring data for continuous opacity monitoring system during a performance evaluation as required in § 63.6(h)(7)(i) and (ii).

(3) Previous (*i.e.,* superseded) versions of the performance evaluation plan as required in § 63.8(d)(3).

(4) Request for alternatives to relative accuracy test for CEMS as required in § 63.8(f)(6)(i).

(5) Records of the date and time that each deviation started and stopped.

(c) You must keep the records required in Table 8 to this subpart including records of all monitoring data and calculated averages for applicable operating limits, such as opacity, pressure drop, pH, and operating load, to show continuous compliance with each emission limit and operating limit that applies to you.

(d) For each boiler or process heater subject to an emission limit in Table 1 or 2 or Tables 11 through 15 to this subpart, you must also keep the applicable records in paragraphs (d)(1) through (11) of this section.

(1) You must keep records of monthly fuel use by each boiler or process heater, including the type(s) of fuel and amount(s) used.

(2) If you combust non-hazardous secondary materials that have been determined not to be solid waste pursuant to § 241.3(b)(1) and (2) of this chapter, you must keep a record that documents how the secondary material meets each of the legitimacy criteria under § 241.3(d)(1) of this chapter. If you combust a fuel that has been processed from a discarded non-hazardous secondary material pursuant to § 241.3(b)(4) of this chapter, you must keep records as to how the operations that produced the fuel satisfy the definition of processing in § 241.2 of this chapter. If the fuel received a non-waste determination pursuant to the petition process submitted under § 241.3(c) of this chapter, you must keep a record that documents how the fuel satisfies the requirements of the petition process. For operating units that combust non-hazardous secondary materials as fuel per § 241.4 of this chapter, you must keep records documenting that the material is listed as a non-waste under § 241.4(a) of this chapter. Units exempt from the incinerator standards under section 129(g)(1) of the Clean Air Act because they are qualifying facilities burning a homogeneous waste stream do not need to maintain the records described in this paragraph (d)(2).

(3) A copy of all calculations and supporting documentation of maximum chlorine fuel input, using Equation 7 of § 63.7530, that were done to demonstrate continuous compliance with the HCl emission limit, for sources that demonstrate compliance through performance testing. For sources that demonstrate compliance through fuel analysis, a copy of all calculations and supporting documentation of HCl emission rates, using Equation 16 of § 63.7530, that were done to demonstrate compliance with the HCl emission limit. Supporting documentation should include results of any fuel analyses and basis for the estimates of maximum chlorine fuel input or HCl emission rates. You can use the results from one fuel analysis for multiple boilers and process heaters provided they are all burning the same fuel type. However, you must calculate chlorine fuel input, or HCl emission rate, for each boiler and process heater.

(4) A copy of all calculations and supporting documentation of maximum mercury fuel input, using Equation 8 of § 63.7530, that were done to demonstrate continuous compliance with the mercury emission limit for sources that demonstrate compliance through performance testing. For sources that demonstrate compliance through fuel analysis, a copy of all calculations and supporting documentation of mercury emission rates, using Equation 17 of § 63.7530, that were done to demonstrate compliance with the mercury emission limit. Supporting documentation should include results of any fuel analyses and basis for the estimates of maximum mercury fuel input or mercury emission rates. You can use the results from one fuel analysis for multiple boilers and process heaters provided they are all burning the same fuel type. However, you must calculate mercury fuel input, or mercury emission rates, for each boiler and process heater.

(5) If, consistent with § 63.7515(b), you choose to stack test less frequently than annually, you must keep a record that documents that your emissions in the previous stack test(s) were less than 75 percent of the applicable emission limit (or, in specific instances noted in Tables 1 and 2 or 11 through 15 to this subpart, less than the applicable emission limit), and document that there was no change in source operations including fuel composition and operation of air pollution control equipment that would cause emissions of the relevant pollutant to increase within the past year.

(6) Records of the occurrence and duration of each malfunction of the boiler or process heater, or of the associated air pollution control and monitoring equipment.

(7) Records of actions taken during periods of malfunction to minimize emissions in accordance with the general duty to minimize emissions in § 63.7500(a)(3), including corrective actions to restore the malfunctioning boiler or process heater, air pollution control, or monitoring equipment to its normal or usual manner of operation.

(8) A copy of all calculations and supporting documentation of maximum TSM fuel input, using Equation 9 of § 63.7530, that were done to demonstrate continuous compliance with the TSM emission limit for sources that demonstrate compliance through performance testing. For sources that demonstrate compliance through fuel analysis, a copy of all calculations and supporting documentation of TSM emission rates, using Equation 18 of § 63.7530, that were done to demonstrate compliance with the TSM emission limit. Supporting documentation should include results of any fuel analyses and basis for the estimates of maximum TSM fuel input or TSM emission rates. You can use the results from one fuel analysis for multiple boilers and process heaters provided they are all burning the same fuel type. However, you must calculate TSM fuel input, or TSM emission rates, for each boiler and process heater.

(9) You must maintain records of the calendar date, time, occurrence and duration of each startup and shutdown.

(10) You must maintain records of the type(s) and amount(s) of fuels used during each startup and shutdown.

(11) For each startup period, for units selecting paragraph (2) of the definition of “startup” in § 63.7575 you must maintain records of the time that clean fuel combustion begins; the time when you start feeding fuels that are not clean fuels; the time when useful thermal energy is first supplied; and the time when the PM controls are engaged.

(12) If you choose to rely on paragraph (2) of the definition of “startup” in § 63.7575, for each startup period, you must maintain records of the hourly steam temperature, hourly steam pressure, hourly steam flow, hourly flue gas temperature, and all hourly average CMS data (*e.g.,* CEMS, PM CPMS, COMS, ESP total secondary electric power input, scrubber pressure drop, scrubber liquid flow rate) collected during each startup period to confirm that the control devices are engaged. In addition, if compliance with the PM emission limit is demonstrated using a PM control device, you must maintain records as specified in paragraphs (d)(12)(i) through (iii) of this section.

(i) For a boiler or process heater with an electrostatic precipitator, record the number of fields in service, as well as each field's secondary voltage and secondary current during each hour of startup.

(ii) For a boiler or process heater with a fabric filter, record the number of compartments in service, as well as the differential pressure across the baghouse during each hour of startup.

(iii) For a boiler or process heater with a wet scrubber needed for filterable PM control, record the scrubber's liquid flow rate and the pressure drop during each hour of startup.

(13) If you choose to use paragraph (2) of the definition of “startup” in § 63.7575 and you find that you are unable to safely engage and operate your PM control(s) within 1 hour of first firing of non-clean fuels, you may choose to rely on paragraph (1) of definition of “startup” in § 63.7575 or you may submit to the delegated permitting authority a request for a variance with the PM controls requirement, as described below.

(i) The request shall provide evidence of a documented manufacturer-identified safety issue.

(ii) The request shall provide information to document that the PM control device is adequately designed and sized to meet the applicable PM emission limit.

(iii) In addition, the request shall contain documentation that:

(A) The unit is using clean fuels to the maximum extent possible to bring the unit and PM control device up to the temperature necessary to alleviate or prevent the identified safety issues prior to the combustion of primary fuel;

(B) The unit has explicitly followed the manufacturer's procedures to alleviate or prevent the identified safety issue; and

(C) Identifies with specificity the details of the manufacturer's statement of concern.

(iv) You must comply with all other work practice requirements, including but not limited to data collection, recordkeeping, and reporting requirements.

(e) If you elect to average emissions consistent with § 63.7522, you must additionally keep a copy of the emission averaging implementation plan required in § 63.7522(g), all calculations required under § 63.7522, including monthly records of heat input or steam generation, as applicable, and monitoring records consistent with § 63.7541.

(f) If you elect to use efficiency credits from energy conservation measures to demonstrate compliance according to § 63.7533, you must keep a copy of the Implementation Plan required in § 63.7533(d) and copies of all data and calculations used to establish credits according to § 63.7533(b), (c), and (f).

(g) If you elected to demonstrate that the unit meets the specification for mercury for the unit designed to burn gas 1 subcategory, you must maintain monthly records (or at the frequency required by § 63.7540(c)) of the calculations and results of the fuel specification for mercury in Table 6.

(h) If you operate a unit in the unit designed to burn gas 1 subcategory that is subject to this subpart, and you use an alternative fuel other than natural gas, refinery gas, gaseous fuel subject to another subpart under this part, other gas 1 fuel, or gaseous fuel subject to another subpart of this part or part 60, 61, or 65, you must keep records of the total hours per calendar year that alternative fuel is burned and the total hours per calendar year that the unit operated during periods of gas curtailment or gas supply emergencies.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7185, Jan. 31, 2013; 80 FR 72816, Nov. 20, 2015; 87 FR 60846, Oct. 6, 2022]

§ 63.7560 In what form and how long must I keep my records?

(a) Your records must be in a form suitable and readily available for expeditious review, according to § 63.10(b)(1).

(b) As specified in § 63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.

(c) You must keep each record on site, or they must be accessible from on site (for example, through a computer network), for at least 2 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to § 63.10(b)(1). You can keep the records off site for the remaining 3 years.

Other Requirements and Information

§ 63.7565 What parts of the General Provisions apply to me?

Table 10 to this subpart shows which parts of the General Provisions in §§ 63.1 through 63.15 apply to you.

§ 63.7570 Who implements and enforces this subpart?

(a) This subpart can be implemented and enforced by the EPA, or an Administrator such as your state, local, or tribal agency. If the EPA Administrator has delegated authority to your state, local, or tribal agency, then that agency (as well as the EPA) has the authority to implement and enforce this subpart. You should contact your EPA Regional Office to find out if this subpart is delegated to your state, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a state, local, or tribal agency under 40 CFR part 63, subpart E, the authorities listed in paragraphs (b)(1) through (4) of this section are retained by the EPA Administrator and are not transferred to the state, local, or tribal agency, however, the EPA retains oversight of this subpart and can take enforcement actions, as appropriate.

(1) Approval of alternatives to the emission limits and work practice standards in § 63.7500(a) and (b) under § 63.6(g), except as specified in § 63.7555(d)(13).

(2) Approval of major change to test methods in Table 5 to this subpart under § 63.7(e)(2)(ii) and (f) and as defined in § 63.90, and alternative analytical methods requested under § 63.7521(b)(2).

(3) Approval of major change to monitoring under § 63.8(f) and as defined in § 63.90, and approval of alternative operating parameters under §§ 63.7500(a)(2) and 63.7522(g)(2).

(4) Approval of major change to recordkeeping and reporting under § 63.10(e) and as defined in § 63.90.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7186, Jan. 31, 2013; 80 FR 72817, Nov. 20, 2015]

§ 63.7575 What definitions apply to this subpart?

Terms used in this subpart are defined in the Clean Air Act, in § 63.2 (the General Provisions), and in this section as follows:

10-day rolling average means the arithmetic mean of the previous 240 hours of valid operating data. Valid data excludes hours during startup and shutdown, data collected during periods when the monitoring system is out of control as specified in your site-specific monitoring plan, while conducting repairs associated with periods when the monitoring system is out of control, or while conducting required monitoring system quality assurance or quality control activities, and periods when this unit is not operating. The 240 hours should be consecutive, but not necessarily continuous if operations were intermittent.

12-month rolling average means the arithmetic mean of the previous 12 months of valid fuel analysis data. The 12 months should be consecutive, but not necessarily continuous if operations were intermittent.

30-day rolling average means the arithmetic mean of the previous 720 hours of valid CO CEMS data. The 720 hours should be consecutive, but not necessarily continuous if operations were intermittent. For parameters other than CO, 30-day rolling average means either the arithmetic mean of all valid hours of data from 30 successive operating days or the arithmetic mean of the previous 720 hours of valid operating data. Valid data excludes hours during startup and shutdown, data collected during periods when the monitoring system is out of control as specified in your site-specific monitoring plan, while conducting repairs associated with periods when the monitoring system is out of control, or while conducting required monitoring system quality assurance or quality control activities, and periods when this unit is not operating.

Annual capacity factor means the ratio between the actual heat input to a boiler or process heater from the fuels burned during a calendar year and the potential heat input to the boiler or process heater had it been operated for 8,760 hours during a year at the maximum steady state design heat input capacity.

Annual heat input means the heat input for the 12 months preceding the compliance demonstration.

Average annual heat input rate means total heat input divided by the hours of operation for the 12 months preceding the compliance demonstration.

Bag leak detection system means a group of instruments that are capable of monitoring particulate matter loadings in the exhaust of a fabric filter (*i.e.,* baghouse) in order to detect bag failures. A bag leak detection system includes, but is not limited to, an instrument that operates on electrodynamic, triboelectric, light scattering, light transmittance, or other principle to monitor relative particulate matter loadings.

Benchmark means the fuel heat input for a boiler or process heater for the one-year period before the date that an energy demand reduction occurs, unless it can be demonstrated that a different time period is more representative of historical operations.

Biodiesel means a mono-alkyl ester derived from biomass and conforming to ASTM D6751-11b, Standard Specification for Biodiesel Fuel Blend Stock (B100) for Middle Distillate Fuels (incorporated by reference, see § 63.14).

Biomass or bio-based solid fuel means any biomass-based solid fuel that is not a solid waste. This includes, but is not limited to, wood residue; wood products (*e.g.,* trees, tree stumps, tree limbs, bark, lumber, sawdust, sander dust, chips, scraps, slabs, millings, and shavings); animal manure, including litter and other bedding materials; vegetative agricultural and silvicultural materials, such as logging residues (slash), nut and grain hulls and chaff (*e.g.,* almond, walnut, peanut, rice, and wheat), bagasse, orchard prunings, corn stalks, coffee bean hulls and grounds. This definition of biomass is not intended to suggest that these materials are or are not solid waste.

Blast furnace gas fuel-fired boiler or process heater means an industrial/commercial/institutional boiler or process heater that receives 90 percent or more of its total annual gas volume from blast furnace gas.

Boiler means an enclosed device using controlled flame combustion and having the primary purpose of recovering thermal energy in the form of steam or hot water. Controlled flame combustion refers to a steady-state, or near steady-state, process wherein fuel and/or oxidizer feed rates are controlled. A device combusting solid waste, as defined in § 241.3 of this chapter, is not a boiler unless the device is exempt from the definition of a solid waste incineration unit as provided in section 129(g)(1) of the Clean Air Act. Waste heat boilers are excluded from this definition.

Boiler system means the boiler and associated components, such as, the feed water system, the combustion air system, the fuel system (including burners), blowdown system, combustion control systems, steam systems, and condensate return systems.

Calendar year means the period between January 1 and December 31, inclusive, for a given year.

Clean dry biomass means any biomass-based solid fuel that have not been painted, pigment-stained, or pressure treated, does not contain contaminants at concentrations not normally associated with virgin biomass materials and has a moisture content of less than 20 percent and is not a solid waste.

Coal means all solid fuels classifiable as anthracite, bituminous, sub-bituminous, or lignite by ASTM D388 (incorporated by reference, see § 63.14), coal refuse, and petroleum coke. For the purposes of this subpart, this definition of “coal” includes synthetic fuels derived from coal, including but not limited to, solvent-refined coal, coal-oil mixtures, and coal-water mixtures. Coal derived gases are excluded from this definition.

Coal refuse means any by-product of coal mining or coal cleaning operations with an ash content greater than 50 percent (by weight) and a heating value less than 13,900 kilojoules per kilogram (6,000 Btu per pound) on a dry basis.

Commercial/institutional boiler means a boiler used in commercial establishments or institutional establishments such as medical centers, nursing homes, research centers, institutions of higher education, elementary and secondary schools, libraries, religious establishments, governmental buildings, hotels, restaurants, and laundries to provide electricity, steam, and/or hot water.

Common stack means the exhaust of emissions from two or more affected units through a single flue. Affected units with a common stack may each have separate air pollution control systems located before the common stack, or may have a single air pollution control system located after the exhausts come together in a single flue.

Cost-effective energy conservation measure means a measure that is implemented to improve the energy efficiency of the boiler or facility that has a payback (return of investment) period of 2 years or less.

Daily block average means the arithmetic mean of all valid emission concentrations or parameter levels recorded when a unit is operating measured over the 24-hour period from 12 a.m. (midnight) to 12 a.m. (midnight), except for periods of startup and shutdown or downtime.

Deviation.

(1) ***Deviation*** means any instance in which an affected source subject to this subpart, or an owner or operator of such a source:

(i) Fails to meet any applicable requirement or obligation established by this subpart including, but not limited to, any emission limit, operating limit, or work practice standard; or

(ii) Fails to meet any term or condition that is adopted to implement an applicable requirement in this subpart and that is included in the operating permit for any affected source required to obtain such a permit.

(2) A deviation is not always a violation.

Dioxins/furans means tetra- through octa-chlorinated dibenzo-p-dioxins and dibenzofurans.

Distillate oil means fuel oils that contain 0.05 weight percent nitrogen or less and comply with the specifications for fuel oil numbers 1 and 2, as defined by the American Society of Testing and Materials in ASTM D396 (incorporated by reference, see § 63.14) or diesel fuel oil numbers 1 and 2, as defined by the American Society for Testing and Materials in ASTM D975 (incorporated by reference, see § 63.14), kerosene, and biodiesel as defined by the American Society of Testing and Materials in ASTM D6751-11b (incorporated by reference, see § 60.14).

Dry scrubber means an add-on air pollution control system that injects dry alkaline sorbent (dry injection) or sprays an alkaline sorbent (spray dryer) to react with and neutralize acid gas in the exhaust stream forming a dry powder material. Sorbent injection systems used as control devices in fluidized bed boilers and process heaters are included in this definition. A dry scrubber is a dry control system.

Dutch oven means a unit having a refractory-walled cell connected to a conventional boiler setting. Fuel materials are introduced through an opening in the roof of the dutch oven and burn in a pile on its floor. Fluidized bed boilers are not part of the dutch oven design category.

Efficiency credit means emission reductions above those required by this subpart. Efficiency credits generated may be used to comply with the emissions limits. Credits may come from pollution prevention projects that result in reduced fuel use by affected units. Boilers that are shut down cannot be used to generate credits unless the facility provides documentation linking the permanent shutdown to implementation of the energy conservation measures identified in the energy assessment.

Electric utility steam generating unit (EGU) means a fossil fuel-fired combustion unit of more than 25 megawatts electric (MWe) that serves a generator that produces electricity for sale. A fossil fuel-fired unit that cogenerates steam and electricity and supplies more than one-third of its potential electric output capacity and more than 25 MWe output to any utility power distribution system for sale is considered an electric utility steam generating unit. To be “capable of combusting” fossil fuels, an EGU would need to have these fuels allowed in their operating permits and have the appropriate fuel handling facilities on-site or otherwise available (e.g., coal handling equipment, including coal storage area, belts and conveyers, pulverizers, etc.; oil storage facilities). In addition, fossil fuel-fired EGU means any EGU that fired fossil fuel for more than 10.0 percent of the average annual heat input in any 3 consecutive calendar years or for more than 15.0 percent of the annual heat input during any one calendar year after April 16, 2012.

Electrostatic precipitator (ESP) means an add-on air pollution control device used to capture particulate matter by charging the particles using an electrostatic field, collecting the particles using a grounded collecting surface, and transporting the particles into a hopper. An electrostatic precipitator is usually a dry control system.

Energy assessment means the following for the emission units covered by this subpart:

(1) The energy assessment for facilities with affected boilers and process heaters with a combined heat input capacity of less than 0.3 trillion Btu (TBtu) per year will be 8 on-site technical labor hours in length maximum, but may be longer at the discretion of the owner or operator of the affected source. The boiler system(s), process heater(s), and any on-site energy use system(s) accounting for at least 50 percent of the affected boiler(s) energy (*e.g.,* steam, hot water, process heat, or electricity) production, as applicable, will be evaluated to identify energy savings opportunities, within the limit of performing an 8-hour on-site energy assessment.

(2) The energy assessment for facilities with affected boilers and process heaters with a combined heat input capacity of 0.3 to 1.0 TBtu/year will be 24 on-site technical labor hours in length maximum, but may be longer at the discretion of the owner or operator of the affected source. The boiler system(s), process heater(s), and any on-site energy use system(s) accounting for at least 33 percent of the energy (*e.g.,* steam, hot water, process heat, or electricity) production, as applicable, will be evaluated to identify energy savings opportunities, within the limit of performing a 24-hour on-site energy assessment.

(3) The energy assessment for facilities with affected boilers and process heaters with a combined heat input capacity greater than 1.0 TBtu/year will be up to 24 on-site technical labor hours in length for the first TBtu/yr plus 8 on-site technical labor hours for every additional 1.0 TBtu/yr not to exceed 160 on-site technical hours, but may be longer at the discretion of the owner or operator of the affected source. The boiler system(s), process heater(s), and any on-site energy use system(s) accounting for at least 20 percent of the energy (*e.g.,* steam, process heat, hot water, or electricity) production, as applicable, will be evaluated to identify energy savings opportunities.

(4) The on-site energy use systems serving as the basis for the percent of affected boiler(s) and process heater(s) energy production in paragraphs (1), (2), and (3) of this definition may be segmented by production area or energy use area as most logical and applicable to the specific facility being assessed (*e.g.,* product X manufacturing area; product Y drying area; Building Z).

Energy management practices means the set of practices and procedures designed to manage energy use that are demonstrated by the facility's energy policies, a facility energy manager and other staffing responsibilities, energy performance measurement and tracking methods, an energy saving goal, action plans, operating procedures, internal reporting requirements, and periodic review intervals used at the facility.

Energy management program means a program that includes a set of practices and procedures designed to manage energy use that are demonstrated by the facility's energy policies, a facility energy manager and other staffing responsibilities, energy performance measurement and tracking methods, an energy saving goal, action plans, operating procedures, internal reporting requirements, and periodic review intervals used at the facility. Facilities may establish their program through energy management systems compatible with ISO 50001.

Energy use system includes the following systems located on-site that use energy (steam, hot water, or electricity) provided by the affected boiler or process heater: process heating; compressed air systems; machine drive (motors, pumps, fans); process cooling; facility heating, ventilation, and air-conditioning systems; hot water systems; building envelop; and lighting; or other systems that use steam, hot water, process heat, or electricity provided by the affected boiler or process heater. Energy use systems are only those systems using energy clearly produced by affected boilers and process heaters.

Equivalent means the following only as this term is used in Table 6 to this subpart:

(1) An equivalent sample collection procedure means a published voluntary consensus standard or practice (VCS) or EPA method that includes collection of a minimum of three composite fuel samples, with each composite consisting of a minimum of three increments collected at approximately equal intervals over the test period.

(2) An equivalent sample compositing procedure means a published VCS or EPA method to systematically mix and obtain a representative subsample (part) of the composite sample.

(3) An equivalent sample preparation procedure means a published VCS or EPA method that: Clearly states that the standard, practice or method is appropriate for the pollutant and the fuel matrix; or is cited as an appropriate sample preparation standard, practice or method for the pollutant in the chosen VCS or EPA determinative or analytical method.

(4) An equivalent procedure for determining heat content means a published VCS or EPA method to obtain gross calorific (or higher heating) value.

(5) An equivalent procedure for determining fuel moisture content means a published VCS or EPA method to obtain moisture content. If the sample analysis plan calls for determining metals (especially the mercury,

selenium, or arsenic) using an aliquot of the dried sample, then the drying temperature must be modified to prevent vaporizing these metals. On the other hand, if metals analysis is done on an “as received” basis, a separate aliquot can be dried to determine moisture content and the metals concentration mathematically adjusted to a dry basis.

(6) An equivalent pollutant (mercury, HCl) determinative or analytical procedure means a published VCS or EPA method that clearly states that the standard, practice, or method is appropriate for the pollutant and the fuel matrix and has a published detection limit equal or lower than the methods listed in Table 6 to this subpart for the same purpose.

Fabric filter means an add-on air pollution control device used to capture particulate matter by filtering gas streams through filter media, also known as a baghouse. A fabric filter is a dry control system.

Federally enforceable means all limitations and conditions that are enforceable by the EPA Administrator, including, but not limited to, the requirements of 40 CFR parts 60, 61, 63, and 65, requirements within any applicable state implementation plan, and any permit requirements established under 40 CFR 52.21 or under 40 CFR 51.18 and 40 CFR 51.24.

Fluidized bed boiler means a boiler utilizing a fluidized bed combustion process that is not a pulverized coal boiler.

Fluidized bed boiler with an integrated fluidized bed heat exchanger means a boiler utilizing a fluidized bed combustion where the entire tube surface area is located outside of the furnace section at the exit of the cyclone section and exposed to the flue gas stream for conductive heat transfer. This design applies only to boilers in the unit designed to burn coal/solid fossil fuel subcategory that fire coal refuse.

Fluidized bed combustion means a process where a fuel is burned in a bed of granulated particles, which are maintained in a mobile suspension by the forward flow of air and combustion products.

Fossil fuel means natural gas, oil, coal, and any form of solid, liquid, or gaseous fuel derived from such material.

Fuel cell means a boiler type in which the fuel is dropped onto suspended fixed grates and is fired in a pile. The refractory-lined fuel cell uses combustion air preheating and positioning of secondary and tertiary air injection ports to improve boiler efficiency. Fluidized bed, dutch oven, pile burner, hybrid suspension grate, and suspension burners are not part of the fuel cell subcategory.

Fuel type means each category of fuels that share a common name or classification. Examples include, but are not limited to, bituminous coal, sub-bituminous coal, lignite, anthracite, biomass, distillate oil, residual oil. Individual fuel types received from different suppliers are not considered new fuel types.

Gaseous fuel includes, but is not limited to, natural gas, process gas, landfill gas, coal derived gas, refinery gas, and biogas. Blast furnace gas and process gases that are regulated under another subpart of this part, or part 60, part 61, or part 65 of this chapter, are exempted from this definition.

Heat input means heat derived from combustion of fuel in a boiler or process heater and does not include the heat input from preheated combustion air, recirculated flue gases, returned condensate, or exhaust gases from other sources such as gas turbines, internal combustion engines, kilns, etc.

Heavy liquid includes residual oil and any other liquid fuel not classified as a light liquid.

Hourly average means the arithmetic average of at least four CMS data values representing the four 15-minute periods in an hour, or at least two 15-minute data values during an hour when CMS calibration, quality assurance, or maintenance activities are being performed.

Hot water heater means a closed vessel with a capacity of no more than 120 U.S. gallons in which water is heated by combustion of gaseous, liquid, or biomass/bio-based solid fuel and is withdrawn for use external to the vessel. Hot water boilers (i.e., not generating steam) combusting gaseous, liquid, or biomass fuel with a heat input capacity of less than 1.6 million Btu per hour are included in this definition. The 120 U.S. gallon capacity threshold to be

considered a hot water heater is independent of the 1.6 MMBtu/hr heat input capacity threshold for hot water boilers. Hot water heater also means a tankless unit that provides on demand hot water.

Hybrid suspension grate boiler means a boiler designed with air distributors to spread the fuel material over the entire width and depth of the boiler combustion zone. The biomass fuel combusted in these units exceeds a moisture content of 40 percent on an as-fired annual heat input basis as demonstrated by monthly fuel analysis. The drying and much of the combustion of the fuel takes place in suspension, and the combustion is completed on the grate or floor of the boiler. Fluidized bed, dutch oven, and pile burner designs are not part of the hybrid suspension grate boiler design category.

Industrial boiler means a boiler used in manufacturing, processing, mining, and refining or any other industry to provide steam, hot water, and/or electricity.

Light liquid includes distillate oil, biodiesel, or vegetable oil.

Limited-use boiler or process heater means any boiler or process heater that burns any amount of solid, liquid, or gaseous fuels and has a federally enforceable annual capacity factor of no more than 10 percent.

Liquid fuel includes, but is not limited to, light liquid, heavy liquid, any form of liquid fuel derived from petroleum, used oil, liquid biofuels, biodiesel, and vegetable oil.

Load fraction means the actual heat input of a boiler or process heater divided by heat input during the performance test that established the minimum sorbent injection rate or minimum activated carbon injection rate, expressed as a fraction (*e.g.,* for 50 percent load the load fraction is 0.5). For boilers and process heaters that co-fire natural gas or refinery gas with a solid or liquid fuel, the load fraction is determined by the actual heat input of the solid or liquid fuel divided by heat input of the solid or liquid fuel fired during the performance test (*e.g.,* if the performance test was conducted at 100 percent solid fuel firing, for 100 percent load firing 50 percent solid fuel and 50 percent natural gas the load fraction is 0.5).

Major source for oil and natural gas production facilities, as used in this subpart, shall have the same meaning as in § 63.2, except that:

(1) Emissions from any oil or gas exploration or production well (with its associated equipment, as defined in this section), and emissions from any pipeline compressor station or pump station shall not be aggregated with emissions from other similar units to determine whether such emission points or stations are major sources, even when emission points are in a contiguous area or under common control;

(2) Emissions from processes, operations, or equipment that are not part of the same facility, as defined in this section, shall not be aggregated; and

(3) For facilities that are production field facilities, only HAP emissions from glycol dehydration units and storage vessels with the potential for flash emissions shall be aggregated for a major source determination. For facilities that are not production field facilities, HAP emissions from all HAP emission units shall be aggregated for a major source determination.

Metal process furnaces are a subcategory of process heaters, as defined in this subpart, which include natural gas-fired annealing furnaces, preheat furnaces, reheat furnaces, aging furnaces, heat treat furnaces, and homogenizing furnaces.

Million Btu (MMBtu) means one million British thermal units.

Minimum activated carbon injection rate means load fraction multiplied by the lowest hourly average activated carbon injection rate measured according to Table 7 to this subpart during the most recent performance test demonstrating compliance with the applicable emission limit.

Minimum oxygen level means the lowest hourly average oxygen level measured according to Table 7 to this subpart during the most recent performance test demonstrating compliance with the applicable emission limit.

Minimum pressure drop means the lowest hourly average pressure drop measured according to Table 7 to this subpart during the most recent performance test demonstrating compliance with the applicable emission limit.

Minimum scrubber effluent pH means the lowest hourly average sorbent liquid pH measured at the inlet to the wet scrubber according to Table 7 to this subpart during the most recent performance test demonstrating compliance with the applicable hydrogen chloride emission limit.

Minimum scrubber liquid flow rate means the lowest hourly average liquid flow rate (e.g., to the PM scrubber or to the acid gas scrubber) measured according to Table 7 to this subpart during the most recent performance stack test demonstrating compliance with the applicable emission limit.

Minimum scrubber pressure drop means the lowest hourly average scrubber pressure drop measured according to Table 7 to this subpart during the most recent performance test demonstrating compliance with the applicable emission limit.

Minimum sorbent injection rate means:

(1) The load fraction multiplied by the lowest hourly average sorbent injection rate for each sorbent measured according to Table 7 to this subpart during the most recent performance test demonstrating compliance with the applicable emission limits; or

(2) For fluidized bed combustion not using an acid gas wet scrubber or dry sorbent injection control technology to comply with the HCl emission limit, the lowest average ratio of sorbent to sulfur measured during the most recent performance test.

Minimum total secondary electric power means the lowest hourly average total secondary electric power determined from the values of secondary voltage and secondary current to the electrostatic precipitator measured according to Table 7 to this subpart during the most recent performance test demonstrating compliance with the applicable emission limits.

Natural gas means:

(1) A naturally occurring mixture of hydrocarbon and nonhydrocarbon gases found in geologic formations beneath the earth's surface, of which the principal constituent is methane; or

(2) Liquefied petroleum gas, as defined in ASTM D1835 (incorporated by reference, see § 63.14); or

(3) A mixture of hydrocarbons that maintains a gaseous state at ISO conditions. Additionally, natural gas must either be composed of at least 70 percent methane by volume or have a gross calorific value between 35 and 41 megajoules (MJ) per dry standard cubic meter (950 and 1,100 Btu per dry standard cubic foot); or

(4) Propane or propane derived synthetic natural gas. Propane means a colorless gas derived from petroleum and natural gas, with the molecular structure C_3H_8.

Opacity means the degree to which emissions reduce the transmission of light and obscure the view of an object in the background.

Operating day means a 24-hour period between 12 midnight and the following midnight during which any fuel is combusted at any time in the boiler or process heater unit. It is not necessary for fuel to be combusted for the entire 24-hour period. For calculating rolling average emissions, an operating day does not include the hours of operation during startup or shutdown.

Other combustor means a unit designed to burn solid fuel that is not classified as a dutch oven, fluidized bed, fuel cell, hybrid suspension grate boiler, pulverized coal boiler, stoker, sloped grate, or suspension boiler as defined in this subpart.

Other gas 1 fuel means a gaseous fuel that is not natural gas or refinery gas and does not exceed a maximum mercury concentration of 40 micrograms/cubic meters of gas.

Oxygen analyzer system means all equipment required to determine the oxygen content of a gas stream and used to monitor oxygen in the boiler or process heater flue gas, boiler or process heater, firebox, or other appropriate location. This definition includes oxygen trim systems. The source owner or operator must install, calibrate, maintain, and operate the oxygen analyzer system in accordance with the manufacturer's recommendations.

Oxygen trim system means a system of monitors that is used to maintain excess air at the desired level in a combustion device over its operating load range. A typical system consists of a flue gas oxygen and/or CO monitor that automatically provides a feedback signal to the combustion air controller or draft controller.

Particulate matter (PM) means any finely divided solid or liquid material, other than uncombined water, as measured by the test methods specified under this subpart, or an approved alternative method.

Period of gas curtailment or supply interruption means a period of time during which the supply of gaseous fuel to an affected boiler or process heater is restricted or halted for reasons beyond the control of the facility. The act of entering into a contractual agreement with a supplier of natural gas established for curtailment purposes does not constitute a reason that is under the control of a facility for the purposes of this definition. An increase in the cost or unit price of natural gas due to normal market fluctuations not during periods of supplier delivery restriction does not constitute a period of natural gas curtailment or supply interruption. On-site gaseous fuel system emergencies or equipment failures qualify as periods of supply interruption when the emergency or failure is beyond the control of the facility.

Pile burner means a boiler design incorporating a design where the anticipated biomass fuel has a high relative moisture content. Grates serve to support the fuel, and underfire air flowing up through the grates provides oxygen for combustion, cools the grates, promotes turbulence in the fuel bed, and fires the fuel. The most common form of pile burning is the dutch oven.

Process heater means an enclosed device using controlled flame, and the unit's primary purpose is to transfer heat indirectly to a process material (liquid, gas, or solid) or to a heat transfer material (e.g., glycol or a mixture of glycol and water) for use in a process unit, instead of generating steam. Process heaters are devices in which the combustion gases do not come into direct contact with process materials. A device combusting solid waste, as defined in § 241.3 of this chapter, is not a process heater unless the device is exempt from the definition of a solid waste incineration unit as provided in section 129(g)(1) of the Clean Air Act. Process heaters do not include units used for comfort heat or space heat, food preparation for on-site consumption, or autoclaves. Waste heat process heaters are excluded from this definition.

Pulverized coal boiler means a boiler in which pulverized coal or other solid fossil fuel is introduced into an air stream that carries the coal to the combustion chamber of the boiler where it is fired in suspension.

Qualified energy assessor means:

(1) Someone who has demonstrated capabilities to evaluate energy savings opportunities for steam generation and major energy using systems, including, but not limited to:

(i) Boiler combustion management.

(ii) Boiler thermal energy recovery, including

(A) Conventional feed water economizer,

(B) Conventional combustion air preheater, and

(C) Condensing economizer.

(iii) Boiler blowdown thermal energy recovery.

(iv) Primary energy resource selection, including

(A) Fuel (primary energy source) switching, and

(B) Applied steam energy versus direct-fired energy versus electricity.

(v) Insulation issues.

(vi) Steam trap and steam leak management.

(vi) Condensate recovery.

(viii) Steam end-use management.

(2) Capabilities and knowledge includes, but is not limited to:

(i) Background, experience, and recognized abilities to perform the assessment activities, data analysis, and report preparation.

(ii) Familiarity with operating and maintenance practices for steam or process heating systems.

(iii) Additional potential steam system improvement opportunities including improving steam turbine operations and reducing steam demand.

(iv) Additional process heating system opportunities including effective utilization of waste heat and use of proper process heating methods.

(v) Boiler-steam turbine cogeneration systems.

(vi) Industry specific steam end-use systems.

Refinery gas means any gas that is generated at a petroleum refinery and is combusted. Refinery gas includes natural gas when the natural gas is combined and combusted in any proportion with a gas generated at a refinery. Refinery gas includes gases generated from other facilities when that gas is combined and combusted in any proportion with gas generated at a refinery.

Regulated gas stream means an offgas stream that is routed to a boiler or process heater for the purpose of achieving compliance with a standard under another subpart of this part or part 60, part 61, or part 65 of this chapter.

Residential boiler means a boiler used to provide heat and/or hot water and/or as part of a residential combined heat and power system. This definition includes boilers located at an institutional facility (e.g., university campus, military base, church grounds) or commercial/industrial facility (e.g., farm) used primarily to provide heat and/or hot water for:

(1) A dwelling containing four or fewer families; or

(2) A single unit residence dwelling that has since been converted or subdivided into condominiums or apartments.

Residual oil means crude oil, fuel oil that does not comply with the specifications under the definition of distillate oil, and all fuel oil numbers 4, 5, and 6, as defined by the American Society of Testing and Materials in ASTM D396-10 (incorporated by reference, *see* § 63.14(b)).

Responsible official means responsible official as defined in § 70.2.

Rolling average means the average of all data collected during the applicable averaging period. For demonstration of compliance with a CO CEMS-based emission limit based on CO concentration a 30-day (10-day) rolling average is comprised of the average of all the hourly average concentrations over the previous 720 (240) operating hours calculated each operating day. To demonstrate compliance on a 30-day rolling average basis for parameters other than CO, you must indicate the basis of the 30-day rolling average period you are using for compliance, as discussed in § 63.7545(e)(2)(iii). If you indicate the 30 operating day basis, you must calculate a new average value each operating day and shall include the measured hourly values for the preceding 30 operating days. If you select the 720 operating hours basis, you must average of all the hourly average concentrations over the previous 720 operating hours calculated each operating day.

Secondary material means the material as defined in § 241.2 of this chapter.

Shutdown means the period in which cessation of operation of a boiler or process heater is initiated for any purpose. Shutdown begins when the boiler or process heater no longer supplies useful thermal energy (such as heat or steam) for heating, cooling, or process purposes and/or generates electricity or when no fuel is being fed to the boiler or process heater, whichever is earlier. Shutdown ends when the boiler or process heater no longer supplies useful thermal energy (such as steam or heat) for heating, cooling, or process purposes and/or generates electricity, and no fuel is being combusted in the boiler or process heater.

Sloped grate means a unit where the solid fuel is fed to the top of the grate from where it slides downwards; while sliding the fuel first dries and then ignites and burns. The ash is deposited at the bottom of the grate. Fluidized bed, dutch oven, pile burner, hybrid suspension grate, suspension burners, and fuel cells are not considered to be a sloped grate design.

Solid fossil fuel includes, but is not limited to, coal, coke, petroleum coke, and tire derived fuel.

Solid fuel means any solid fossil fuel or biomass or bio-based solid fuel.

Startup means:

(1) Either the first-ever firing of fuel in a boiler or process heater for the purpose of supplying useful thermal energy for heating and/or producing electricity, or for any other purpose, or the firing of fuel in a boiler after a shutdown event for any purpose. Startup ends when any of the useful thermal energy from the boiler or process heater is supplied for heating, and/or producing electricity, or for any other purpose, or

(2) The period in which operation of a boiler or process heater is initiated for any purpose. Startup begins with either the first-ever firing of fuel in a boiler or process heater for the purpose of supplying useful thermal energy (such as steam or heat) for heating, cooling or process purposes, or producing electricity, or the firing of fuel in a boiler or process heater for any purpose after a shutdown event. Startup ends four hours after when the boiler or process heater supplies useful thermal energy (such as heat or steam) for heating, cooling, or process purposes, or generates electricity, whichever is earlier.

Steam output means:

(1) For a boiler that produces steam for process or heating only (no power generation), the energy content in terms of MMBtu of the boiler steam output,

(2) For a boiler that cogenerates process steam and electricity (also known as combined heat and power), the total energy output, which is the sum of the energy content of the steam exiting the turbine and sent to process in MMBtu and the energy of the electricity generated converted to MMBtu at a rate of 10,000 Btu per kilowatt-hour generated (10 MMBtu per megawatt-hour), and

(3) For a boiler that generates only electricity, the alternate output-based emission limits would be the appropriate emission limit from Table 1, 2, 14, or 15 to this subpart in units of pounds per million Btu heat input (lb per MWh).

(4) For a boiler that performs multiple functions and produces steam to be used for any combination of paragraphs (1), (2), and (3) of this definition that includes electricity generation of paragraph (3) of this definition,

the total energy output, in terms of MMBtu of steam output, is the sum of the energy content of steam sent directly to the process and/or used for heating (S_1), the energy content of turbine steam sent to process plus energy in electricity according to paragraph (2) of this definition (S_2), and the energy content of electricity generated by a electricity only turbine as paragraph (3) of this definition (MW_3) and would be calculated using Equation 1 to this definition. In the case of boilers supplying steam to one or more common headers, S_1, S_2, and $MW_{(3)}$ for each boiler would be calculated based on its (steam energy) contribution (fraction of total steam energy) to the common header.

Equation 1 to the definition *Steam Output*

$$SO_M = S_1 + S_2 + (MW_{(3)} \; x \; CFn) \qquad \text{(Eq. 1)}$$

Where:

SO_M = Total steam output for multi-function boiler, MMBtu.

S_1 = Energy content of steam sent directly to the process and/or used for heating, MMBtu.

S_2 = Energy content of turbine steam sent to the process plus energy in electricity according to paragraph (2) of this definition, MMBtu.

$MW_{(3)}$ = Electricity generated according to paragraph (3) of this definition, MWh.

CFn = Conversion factor for the appropriate subcategory for converting electricity generated according to paragraph (3) of this definition to equivalent steam energy, MMBtu/MWh.

CFn for emission limits for boilers in the unit designed to burn solid fuel subcategory = 10.8.

CFn PM and CO emission limits for boilers in one of the subcategories of units designed to burn coal = 11.7.

CFn PM and CO emission limits for boilers in one of the subcategories of units designed to burn biomass = 12.1.

CFn for emission limits for boilers in one of the subcategories of units designed to burn liquid fuel = 11.2.

CFn for emission limits for boilers in the unit designed to burn gas 2 (other) subcategory = 6.2.

Stoker means a unit consisting of a mechanically operated fuel feeding mechanism, a stationary or moving grate to support the burning of fuel and admit under-grate air to the fuel, an overfire air system to complete combustion, and an ash discharge system. This definition of stoker includes air swept stokers. There are two general types of stokers: Underfeed and overfeed. Overfeed stokers include mass feed and spreader stokers. Fluidized bed, dutch oven, pile burner, hybrid suspension grate, suspension burners, and fuel cells are not considered to be a stoker design.

Stoker/sloped grate/other unit designed to burn kiln dried biomass means the unit is in the units designed to burn biomass/bio-based solid subcategory that is either a stoker, sloped grate, or other combustor design and is not in the stoker/sloped grate/other units designed to burn wet biomass subcategory.

Stoker/sloped grate/other unit designed to burn wet biomass means the unit is in the units designed to burn biomass/bio-based solid subcategory that is either a stoker, sloped grate, or other combustor design and any of the biomass/bio-based solid fuel combusted in the unit exceeds 20 percent moisture on an annual heat input basis.

Suspension burner means a unit designed to fire dry biomass/biobased solid particles in suspension that are conveyed in an airstream to the furnace like pulverized coal. The combustion of the fuel material is completed on a grate or floor below. The biomass/biobased fuel combusted in the unit shall not exceed 20 percent moisture on an

annual heat input basis. Fluidized bed, dutch oven, pile burner, and hybrid suspension grate units are not part of the suspension burner subcategory.

Temporary boiler means any gaseous or liquid fuel boiler or process heater that is designed to, and is capable of, being carried or moved from one location to another by means of, for example, wheels, skids, carrying handles, dollies, trailers, or platforms. A boiler or process heater is not a temporary boiler or process heater if any one of the following conditions exists:

(1) The equipment is attached to a foundation.

(2) The boiler or process heater or a replacement remains at a location within the facility and performs the same or similar function for more than 12 consecutive months, unless the regulatory agency approves an extension. An extension may be granted by the regulating agency upon petition by the owner or operator of a unit specifying the basis for such a request. Any temporary boiler or process heater that replaces a temporary boiler or process heater at a location and performs the same or similar function will be included in calculating the consecutive time period.

(3) The equipment is located at a seasonal facility and operates during the full annual operating period of the seasonal facility, remains at the facility for at least 2 years, and operates at that facility for at least 3 months each year.

(4) The equipment is moved from one location to another within the facility but continues to perform the same or similar function and serve the same electricity, process heat, steam, and/or hot water system in an attempt to circumvent the residence time requirements of this definition.

Total selected metals (TSM) means the sum of the following metallic hazardous air pollutants: arsenic, beryllium, cadmium, chromium, lead, manganese, nickel and selenium.

Traditional fuel means the fuel as defined in § 241.2 of this chapter.

Tune-up means adjustments made to a boiler or process heater in accordance with the procedures outlined in § 63.7540(a)(10).

Ultra low sulfur liquid fuel means a distillate oil that has less than or equal to 15 ppm sulfur.

Unit designed to burn biomass/bio-based solid subcategory includes any boiler or process heater that burns at least 10 percent biomass or bio-based solids on an annual heat input basis in combination with solid fossil fuels, liquid fuels, or gaseous fuels.

Unit designed to burn coal/solid fossil fuel subcategory includes any boiler or process heater that burns any coal or other solid fossil fuel alone or at least 10 percent coal or other solid fossil fuel on an annual heat input basis in combination with liquid fuels, gaseous fuels, or less than 10 percent biomass and bio-based solids on an annual heat input basis.

Unit designed to burn gas 1 subcategory includes any boiler or process heater that burns only natural gas, refinery gas, and/or other gas 1 fuels. Gaseous fuel boilers and process heaters that burn liquid fuel for periodic testing of liquid fuel, maintenance, or operator training, not to exceed a combined total of 48 hours during any calendar year, are included in this definition. Gaseous fuel boilers and process heaters that burn liquid fuel during periods of gas curtailment or gas supply interruptions of any duration are also included in this definition.

Unit designed to burn gas 2 (other) subcategory includes any boiler or process heater that is not in the unit designed to burn gas 1 subcategory and burns any gaseous fuels either alone or in combination with less than 10 percent coal/solid fossil fuel, and less than 10 percent biomass/bio-based solid fuel on an annual heat input basis, and no liquid fuels. Gaseous fuel boilers and process heaters that are not in the unit designed to burn gas 1 subcategory and that burn liquid fuel for periodic testing of liquid fuel, maintenance, or operator training, not to exceed a combined total of 48 hours during any calendar year, are included in this definition. Gaseous fuel boilers and process heaters that are not in the unit designed to burn gas 1 subcategory and that burn liquid fuel during periods of gas curtailment or gas supply interruption of any duration are also included in this definition.

Unit designed to burn heavy liquid subcategory means a unit in the unit designed to burn liquid subcategory where at least 10 percent of the heat input from liquid fuels on an annual heat input basis comes from heavy liquids.

Unit designed to burn light liquid subcategory means a unit in the unit designed to burn liquid subcategory that is not part of the unit designed to burn heavy liquid subcategory.

Unit designed to burn liquid subcategory includes any boiler or process heater that burns any liquid fuel, but less than 10 percent coal/solid fossil fuel and less than 10 percent biomass/bio-based solid fuel on an annual heat input basis, either alone or in combination with gaseous fuels. Units in the unit design to burn gas 1 or unit designed to burn gas 2 (other) subcategories that burn liquid fuel for periodic testing of liquid fuel, maintenance, or operator training, not to exceed a combined total of 48 hours during any calendar year are not included in this definition. Units in the unit design to burn gas 1 or unit designed to burn gas 2 (other) subcategories during periods of gas curtailment or gas supply interruption of any duration are also not included in this definition.

Unit designed to burn liquid fuel that is a non-continental unit means an industrial, commercial, or institutional boiler or process heater meeting the definition of the unit designed to burn liquid subcategory located in the State of Hawaii, the Virgin Islands, Guam, American Samoa, the Commonwealth of Puerto Rico, or the Northern Mariana Islands.

Unit designed to burn solid fuel subcategory means any boiler or process heater that burns only solid fuels or at least 10 percent solid fuel on an annual heat input basis in combination with liquid fuels or gaseous fuels.

Useful thermal energy means energy (*i.e.,* steam, hot water, or process heat) that meets the minimum operating temperature, flow, and/or pressure required by any energy use system that uses energy provided by the affected boiler or process heater.

Vegetable oil means oils extracted from vegetation.

Voluntary Consensus Standards or VCS mean technical standards (*e.g.,* materials specifications, test methods, sampling procedures, business practices) developed or adopted by one or more voluntary consensus bodies. EPA/Office of Air Quality Planning and Standards, by precedent, has only used VCS that are written in English. Examples of VCS bodies are: American Society of Testing and Materials (ASTM 100 Barr Harbor Drive, P.O. Box CB700, West Conshohocken, Pennsylvania 19428-B2959, (800) 262-1373, *http://www.astm.org*), American Society of Mechanical Engineers (ASME ASME, Three Park Avenue, New York, NY 10016-5990, (800) 843-2763, *http://www.asme.org*), International Standards Organization (ISO 1, ch. de la Voie-Creuse, Case postale 56, CH-1211 Geneva 20, Switzerland, + 41 22 749 01 11, *http://www.iso.org/iso/home.htm*), Standards Australia (AS Level 10, The Exchange Centre, 20 Bridge Street, Sydney, GPO Box 476, Sydney NSW 2001, + 61 2 9237 6171 *http://www.stadards.org.au*), British Standards Institution (BSI, 389 Chiswick High Road, London, W4 4AL, United Kingdom, + 44 (0)20 8996 9001, *http://www.bsigroup.com*), Canadian Standards Association (CSA 5060 Spectrum Way, Suite 100, Mississauga, Ontario L4W 5N6, Canada, 800-463-6727, *http://www.csa.ca*), European Committee for Standardization (CEN CENELEC Management Centre Avenue Marnix 17 B-1000 Brussels, Belgium + 32 2 550 08 11, *http://www.cen.eu/cen*), and German Engineering Standards (VDI VDI Guidelines Department, P.O. Box 10 11 39 40002, Duesseldorf, Germany, + 49 211 6214-230, *http://www.vdi.eu*). The types of standards that are not considered VCS are standards developed by: The United States, *e.g.,* California (CARB) and Texas (TCEQ); industry groups, such as American Petroleum Institute (API), Gas Processors Association (GPA), and Gas Research Institute (GRI); and other branches of the U.S. government, *e.g.,* Department of Defense (DOD) and Department of Transportation (DOT). This does not preclude EPA from using standards developed by groups that are not VCS bodies within their rule. When this occurs, EPA has done searches and reviews for VCS equivalent to these non-EPA methods.

Waste heat boiler means a device that recovers normally unused energy (i.e., hot exhaust gas) and converts it to usable heat. Waste heat boilers are also referred to as heat recovery steam generators. Waste heat boilers are heat exchangers generating steam from incoming hot exhaust gas from an industrial (e.g., thermal oxidizer, kiln, furnace) or power (e.g., combustion turbine, engine) equipment. Duct burners are sometimes used to increase the temperature of the incoming hot exhaust gas.

Waste heat process heater means an enclosed device that recovers normally unused energy (i.e., hot exhaust gas) and converts it to usable heat. Waste heat process heaters are also referred to as recuperative process heaters. This definition includes both fired and unfired waste heat process heaters.

Wet scrubber means any add-on air pollution control device that mixes an aqueous stream or slurry with the exhaust gases from a boiler or process heater to control emissions of particulate matter or to absorb and neutralize acid gases, such as hydrogen chloride. A wet scrubber creates an aqueous stream or slurry as a byproduct of the emissions control process.

Work practice standard means any design, equipment, work practice, or operational standard, or combination thereof, that is promulgated pursuant to section 112(h) of the Clean Air Act.

[78 FR 15664, Mar. 21, 2011, as amended at 78 FR 7163, Jan. 31, 2013; 80 FR 72817, Nov. 20, 2015; 87 FR 60846, Oct. 6, 2022]

Table 1 to Subpart DDDDD of Part 63 - Emission Limits for New or Reconstructed Boilers and Process Heaters [c]

As stated in § 63.7500, you must comply with the following applicable emission limits:

Table 1 to Subpart DDDDD of Part 63 - Emission Limits for New or Reconstructed Boilers and Process Heaters [c]

[Units with heat input capacity of 10 million Btu per hour or greater]

If your boiler or process heater is in this subcategory . . .	**For the following pollutants . . .**	**The emissions must not exceed the following emission limits, except during startup and shutdown . . .**	**Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .**	**Using this specified sampling**
1. Units in all subcategories designed to burn solid fuel	a. HCl	2.1E-04[a] lb per MMBtu of heat input	2.9E-04[a] lb per MMBtu of steam output or 2.7E-03[a] lb per MWh	For M26A, collect a minimum of 1 dscm per run; for M26 collect a minimum of 120 liters per run.
	b. Mercury	8.0E-07[a] lb per MMBtu of heat input	8.7E-07[a] lb per MMBtu of steam output or 1.1E-05[a] lb per MWh	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
2. Units designed to burn coal/solid fossil fuel	a. Filterable PM (or TSM)	1.1E-03 lb per MMBtu of heat input; or (2.3E-05 lb per MMBtu of heat input)	1.1E-03 lb per MMBtu of steam output or 1.4E-02 lb per MWh; or (2.7E-05 lb per MMBtu of steam output or 2.9E-04 lb per MWh)	Collect a minimum of 3 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling
3. Pulverized coal boilers designed to burn coal/solid fossil fuel	a. Carbon monoxide (CO) (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (320 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	0.11 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
4. Stokers/others designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (340 ppm by volume on a dry basis corrected to 3-percent oxygen[d], 30-day rolling average)	0.12 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
5. Fluidized bed units designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (230 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	0.11 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
6. Fluidized bed units with an integrated heat exchanger designed to burn coal/solid fossil fuel	a. CO (or CEMS)	140 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (150 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	1.2E-01 lb per MMBtu of steam output or 1.5 lb per MWh; 3-run average	1 hr minimum sampling time.
7. Stokers/sloped grate/others designed to burn wet biomass fuel	a. CO (or CEMS)	590 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (390 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	6.1E-01 lb per MMBtu of steam output or 6.5 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.3E-02 lb per MMBtu of heat input; or (2.6E-05 lb per MMBtu of heat input)	1.4E-02 lb per MMBtu of steam output or 1.9E-01 lb per MWh; or (2.7E-05 lb per MMBtu of steam output or 3.7E-04 lb per MWh)	Collect a minimum of 2 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling
8. Stokers/sloped grate/others designed to burn kiln-dried biomass fuel	a. CO	460 ppm by volume on a dry basis corrected to 3-percent oxygen	4.3E-01 lb per MMBtu of steam output or 5.1 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (5.0E-03 lb per MMBtu of heat input)	3.5E-02 lb per MMBtu of steam output or 4.2E-01 lb per MWh; or (5.2E-03 lb per MMBtu of steam output or 7.0E-02 lb per MWh)	Collect a minimum of 2 dscm per run.
9. Fluidized bed units designed to burn biomass/bio-based solids	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (310 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	1.3E-01 lb per MMBtu of steam output or 1.5 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	4.1E-03 lb per MMBtu of heat input; or (8.4E-06[a] lb per MMBtu of heat input)	5.0E-03 lb per MMBtu of steam output or 5.8E-02 lb per MWh; or (1.1E-05[a] lb per MMBtu of steam output or 1.2E-04[a] lb per MWh)	Collect a minimum of 3 dscm per run.
10. Suspension burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	220 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (2,000 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 10-day rolling average)	0.18 lb per MMBtu of steam output or 2.5 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (8.0E-03 lb per MMBtu of heat input)	3.1E-02 lb per MMBtu of steam output or 4.2E-01 lb per MWh; or (8.1E-03 lb per MMBtu of steam output or 1.2E-01 lb per MWh)	Collect a minimum of 2 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling
11. Dutch Ovens/Pile burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	330 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (520 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 10-day rolling average)	3.5E-01 lb per MMBtu of steam output or 3.6 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.5E-03 lb per MMBtu of heat input; or (3.9E-05 lb per MMBtu of heat input)	3.4E-03 lb per MMBtu of steam output or 3.5E-02 lb per MWh; or (5.2E-05 lb per MMBtu of steam output or 5.5E-04 lb per MWh)	Collect a minimum of 3 dscm per run.
12. Fuel cell units designed to burn biomass/bio-based solids	a. CO	910 ppm by volume on a dry basis corrected to 3-percent oxygen	1.1 lb per MMBtu of steam output or 1.0E+01 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.1E-02 lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	2.0E-02 lb per MMBtu of steam output or 1.6E-01 lb per MWh; or (5.1E-05 lb per MMBtu of steam output or 4.1E-04 lb per MWh)	Collect a minimum of 2 dscm per run.
13. Hybrid suspension grate boiler designed to burn biomass/bio-based solids	a. CO (or CEMS)	180 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (900 ppm by volume on a dry basis corrected to 3-percent oxygen[d], 30-day rolling average)	0.22 lb per MMBtu of steam output or 2.0 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.6E-02 lb per MMBtu of heat input; or (4.4E-04 lb per MMBtu of heat input)	3.3E-02 lb per MMBtu of steam output or 3.7E-01 lb per MWh; or (5.5E-04 lb per MMBtu of steam output or 6.2E-03 lb per MWh)	Collect a minimum of 3 dscm per run.
14. Units designed to burn liquid fuel	a. HCl	1.5E-04[a] lb per MMBtu of heat input	1.7E-04[a] lb per MMBtu of steam output or 2.1E-03[a] lb per MWh	For M26A: Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling
	b. Mercury	4.8E-07[a] lb per MMBtu of heat input	5.3E-07[a] lb per MMBtu of steam output or 6.7E-06[a] lb per MWh	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
15. Units designed to burn heavy liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.9E-03 lb per MMBtu of heat input; or (6.1E-06[a] lb per MMBtu of heat input)	2.1E-03 lb per MMBtu of steam output or 2.7E-02 lb per MWh; or (6.7E-6[a] lb per MMBtu of steam output or 8.5E-5[a] lb per MWh)	Collect a minimum of 3 dscm per run.
16. Units designed to burn light liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.13 lb per MMBtu of steam output or 1.4 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.1E-03[a] lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	1.2E-03[a] lb per MMBtu of steam output or 1.6E-02[a] lb per MWh; or (3.2E-05 lb per MMBtu of steam output or 4.0E-04 lb per MWh)	Collect a minimum of 3 dscm per run.
17. Units designed to burn liquid fuel that are non-continental units	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average based on stack test	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.3E-02 lb per MMBtu of heat input; or (8.6E-04 lb per MMBtu of heat input)	2.5E-02 lb per MMBtu of steam output or 3.2E-01 lb per MWh; or (9.4E-04 lb per MMBtu of steam output or 1.2E-02 lb per MWh)	Collect a minimum of 4 dscm per run.
18. Units designed to burn gas 2 (other) gases	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.16 lb per MMBtu of steam output or 1.0 lb per MWh	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling
	b. HCl	1.7E-03 lb per MMBtu of heat input	2.9E-03 lb per MMBtu of steam output or 1.8E-02 lb per MWh	For M26A, collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	c. Mercury	7.9E-06 lb per MMBtu of heat input	1.4E-05 lb per MMBtu of steam output or 8.3E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 3 dscm.
	d. Filterable PM (or TSM)	7.3E-03 lb per MMBtu of heat input; or (2.1E-04 lb per MMBtu of heat input)	1.3E-02 lb per MMBtu of steam output or 7.6E-02 lb per MWh; or (3.5E-04 lb per MMBtu of steam output or 2.2E-03 lb per MWh)	Collect a minimum of 3 dscm per run.

[a] If you are conducting stack tests to demonstrate compliance and your performance tests for this pollutant for at least 2 consecutive years show that your emissions are at or below this limit, you can skip testing according to § 63.7515 if all of the other provisions of § 63.7515 are met. For all other pollutants that do not contain a footnote “a”, your performance tests for this pollutant for at least 2 consecutive years must show that your emissions are at or below 75 percent of this limit in order to qualify for skip testing.

[b] Incorporated by reference, see § 63.14.

[c] If your affected source is a new or reconstructed affected source that commenced construction or reconstruction after June 4, 2010, and before April 1, 2013, you may comply with the emission limits in Table 11, 12, or 13 to this subpart until January 31, 2016. On and after January 31, 2016, but before October 6, 2025 you may comply with the emission limits in Table 14 to this subpart. On and after October 6, 2025 you must comply with the emission limits in this Table 1.

[d] An owner or operator may determine compliance with the carbon monoxide emissions limit using CO_2 as a diluent correction in place of oxygen as described in § 63.7525(a)(1). EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to generate the appropriate CO_2 correction percentage for the fuel type burned in the unit and must also take into account that the 3-percent oxygen correction is to be done on a dry basis. The methodology must account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. This methodology must be detailed in the site-specific monitoring plan developed according to § 63.7505(d).

[87 FR 60847, Oct. 6, 2022]

Table 2 to Subpart DDDDD of Part 63 - Emission Limits for Existing Boilers and Process Heaters [d]

As stated in § 63.7500, you must comply with the following applicable emission limits:

[Units with heat input capacity of 10 million Btu per hour or greater]

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
1. Units in all subcategories designed to burn solid fuel	a. HCl	2.0E-02 lb per MMBtu of heat input	2.3E-02 lb per MMBtu of steam output or 0.26 lb per MWh	For M26A, collect a minimum of 1 dscm per run; for M26, collect a minimum of 120 liters per run.
	b. Mercury	5.4E-06 lb per MMBtu of heat input	6.2E-06 lb per MMBtu of steam output or 6.9E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 3 dscm.
2. Units design to burn coal/solid fossil fuel	a. Filterable PM (or TSM)	3.9E-02 lb per MMBtu of heat input; or (5.3E-05 lb per MMBtu of heat input)	4.1E-02 lb per MMBtu of steam output or 4.8E-01 lb per MWh; or (5.6E-05 lb per MMBtu of steam output or 6.5E-04 lb per MWh)	Collect a minimum of 2 dscm per run.
3. Pulverized coal boilers designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (320 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	0.11 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
4. Stokers/others designed to burn coal/solid fossil fuel	a. CO (or CEMS)	150 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (340 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	0.14 lb per MMBtu of steam output or 1.6 lb per MWh; 3-run average	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
5. Fluidized bed units designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (230 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	0.12 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
6. Fluidized bed units with an integrated heat exchanger designed to burn coal/solid fossil fuel	a. CO (or CEMS)	140 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (150 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	1.3E-01 lb per MMBtu of steam output or 1.5 lb per MWh; 3-run average	1 hr minimum sampling time.
7. Stokers/sloped grate/others designed to burn wet biomass fuel	a. CO (or CEMS)	1,100 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (720 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	1.1 lb per MMBtu of steam output or 13 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.4E-02 lb per MMBtu of heat input; or (2.0E-04 lb per MMBtu of heat input)	4.0E-02 lb per MMBtu of steam output or 4.8E-01 lb per MWh; or (2.4E-04 lb per MMBtu of steam output or 2.8E-03 lb per MWh)	Collect a minimum of 2 dscm per run.
8. Stokers/sloped grate/others designed to burn kiln-dried biomass fuel	a. CO	460 ppm by volume on a dry basis corrected to 3-percent oxygen	4.2E-01 lb per MMBtu of steam output or 5.1 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.2E-01 lb per MMBtu of heat input; or (5.0E-03 lb per MMBtu of heat input)	3.7E-01 lb per MMBtu of steam output or 4.5 lb per MWh; or (5.9E-03 lb per MMBtu of steam output or 7.0E-02 lb per MWh)	Collect a minimum of 1 dscm per run.
9. Fluidized bed units designed to burn biomass/bio-based solid	a. CO (or CEMS)	210 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (310 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	2.1E-01 lb per MMBtu of steam output or 2.3 lb per MWh; 3-run average	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Filterable PM (or TSM)	7.4E-03 lb per MMBtu of heat input; or (6.4E-05 lb per MMBtu of heat input)	9.2E-03 lb per MMBtu of steam output or 0.11 lb per MWh; or (8.0E-05 lb per MMBtu of steam output or 9.0E-04 lb per MWh)	Collect a minimum of 1 dscm per run.
10. Suspension burners designed to burn biomass/bio-based solid	a. CO (or CEMS)	2,400 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (2,000 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 10-day rolling average)	1.9 lb per MMBtu of steam output or 27 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	4.1E-02 lb per MMBtu of heat input; or (8.0E-03 lb per MMBtu of heat input)	4.2E-02 lb per MMBtu of steam output or 5.8E-01 lb per MWh; or (8.1E-03 lb per MMBtu of steam output or 0.12 lb per MWh)	Collect a minimum of 2 dscm per run.
11. Dutch Ovens/Pile burners designed to burn biomass/bio-based solid	a. CO (or CEMS)	770 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (520 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 10-day rolling average)	8.4E-01 lb per MMBtu of steam output or 8.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.8E-01 lb per MMBtu of heat input; or (2.0E-03 lb per MMBtu of heat input)	2.5E-01 lb per MMBtu of steam output or 2.6 lb per MWh; or (2.8E-03 lb per MMBtu of steam output or 2.8E-02 lb per MWh)	Collect a minimum of 1 dscm per run.
12. Fuel cell units designed to burn biomass/bio-based solid	a. CO	1,100 ppm by volume on a dry basis corrected to 3-percent oxygen	2.4 lb per MMBtu of steam output or 12 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.0E-02 lb per MMBtu of heat input; or (5.8E-03 lb per MMBtu of heat input)	5.5E-02 lb per MMBtu of steam output or 2.8E-01 lb per MWh; or (1.6E-02 lb per MMBtu of steam output or 8.1E-02 lb per MWh)	Collect a minimum of 2 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
13. Hybrid suspension grate units designed to burn biomass/bio-based solid	a. CO (or CEMS)	3,500 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (900 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	3.5 lb per MMBtu of steam output or 39 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	4.4E-01 lb per MMBtu of heat input; or (4.5E-04 lb per MMBtu of heat input)	5.5E-01 lb per MMBtu of steam output or 6.2 lb per MWh; or (5.7E-04 lb per MMBtu of steam output or 6.3E-03 lb per MWh)	Collect a minimum of 1 dscm per run.
14. Units designed to burn liquid fuel	a. HCl	1.1E-03 lb per MMBtu of heat input	1.4E-03 lb per MMBtu of steam output or 1.6E-02 lb per MWh	For M26A, collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	b. Mercury	7.3E-07 lb per MMBtu of heat input	8.8E-07 lb per MMBtu of steam output or 1.1E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B collect a minimum sample as specified in the method, for ASTM D6784[b] collect a minimum of 2 dscm.
15. Units designed to burn heavy liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	5.9E-02 lb per MMBtu of heat input; or (2.0E-04 lb per MMBtu of heat input)	7.2E-02 lb per MMBtu of steam output or 8.2E-01 lb per MWh; or (2.5E-04 lb per MMBtu of steam output or 2.8E-03 lb per MWh)	Collect a minimum of 1 dscm per run.
16. Units designed to burn light liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.13 lb per MMBtu of steam output or 1.4 lb per MWh	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Filterable PM (or TSM)	7.9E-03 lb per MMBtu of heat input; or (6.2E-05 lb per MMBtu of heat input)	9.6E-03 lb per MMBtu of steam output or 1.1E-01 lb per MWh; or (7.5E-05 lb per MMBtu of steam output or 8.6E-04 lb per MWh)	Collect a minimum of 3 dscm per run.
17. Units designed to burn liquid fuel that are non-continental units	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average based on stack test	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.2E-01 lb per MMBtu of heat input; or (8.6E-04 lb per MMBtu of heat input)	2.7E-01 lb per MMBtu of steam output or 3.1 lb per MWh; or (1.1E-03 lb per MMBtu of steam output or 1.2E-02 lb per MWh)	Collect a minimum of 2 dscm per run.
18. Units designed to burn gas 2 (other) gases	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.16 lb per MMBtu of steam output or 1.0 lb per MWh	1 hr minimum sampling time.
	b. HCl	1.7E-03 lb per MMBtu of heat input	2.9E-03 lb per MMBtu of steam output or 1.8E-02 lb per MWh	For M26A, collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	c. Mercury	7.9E-06 lb per MMBtu of heat input	1.4E-05 lb per MMBtu of steam output or 8.3E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 2 dscm.
	d. Filterable PM (or TSM)	7.3E-03 lb per MMBtu of heat input or (2.1E-04 lb per MMBtu of heat input)	1.3E-02 lb per MMBtu of steam output or 7.6E-02 lb per MWh; or (3.5E-04 lb per MMBtu of steam output or 2.2E-03 lb per MWh)	Collect a minimum of 3 dscm per run.

[a] If you are conducting stack tests to demonstrate compliance and your performance tests for this pollutant for at least 2 consecutive years show that your emissions are at or below this limit, you can skip testing according to § 63.7515 if all of the other provisions of § 63.7515 are met. For all other pollutants that do not contain a footnote a, your performance tests for this pollutant for at least 2 consecutive years must show that your emissions are at or below 75 percent of this limit in order to qualify for skip testing.

[b] Incorporated by reference, see § 63.14.

[c] An owner or operator may determine compliance with the carbon monoxide emissions limit be determined using CO_2 as a diluent correction in place of oxygen as described in § 63.7525(a)(1). EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to generate the appropriate CO_2 correction percentage for the fuel type burned in the unit and must also take into account that the 3-percent oxygen correction is to be done on a dry basis. The methodology must account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. This methodology must be detailed in the site-specific monitoring plan developed according to § 63.7505(d).

[d] Before October 6, 2025 you may comply with the emission limits in Table 15 to this subpart. On and after October 6, 2025], you must comply with the emission limits in this Table 2.

[87 FR 60849, Oct. 6, 2022]

Table 3 to Subpart DDDDD of Part 63 - Work Practice Standards

As stated in § 63.7500, you must comply with the following applicable work practice standards:

If your unit is . . .	You must meet the following . . .
1. A new or existing boiler or process heater with a continuous oxygen trim system that maintains an optimum air to fuel ratio, or a heat input capacity of less than or equal to 5 million Btu per hour in any of the following subcategories: unit designed to burn gas 1; unit designed to burn gas 2 (other); or unit designed to burn light liquid, or a limited use boiler or process heater	Conduct a tune-up of the boiler or process heater every 5 years as specified in § 63.7540.
2. A new or existing boiler or process heater without a continuous oxygen trim system and with heat input capacity of less than 10 million Btu per hour in the unit designed to burn heavy liquid or unit designed to burn solid fuel subcategories; or a new or existing boiler or process heater with heat input capacity of less than 10 million Btu per hour, but greater than 5 million Btu per hour, in any of the following subcategories: unit designed to burn gas 1; unit designed to burn gas 2 (other); or unit designed to burn light liquid	Conduct a tune-up of the boiler or process heater biennially as specified in § 63.7540.
3. A new or existing boiler or process heater without a continuous oxygen trim system and with heat input capacity of 10 million Btu per hour or greater	Conduct a tune-up of the boiler or process heater annually as specified in § 63.7540. Units in either the Gas 1 or Metal Process Furnace subcategories will conduct this tune-up as a work practice for all regulated emissions under this subpart. Units in all other subcategories will conduct this tune-up as a work practice for dioxins/furans.

If your unit is . . .	You must meet the following . . .
4. An existing boiler or process heater located at a major source facility, not including limited use units	Must have a one-time energy assessment performed by a qualified energy assessor. An energy assessment completed on or after January 1, 2008, that meets or is amended to meet the energy assessment requirements in this table, satisfies the energy assessment requirement. A facility that operated under an energy management program developed according to the ENERGY STAR guidelines for energy management or compatible with ISO 50001 for at least one year between January 1, 2008 and the compliance date specified in § 63.7495 that includes the affected units also satisfies the energy assessment requirement. The energy assessment must include the following with extent of the evaluation for items a. to e. appropriate for the on-site technical hours listed in § 63.7575:
	a. A visual inspection of the boiler or process heater system.
	b. An evaluation of operating characteristics of the boiler or process heater systems, specifications of energy using systems, operating and maintenance procedures, and unusual operating constraints.
	c. An inventory of major energy use systems consuming energy from affected boilers and process heaters and which are under the control of the boiler/process heater owner/operator.
	d. A review of available architectural and engineering plans, facility operation and maintenance procedures and logs, and fuel usage.
	e. A review of the facility's energy management program and provide recommendations for improvements consistent with the definition of energy management program, if identified.
	f. A list of cost-effective energy conservation measures that are within the facility's control.
	g. A list of the energy savings potential of the energy conservation measures identified.
	h. A comprehensive report detailing the ways to improve efficiency, the cost of specific improvements, benefits, and the time frame for recouping those investments.
5. An existing or new boiler or process heater subject to emission limits in Table 1 or 2 or 11 through 15 to this subpart during startup	a. You must operate all CMS during startup. b. For startup of a boiler or process heater, you must use one or a combination of the following clean fuels: natural gas, synthetic natural gas, propane, other Gas 1 fuels, distillate oil, syngas, ultra-low sulfur diesel, fuel oil-soaked rags, kerosene, hydrogen, paper, cardboard, refinery gas, liquefied petroleum gas, clean dry biomass, and any fuels meeting the appropriate HCl, mercury and TSM emission standards by fuel analysis.

If your unit is . . .	You must meet the following . . .
	c. You have the option of complying using either of the following work practice standards. (1) If you choose to comply using paragraph (1) of the definition of “startup” in § 63.7575, once you start firing fuels that are not clean fuels you must vent emissions to the main stack(s) and engage all of the applicable control devices except limestone injection in fluidized bed combustion (FBC) boilers, dry scrubber, fabric filter, and selective catalytic reduction (SCR). You must start your limestone injection in FBC boilers, dry scrubber, fabric filter, and SCR systems as expeditiously as possible. Startup ends when steam or heat is supplied for any purpose, OR (2) If you choose to comply using paragraph (2) of the definition of “startup” in § 63.7575, once you start to feed fuels that are not clean fuels, you must vent emissions to the main stack(s) and engage all of the applicable control devices so as to comply with the emission limits within 4 hours of start of supplying useful thermal energy. You must engage and operate PM control within one hour of first feeding fuels that are not clean fuels[a]. You must start all applicable control devices as expeditiously as possible, but, in any case, when necessary to comply with other standards applicable to the source by a permit limit or a rule other than this subpart that require operation of the control devices. You must develop and implement a written startup and shutdown plan, as specified in § 63.7505(e).
	d. You must comply with all applicable emission limits at all times except during startup and shutdown periods at which time you must meet this work practice. You must collect monitoring data during periods of startup, as specified in § 63.7535(b). You must keep records during periods of startup. You must provide reports concerning activities and periods of startup, as specified in § 63.7555.
6. An existing or new boiler or process heater subject to emission limits in Table 1 or 2 or Tables 11 through 15 to this subpart during shutdown	You must operate all CMS during shutdown. While firing fuels that are not clean fuels during shutdown, you must vent emissions to the main stack(s) and operate all applicable control devices, except limestone injection in FBC boilers, dry scrubber, fabric filter, and SCR but, in any case, when necessary to comply with other standards applicable to the source that require operation of the control device.
	If, in addition to the fuel used prior to initiation of shutdown, another fuel must be used to support the shutdown process, that additional fuel must be one or a combination of the following clean fuels: Natural gas, synthetic natural gas, propane, other Gas 1 fuels, distillate oil, syngas, ultra-low sulfur diesel, refinery gas, and liquefied petroleum gas.

If your unit is . . .	You must meet the following . . .
	You must comply with all applicable emissions limits at all times except for startup or shutdown periods conforming with this work practice. You must collect monitoring data during periods of shutdown, as specified in § 63.7535(b). You must keep records during periods of shutdown. You must provide reports concerning activities and periods of shutdown, as specified in § 63.7555.

[a] As specified in § 63.7555(d)(13), the source may request an alternative timeframe with the PM controls requirement to the permitting authority (state, local, or tribal agency) that has been delegated authority for this subpart by EPA. The source must provide evidence that (1) it is unable to safely engage and operate the PM control(s) to meet the "fuel firing + 1 hour" requirement and (2) the PM control device is appropriately designed and sized to meet the filterable PM emission limit. It is acknowledged that there may be another control device that has been installed other than ESP that provides additional PM control (e.g., scrubber).

[87 FR 60852, Oct. 6, 2022]

Table 4 to Subpart DDDDD of Part 63 - Operating Limits for Boilers and Process Heaters

As stated in § 63.7500, you must comply with the applicable operating limits:

Table 4 to Subpart DDDDD of Part 63 - Operating Limits for Boilers and Process Heaters

When complying with a numerical emission limit under Table 1, 2, 11, 12, 13, 14, or 15 of this subpart using . . .	You must meet these operating limits. . .
1. Wet PM scrubber control on a boiler or process heater not using a PM CPMS	Maintain the 30-day rolling average pressure drop and the 30-day rolling average liquid flow rate at or above the lowest one-hour average pressure drop and the lowest one-hour average liquid flow rate, respectively, measured during the performance test demonstrating compliance with the PM emission limitation according to § 63.7530(b) and Table 7 to this subpart.
2. Wet acid gas (HCl) scrubber[a] control on a boiler or process heater not using a HCl CEMS	Maintain the 30-day rolling average effluent pH at or above the lowest one-hour average pH and the 30-day rolling average liquid flow rate at or above the lowest one-hour average liquid flow rate measured during the performance test demonstrating compliance with the HCl emission limitation according to § 63.7530(b) and Table 7 to this subpart.
3. Fabric filter control on a boiler or process heater not using a PM CPMS	a. Maintain opacity to less than or equal to 10 percent opacity or the highest hourly average opacity reading measured during the performance test run demonstrating compliance with the PM (or TSM) emission limitation (daily block average); or
	b. Install and operate a bag leak detection system according to § 63.7525 and operate the fabric filter such that the bag leak detection system alert is not activated more than 5 percent of the operating time during each 6-month period.
4. Electrostatic precipitator control on a boiler or process heater not using a PM CPMS	a. This option is for boilers and process heaters that operate dry control systems (*i.e.*, an ESP without a wet scrubber). Existing and new boilers and process heaters must maintain opacity to less than or equal to 10 percent opacity or the highest hourly average opacity reading measured during the performance test run demonstrating compliance with the PM (or TSM) emission limitation (daily block average).

When complying with a numerical emission limit under Table 1, 2, 11, 12, 13, 14, or 15 of this subpart using . . .	You must meet these operating limits. . .
	b. This option is only for boilers and process heaters not subject to PM CPMS or continuous compliance with an opacity limit (*i.e.*, dry ESP). Maintain the 30-day rolling average total secondary electric power input of the electrostatic precipitator at or above the operating limits established during the performance test according to § 63.7530(b) and Table 7 to this subpart.
5. Dry scrubber or carbon injection control on a boiler or process heater not using a mercury CEMS	Maintain the minimum sorbent or carbon injection rate as defined in § 63.7575 of this subpart.
6. Any other add-on air pollution control type on a boiler or process heater not using a PM CPMS	This option is for boilers and process heaters that operate dry control systems. Existing and new boilers and process heaters must maintain opacity to less than or equal to 10 percent opacity or the highest hourly average opacity reading measured during the performance test run demonstrating compliance with the PM (or TSM) emission limitation (daily block average).
7. Performance testing	For boilers and process heaters that demonstrate compliance with a performance test, maintain the 30-day rolling average operating load of each unit such that it does not exceed 110 percent of the highest hourly average operating load recorded during the performance test.
8. Oxygen analyzer system	For boilers and process heaters subject to a CO emission limit that demonstrate compliance with an O_2 analyzer system as specified in § 63.7525(a), maintain the 30-day rolling average oxygen content at or above the lowest hourly average oxygen concentration measured during the CO performance test, as specified in Table 8. This requirement does not apply to units that install an oxygen trim system since these units will set the trim system to the level specified in § 63.7525(a).
9. SO_2 CEMS	For boilers or process heaters subject to an HCl emission limit that demonstrate compliance with an SO_2 CEMS, maintain the 30-day rolling average SO_2 emission rate at or below the highest hourly average SO_2 concentration measured during the HCl performance test, as specified in Table 8.

[a] A wet acid gas scrubber is a control device that removes acid gases by contacting the combustion gas with an alkaline slurry or solution. Alkaline reagents include, but not limited to, lime, limestone and sodium.

[80 FR 72874, Nov. 20, 2015, as amended at 87 FR 60853, Oct. 6, 2022]

Table 5 to Subpart DDDDD of Part 63 - Performance Testing Requirements

As stated in § 63.7520, you must comply with the following requirements for performance testing for existing, new or reconstructed affected sources:

To conduct a performance test for the following pollutant . . .	You must. . .	Using, as appropriate . . .
1. Filterable PM	a. Select sampling ports location and the number of traverse points	Method 1 at 40 CFR part 60, appendix A-1 of this chapter.
	b. Determine velocity and volumetric flow-rate of the stack gas	Method 2, 2F, or 2G at 40 CFR part 60, appendix A-1 or A-2 to part 60 of this chapter.

To conduct a performance test for the following pollutant . . .	You must. . .	Using, as appropriate . . .
	c. Determine oxygen or carbon dioxide concentration of the stack gas	Method 3A or 3B at 40 CFR part 60, appendix A-2 to part 60 of this chapter, or ANSI/ASME PTC 19.10-1981.[a]
	d. Measure the moisture content of the stack gas	Method 4 at 40 CFR part 60, appendix A-3 of this chapter.
	e. Measure the PM emission concentration	Method 5 or 17 (positive pressure fabric filters must use Method 5D) at 40 CFR part 60, appendix A-3 or A-6 of this chapter.
	f. Convert emissions concentration to lb per MMBtu emission rates	Method 19 F-factor methodology at 40 CFR part 60, appendix A-7 of this chapter.
2. TSM	a. Select sampling ports location and the number of traverse points	Method 1 at 40 CFR part 60, appendix A-1 of this chapter.
	b. Determine velocity and volumetric flow-rate of the stack gas	Method 2, 2F, or 2G at 40 CFR part 60, appendix A-1 or A-2 of this chapter.
	c. Determine oxygen or carbon dioxide concentration of the stack gas	Method 3A or 3B at 40 CFR part 60, appendix A-1 of this chapter, or ANSI/ASME PTC 19.10-1981.[a]
	d. Measure the moisture content of the stack gas	Method 4 at 40 CFR part 60, appendix A-3 of this chapter.
	e. Measure the TSM emission concentration	Method 29 at 40 CFR part 60, appendix A-8 of this chapter
	f. Convert emissions concentration to lb per MMBtu emission rates	Method 19 F-factor methodology at 40 CFR part 60, appendix A-7 of this chapter.
3. Hydrogen chloride	a. Select sampling ports location and the number of traverse points	Method 1 at 40 CFR part 60, appendix A-1 of this chapter.
	b. Determine velocity and volumetric flow-rate of the stack gas	Method 2, 2F, or 2G at 40 CFR part 60, appendix A-2 of this chapter.
	c. Determine oxygen or carbon dioxide concentration of the stack gas	Method 3A or 3B at 40 CFR part 60, appendix A-2 of this chapter, or ANSI/ASME PTC 19.10-1981.[a]
	d. Measure the moisture content of the stack gas	Method 4 at 40 CFR part 60, appendix A-3 of this chapter.
	e. Measure the hydrogen chloride emission concentration	Method 26 or 26A (M26 or M26A) at 40 CFR part 60, appendix A-8 of this chapter.
	f. Convert emissions concentration to lb per MMBtu emission rates	Method 19 F-factor methodology at 40 CFR part 60, appendix A-7 of this chapter.

To conduct a performance test for the following pollutant . . .	You must. . .	Using, as appropriate . . .
4. Mercury	a. Select sampling ports location and the number of traverse points	Method 1 at 40 CFR part 60, appendix A-1 of this chapter.
	b. Determine velocity and volumetric flow-rate of the stack gas	Method 2, 2F, or 2G at 40 CFR part 60, appendix A-1 or A-2 of this chapter.
	c. Determine oxygen or carbon dioxide concentration of the stack gas	Method 3A or 3B at 40 CFR part 60, appendix A-1 of this chapter, or ANSI/ASME PTC 19.10-1981.[a]
	d. Measure the moisture content of the stack gas	Method 4 at 40 CFR part 60, appendix A-3 of this chapter.
	e. Measure the mercury emission concentration	Method 29, 30A, or 30B (M29, M30A, or M30B) at 40 CFR part 60, appendix A-8 of this chapter or Method 101A at 40 CFR part 61, appendix B of this chapter, or ASTM Method D6784.[a]
	f. Convert emissions concentration to lb per MMBtu emission rates	Method 19 F-factor methodology at 40 CFR part 60, appendix A-7 of this chapter.
5. CO	a. Select the sampling ports location and the number of traverse points	Method 1 at 40 CFR part 60, appendix A-1 of this chapter.
	b. Determine oxygen concentration of the stack gas	Method 3A or 3B at 40 CFR part 60, appendix A-3 of this chapter, or ASTM D6522-00 (Reapproved 2005), or ANSI/ASME PTC 19.10-1981.[a]
	c. Measure the moisture content of the stack gas	Method 4 at 40 CFR part 60, appendix A-3 of this chapter.
	d. Measure the CO emission concentration	Method 10 at 40 CFR part 60, appendix A-4 of this chapter. Use a measurement span value of 2 times the concentration of the applicable emission limit.

[a] Incorporated by reference, see § 63.14.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7200, Jan. 31, 2013; 80 FR 72825, Nov. 20, 2015]

Table 6 to Subpart DDDDD of Part 63 - Fuel Analysis Requirements

As stated in § 63.7521, you must comply with the following requirements for fuel analysis testing for existing, new or reconstructed affected sources. However, equivalent methods (as defined in § 63.7575) may be used in lieu of the prescribed methods at the discretion of the source owner or operator:

To conduct a fuel analysis for the following pollutant . . .	You must . . .	Using . . .
1. Mercury	a. Collect fuel samples	Procedure in § 63.7521(c) or ASTM D5192[a], or ASTM D7430[a], or ASTM D6883[a], or ASTM D2234/D2234M[a] (for coal) or EPA 1631 or EPA 1631E or ASTM D6323[a] (for solid), or EPA 821-R-01-013 (for liquid or solid), or ASTM D4177[a] (for liquid), or ASTM D4057[a] (for liquid), or equivalent.
	b. Composite fuel samples	Procedure in § 63.7521(d) or equivalent.
	c. Prepare composited fuel samples	EPA SW-846-3050B[a] (for solid samples), ASTM D2013/D2013M[a] (for coal), ASTM D5198[a] (for biomass), or EPA 3050[a] (for solid fuel), or EPA 821-R-01-013[a] (for liquid or solid), or equivalent.
	d. Determine heat content of the fuel type	ASTM D5865[a] (for coal) or ASTM E711[a] (for biomass), or ASTM D5864[a] for liquids and other solids, or ASTM D240[a] or equivalent.
	e. Determine moisture content of the fuel type	ASTM D3173[a], ASTM E871[a], or ASTM D5864[a], or ASTM D240[a], or ASTM D95[a] (for liquid fuels), or ASTM D4006[a] (for liquid fuels), or equivalent.
	f. Measure mercury concentration in fuel sample	ASTM D6722[a] (for coal), EPA SW-846-7471B[a] or EPA 1631 or EPA 1631E[a] (for solid samples), or EPA SW-846-7470A[a] or EPA SW-846-7471B[a] (for liquid samples), or EPA 821-R-01-013[a] (for liquid or solid), or equivalent.
	g. Convert concentration into units of pounds of mercury per MMBtu of heat content	For fuel mixtures use Equation 8 in § 63.7530.
2. HCl	a. Collect fuel samples	Procedure in § 63.7521(c) or ASTM D5192[a], or ASTM D7430[a], or ASTM D6883[a], or ASTM D2234/D2234M[a] (for coal) or ASTM D6323[a] (for coal or biomass), ASTM D4177[a] (for liquid fuels) or ASTM D4057[a] (for liquid fuels), or equivalent.
	b. Composite fuel samples	Procedure in § 63.7521(d) or equivalent.
	c. Prepare composited fuel samples	EPA SW-846-3050B[a] (for solid samples), ASTM D2013/D2013M[a] (for coal), or ASTM D5198[a] (for biomass), or EPA 3050[a] or equivalent.
	d. Determine heat content of the fuel type	ASTM D5865[a] (for coal) or ASTM E711[a] (for biomass), ASTM D5864[a], ASTM D240[a] or equivalent.
	e. Determine moisture content of the fuel type	ASTM D3173[a] or ASTM E871[a], or D5864[a], or ASTM D240[a], or ASTM D95[a] (for liquid fuels), or ASTM D4006[a] (for liquid fuels), or equivalent.
	f. Measure chlorine concentration in fuel sample	EPA SW-846-9250[a], ASTM D6721[a], ASTM D4208[a] (for coal), or EPA SW-846-5050[a] or ASTM E776[a] (for solid fuel), or EPA SW-846-9056[a] or SW-846-9076[a] (for solids or liquids) or equivalent.

To conduct a fuel analysis for the following pollutant . . .	You must . . .	Using . . .
	g. Convert concentrations into units of pounds of HCl per MMBtu of heat content	For fuel mixtures use Equation 7 in § 63.7530 and convert from chlorine to HCl by multiplying by 1.028.
3. Mercury Fuel Specification for other gas 1 fuels	a. Measure mercury concentration in the fuel sample and convert to units of micrograms per cubic meter, or	Method 30B (M30B) at 40 CFR part 60, appendix A-8 of this chapter or ASTM D5954[a], ASTM D6350[a], ISO 6978-1:2003(E)[a], or ISO 6978-2:2003(E)[a], or EPA-1631[a] or equivalent.
	b. Measure mercury concentration in the exhaust gas when firing only the other gas 1 fuel is fired in the boiler or process heater	Method 29, 30A, or 30B (M29, M30A, or M30B) at 40 CFR part 60, appendix A-8 of this chapter or Method 101A or Method 102 at 40 CFR part 61, appendix B of this chapter, or ASTM Method D6784[a] or equivalent.
4. TSM	a. Collect fuel samples	Procedure in § 63.7521(c) or ASTM D5192[a], or ASTM D7430[a], or ASTM D6883[a], or ASTM D2234/D2234M[a] (for coal) or ASTM D6323[a] (for coal or biomass), or ASTM D4177[a], (for liquid fuels), or ASTM D4057[a] (for liquid fuels), or equivalent.
	b. Composite fuel samples	Procedure in § 63.7521(d) or equivalent.
	c. Prepare composited fuel samples	EPA SW-846-3050B[a] (for solid samples), ASTM D2013/D2013M[a] (for coal), ASTM D5198[a] or TAPPI T266[a] (for biomass), or EPA 3050[a] or equivalent.
	d. Determine heat content of the fuel type	ASTM D5865[a] (for coal) or ASTM E711[a] (for biomass), or ASTM D5864[a] for liquids and other solids, or ASTM D240[a] or equivalent.
	e. Determine moisture content of the fuel type	ASTM D3173[a] or ASTM E871[a], or D5864[a], or ASTM D240[a], or ASTM D95[a] (for liquid fuels), or ASTM D4006[a] (for liquid fuels), or ASTM D4177[a] (for liquid fuels) or ASTM D4057[a] (for liquid fuels), or equivalent.
	f. Measure TSM concentration in fuel sample	ASTM D3683[a], or ASTM D4606[a], or ASTM D6357[a] or EPA 200.8[a] or EPA SW-846-6020[a], or EPA SW-846-6020A[a], or EPA SW-846-6010C[a], EPA 7060[a] or EPA 7060A[a] (for arsenic only), or EPA SW-846-7740[a] (for selenium only).
	g. Convert concentrations into units of pounds of TSM per MMBtu of heat content	For fuel mixtures use Equation 9 in § 63.7530.

[a] Incorporated by reference, see § 63.14.

[83 FR 56725, Nov. 14, 2018]

Table 7 to Subpart DDDDD of Part 63 - Establishing Operating Limits [ab]

As stated in § 63.7520, you must comply with the following requirements for establishing operating limits:

Table 7 to Subpart DDDDD of Part 63 - Establishing Operating Limits [ab]

If you have an applicable emission limit for . . .	And your operating limits are based on . . .	You must . . .	Using . . .	According to the following requirements
1. PM, TSM, or mercury	a. Wet scrubber operating parameters	i. Establish a site-specific minimum scrubber pressure drop and minimum flow rate operating limit according to § 63.7530(b)	(1) Data from the scrubber pressure drop and liquid flow rate monitors and the PM, TSM, or mercury performance test	(a) You must collect scrubber pressure drop and liquid flow rate data every 15 minutes during the entire period of the performance tests.
				(b) Determine the lowest hourly average scrubber pressure drop and liquid flow rate by computing the hourly averages using all of the 15-minute readings taken during each performance test.
	b. Electrostatic precipitator operating parameters (option only for units that operate wet scrubbers)	i. Establish a site-specific minimum total secondary electric power input according to § 63.7530(b)	(1) Data from the voltage and secondary amperage monitors during the PM or mercury performance test	(a) You must collect secondary voltage and secondary amperage for each ESP cell and calculate total secondary electric power input data every 15 minutes during the entire period of the performance tests.
				(b) Determine the average total secondary electric power input by computing the hourly averages using all of the 15-minute readings taken during each performance test.
	c. Opacity	i. Establish a site-specific maximum opacity level	(1) Data from the opacity monitoring system during the PM performance test	(a) You must collect opacity readings every 15 minutes during the entire period of the performance tests.
				(b) Determine the average hourly opacity reading by computing the hourly averages using all of the 15-minute readings taken during each performance test.

If you have an applicable emission limit for . . .	And your operating limits are based on . . .	You must . . .	Using . . .	According to the following requirements
				(c) Determine the highest hourly average opacity reading measured during the test run demonstrating compliance with the PM (or TSM) emission limitation.
2. HCl	a. Wet scrubber operating parameters	i. Establish site-specific minimum effluent pH and flow rate operating limits according to § 63.7530(b)	(1) Data from the pH and liquid flow-rate monitors and the HCl performance test	(a) You must collect pH and liquid flow-rate data every 15 minutes during the entire period of the performance tests.
				(b) Determine the hourly average pH and liquid flow rate by computing the hourly averages using all of the 15-minute readings taken during each performance test.
	b. Dry scrubber operating parameters	i. Establish a site-specific minimum sorbent injection rate operating limit according to § 63.7530(b). If different acid gas sorbents are used during the HCl performance test, the average value for each sorbent becomes the site-specific operating limit for that sorbent	(1) Data from the sorbent injection rate monitors and HCl or mercury performance test	(a) You must collect sorbent injection rate data every 15 minutes during the entire period of the performance tests.
				(b) Determine the hourly average sorbent injection rate by computing the hourly averages using all of the 15-minute readings taken during each performance test.
				(c) Determine the lowest hourly average of the three test run averages established during the performance test as your operating limit. When your unit operates at lower loads, multiply your sorbent injection rate by the load fraction, as defined in § 63.7575, to determine the required injection rate.

If you have an applicable emission limit for . . .	And your operating limits are based on . . .	You must . . .	Using . . .	According to the following requirements
	c. Alternative Maximum SO_2 emission rate	i. Establish a site-specific maximum SO_2 emission rate operating limit according to § 63.7530(b)	(1) Data from SO_2 CEMS and the HCl performance test	(a) You must collect the SO_2 emissions data according to § 63.7525(m) during the most recent HCl performance tests.
				(b) The maximum SO_2 emission rate is equal to the highest hourly average SO_2 emission rate measured during the most recent HCl performance tests.
3. Mercury	a. Activated carbon injection	i. Establish a site-specific minimum activated carbon injection rate operating limit according to § 63.7530(b)	(1) Data from the activated carbon rate monitors and mercury performance test	(a) You must collect activated carbon injection rate data every 15 minutes during the entire period of the performance tests.
				(b) Determine the hourly average activated carbon injection rate by computing the hourly averages using all of the 15-minute readings taken during each performance test.
				(c) Determine the lowest hourly average established during the performance test as your operating limit. When your unit operates at lower loads, multiply your activated carbon injection rate by the load fraction, as defined in § 63.7575, to determine the required injection rate.
4. Carbon monoxide for which compliance is demonstrated by a performance test	a. Oxygen	i. Establish a unit-specific limit for minimum oxygen level according to § 63.7530(b)	(1) Data from the oxygen analyzer system specified in § 63.7525(a)	(a) You must collect oxygen data every 15 minutes during the entire period of the performance tests.
				(b) Determine the hourly average oxygen concentration by computing the hourly averages using all of the 15-minute readings taken during each performance test.

If you have an applicable emission limit for . . .	And your operating limits are based on . . .	You must . . .	Using . . .	According to the following requirements
				(c) Determine the lowest hourly average established during the performance test as your minimum operating limit.
5. Any pollutant for which compliance is demonstrated by a performance test	a. Boiler or process heater operating load	i. Establish a unit specific limit for maximum operating load according to § 63.7520(c)	(1) Data from the operating load monitors or from steam generation monitors	(a) You must collect operating load or steam generation data every 15 minutes during the entire period of the performance test.
				(b) Determine the average operating load by computing the hourly averages using all of the 15-minute readings taken during each performance test.
				(c) Determine the highest hourly average of the three test run averages during the performance test, and multiply this by 1.1 (110 percent) as your operating limit.

[a] Operating limits must be confirmed or reestablished during performance tests.

[b] If you conduct multiple performance tests, you must set the minimum liquid flow rate and pressure drop operating limits at the higher of the minimum values established during the performance tests. For a minimum oxygen level, if you conduct multiple performance tests, you must set the minimum oxygen level at the lower of the minimum values established during the performance tests. For maximum operating load, if you conduct multiple performance tests, you must set the maximum operating load at the lower of the maximum values established during the performance tests.

[87 FR 60853, Oct. 6, 2022]

Table 8 to Subpart DDDDD of Part 63 - Demonstrating Continuous Compliance

As stated in § 63.7540, you must show continuous compliance with the emission limitations for each boiler or process heater according to the following:

If you must meet the following operating limits or work practice standards . . .	You must demonstrate continuous compliance by . . .
1. Opacity	a. Collecting the opacity monitoring system data according to § 63.7525(c) and § 63.7535; and
	b. Reducing the opacity monitoring data to 6-minute averages; and

If you must meet the following operating limits or work practice standards . . .	You must demonstrate continuous compliance by . . .
	c. Maintaining daily block average opacity to less than or equal to 10 percent or the highest hourly average opacity reading measured during the performance test run demonstrating compliance with the PM (or TSM) emission limitation.
2. PM CPMS	a. Collecting the PM CPMS output data according to § 63.7525;
	b. Reducing the data to 30-day rolling averages; and
	c. Maintaining the 30-day rolling average PM CPMS output data to less than the operating limit established during the performance test according to § 63.7530(b)(4).
3. Fabric Filter Bag Leak Detection Operation	Installing and operating a bag leak detection system according to § 63.7525 and operating the fabric filter such that the requirements in § 63.7540(a)(7) are met.
4. Wet Scrubber Pressure Drop and Liquid Flow-rate	a. Collecting the pressure drop and liquid flow rate monitoring system data according to §§ 63.7525 and 63.7535; and
	b. Reducing the data to 30-day rolling averages; and
	c. Maintaining the 30-day rolling average pressure drop and liquid flow-rate at or above the operating limits established during the performance test according to § 63.7530(b).
5. Wet Scrubber pH	a. Collecting the pH monitoring system data according to §§ 63.7525 and 63.7535; and
	b. Reducing the data to 30-day rolling averages; and
	c. Maintaining the 30-day rolling average pH at or above the operating limit established during the performance test according to § 63.7530(b).
6. Dry Scrubber Sorbent or Carbon Injection Rate	a. Collecting the sorbent or carbon injection rate monitoring system data for the dry scrubber according to §§ 63.7525 and 63.7535; and
	b. Reducing the data to 30-day rolling averages; and
	c. Maintaining the 30-day rolling average sorbent or carbon injection rate at or above the minimum sorbent or carbon injection rate as defined in § 63.7575.
7. Electrostatic Precipitator Total Secondary Electric Power Input	a. Collecting the total secondary electric power input monitoring system data for the electrostatic precipitator according to §§ 63.7525 and 63.7535; and
	b. Reducing the data to 30-day rolling averages; and
	c. Maintaining the 30-day rolling average total secondary electric power input at or above the operating limits established during the performance test according to § 63.7530(b).
8. Emission limits using fuel analysis	a. Conduct monthly fuel analysis for HCl or mercury or TSM according to Table 6 to this subpart; and
	b. Reduce the data to 12-month rolling averages; and
	c. Maintain the 12-month rolling average at or below the applicable emission limit for HCl or mercury or TSM in Tables 1 and 2 or 11 through 15 to this subpart.
	d. Calculate the HCl, mercury, and/or TSM emission rate from the boiler or process heater in units of lb/MMBtu using Equation 15 and Equations 16, 17, and/or 18 in § 63.7530.

If you must meet the following operating limits or work practice standards . . .	You must demonstrate continuous compliance by . . .
9. Oxygen content	a. Continuously monitor the oxygen content using an oxygen analyzer system according to § 63.7525(a). This requirement does not apply to units that install an oxygen trim system since these units will set the trim system to the level specified in § 63.7525(a)(7).
	b. Reducing the data to 30-day rolling averages; and
	c. Maintain the 30-day rolling average oxygen content at or above the lowest hourly average oxygen level measured during the CO performance test.
10. Boiler or process heater operating load	a. Collecting operating load data or steam generation data every 15 minutes. b. Reducing the data to 30-day rolling averages; and
	c. Maintaining the 30-day rolling average operating load such that it does not exceed 110 percent of the highest hourly average operating load recorded during the performance test according to § 63.7520(c).
11. SO_2 emissions using SO_2 CEMS	a. Collecting the SO_2 CEMS output data according to § 63.7525;
	b. Reducing the data to 30-day rolling averages; and
	c. Maintaining the 30-day rolling average SO_2 CEMS emission rate to a level at or below the highest hourly SO_2 rate measured during the HCl performance test according to § 63.7530.

[78 FR 7204, Jan. 31, 2013, as amended at 80 FR 72829, Nov. 20, 2015; 87 FR 60855, Oct. 6, 2022]

Table 9 to Subpart DDDDD of Part 63 - Reporting Requirements

As stated in § 63.7550, you must comply with the following requirements for reports:

You must submit a(n)	The report must contain . . .	You must submit the report . . .
1. Compliance report	a. Information required in § 63.7550(c)(1) through (5); and	Semiannually, annually, biennially, or every 5 years according to the requirements in § 63.7550(b).
	b. If there are no deviations from any emission limitation (emission limit and operating limit) that applies to you and there are no deviations from the requirements for work practice standards for periods of startup and shutdown in Table 3 to this subpart that apply to you, a statement that there were no deviations from the emission limitations and work practice standards during the reporting period. If there were no periods during which the CMSs, including continuous emissions monitoring system, continuous opacity monitoring system, and operating parameter monitoring systems, were out-of-control as specified in § 63.8(c)(7), a statement that there were no periods during which the CMSs were out-of-control during the reporting period; and	

You must submit a(n)	The report must contain . . .	You must submit the report . . .
	c. If you have a deviation from any emission limitation (emission limit and operating limit) where you are not using a CMS to comply with that emission limit or operating limit, or a deviation from a work practice standard for periods of startup and shutdown, during the reporting period, the report must contain the information in § 63.7550(d); and	
	d. If there were periods during which the CMSs, including continuous emissions monitoring system, continuous opacity monitoring system, and operating parameter monitoring systems, were out-of-control as specified in § 63.8(c)(7), or otherwise not operating, the report must contain the information in § 63.7550(e)	

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7205, Jan. 31, 2013; 80 FR 72830, Nov. 20, 2015]

Table 10 to Subpart DDDDD of Part 63 - Applicability of General Provisions to Subpart DDDDD

As stated in § 63.7565, you must comply with the applicable General Provisions according to the following:

Citation	Subject	Applies to subpart DDDDD
§ 63.1	Applicability	Yes.
§ 63.2	Definitions	Yes. Additional terms defined in § 63.7575
§ 63.3	Units and Abbreviations	Yes.
§ 63.4	Prohibited Activities and Circumvention	Yes.
§ 63.5	Preconstruction Review and Notification Requirements	Yes.
§ 63.6(a), (b)(1)-(b)(5), (b)(7), (c)	Compliance with Standards and Maintenance Requirements	Yes.
§ 63.6(e)(1)(i)	General duty to minimize emissions.	No. See § 63.7500(a)(3) for the general duty requirement.
§ 63.6(e)(1)(ii)	Requirement to correct malfunctions as soon as practicable.	No.
§ 63.6(e)(3)	Startup, shutdown, and malfunction plan requirements.	No.
§ 63.6(f)(1)	Startup, shutdown, and malfunction exemptions for compliance with non-opacity emission standards.	No.
§ 63.6(f)(2) and (3)	Compliance with non-opacity emission standards.	Yes.
§ 63.6(g)	Use of alternative standards	Yes, except § 63.7555(d)(13) specifies the procedure for application and approval of an alternative timeframe with the PM controls requirement in the startup work practice (2).

Citation	Subject	Applies to subpart DDDDD
§ 63.6(h)(1)	Startup, shutdown, and malfunction exemptions to opacity standards.	No. See § 63.7500(a).
§ 63.6(h)(2) to (h)(9)	Determining compliance with opacity emission standards	No. Subpart DDDDD specifies opacity as an operating limit not an emission standard.
§ 63.6(i)	Extension of compliance	Yes. Note: Facilities may also request extensions of compliance for the installation of combined heat and power, waste heat recovery, or gas pipeline or fuel feeding infrastructure as a means of complying with this subpart.
§ 63.6(j)	Presidential exemption.	Yes.
§ 63.7(a), (b), (c), and (d)	Performance Testing Requirements	Yes.
§ 63.7(e)(1)	Conditions for conducting performance tests	No. Subpart DDDDD specifies conditions for conducting performance tests at § 63.7520(a) to (c).
§ 63.7(e)(2)-(e)(9), (f), (g), and (h)	Performance Testing Requirements	Yes.
§ 63.8(a) and (b)	Applicability and Conduct of Monitoring	Yes.
§ 63.8(c)(1)	Operation and maintenance of CMS	Yes.
§ 63.8(c)(1)(i)	General duty to minimize emissions and CMS operation	No. See § 63.7500(a)(3).
§ 63.8(c)(1)(ii)	Operation and maintenance of CMS	Yes.
§ 63.8(c)(1)(iii)	Startup, shutdown, and malfunction plans for CMS	No.
§ 63.8(c)(2) to (c)(9)	Operation and maintenance of CMS	Yes.
§ 63.8(d)(1) and (2)	Monitoring Requirements, Quality Control Program	Yes.
§ 63.8(d)(3)	Written procedures for CMS	Yes, except for the last sentence, which refers to a startup, shutdown, and malfunction plan. Startup, shutdown, and malfunction plans are not required.
§ 63.8(e)	Performance evaluation of a CMS	Yes.
§ 63.8(f)	Use of an alternative monitoring method.	Yes.
§ 63.8(g)	Reduction of monitoring data	Yes.
§ 63.9	Notification Requirements	Yes.
§ 63.10(a), (b)(1)	Recordkeeping and Reporting Requirements	Yes.

Citation	Subject	Applies to subpart DDDDD
§ 63.10(b)(2)(i)	Recordkeeping of occurrence and duration of startups or shutdowns	Yes.
§ 63.10(b)(2)(ii)	Recordkeeping of malfunctions	No. See § 63.7555(d)(7) for recordkeeping of occurrence and duration and § 63.7555(d)(8) for actions taken during malfunctions.
§ 63.10(b)(2)(iii)	Maintenance records	Yes.
§ 63.10(b)(2)(iv) and (v)	Actions taken to minimize emissions during startup, shutdown, or malfunction	No.
§ 63.10(b)(2)(vi)	Recordkeeping for CMS malfunctions	Yes.
§ 63.10(b)(2)(vii) to (xiv)	Other CMS requirements	Yes.
§ 63.10(b)(3)	Recordkeeping requirements for applicability determinations	No.
§ 63.10(c)(1) to (9)	Recordkeeping for sources with CMS	Yes.
§ 63.10(c)(10) and (11)	Recording nature and cause of malfunctions, and corrective actions	No. See § 63.7555(d)(7) for recordkeeping of occurrence and duration and § 63.7555(d)(8) for actions taken during malfunctions.
§ 63.10(c)(12) and (13)	Recordkeeping for sources with CMS	Yes.
§ 63.10(c)(15)	Use of startup, shutdown, and malfunction plan	No.
§ 63.10(d)(1) and (2)	General reporting requirements	Yes.
§ 63.10(d)(3)	Reporting opacity or visible emission observation results	No.
§ 63.10(d)(4)	Progress reports under an extension of compliance	Yes.
§ 63.10(d)(5)	Startup, shutdown, and malfunction reports	No. See § 63.7550(c)(11) for malfunction reporting requirements.
§ 63.10(e)	Additional reporting requirements for sources with CMS	Yes.
§ 63.10(f)	Waiver of recordkeeping or reporting requirements	Yes.
§ 63.11	Control Device Requirements	No.
§ 63.12	State Authority and Delegation	Yes.

Citation	Subject	Applies to subpart DDDDD
§ 63.13-63.16	Addresses, Incorporation by Reference, Availability of Information, Performance Track Provisions	Yes.
§ 63.1(a)(5),(a)(7)-(a)(9), (b)(2), (c)(3)-(4), (d), 63.6(b)(6), (c)(3), (c)(4), (d), (e)(2), (e)(3)(ii), (h)(3), (h)(5)(iv), 63.8(a)(3), 63.9(b)(3), (h)(4), 63.10(c)(2)-(4), (c)(9).	Reserved	No.

[76 FR 15664, Mar. 21, 2011, as amended at 78 FR 7205, Jan. 31, 2013; 80 FR 72830, Nov. 20, 2015]

Table 11 to Subpart DDDDD of Part 63 - Alternative Emission Limits for New or Reconstructed Boilers and Process Heaters That Commenced Construction or Reconstruction After June 4, 2010, and Before May 20, 2011

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
1. Units in all subcategories designed to burn solid fuel	a. HCl	0.022 lb per MMBtu of heat input	For M26A, collect a minimum of 1 dscm per run; for M26 collect a minimum of 120 liters per run.
2. Units in all subcategories designed to burn solid fuel that combust at least 10 percent biomass/bio-based solids on an annual heat input basis and less than 10 percent coal/solid fossil fuels on an annual heat input basis	a. Mercury	8.0E-07[a] lb per MMBtu of heat input	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
3. Units in all subcategories designed to burn solid fuel that combust at least 10 percent coal/solid fossil fuels on an annual heat input basis and less than 10 percent biomass/bio-based solids on an annual heat input basis	a. Mercury	2.0E-06 lb per MMBtu of heat input	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
4. Units design to burn coal/solid fossil fuel	a. Filterable PM (or TSM)	1.1E-03 lb per MMBtu of heat input; or (2.3E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
5. Pulverized coal boilers designed to burn coal/solid fossil fuel	a. Carbon monoxide (CO) (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (320 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
6. Stokers designed to burn coal/solid fossil fuel	a. CO (or CEMS).	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (340 ppm by volume on a dry basis corrected to 3 percent oxygen ,[c] 10-day rolling average)	1 hr minimum sampling time.
7. Fluidized bed units designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (230 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
8. Fluidized bed units with an integrated heat exchanger designed to burn coal/solid fossil fuel	a. CO (or CEMS)	140 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (150 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
9. Stokers/sloped grate/others designed to burn wet biomass fuel	a. CO (or CEMS)	620 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (390 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (2.6E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
10. Stokers/sloped grate/others designed to burn kiln-dried biomass fuel	a. CO	560 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (4.0E-03 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run
11. Fluidized bed units designed to burn biomass/bio-based solids	a. CO (or CEMS)	230 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (310 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Filterable PM (or TSM)	9.8E-03 lb per MMBtu of heat input; or (8.3E-05[a] lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run
12. Suspension burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	2,400 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (2,000 ppm by volume on a dry basis corrected to 3 percent oxygen[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (6.5E-03 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
13. Dutch Ovens/Pile burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	1,010 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (520 ppm by volume on a dry basis corrected to 3 percent oxygen[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	8.0E-03 lb per MMBtu of heat input; or (3.9E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
14. Fuel cell units designed to burn biomass/bio-based solids	a. CO	910 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.0E-02 lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
15. Hybrid suspension grate boiler designed to burn biomass/bio-based solids	a. CO (or CEMS)	1,100 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (900 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.6E-02 lb per MMBtu of heat input; or (4.4E-04 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run
16. Units designed to burn liquid fuel	a. HCl	4.4E-04 lb per MMBtu of heat input	For M26A: Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Mercury.	4.8E-07[a] lb per MMBtu of heat input	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
17. Units designed to burn heavy liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.3E-02 lb per MMBtu of heat input; or (7.5E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
18. Units designed to burn light liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.0E-03[a] lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run
19. Units designed to burn liquid fuel that are non-continental units	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average based on stack test	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.3E-02 lb per MMBtu of heat input; or (8.6E-04 lb per MMBtu of heat input)	Collect a minimum of 4 dscm per run
20. Units designed to burn gas 2 (other) gases	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. HCl	1.7E-03 lb per MMBtu of heat input	For M26A, Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	c. Mercury	7.9E-06 lb per MMBtu of heat input	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 3 dscm.
	d. Filterable PM (or TSM)	6.7E-03 lb per MMBtu of heat input; or (2.1E-04 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.

[a] If you are conducting stack tests to demonstrate compliance and your performance tests for this pollutant for at least 2 consecutive years show that your emissions are at or below this limit, you can skip testing according to § 63.7515 if all of the other provision of § 63.7515 are met. For all other pollutants that do not contain a footnote “a”, your

performance tests for this pollutant for at least 2 consecutive years must show that your emissions are at or below 75 percent of this limit in order to qualify for skip testing.

[b] Incorporated by reference, see § 63.14.

[c] An owner or operator may determine compliance with the carbon monoxide emissions limit using carbon dioxide as a diluent correction in place of oxygen as described in § 63.7525(a)(1). EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to generate the appropriate CO_2 correction percentage for the fuel type burned in the unit, and must also take into account that the 3% oxygen correction is to be done on a dry basis. The methodology must account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. This methodology must be detailed in the site-specific monitoring plan developed according to § 63.7505(d).

[87 FR 60855, Oct. 6, 2022]

Table 12 to Subpart DDDDD of Part 63 - Alternative Emission Limits for New or Reconstructed Boilers and Process Heaters That Commenced Construction or Reconstruction After May 20, 2011, and Before December 23, 2011

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
1. Units in all subcategories designed to burn solid fuel	a. HCl	0.022 lb per MMBtu of heat input	For M26A, collect a minimum of 1 dscm per run; for M26 collect a minimum of 120 liters per run.
	b. Mercury	3.5E-06[a] lb per MMBtu of heat input	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 3 dscm.
2. Units design to burn coal/solid fossil fuel	a. Filterable PM (or TSM)	1.1E-03 lb per MMBtu of heat input; or (2.3E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
3. Pulverized coal boilers designed to burn coal/solid fossil fuel	a. Carbon monoxide (CO) (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (320 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
4. Stokers designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (340 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
5. Fluidized bed units designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (230 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
6. Fluidized bed units with an integrated heat exchanger designed to burn coal/solid fossil fuel	a. CO (or CEMS)	140 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (150 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
7. Stokers/sloped grate/others designed to burn wet biomass fuel	a. CO (or CEMS)	620 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (390 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (2.6E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
8. Stokers/sloped grate/others designed to burn kiln-dried biomass fuel	a. CO	460 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (4.0E-03 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
9. Fluidized bed units designed to burn biomass/bio-based solids	a. CO (or CEMS)	260 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (310 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	9.8E-03 lb per MMBtu of heat input; or (8.3E-05[a] lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
10. Suspension burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	2,400 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (2,000 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (6.5E-03 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
11. Dutch Ovens/Pile burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	470 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (520 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.2E-03 lb per MMBtu of heat input; or (3.9E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
12. Fuel cell units designed to burn biomass/bio-based solids	a. CO	910 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.0E-02 lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
13. Hybrid suspension grate boiler designed to burn biomass/bio-based solids	a. CO (or CEMS)	1,500 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (900 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.6E-02 lb per MMBtu of heat input; or (4.4E-04 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
14. Units designed to burn liquid fuel	a. HCl	4.4E-04 lb per MMBtu of heat input	For M26A: Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	b. Mercury	4.8E-07[a] lb per MMBtu of heat input	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
15. Units designed to burn heavy liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.3E-02 lb per MMBtu of heat input; or (7.5E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
16. Units designed to burn light liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.3E-03[a] lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
17. Units designed to burn liquid fuel that are non-continental units	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average based on stack test	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.3E-02 lb per MMBtu of heat input; or (8.6E-04 lb per MMBtu of heat input)	Collect a minimum of 4 dscm per run.
18. Units designed to burn gas 2 (other) gases	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. HCl	1.7E-03 lb per MMBtu of heat input	For M26A, Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	c. Mercury	7.9E-06 lb per MMBtu of heat input	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 3 dscm.
	d. Filterable PM (or TSM)	6.7E-03 lb per MMBtu of heat input; or (2.1E-04 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.

[a] If you are conducting stack tests to demonstrate compliance and your performance tests for this pollutant for at least 2 consecutive years show that your emissions are at or below this limit, you can skip testing according to § 63.7515 if all of the other provision of § 63.7515 are met. For all other pollutants that do not contain a footnote “a”, your performance tests for this pollutant for at least 2 consecutive years must show that your emissions are at or below 75 percent of this limit in order to qualify for skip testing.

[b] Incorporated by reference, see § 63.14.

[c] An owner or operator may determine compliance with the carbon monoxide emissions limit using carbon dioxide as a diluent correction in place of oxygen as described in § 63.7525(a)(1). EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to generate the appropriate CO_2 correction percentage for the fuel type burned in the unit, and must also take into account that the 3% oxygen correction is to be done on a dry basis. The methodology must account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. This methodology must be detailed in the site-specific monitoring plan developed according to § 63.7505(d).

[87 FR 60857, Oct. 6, 2022]

Table 13 to Subpart DDDDD of Part 63 - Alternative Emission Limits for New or Reconstructed Boilers and Process Heaters That Commenced Construction or Reconstruction After December 23, 2011, and Before April 1, 2013

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
1. Units in all subcategories designed to burn solid fuel	a. HCl	0.022 lb per MMBtu of heat input	For M26A, collect a minimum of 1 dscm per run; for M26 collect a minimum of 120 liters per run.
	b. Mercury	8.6E-07[a] lb per MMBtu of heat input	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
2. Pulverized coal boilers designed to burn coal/solid fossil fuel	a. Carbon monoxide (CO) (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (320 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.1E-03 lb per MMBtu of heat input; or (2.8E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
3. Stokers designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (340 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.8E-02 lb per MMBtu of heat input; or (2.3E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
4. Fluidized bed units designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (230 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.1E-03 lb per MMBtu of heat input; or (2.3E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
5. Fluidized bed units with an integrated heat exchanger designed to burn coal/solid fossil fuel	a. CO (or CEMS)	140 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (150 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.1E-03 lb per MMBtu of heat input; or (2.3E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
6. Stokers/sloped grate/others designed to burn wet biomass fuel	a. CO (or CEMS)	620 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (410 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (2.6E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
7. Stokers/sloped grate/others designed to burn kiln-dried biomass fuel	a. CO	460 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Filterable PM (or TSM)	3.2E-01 lb per MMBtu of heat input; or (4.0E-03 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
8. Fluidized bed units designed to burn biomass/bio-based solids	a. CO (or CEMS)	230 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (310 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	9.8E-03 lb per MMBtu of heat input; or (8.3E-05[a] lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
9. Suspension burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	2,400 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (2,000 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	5.1E-02 lb per MMBtu of heat input; or (6.5E-03 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
10. Dutch Ovens/Pile burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	810 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (520 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.6E-02 lb per MMBtu of heat input; or (3.9E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
11. Fuel cell units designed to burn biomass/bio-based solids	a. CO	910 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.0E-02 lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
12. Hybrid suspension grate boiler designed to burn biomass/bio-based solids	a. CO (or CEMS)	1,500 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (900 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 30-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.6E-02 lb per MMBtu of heat input; or (4.4E-04 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
13. Units designed to burn liquid fuel	a. HCl	1.2E-03 lb per MMBtu of heat input	For M26A: Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during periods of startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Mercury	4.9E-07[a] lb per MMBtu of heat input	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b]collect a minimum of 4 dscm.
14. Units designed to burn heavy liquid fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average; or (18 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 10-day rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.3E-03 lb per MMBtu of heat input; or (7.5E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
15. Units designed to burn light liquid fuel	a. CO (or CEMS)	130[a] ppm by volume on a dry basis corrected to 3 percent oxygen; or (60 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 1-day block average).	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.1E-03[a] lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.
16. Units designed to burn liquid fuel that are non-continental units	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen, 3-run average based on stack test; or (91 ppm by volume on a dry basis corrected to 3 percent oxygen,[c] 3-hour rolling average)	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.3E-02 lb per MMBtu of heat input; or (8.6E-04 lb per MMBtu of heat input)	Collect a minimum of 2 dscm per run.
17. Units designed to burn gas 2 (other) gases	a. CO	130 ppm by volume on a dry basis corrected to 3 percent oxygen	1 hr minimum sampling time.
	b. HCl	1.7E-03 lb per MMBtu of heat input	For M26A, Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	c. Mercury	7.9E-06 lb per MMBtu of heat input	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b]collect a minimum of 3 dscm.
	d. Filterable PM (or TSM)	6.7E-03 lb per MMBtu of heat input; or (2.1E-04 lb per MMBtu of heat input)	Collect a minimum of 3 dscm per run.

[a] If you are conducting stack tests to demonstrate compliance and your performance tests for this pollutant for at least 2 consecutive years show that your emissions are at or below this limit and you are not required to conduct testing for CEMS or CPMS monitor certification, you can skip testing according to § 63.7515 if all of the other provision of § 63.7515 are met. For all other pollutants that do not contain a footnote "a", your performance tests for this pollutant for at least 2 consecutive years must show that your emissions are at or below 75 percent of this limit in order to qualify for skip testing.

[b] Incorporated by reference, see § 63.14.

[c] An owner or operator may determine compliance with the carbon monoxide emissions limit using carbon dioxide as a diluent correction in place of oxygen as described in § 63.7525(a)(1). EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to generate the appropriate CO_2 correction percentage for the fuel type burned in the unit, and must also take into account that the 3% oxygen correction is to be done on a dry basis. The methodology must account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. This methodology must be detailed in the site-specific monitoring plan developed according to § 63.7505(d).

[87 FR 60859, Oct. 6, 2022]

Table 14 to Subpart DDDDD of Part 63 - Alternative Emission Limits for New or Reconstructed Boilers and Process Heaters [c]

As stated in § 63.7500, you may continue to comply with the following applicable emission limits until October 6, 2025:

[Units with heat input capacity of 10 million Btu per hour or greater]

If your boiler or process heater is in this subcategory . . .	**For the following pollutants . . .**	**The emissions must not exceed the following emission limits, except during startup and shutdown . . .**	**Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .**	**Using this specified sampling volume or test run duration . . .**
1. Units in all subcategories designed to burn solid fuel.	a. HCl	2.2E-02 lb per MMBtu of heat input	2.5E-02 lb per MMBtu of steam output or 0.28 lb per MWh	For M26A, collect a minimum of 1 dscm per run; for M26 collect a minimum of 120 liters per run.
	b. Mercury	8.0E-07[a] lb per MMBtu of heat input	8.7E-07[a] lb per MMBtu of steam output or 1.1E-05[a] lb per MWh	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
2. Units designed to burn coal/solid fossil fuel	a. Filterable PM (or TSM)	1.1E-03 lb per MMBtu of heat input; or (2.3E-05 lb per MMBtu of heat input)	1.1E-03 lb per MMBtu of steam output or 1.4E-02 lb per MWh; or (2.7E-05 lb per MMBtu of steam output or 2.9E-04 lb per MWh)	Collect a minimum of 3 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
3. Pulverized coal boilers designed to burn coal/solid fossil fuel	a. Carbon monoxide (CO) (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (320 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	0.11 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
4. Stokers/others designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (340 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	0.12 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
5. Fluidized bed units designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (230 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	0.11 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
6. Fluidized bed units with an integrated heat exchanger designed to burn coal/solid fossil fuel	a. CO (or CEMS)	140 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (150 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	1.2E-01 lb per MMBtu of steam output or 1.5 lb per MWh; 3-run average	1 hr minimum sampling time.
7. Stokers/sloped grate/others designed to burn wet biomass fuel	a. CO (or CEMS)	620 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (390 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	5.8E-01 lb per MMBtu of steam output or 6.8 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (2.6E-05 lb per MMBtu of heat input)	3.5E-02 lb per MMBtu of steam output or 4.2E-01 lb per MWh; or (2.7E-05 lb per MMBtu of steam output or 3.7E-04 lb per MWh)	Collect a minimum of 2 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
8. Stokers/sloped grate/others designed to burn kiln-dried biomass fuel	a. CO	460 ppm by volume on a dry basis corrected to 3-percent oxygen	4.2E-01 lb per MMBtu of steam output or 5.1 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (4.0E-03 lb per MMBtu of heat input)	3.5E-02 lb per MMBtu of steam output or 4.2E-01 lb per MWh; or (4.2E-03 lb per MMBtu of steam output or 5.6E-02 lb per MWh)	Collect a minimum of 2 dscm per run.
9. Fluidized bed units designed to burn biomass/bio-based solids	a. CO (or CEMS)	230 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (310 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	2.2E-01 lb per MMBtu of steam output or 2.6 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	9.8E-03 lb per MMBtu of heat input; or (8.3E-05[a] lb per MMBtu of heat input)	1.2E-02 lb per MMBtu of steam output or 0.14 lb per MWh; or (1.1E-04[a] lb per MMBtu of steam output or 1.2E-03[a] lb per MWh)	Collect a minimum of 3 dscm per run.
10. Suspension burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	2,400 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (2,000 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 10-day rolling average)	1.9 lb per MMBtu of steam output or 27 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.0E-02 lb per MMBtu of heat input; or (6.5E-03 lb per MMBtu of heat input)	3.1E-02 lb per MMBtu of steam output or 4.2E-01 lb per MWh; or (6.6E-03 lb per MMBtu of steam output or 9.1E-02 lb per MWh)	Collect a minimum of 2 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
11. Dutch Ovens/Pile burners designed to burn biomass/bio-based solids	a. CO (or CEMS)	330 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (520 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 10-day rolling average)	3.5E-01 lb per MMBtu of steam output or 3.6 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.2E-03 lb per MMBtu of heat input; or (3.9E-05 lb per MMBtu of heat input)	4.3E-03 lb per MMBtu of steam output or 4.5E-02 lb per MWh; or (5.2E-05 lb per MMBtu of steam output or 5.5E-04 lb per MWh)	Collect a minimum of 3 dscm per run.
12. Fuel cell units designed to burn biomass/bio-based solids	a. CO	910 ppm by volume on a dry basis corrected to 3-percent oxygen	1.1 lb per MMBtu of steam output or 1.0E+01 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.0E-02 lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	3.0E-02 lb per MMBtu of steam output or 2.8E-01 lb per MWh; or (5.1E-05 lb per MMBtu of steam output or 4.1E-04 lb per MWh)	Collect a minimum of 2 dscm per run.
13. Hybrid suspension grate boiler designed to burn biomass/bio-based solids	a. CO (or CEMS)	1,100 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (900 ppm by volume on a dry basis corrected to 3-percent oxygen,[d] 30-day rolling average)	1.4 lb per MMBtu of steam output or 12 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.6E-02 lb per MMBtu of heat input; or (4.4E-04 lb per MMBtu of heat input)	3.3E-02 lb per MMBtu of steam output or 3.7E-01 lb per MWh; or (5.5E-04 lb per MMBtu of steam output or 6.2E-03 lb per MWh)	Collect a minimum of 3 dscm per run.
14. Units designed to burn liquid fuel	a. HCl	4.4E-04 lb per MMBtu of heat input	4.8E-04 lb per MMBtu of steam output or 6.1E-03 lb per MWh	For M26A: Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Mercury	4.8E-07[a] lb per MMBtu of heat input	5.3E-07[a] lb per MMBtu of steam output or 6.7E-06[a] lb per MWh	For M29, collect a minimum of 4 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 4 dscm.
15. Units designed to burn heavy liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.3E-02 lb per MMBtu of heat input; or (7.5E-05[a] lb per MMBtu of heat input)	1.5E-02 lb per MMBtu of steam output or 1.8E-01 lb per MWh; or (8.2E-05[a] lb per MMBtu of steam output or 1.1E-03[a] lb per MWh)	Collect a minimum of 3 dscm per run.
16. Units designed to burn light liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.13 lb per MMBtu of steam output or 1.4 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	1.1E-03[a] lb per MMBtu of heat input; or (2.9E-05 lb per MMBtu of heat input)	1.2E-03[a] lb per MMBtu of steam output or 1.6E-02[a] lb per MWh; or (3.2E-05 lb per MMBtu of steam output or 4.0E-04 lb per MWh)	Collect a minimum of 3 dscm per run.
17. Units designed to burn liquid fuel that are non-continental units	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average based on stack test	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.3E-02 lb per MMBtu of heat input; or (8.6E-04 lb per MMBtu of heat input)	2.5E-02 lb per MMBtu of steam output or 3.2E-01 lb per MWh; or (9.4E-04 lb per MMBtu of steam output or 1.2E-02 lb per MWh)	Collect a minimum of 4 dscm per run.
18. Units designed to burn gas 2 (other) gases	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.16 lb per MMBtu of steam output or 1.0 lb per MWh	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	Or the emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. HCl	1.7E-03 lb per MMBtu of heat input	2.9E-03 lb per MMBtu of steam output or 1.8E-02 lb per MWh	For M26A, Collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	c. Mercury	7.9E-06 lb per MMBtu of heat input	1.4E-05 lb per MMBtu of steam output or 8.3E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 3 dscm.
	d. Filterable PM (or TSM)	6.7E-03 lb per MMBtu of heat input; or (2.1E-04 lb per MMBtu of heat input)	1.2E-02 lb per MMBtu of steam output or 7.0E-02 lb per MWh; or (3.5E-04 lb per MMBtu of steam output or 2.2E-03 lb per MWh)	Collect a minimum of 3 dscm per run.

[a] If you are conducting stack tests to demonstrate compliance and your performance tests for this pollutant for at least 2 consecutive years show that your emissions are at or below this limit, you can skip testing according to § 63.7515 if all of the other provisions of § 63.7515 are met. For all other pollutants that do not contain a footnote “a”, your performance tests for this pollutant for at least 2 consecutive years must show that your emissions are at or below 75 percent of this limit in order to qualify for skip testing.

[b] Incorporated by reference, see § 63.14.

[c] If your affected source is a new or reconstructed affected source that commenced construction or reconstruction after June 4, 2010, and before April 1, 2013, you may comply with the emission limits in Table 11, 12, or 13 to this subpart until January 31, 2016. On and after January 31, 2016, but before October 6, 2025 you may comply with the emission limits in this Table 14. On and after October 6, 2025, you must comply with the emission limits in Table 1 to this subpart.

[d] An owner or operator may determine compliance with the carbon monoxide emissions limit using carbon dioxide as a diluent correction in place of oxygen as described in § 63.7525(a)(1). EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to generate the appropriate CO_2 correction percentage for the fuel type burned in the unit, and must also take into account that the 3% oxygen correction is to be done on a dry basis. The methodology must account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. This methodology must be detailed in the site-specific monitoring plan developed according to § 63.7505(d).

[87 FR 60860, Oct. 6, 2022]

Table 15 to Subpart DDDDD of Part 63 - Alternative Emission Limits for Existing Boilers and Process Heaters[d]

As stated in § 63.7500, you may continue to comply with following emission limits until October 6, 2025:

[Units with heat input capacity of 10 million Btu per hour or greater]

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
1. Units in all subcategories designed to burn solid fuel	a. HCl	2.2E-02 lb per MMBtu of heat input	2.5E-02 lb per MMBtu of steam output or 0.27 lb per MWh	For M26A, Collect a minimum of 1 dscm per run; for M26, collect a minimum of 120 liters per run.
	b. Mercury	5.7E-06 lb per MMBtu of heat input	6.4E-06 lb per MMBtu of steam output or 7.3E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 3 dscm.
2. Units design to burn coal/solid fossil fuel	a. Filterable PM (or TSM)	4.0E-02 lb per MMBtu of heat input; or (5.3E-05 lb per MMBtu of heat input)	4.2E-02 lb per MMBtu of steam output or 4.9E-01 lb per MWh; or (5.6E-05 lb per MMBtu of steam output or 6.5E-04 lb per MWh)	Collect a minimum of 2 dscm per run.
3. Pulverized coal boilers designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (320 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	0.11 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
4. Stokers/others designed to burn coal/solid fossil fuel	a. CO (or CEMS)	160 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (340 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	0.14 lb per MMBtu of steam output or 1.7 lb per MWh; 3-run average	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
5. Fluidized bed units designed to burn coal/solid fossil fuel	a. CO (or CEMS)	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (230 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	0.12 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
6. Fluidized bed units with an integrated heat exchanger designed to burn coal/solid fossil fuel	a. CO (or CEMS)	140 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (150 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	1.3E-01 lb per MMBtu of steam output or 1.5 lb per MWh; 3-run average	1 hr minimum sampling time.
7. Stokers/sloped grate/others designed to burn wet biomass fuel	a. CO (or CEMS)	1,500 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (720 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	1.4 lb per MMBtu of steam output or 17 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.7E-02 lb per MMBtu of heat input; or (2.4E-04 lb per MMBtu of heat input)	4.3E-02 lb per MMBtu of steam output or 5.2E-01 lb per MWh; or (2.8E-04 lb per MMBtu of steam output or 3.4E-04 lb per MWh)	Collect a minimum of 2 dscm per run.
8. Stokers/sloped grate/others designed to burn kiln-dried biomass fuel	a. CO	460 ppm by volume on a dry basis corrected to 3-percent oxygen	4.2E-01 lb per MMBtu of steam output or 5.1 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	3.2E-01 lb per MMBtu of heat input; or (4.0E-03 lb per MMBtu of heat input)	3.7E-01 lb per MMBtu of steam output or 4.5 lb per MWh; or (4.6E-03 lb per MMBtu of steam output or 5.6E-02 lb per MWh)	Collect a minimum of 1 dscm per run.
9. Fluidized bed units designed to burn biomass/bio-based solid	a. CO (or CEMS)	470 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (310 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	4.6E-01 lb per MMBtu of steam output or 5.2 lb per MWh; 3-run average	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Filterable PM (or TSM)	1.1E-01 lb per MMBtu of heat input; or (1.2E-03 lb per MMBtu of heat input)	1.4E-01 lb per MMBtu of steam output or 1.6 lb per MWh; or (1.5E-03 lb per MMBtu of steam output or 1.7E-02 lb per MWh)	Collect a minimum of 1 dscm per run.
10. Suspension burners designed to burn biomass/bio-based solid	a. CO (or CEMS)	2,400 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (2,000 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 10-day rolling average)	1.9 lb per MMBtu of steam output or 27 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	5.1E-02 lb per MMBtu of heat input; or (6.5E-03 lb per MMBtu of heat input)	5.2E-02 lb per MMBtu of steam output or 7.1E-01 lb per MWh; or (6.6E-03 lb per MMBtu of steam output or 9.1E-02 lb per MWh)	Collect a minimum of 2 dscm per run.
11. Dutch Ovens/Pile burners designed to burn biomass/bio-based solid	a. CO (or CEMS)	770 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (520 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 10-day rolling average)	8.4E-01 lb per MMBtu of steam output or 8.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.8E-01 lb per MMBtu of heat input; or (2.0E-03 lb per MMBtu of heat input)	3.9E-01 lb per MMBtu of steam output or 3.9 lb per MWh; or (2.8E-03 lb per MMBtu of steam output or 2.8E-02 lb per MWh)	Collect a minimum of 1 dscm per run.
12. Fuel cell units designed to burn biomass/bio-based solid	a. CO	1,100 ppm by volume on a dry basis corrected to 3-percent oxygen	2.4 lb per MMBtu of steam output or 12 lb per MWh	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.0E-02 lb per MMBtu of heat input; or (5.8E-03 lb per MMBtu of heat input)	5.5E-02 lb per MMBtu of steam output or 2.8E-01 lb per MWh; or (1.6E-02 lb per MMBtu of steam output or 8.1E-02 lb per MWh)	Collect a minimum of 2 dscm per run.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
13. Hybrid suspension grate units designed to burn biomass/bio-based solid	a. CO (or CEMS)	3,500 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average; or (900 ppm by volume on a dry basis corrected to 3-percent oxygen,[c] 30-day rolling average)	3.5 lb per MMBtu of steam output or 39 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	4.4E-01 lb per MMBtu of heat input; or (4.5E-04 lb per MMBtu of heat input)	5.5E-01 lb per MMBtu of steam output or 6.2 lb per MWh; or (5.7E-04 lb per MMBtu of steam output or 6.3E-03 lb per MWh)	Collect a minimum of 1 dscm per run.
14. Units designed to burn liquid fuel	a. HCl	1.1E-03 lb per MMBtu of heat input	1.4E-03 lb per MMBtu of steam output or 1.6E-02 lb per MWh	For M26A, collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	b. Mercury	2.0E-06 lb per MMBtu of heat input	2.5E-06 lb per MMBtu of steam output or 2.8E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B collect a minimum sample as specified in the method, for ASTM D6784[b] collect a minimum of 2 dscm.
15. Units designed to burn heavy liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	6.2E-02 lb per MMBtu of heat input; or (2.0E-04 lb per MMBtu of heat input)	7.5E-02 lb per MMBtu of steam output or 8.6E-01 lb per MWh; or (2.5E-04 lb per MMBtu of steam output or 2.8E-03 lb per MWh)	Collect a minimum of 1 dscm per run.
16. Units designed to burn light liquid fuel	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.13 lb per MMBtu of steam output or 1.4 lb per MWh	1 hr minimum sampling time.

If your boiler or process heater is in this subcategory . . .	For the following pollutants . . .	The emissions must not exceed the following emission limits, except during startup and shutdown . . .	The emissions must not exceed the following alternative output-based limits, except during startup and shutdown . . .	Using this specified sampling volume or test run duration . . .
	b. Filterable PM (or TSM)	7.9E-03 lb per MMBtu of heat input; or (6.2E-05 lb per MMBtu of heat input)	9.6E-03 lb per MMBtu of steam output or 1.1E-01 lb per MWh; or (7.5E-05 lb per MMBtu of steam output or 8.6E-04 lb per MWh)	Collect a minimum of 3 dscm per run.
17. Units designed to burn liquid fuel that are non-continental units	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen, 3-run average based on stack test	0.13 lb per MMBtu of steam output or 1.4 lb per MWh; 3-run average	1 hr minimum sampling time.
	b. Filterable PM (or TSM)	2.7E-01 lb per MMBtu of heat input; or (8.6E-04 lb per MMBtu of heat input)	3.3E-01 lb per MMBtu of steam output or 3.8 lb per MWh; or (1.1E-03 lb per MMBtu of steam output or 1.2E-02 lb per MWh)	Collect a minimum of 2 dscm per run.
18. Units designed to burn gas 2 (other) gases	a. CO	130 ppm by volume on a dry basis corrected to 3-percent oxygen	0.16 lb per MMBtu of steam output or 1.0 lb per MWh	1 hr minimum sampling time.
	b. HCl	1.7E-03 lb per MMBtu of heat input	2.9E-03 lb per MMBtu of steam output or 1.8E-02 lb per MWh	For M26A, collect a minimum of 2 dscm per run; for M26, collect a minimum of 240 liters per run.
	c. Mercury	7.9E-06 lb per MMBtu of heat input	1.4E-05 lb per MMBtu of steam output or 8.3E-05 lb per MWh	For M29, collect a minimum of 3 dscm per run; for M30A or M30B, collect a minimum sample as specified in the method; for ASTM D6784[b] collect a minimum of 2 dscm.
	d. Filterable PM (or TSM)	6.7E-03 lb per MMBtu of heat input or (2.1E-04 lb per MMBtu of heat input)	1.2E-02 lb per MMBtu of steam output or 7.0E-02 lb per MWh; or (3.5E-04 lb per MMBtu of steam output or 2.2E-03 lb per MWh)	Collect a minimum of three dscm per run.

[a] If you are conducting stack tests to demonstrate compliance and your performance tests for this pollutant for at least 2 consecutive years show that your emissions are at or below this limit, you can skip testing according to § 63.7515 if all of the other provisions of § 63.7515 are met. For all other pollutants that do not contain a footnote a, your performance tests for this pollutant for at least 2 consecutive years must show that your emissions are at or below 75 percent of this limit in order to qualify for skip testing.

[b] Incorporated by reference, see § 63.14.

[c] An owner or operator may determine compliance with the carbon monoxide emissions limit using carbon dioxide as a diluent correction in place of oxygen as described in § 63.7525(a)(1). EPA Method 19 F-factors in 40 CFR part 60, appendix A-7, and EPA Method 19 equations in 40 CFR part 60, appendix A-7, must be used to generate the appropriate CO_2 correction percentage for the fuel type burned in the unit, and must also take into account that the 3% oxygen correction is to be done on a dry basis. The methodology must account for any CO_2 being added to, or removed from, the emissions gas stream as a result of limestone injection, scrubber media, etc. This methodology must be detailed in the site-specific monitoring plan developed according to § 63.7505(d).

[d] Before October 6, 2025 you may comply with the emission limits in this Table 15. On and after October 6, 2025, you must comply with the emission limits in Table 2 to this subpart.

[87 FR 60863, Oct. 6, 2022]

Indiana Department of Environmental Management
Office of Air Quality

Addendum to the Technical Support Document (ATSD) for a Part 70 Administrative Operating Permit

Source Background and Description

Source Name:	**Life Cycle Power**
Source Location:	**3602 West SR 32, Lebanon, IN 46052**
County:	**Boone**
SIC Code:	**4911 (Electric Services)**
Operation Permit No.:	**T 011-50087-00094**
Permit Reviewer:	**Phillip Jackson**

On June 26, 2026, the Office of Air Quality (OAQ) had a notice posted on IDEM's website (https://www.in.gov/idem/public-notices/), stating that Life Cycle Power had applied for a Part 70 Administrative Operating Permit to construct and operate a new stationary greenfield power generating facility to power Orla, LLC (a stationary data center that has been determined to be part of the same source). The notice also stated that the OAQ proposed to issue a Part 70 Administrative Operating Permit for this operation and provided information on how the public could review the proposed permit and other documentation. Finally, the notice informed interested parties that there was a period of thirty (30) days to provide comments on whether or not this permit should be issued as proposed.

On June 26, 2026, OAQ also posted a notice on IDEM's website (https://www.in.gov/idem/public-notices/), stating that IDEM, OAQ would hold a virtual public hearing on August 6, 2026, to discuss the draft Part 70 Administrative Operating Permit for Life Cycle Power. The notice provided information on how the public could attend the virtual public hearing, provided information for citizens that needed reasonable accommodations to participate in this event, including accommodations for persons with speech or hearing difficulties, and how the public could review and provide comments on the proposed permits and other documentation. Finally, the notice informed interested parties that the public notice period would end on August 10, 2026.

On August 6, 2026, IDEM, OAQ conducted a virtual public hearing regarding the draft Part 70 Administrative Operating Permit for Life Cycle Power.

IDEM, OAQ thanks all of the commenters and attendees at the virtual public hearing for their interest in the proposed permits and their participation in the permit review process.

The Technical Support Document (TSD) is used by IDEM, OAQ for historical purposes. IDEM, OAQ does not make any changes to the original TSD, but the permit will have the updated changes. The comments and revised permit language are provided below with deleted language as strikeouts and new language **bolded**.

General Statement 1 – Impact to the Environment and Public Health

Some commenters expressed concerns regarding the negative impact of the proposed source with respect to the environment and public health within the community.

IDEM Response to General Statement 1 – Impact to the Environment and Public Health

IDEM's Mission Goal and Authority

IDEM's mission is to implement federal and state regulations to protect human health and the environment while allowing for environmentally sound operations of industrial, agricultural, commercial, and government activities vital to a prosperous economy.

Indiana Department of Environmental Management, Office of Air Quality (IDEM, OAQ) issues air pollution permits to facilities that emit regulated levels of pollutants to the air. Permits require sources to comply with all health-based and technology-based standards established by the U.S. Environmental Protection Agency (EPA) and the Indiana Environmental Rules Board. Permit decisions made by IDEM, OAQ are based on the ability of a source to comply with air permit requirements and applicable state and federal air quality rules and regulations.

326 IAC 2-1.1-8 requires that IDEM approve or deny an application received by the department.

The proposed permit contains all health-based and technology-based standards established by the U.S. EPA and the Indiana Environmental Rules Board (ERB), which will limit the amount of air pollution emissions from the facility in accordance with all applicable requirements. Specifically, the permit contains all applicable control device operating requirements, compliance determination requirements, compliance monitoring requirements, and associated record keeping and reporting requirements to assure that all permit limitations are enforceable as a practical matter and to assure that the source can demonstrate compliance with all applicable state and federal rules on a continuous basis. These conditions work in conjunction to protect human health and the environment.

IDEM, OAQ has no authority to create any permit limits or measures that exceed what is legally required for a regulated source.

IDEM, OAQ handles all air permit applications on an objective, consistent, and impartial basis. IDEM, OAQ staff are expected to comply with all applicable state ethics rules and policies. They strive to draft air permit documents and associated calculations/analyses that are thorough, accurate, and that contain all applicable state and federal requirements. All permit limitations are federally enforceable as a practical matter and protective of human health and the environment.

Indiana's air pollution control rules are contained in Title 326 of the Indiana Administrative Code, which is available at http://www.in.gov/legislative/iac/iac_title?iact=326 on the Internet.
The Indiana air permitting requirements that are applicable to this source are part of the state implementation plan (SIP) that is approved by EPA. Environmental laws are enacted by the Indiana legislature and the legislature has delegated rulemaking authority to the Indiana Environmental Rules Board (ERB). For information on how to get involved in Indiana's Environmental Rulemaking Process, please go to https://www.in.gov/idem/legal/rulemaking/ on IDEM's website.

The information provided by the applicant in its air permit application indicates that the Permittee will be able to comply with all permit requirements; therefore, IDEM will issue the permit.

National Ambient Air Quality Standards (NAAQS)

IDEM, OAQ relies on the scientific expertise of U.S. EPA which has developed the National Ambient Air Quality Standards (NAAQS) to protect public health and the environment.

The federal Clean Air Act requires the U.S. EPA to set National Ambient Air Quality Standards (NAAQS) for six criteria pollutants. These standards are set at levels that protect human health,

including the health of sensitive persons, such as asthmatics, children, and the elderly. The NAAQS are often referred to as the federal health standards for outdoor air. More information about these pollutants is available at https://www.epa.gov/criteria-air-pollutants on U.S. EPA's website. The complete table of the NAAQS can be found at https://www.epa.gov/criteria-air-pollutants/naaqs-table.

The Clean Air Act requires that U.S. EPA conduct periodic review of the most current scientific information to determine if air quality standards are adequate to protect human health and general welfare. This review includes an integrated science assessment which is a comprehensive review of science judgments and risk and exposure assessments. An independent committee, the Clean Air Scientific Advisory Committee (CASAC), reviews all health information and makes recommendations to U.S. EPA on whether current health standards are protective of public health and welfare or should be revised. After any health standard recommendations have been approved and finalized through rulemaking, IDEM is required to follow the new standards. Additional information on the CASAC can be found at the following website: https://casac.epa.gov/.

Ambient Air at Monitoring Stations Around Indiana

IDEM conducts sampling of the ambient air at monitoring stations around Indiana. This air monitoring is conducted to measure whether the NAAQS are being met. Information about Indiana's air monitoring system and monitoring results are available at https://www.in.gov/idem/airmonitoring/. Information about current and expected air pollution levels are on IDEM's SmogWatch site at https://apps.idem.in.gov/smogwatch/Today.aspx on the internet.

The Indiana Department of Environmental Management (IDEM) regulates air quality to protect public health and the environment in the State of Indiana. Air monitoring data are required by regulation and are used to determine compliance with U.S. EPA's National Ambient Air Quality Standards (NAAQS). Other important uses of the air monitoring data include, the production of a daily Air Quality Index (AQI) report, daily air quality forecast report, support of short and long-term health risk assessments, identification of a localized health concern, and tracking long-term trends in air quality. Indiana monitors the six criteria pollutants which have NAAQS identified for them; carbon monoxide (CO), lead, nitrogen dioxide (NO_2), ground-level ozone (O_3), particulate matter (PM_{10} and $PM_{2.5}$), and sulfur dioxide (SO_2). Other pollutants which do not have ambient standards established for them are also monitored: toxics (volatile organic compounds, VOCs), metals, carbonyls, $PM_{2.5}$ speciated compounds, ozone precursors, and carbon dioxide (CO_2). In addition, meteorological data are also collected to support the monitoring and aid in analysis of the data.

IDEM presents two different types of air quality data, intermittent and continuous, on IDEM's Internet website https://www.in.gov/idem/airmonitoring/. Monthly and annual summary reports of pollutants collected by manual methods are available as well as hourly values from continuous monitors. The Data Management and Display System (DMDS) provides on-line access to Indiana's continuous air quality monitoring data. It has been available to the public since July 2007. DMDS offers access to near real-time data from active air monitoring sites across Indiana. This allows anyone to track pollutant and meteorological values throughout the day. In addition, past data back to 1998 are available as raw data and canned summary reports or user specified retrievals. Site information with site photographs can be found at the following website: https://www.in.gov/idem/airmonitoring/air-quality-data/

IDEM issues Air Quality Action Day (AQAD) advisories on days when ground level ozone pollution or fine particulate matter ($PM_{2.5}$) could build to unhealthy levels in the outdoor air. IDEM issues AQAD advisories based on air quality forecasts, air quality standards, and Air Quality Index (AQI) categories. Typical conditions for ozone AQADs in Indiana are high temperatures

approaching 80° Fahrenheit or above, clear skies, dry atmosphere, calm to light southerly winds, very little air mixing, high NOx values the previous night, and/or persistent high pressure over the eastern Midwest states and East Coast. Typical conditions for $PM_{2.5}$ AQADs in Indiana are temperature inversions, light winds, clear skies, persistent high pressure, high humidity values, transport from high $PM_{2.5}$ locations (such as wildfires), and/or warm and humid air over snow cover during the winter. When AQADs are predicted, Hoosiers can take action to protect their health and protect air quality. For additional information on AQAD advisories and actions to take during AQAD advisories, please see the following website: https://www.in.gov/idem/airquality/air-quality-action-day-aqad-advisories/

The Air Quality Index (AQI) is a health index which combines the evaluation of various air pollutants in order to provide an easily understood measure of air quality. The AQI focuses on health effects that can occur within a few hours or days after breathing polluted air. Air monitoring data are used to issue health alerts to warn the public of elevated pollution levels. The index provides a scale to which air quality is compared and indicates the associated health effects of concern. IDEM issues health alerts for high air pollutant levels based on the AQI. The AQI uses index numbers, health effect levels, and colors to communicate the health levels. The higher the AQI value, the greater the level of air pollution and the greater the chance of health impacts. For example, an AQI value of 50 represents good air quality and little potential to affect public health, while an AQI value over 300 represents hazardous air quality that could cause health effects. An AQI value of 100 generally corresponds to the National Ambient Air Quality Standard (NAAQS) for the pollutant, which is the level the United States Environmental Protection Agency (U.S. EPA) has set to protect public health. AQI values below 100 are generally regarded as satisfactory. When AQI values are above 100, air quality is considered to be unhealthy, first for certain sensitive groups of people, then for everyone as AQI values get higher. The Air Quality Index (AQI) for pollutants including ozone and particulate matter (PM) can be found at the following website: https://www.in.gov/idem/airmonitoring/air-quality-data/.

Extensive information about Indiana's air monitoring system and monitoring results is available at https://www.in.gov/idem/airmonitoring/ on IDEM's website.

SmogWatch is an informational tool created by IDEM to share current air quality and air quality forecasts for each day. SmogWatch provides daily information about ground-level ozone and particulate matter air quality forecasts, health information, and monitoring data for eight regions of Indiana. Current air quality and air quality forecasts for each day are available at https://apps.idem.in.gov/smogwatch/Current.aspx.

Ambient Air Monitoring Network Plan and Public Participation

In October 2006, United States Environmental Protection Agency (U.S. EPA) issued final regulations concerning state and local agency ambient air monitoring networks. These regulations in 40 Code of Federal Regulations 58, Subpart B (40 CFR 58.10), require states to submit an annual monitoring network review to U.S. EPA. This network plan is required to provide the framework for establishment and maintenance of an air quality surveillance system and to list any changes that are proposed to take place to the current network. Indiana's current Ambient Air Monitoring Network Plan is available at https://www.in.gov/idem/airmonitoring/indianas-ambient-air-monitoring-network/ on IDEM's website.
Locations of the monitors are reviewed annually pursuant to 40 CFR 58.10 and are subject to public comment. IDEM is required to develop and submit an annual monitoring network plan to U.S. EPA that details the current air quality surveillance system and proposed changes for the coming year. IDEM must release the proposed plan to the public for inspection for 30 days prior to submission to U.S. EPA by July 1. IDEM posts the proposed plan on IDEM's website (https://www.in.gov/idem/airmonitoring/indianas-ambient-air-monitoring-network/) when it becomes available. Information on how to submit comments is located in Appendix A of the plan.

IDEM, OAQ will evaluate comments and requests on monitoring locations and act if any changes are necessary to meet the monitoring goals and monitoring projects across the state. IDEM's contact for the monitoring plan may be contacted by U.S. Mail: IDEM/OAQ/AMB, 100 North Senate Avenue, Shadeland, Indianapolis, IN 46204-2251, by FAX at 317-308-3239.

Ambient Air Monitors Near Lebanon, IN

The following table summarizes the IDEM air pollution monitors that are located near Lebanon, Indiana:

County	City	Monitor Site Name	Site Address	Air Pollutants Monitored
Boon	Lebanon	Whiteston	Perry-Worth Elm School 3900 E. 300 S. Lebanon, IN	Ozone (O_3)
Hamilton	Noblesville	Noblesville - 191st St.	Our Lady of Grace Catholic Church 9900 E. 191st St	Ozone (O_3)
Hendrix	Avon	Avon	7203 E. US Highway 36	Ozone (O_3)

General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting

Some commenters expressed concern regarding possible future violations and what penalties there would be for violating a permit term.

IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting

Possible Future Violations and Permitting

IDEM, OAQ understands that some commenters have concern that the source could have possible future violations of environmental law. However, Indiana court cases have held that an initial permit cannot be denied due to an allegation of possible future violations of environmental law. *See* Talara Lykins – CAFO, 2007 OEA 114, DeGroot Dairy CFO, 2006 OEA 1, Kyle Hall, 2008 OEA 100, which can be found at the following website: https://www.in.gov/oea/decisions/ The information provided by the applicant in its air permit application indicates that the Permittee will be able to comply with all permit requirements; therefore, IDEM will issue the permit. Life Cycle Power is required to comply with all air permit requirements and applicable state and federal air quality rules and regulations. If it is determined that Life Cycle Power has violated a permit term or condition, IDEM, OAQ will take appropriate action to bring the source back into compliance with applicable permit conditions, state rules, and federal regulations.

Companies can submit applications to the Indiana Department of Environmental Management (IDEM) as many times as necessary to obtain, renew, or modify permits, provided they comply with regulatory requirements and deadlines.

Compliance Inspections

IDEM, OAQ and U.S. EPA inspections are generally unannounced inspections. IDEM, OAQ normally inspects major sources on an annual basis, consistent with EPA's Clean Air Act Stationary Source Compliance Monitoring Strategy. IDEM, OAQ may make additional inspections on a case-by-case basis based on a number of factors including public complaints received. During an inspection, the IDEM, OAQ inspector will perform a records review, review operations and maintenance (O&M) plans, operation maintenance and monitoring (OMM) plans, preventative maintenance plans (PMPs), operating logs, inspect and review compliance

monitoring, and inspect the facility operations and process parameters to determine if the source is in compliance with all air permit terms and conditions. Regular inspections, regular stack testing, along with compliance monitoring, record keeping and reporting, allow IDEM, OAQ to determine if Life Cycle Power is in continuous compliance with all air permit terms and conditions. If it is determined that the source has violated a permit term or condition, IDEM, OAQ will take appropriate action to bring the source back into compliance with applicable permit conditions, state rules, and federal regulations.

IDEM uses a number of enforcement tools to bring sources that are out of compliance with a permit term or condition back into compliance. If it is determined that a source has violated a permit term or condition, IDEM, OAQ will take appropriate action to bring the source back into compliance with applicable permit conditions, state rules, and federal regulations. Most violations of environmental laws are resolved informally. As part of the informal resolution, a "warning letter" or "violation letter" is sent, noting the violation and measures necessary to correct it in order to ensure the responsible party corrects the documented problem. Certain violations are referred directly to formal administrative enforcement and may receive a Notice of Violation (NOV). An NOV normally results in the assessment of civil penalties and the requirement that IDEM and the respondent sign an Agreed Order (AO). The AO ensures that the respondent achieves and maintains compliance with Indiana's environmental statutes and rules. Any civil penalties accessed as a result of a Notice of Violation (NOV) issued by IDEM, OAQ are determined based on Indiana Code 13-30 and IDEM's Nonrule Policy Document (NPD) "Civil Penalty Policy" (ENFORCEMENT-99-0002-NPD available at https://www.in.gov/idem/files/nrpd_enf-002.pdf on IDEM's website. Pursuant to IC 4-22-2-19.6, IDEM's Civil Penalty Policy will be adopted into a rule through an agency rule making.

Submitting Complaints

IDEM, OAQ encourages residents to contact IDEM, OAQ if they witness or have evidence of any compliance related concerns with this operation. An IDEM, OAQ compliance inspector will investigate complaints, perform any necessary observations or inspections of the source, determine if a violation of a permit term or condition has occurred, take appropriate action when a violation is observed, and initiate any necessary actions to bring the source back into compliance with applicable permit conditions and state and federal rules and regulations.

If a commenter or citizen has complaints and issues with the source with respect to compliance with its air permit, complaints can be submitted to IDEM three (3) different ways:

1. Online at: https://www.in.gov/idem/contact/file-a-complaint/;
2. Through the Complaint Coordinator at (800) 451-6027 ext. 24464; or
3. By printing, completing, and mailing a paper-based Complaint Submission Form (Available under Agency Forms at: https://www.in.gov/idem/forms/idem-agency-forms/).

The current compliance inspector for each county in Indiana can be found at the following website: https://www.in.gov/idem/idem-regional-staff-and-inspectors/.

General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand

Several commenters expressed concerns that the proposed Life Cycle Power generation station would be located too close to their home (residential areas) and would result in water quality being impacted, along with increase in electrical utility prices.

IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand

IDEM, OAQ does not have the authority to evaluate noise as part of the air permit application review process. Noise, smells and other local level permitting decisions are made by local government bodies and officials.

IDEM, OAQ understands that several commenters have concerns that the proposed Life Cycle Power generation station would be located too close to their home (residential areas) and would result in water quality being impacted, along with increase in electrical utility prices. However, IDEM, OAQ does not have the authority to evaluate these types of issues as part of the air permit application review process or to deny an air permit based on concerns about these types of issues.

With respect to the issued raised about potential water and energy usage, these issues are outside the scope of this air pollution permit. Life Cycle Power will be required to obtain any applicable permit(s) from IDEM's Office of Water Quality (OWQ) and/or Indiana Department of Natural Resources (DNR), which will contain all applicable state and federal rules and regulations related to water usage, discharge, and pollution. This proposed air permit only contains applicable state and federal rules and regulations related air pollution.

General Statement 4 – Denial of the Permit

Many commenters requested that the permit be denied.

IDEM Response to General Statement 4 – Denial of the Permit

IDEM, OAQ does not have the authority to deny an air permit upon request. IDEM's authority is to evaluate the proposed project and to assure the proposed permit contains all health-based and technology-based standards established by the U.S. EPA and the Indiana Environmental Rules Board (ERB). IDEM, OAQ handles all air permit applications on an objective, consistent, and impartial basis. IDEM, OAQ staff are expected to comply with all applicable state ethics rules and policies. The information provided by the applicant in its air permit application indicates that the Permittee will be able to comply with all permit requirements; therefore, IDEM will issue the permit.

See the "IDEM Response to General Statement 1 - Impact to the Environment and Public Health" section above for more information regarding how IDEM, OAQ processes air permit applications and ultimately issues air permits.

General Statement 5 – Bridge Power

Many commenters requested clarification regarding Bridge Power from Life Cycle Power, how long the temporary power generation station would be in operation, and to require an end date for these units to be removed by.

IDEM Response to General Statement 5 – Bridge Power

Bridge Power supplies interim electricity to high-demand facilities—such as large industrial sites or data centers—before permanent high-capacity connections to the local utility electrical grid can be completed.

Life Cycle Power provides Orla, LLC with bridge power from generators that will be constructed on the same property, until Orla, LLC can establish permanent connection to the electrical grid.

Although bridge power is intended only to serve as temporary power, IDEM, OAQ treats these units with the same requirements and standards as those that operate at a permanent stationary source. No end date of these on-site generators is necessary. Permitting is not done as a temporary operation. The permit terms and requirements for Life Cycle Power are based on full-time operations. There is no state air permitting requirement to provide an end date.

General Statement 6 – Combined Single Source Evaluation

Many commenters requested clarification regarding why there are two separate permits being issued. This information was provided in the Source Definition section of the TSD, which was included in the public notice period.

IDEM Response to General Statement 6 – Combined Single Source Evaluation

IDEM, OAQ has examined whether these plants are part of the same Part 70 major source. The term “major source” is defined at 326 Indiana Administrative Code 2-7-1(20). The Indiana Administrative Code is available at http://www.in.gov/legislative/iac/iac_title?iact=326 on the Internet. In order for these plants to be considered as a major source under 326 IAC 2-7-1(20)(B) and (C), all three of the following criteria must be met:

(a) The plants must have common ownership and/or control;

(b) The plants must have the same two-digit Standard Industrial Classification (SIC) Code or one must serve as a support facility to the other; and

(c) The plants must be located on the same, contiguous or adjacent properties.

IDEM, OAQ finds that the plants meet all three criteria of the major source definition. Therefore, the plants are part of the same Part 70 major source.

The two plants are considered part of the same Part 70 major source, and permitted as one source. Permitting evaluations are based on these two plants are permitted as one source,.

They are issued separate permits since Orla, LLC and Life Cycle Power are owned and operated by two different entities. Life Cycle Power will have an administrative Title V permit, so they are accountable for any emission units that fall under their purview. The PTE calculations from all emission units found at this source are included in both permits.

General Statement 7 – Best Available Control Technology (BACT) and PSD (326 IAC 2-2)

Many commenters about Best Available Control Technology (BACT), PSD (326 IAC 2-2), and taking stricter limits.

IDEM Response to General Statement 7 – Best Available Control Technology (BACT) and PSD (326 IAC 2-2)

The proposed permit for Life Cycle Power does not state that the emergency generators are allowed to operate unlimited for 500 hours per year. The permit specifies NOx, CO and VOC limits of less than 250 tons per 12 consecutive month period. This means the generators may only operate the number of hours per year in order to render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable. The limit is based on the tons per year emitted, not on number of hours operated.

The Potential to Emit (PTE) calculations use 500 hours in order to calculate a potential to emit (PTE) for emergency units. This is based on EPA guidance for all emergency generators, and is designed to be an overestimation. The calculations are used in order to determine permit levels as well as what limits are

required. The D and E sections of the permit document specify the enforceable limits that apply to the source. The generators must comply with the requirements specified under 40 CFR 63.6640(f) in order to be considered an emergency unit.

Companies in Indiana need to use Best Available Control Technology (BACT) when building major new sources or making major modifications to existing ones, subject to PSD (326 IAC 2-2), Emission Offset (326 IAC 2-3), or new VOC facilities (326 IAC 8-1-6). Essentially, if a project significantly increases air pollution (like major modifications or large new sources) or exceeds VOC limits (25 tons/year) for each unit, a BACT analysis and application must be submitted to the Indiana Department of Environmental Management (IDEM) to ensure the best pollution controls are used. Life Cycle Power has taken synthetic minor limits in order to remain under PSD major source levels, and therefore the BACT is not required.

General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

Many commenters expressed concerns regarding the PTE of Formaldehyde, requesting to have modeling, testing, and stricter limits placed on the source.

IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

IDEM, OAQ recognizes that air pollution emissions from this source and its potential effect on human health and the environment are of great concern to the commenters.

The proposed permit contains all health-based and technology-based standards established by the U.S. EPA and the Indiana Environmental Rules Board, which will limit the amount of air pollution emissions from the facility in accordance with all applicable requirements. These standards are established to protect human health and the environment.

The Potential to Emit (PTE) of Formaldehyde after control from the source is 111.95 tons per year. The source is considered a Major Source of hazardous air pollutants (HAPs) under Section 112 of the Clean Air Act since HAP emissions are equal to or greater than ten (10) tons per year for a single HAP and equal to or greater than twenty-five (25) tons per year for a combination of HAPs. The source has agreed to abide by all rules and regulations that are required by Section 112 of the Clean Air Act.

All generators operated by the source are subject to National Emission Standards for Hazardous Air Pollutants (NESHAP) Subpart ZZZZ for Stationary Reciprocating Internal Combustion Engines, which requires the source to limit the concentration of Formaldehyde that comes from the RICE exhaust and conduct semiannual tests on the engines. The tests required by NESHAP ZZZZ are sufficient to determine compliance with the applicable Formaldehyde standards.

The Indiana air permitting requirements that are applicable to this source are part of the state implementation plan (SIP) that is approved by EPA. Environmental laws are enacted by the Indiana legislature and the legislature has delegated rulemaking authority to the Indiana Environmental Rules Board (ERB). IDEM, OAQ has no authority to create any permit limits or measures that exceed what is legally required for a regulated source. There are no applicable state or federal rules that require ambient dispersion modeling, air toxics screening, or cumulative impact analysis of the HAP emissions (e.g., Formaldehyde) from this source.

The cumulative impact of the combined emissions from all sources in the ambient air is monitored by the IDEM, OAQ, Air Monitoring Branch. Air quality monitoring is conducted at monitoring sites across the state. For additional discussion regarding ambient air monitoring, see IDEM Response to General Statement 1 – Impact to the Environment and Public Health.

Jodi Stewart Comments and IDEM Responses

On July 9, 2026 and August 6, 2026, Jodi Stewart submitted comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Jodi Stewart Comments
See Appendix B and C to see the entirety of both comments.

Below are the questions posed in the comments.

(1) **Question:** Where in the Indiana Constitution is there a grant of authority to use public money for non-public purposes?

(2) **Question:** Where in the Indiana Constitution is there a grant of authority to use the People's natural resources for unauthorized purposes such as economic development funded with public money?

It is, therefore, my wish, that you provide remedy by immediately ceasing and desisting using public money for non-public purposes and by providing public notice to cease and desist such use of public money to all departments of all state and local governments within the State of Indiana.

IDEM Response to Jodi Stewart Comments

(1) IDEM, OAQ, has no control or decision on how monies related to this project are spent, distributed, or used with regard to this draft permit.

(2) In response to the use of natural resources see the following IDEM response at the beginning of the ATSD under the General Statements and IDEM Responses section:

IDEM Response to General Statement 1 – Impact to the Environment and Public Health

There is no record of public money being used for unauthorized purposes in relation to this project.

No changes to the draft permit were made as a result of these comments.

Phil Graybiel Verbal Testimony and Written Comments and IDEM Responses

On August 6, 2026 (verbal testimony during the public hearing) and on August 10, 2026, Phil Graybiel submitted written comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit. Both verbal testimony and written comments are identical:

Phil Graybiel Verbal Testimony and Written Comments

Dear Phillip Jackson

Hello my name is Phil Graybiel and I am a resident of Pike Township. When I think about this permit I am very concerned about the air quality, not only down wind in Indianapolis where my fiance has asthma, but also in Lebanon, IN where I grew up and where my aging parents still live. My family's health is most important when I think about whether this air permit should be approved. The gas engines are like having a gas power plant in my hometown. And we do not know how many more generators will be added. At other data center sites, like El Paso, TX hundreds of generators have been installed when they started with a smaller number like in this permit. I am concerned that there are no specific limits regarding how many hours, and years that these gas engines may run, and no limit on how many hours diesel generators will run in an emergency.

I am concerned about the impact of this pollution on my family, the nitrous oxide limits are at 153 tons a year and volatile organic compounds are at 185 tons, both of these can harm human health and make air quality worse. I am concerned about the 112 tons per year of formaldehyde, a known carcinogen causing cancer in my community. Friends and family of mine have had cancer and I worry that this will only make things worse.

How will IDEM ensure that these so-called emergency generators are not running all the time, because they do not have enough power on the available grid? They should not be operating in a community that can not support such a project in the first place. Please deny these air permits for Orla and Life Cycle Power aka Meta.

These dirty gas engines can not be allowed to operate long term. Why is Meta building this project if there is not enough electricity to support it in the first place? IDEM should prevent them from running these engines for years to come.

Phil Graybiel

IDEM Response to Phil Graybiel Verbal Testimony and Written Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 4 – Denial of the Permit
- IDEM Response to General Statement 5 – Bridge Power
- IDEM Response to General Statement 7 – Best Available Control Technology (BACT) and PSD (326 IAC 2-2)
- IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

No changes to the draft permit were made as a result of these comments.

Sarah Goss Verbal Testimony and Written Comments and IDEM Responses

(a) On August 6, 2026, during the public hearing, Sarah Goss provided the following verbal testimony to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Sarah Goss Verbal Testimony

Hello. My name is Sarah Goss. I live in Lebanon, so I'm a nearby resident. These two drafts are one power system. Life Cycle Power is 65 natural gas reciprocating engines, about 134 megawatts, so this is bridge power that's not going to sustain them until the grid catches up. That is not a handful of emergency generators. There's on the order of two and half times of Lebanon's entire summer peak of about 56 megawatts.

IDEM considers the gas plant and the data center as a single source, which is great, but the draft stays under the 250 tons provision that's simply deterioration of nonstop VOC and CO only by asserting tonnage caps, hopefully 121, 155 -- or 155 tons per engines, not by eliminating how many hours they may run. For the required controls, those caps allow almost continuous boiler operation, so these smaller limited numbers do not mean nonuse, they mean continuous bridging power, engineered to stay just

under major source review.

Even with those limits, formaldehyde stays enormous, on the order of about 112 tons per year. That makes for a major source of hazardous air pollutants, reciprocating engines -- toxic -- per megawatt hours of -- turnover. This campus is designed to deliver about one gigawatt.

Phase one is not the whole story. I ask IDEM to evaluate reasonably perceivable expansion, require a clear operating public profile of our town, including many corporate -- reliability dispatch. Would greenhouse gas -- not on the record, and not treating -- running for each generation, like emergency backup.

I will also submit -- (time cutoff)

....

(Testimony during open forum)

I just wanted to also bring up that the three-year fuel map on the bridge plant alone is on the order of a half a million tons of CO2 per year, and that's -- you know, that's usually done with maps, and it's in any the current plan.

And you're sag -- Indiana is sagging -- power project, and treating a 134-megawatt possible bridge as a temporary footnote, and it should get closer scrutiny, as Rebecca was talking about. This is a continuous primary power source or private campus, and this is closer to utility-scale plans. And we need to have a cumulative air analysis, public operating assumptions, not a silent path around this PSD by permitting this.

Thank you.

(End of testimony)

(b) On August 10, 2026, Sarah Goss submitted written comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Sarah Goss Written Comments

Dear Mr. Jackson, IDEM Office of Air Quality:

Please enter my comments into the public record for the draft Part 70 operating permit for Life Cycle Power, T011-50087-00094 (Public Notice; comment period ending August 10, 2026). I also spoke at the August 6, 2026 virtual public hearing. IDEM treats Life Cycle Power and Orla, LLC (T011-50034-00093) as a single source for PSD purposes; these written comments address T011-50087-00094 (the natural-gas engine plant). Comments specific to Orla's diesel units, if any, will be submitted under that permit number.

I am Sarah Goss, Ecoethic Creative, LLC, **Redacted**, Lebanon, Boone County, Indiana 46052. I comment as a Boone County resident and as a volunteer technical advisor supporting community education on LEAP air and water permitting. This is not legal advice. I support economic development that is transparent and protective. I ask IDEM not to finalize T011-50087-00094 until the issues below are addressed in the permit conditions or explained in writing in the Technical Support Document addendum / response to comments.

SCOPE

The draft authorizes sixty-five (65) Caterpillar G3516H natural-gas reciprocating engines (GEN1–GEN65),

each about 2,763 bhp, totaling on the order of 134 MW, plus two LNG regasification boilers. Controls are SCR (NOx) and oxidation catalyst (CO/VOC). Condition D.1.1 caps the engines at roughly 121 tpy NOx, 155 tpy VOC, and 155 tpy CO on a rolling 12-month basis. The draft keeps limited PTE under the 250 tpy criteria-pollutant PSD major thresholds. Formaldehyde limited PTE for the engines is on the order of 112 tpy — a major HAP source.

The project is described as temporary "bridge" power for Meta's data center until grid service catches up. With required controls at full load, those tonnage caps allow on the order of ~8,700 hours per year — essentially continuous, full-year operation. That is a mid-size gas generation plant on a private campus (~2.4× Lebanon's approximate 56 MW summer peak), limited by annual tons, not by a clear temporary operating profile.

SUBSTANTIVE REQUESTS

1. Operating profile — tonnage caps allow continuous use.

   The draft uses annual tonnage to stay under PSD major thresholds and does not impose a clear enforceable hour or fuel/throughput cap matching a genuinely temporary bridge. Application materials note that some emission scenarios are for PTE estimation and "shall not be used to limit maximum hours of operation."
   I request:

   (a) An enforceable operating-hour profile (or equivalent fuel/throughput limits) consistent with temporary bridge need, or a written finding that continuous full-year operation is intended and permitted;

   (b) Clear recordkeeping and reporting of actual hours, load, and purpose of operation so the public and IDEM can see how the plant is used relative to the "bridge" claim;

   (c) If the plant may serve campus peak or grid-support roles beyond outage cover, state that in the RTC and show how those hours are counted against the caps.

2. Reasonably foreseeable expansion / phased PSD avoidance.

   Meta has publicly stated the Lebanon campus is "designed to deliver 1 GW." This ~134 MW gas plant is not the full story. I request that IDEM evaluate reasonably foreseeable expansion of on-site generation and campus load under applicable PSD / aggregation principles, require disclosure of a phased master plan (MW by phase, cumulative combustion equipment, grid interconnection milestones, and any Life Cycle Power retirement date), and explain why permitting this bridge fleet now does not improperly segment a larger project to avoid PSD/BACT.

3. Formaldehyde and HAP disclosure — separate from VOC.

   Limited PTE includes about 155 tpy VOC and about 112 tpy formaldehyde. Under NSPS Subpart JJJJ as applied in the draft, VOC calculations exclude formaldehyde; formaldehyde is a HAP, not a subset of the VOC tonnage. I request that the RTC and any public summary state this clearly, and that IDEM place in the record a post-control, per-HAP breakdown for the engines (not only formaldehyde ~112 and total HAP ~136 summary figures).

4. Control reliability and testing — 65 engines, sample of 10.

   Condition D.1.7 requires NOx, VOC, and CO testing on a representative sample of ten (10) emissions control systems / engines — only about 15% of the fleet initially — with repeat testing of previously untested units over time. When SCR bed temperature falls below the permit threshold (~572°F under Condition D.1.6(a)), compliance math can revert toward uncontrolled

factors. I request testing and parametric monitoring expectations commensurate with continuous primary power, and clear downtime / malfunction accounting so uncontrolled spikes cannot silently consume the annual caps.

5. Control technology adequacy — RTO/higher-efficiency alternatives.

Condition D.1.6(b) requires the associated oxidation-catalyst control system for VOC and CO to operate whenever each of GEN1–GEN65 operates. Given the scale of co-located combustion and the ~112 tpy formaldehyde PTE, I request that IDEM evaluate the technical and economic feasibility of centralized Regenerative Thermal Oxidizers or higher-destruction-efficiency catalytic controls (exceeding 99%) for combined exhaust streams, and explain in the RTC whether limits comparable to CARB standards for stationary IC engines were considered and, if not, why.

6. Greenhouse gases and fuel math on the record.

The draft / TSD do not meaningfully quantify CO_2 or methane slip. Even if IDEM maintains that GHGs are not Title V/PSD drivers under current Indiana practice, the comment record should include fuel-throughput assumptions and an estimated annual CO_2 for the gas engines at operating rates allowed by the tonnage caps. Coalition fuel-math suggests on the order of ~500,000 metric tons CO_2/year at high utilization for these engines alone — labeled as an estimate, not an applicant figure. Please require the applicant to provide its own fuel and CO_2 estimate, including any methane slip.

7. Natural-gas supply path and fugitives.

Please place in the record how natural gas is supplied (pipeline, LNG/trucking, storage), whether fugitive methane / transfer losses are fully inventoried, and whether fuel-delivery truck emissions and unloading are adequately accounted for. If storage or transfer equipment exists, list it; if none, say so explicitly. Address the LNG regas boilers' role and any transition to pipeline gas.

8. Single-source administration with Orla.

IDEM treats Life Cycle Power and Orla as one source but issues two Part 70 packages. I request that the RTC explain how combined PTE and compliance are enforced across both permits, and that comments on combined campus impacts are cross-referenced in both dockets. Issues specific to Orla's diesel units should be answered under T011-50034-00093.

9. Cumulative LEAP airshed.

Boone County is stacking combustion across Lilly, this Meta campus, and other LEAP-related sources. Please explain in the RTC how IDEM considered cumulative criteria and toxic impacts from this source together with nearby permitting, or why such analysis was omitted.

10. Dispersion modeling meteorology and downwind residential exposure.

Regional climate data for the nearest official station (Indianapolis International Airport, ~25 miles south) show summer surface winds predominantly out of the southwest, with more variable, northwest-leaning patterns in winter. I request that IDEM disclose the specific meteorological dataset (station, period of record) used in any air dispersion modeling performed for this permit, and provide the resulting modeled wind frequency/plume direction data relative to residential receptors within 2 miles of the facility — including western downtown Lebanon and neighborhoods near the U.S. 52/SR 32 split. If no site-specific or representative dispersion modeling was performed for criteria pollutants or HAPs at this scale of co-located combustion, please state that in the RTC and explain why it was not required.

11. Continuous ambient/fenceline monitoring.

    Given the reliance on periodic stack testing of a 10-of-65 engine sample under Condition D.1.7 (see point 4, above), I request that IDEM require Life Cycle Power to fund and maintain continuous fenceline and downwind ambient air monitoring, with real-time public reporting, so that actual field conditions can be checked against modeled and permitted limits.

12. Eagle Creek / water — enter the exchange; do not treat PR as the answer.

    IDEM's own correspondence anticipated Eagle Creek / water questions at the air hearing. Consultant replies citing "closed-loop / zero water" marketing do not displace the public Lebanon Utilities–Orla water/wastewater agreement and regional supply questions. I ask IDEM to enter the relevant applicant–IDEM water exchange in the air docket and to refer supply and discharge issues to OWQ / local pretreatment as appropriate — not to leave the air RTC implying water concerns were answered by brochure language.

CLOSING

Please confirm in the response to comments which of the above resulted in permit changes, TSD revisions, or no change, with a short reason for each. I reserve the right to pursue administrative review of a final decision under Indiana law. Thank you for entering these comments in the record.

Respectfully,

Sarah Goss

IDEM Response to Sarah Goss Verbal Testimony and Written Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 5 – Bridge Power
- IDEM Response to General Statement 6 – Combined Single Source Evaluation
- IDEM Response to General Statement 7 – Best Available Control Technology (BACT) and PSD (326 IAC 2-2)
- IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

Response to Request 1:

Although bridge power is intended only to serve as temporary power, IDEM, OAQ treats these units with the same requirements and standards as those that operate at a permanent stationary source. No end date of these on-site generators is necessary. Permitting is not done as a temporary operation. The permit terms and requirements for Life Cycle Power are based on full-time operations.

Response to Request 2:

A Permittee can submit future applications to the Indiana Department of Environmental Management (IDEM) as many times as necessary to obtain, renew, or modify permits, provided they comply with regulatory requirements and deadlines. Each new permit application will be evaluated as received.

Response to Request 3:

Formaldehyde is evaluated under NESHAP Subpart ZZZZ, not NSPS Subpart JJJJ. Please see IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls for more information regarding Formaldehyde.

Response to Request 4:

These engines are similar and they should be operating in the same capacity, so additional testing of a larger sample size would not be necessary. Additionally, all generators operated by Life Cycle Power are subject to NESHAP Subpart ZZZZ, which requires the source to conduct semiannual tests on all engines. The source is required to calculate the total emissions of the engines, including periods of controlled and uncontrolled.

Response to Request 5:

The engines are controlled by selective catalytic reduction (SCR) and oxidation catalysts. The source is a major source of HAPs. The generators operated by Life Cycle Power are subject to the requirements of National Emission Standards for Hazardous Air Pollutants (NESHAP) Subpart ZZZZ. It sets national emission limitations and operating limitations for hazardous air pollutants (HAPs) emitted from stationary RICE at major sources of HAP emissions. There is no basis to require the source to select alternate control devices

Response to Request 6:

The source is considered a non anyway source (does not require a PSD permit), so the greenhouse gases are not calculated for the source, as the criteria pollutants have limits less than PSD major levels.

Response to Request 7:

IDEM, OAQ does not require the source to disclose how they receive their natural gas, as the method of fuel transportation does not impact the permit. Fugitive emissions from roadway traffic are included in the emission calculations.

Response to Request 8:

Please see IDEM Response to General Statement 6 – Combined Single Source Evaluation for more information regarding the source definition.

Response to Request 9, 10, and 11:

The source is not required to conduct a short-term ambient air quality analysis. There are no applicable state or federal rules that require ambient dispersion modeling, air toxics screening, or cumulative impact analysis of the HAP emissions (e.g., Formaldehyde) from this source. Also see IDEM Response to General Statement 1 – Impact to the Environment and Public Health.

Response to Request 12:

With respect to the issued raised about potential water usage, these issues are outside the scope of this air pollution permit. The Permittee will be required to obtain any applicable permit(s) from IDEM's Office of Water Quality (OWQ) and/or Indiana Department of Natural Resources (DNR), which will contain all applicable state and federal rules and regulations related to water usage, discharge, and pollution. This proposed air permit only contains applicable state and federal rules and regulations related air pollution.

No changes to the draft permit were made as a result of these comments.

Lesli Bair Verbal Testimony and IDEM Responses

On August 6, 2026, during the public hearing, Lesli Bair provided the following verbal testimony to IDEM, OAQ on the draft Part 70 Administrative Operating Permit.

Lesli Bair Verbal Testimony

Hi. I'm Lesli Bair, from Zionsville, and I am very concerned about the air pollution.

I do want to say that nobody wants these data centers, and there's many, many videos from across the country on new sites that people have released, I've got a new site opening in Union, and also videos by some of our neighbors in Lebanon, the current situation, and we've seen brown water and bacteria in water, the noise, the lights, the particulates.

One of the most recent videos is from a citizen in Abilene, Texas, who has to change her air filters every two weeks in her house, and they have -- what's nearby has fewer generators than what is proposed and being built in Lebanon.

The whole AI system is very harmful to the community. It leads to nothing but job losses. AI steals our human creative content, books, cutting spines off of books and stealing art. There's flock cameras tracking everything, they're stealing our data, they're using facial recognition.

And the police are tracking their ex-girlfriends, for example, and we're giving them a tax break for this, with very little in return. In fact, it's just harming us. Very few jobs, the NDA's, tech companies are welfare queens, and I'm very concerned about the amount of pollution.

(Time Cutoff)

...

(Testimony during open forum)

Hi. Thank you.

Indiana has some of the worst air quality in the entire country, and this is not going to help. I frequently get air quality alerts on my phone, and I would like you to deny this permit and act on behalf of the citizens of this region and not on behalf of big data.

Thank you.

(End of Testimony)

IDEM Response to Lesli Bair Verbal Testimony

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 4 – Denial of the Permit

No changes to the draft permit were made as a result of these comments.

Jeni Jenkins Verbal Testimony and Written Comments and IDEM Responses

(a) On August 6, 2026, during the public hearing, Jeni Jenkins provided the following verbal testimony to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Jeni Jenkins Verbal Testimony

Hi. Good evening. My name is Jeni Jenkins. I live in Zionsville, and I'm about approximately 13 miles from where this is going to be. It's been the vast majority of the -- I'm speaking on this as a citizen of Zionsville on the entity.

I would ask IDEM -- excuse me -- to address in its written response why Orla and Life Cycle Power can be one source getting divided into two permits, whose combined limits remain just under the threshold for the more rigorous federal review. This project should be evaluated cumulative -- cumulatively, not permit by permit.

I'm also concerned that it's calculation shows that 65 gas engines are to operate 8,760 hours per year, while the permit apparently contains no binding operating hour limit for permit date. That is not the means for temporary bridge power. IDEM should require a cumulative review, a combined health risk modeling, strict hour limits, and enforceable shutdown data, or substantially revise these permits.

Thank you.

(Time cutoff, no further comments)

(b) On August 9, 2026, Jeni Jenkins submitted written comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Jeni Jenkins Written Comments

Dear Mr. Jackson,

I am submitting these comments as a Boone County resident who lives about 13 miles from this facility.

As a lifelong resident of Boone County, who is learning every day about other communities across the country who have been seriously damaged by data centers when consequential protections were not put in place prior to operation, I’m extremely concerned about what protections will actually be enforceable once Meta is operating?

My first concern is the use of the term “bridge power.” The 65 natural gas engines are described as temporary power until more electricity is available from the grid. But if that is really the case, I do not understand why the permit would allow them to operate essentially year-round without a firm end date.

If this is truly temporary power, I believe the permit should say so in a way that is enforceable. There should be a limit on how long the engines can run and a clear point in time when routine operation must stop once permanent power is available. Otherwise, “bridge power” seems to describe the company’s current plan rather than an actual restriction.

I am also concerned about how IDEM will know when these engines are no longer operating as “cleanly” as when they were brand new. With 65 engines running thousands of hours every year, equipment will age, parts will go bad, and pollution control components will not perform the same way they did when they were new.

I request that IDEM require regular emissions testing throughout the life of the facility, not simply relying on initial testing and company records. If certain pollution control equipment is necessary to keep

emissions within permitted levels, there should be enough monitoring to catch problems when they occur, which *will* inevitably happen.

IDEM should also look carefully at the fact that Orla and Life Cycle Power are part of the same larger Meta project. If IDEM considers them one source for air permitting purposes, the public deserves a clear explanation of how pollution from both permits is being considered together, especially when determining whether additional federal review or pollution controls are required.

Finally, this is only the first phase of a much larger development. IDEM should consider additional generators, engines, boilers and other air pollution sources that are planned. A large project should not escape stronger review and oversight simply because its pollution sources are permitted a little at a time. Anything IDEM is relying on to conclude that this project will not harm public health should be written into the permit in a way that can *actually* be measured and enforced.

Additionally, I am attaching screen recordings and a screenshot that recorded issues that I encountered when attempting to participate in the Virtual Public Hearing that IDEM held on Teams in regards to these permits on August 6, 2026 at 6 pm EST.

--I wanted to speak during the hearing, but after logging in, I was not shown the opportunity to join the chat room lobby, which I understand was where I was to go to be able to sign up to speak during the hearing. If it weren't for a fellow citizen who told me this, I would have never known that was what I'd need to do to sign up. The first attachment shows that this option wasn't offered to me at all upon signing in.

--Although I was never able to enter the chat lobby, I luckily was able to text a private citizen who shared the link with me to sign up to speak. However, when opening the link on my cell phone, as you can see in the next two attachments, after filling out the form, there was no "submit" button anywhere on the page despite scrolling and resizing. Clearly the form was not set up to be mobile friendly, and considering the fact that more people use a cell phone to connect online than a personal computer, this is a huge issue when considering public participation.

Thank you for considering my comments.

Jeni Jenkins

IDEM Response to Jeni Jenkins Verbal Testimony and Written Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 5 – Bridge Power
- IDEM Response to General Statement 6 – Combined Single Source Evaluation
- IDEM Response to General Statement 7 – Best Available Control Technology (BACT) and PSD (326 IAC 2-2)
- IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

In regards to the comments regarding the technical issues to participate in the virtual public hearing, IDEM OAQ is aware of these issues and is actively working on improving the technology related to these virtual hearings.

No changes to the draft permit were made as a result of these comments.

Rebecca TeKolste Verbal Testimony and IDEM Responses

On August 6, 2026, during the public hearing, Rebecca TeKolste provided the following verbal testimony to IDEM, OAQ on the draft Part 70 Administrative Operating Permit.

Rebecca TeKolste Verbal Testimony

Hi, there. My name is Rebecca TeKolste. I'm here representing Hoosier Environmental Council, and I live in Indianapolis.

I want to start by echoing the concerns raised by Sarah Goss and Jeni Jenkins, and then I think I want to raise additional concerns that we have with this project.

So, first, we're particularly concerned about the 112 tons of formaldehyde and how hazardous that will be, then we're concerned that these permits can't require any responsive modeling to determine what nearby residents could actually be exposed to.

We recommend that IDEM should require that modeling for formaldehyde and also all other hazardous air pollutants. These approvals also rely on operating functions that may not reflect how this building may actually function. The emissions analysis that they give, the 65 natural gas engines will operate almost continuously, with very few start-ups and shutdowns, but AI data centers have high variables of energy demand, and if these engines cycle on and off to follow that demand, nearby cities can experience repeated short-term spikes in air pollution, and that that has not been evaluated.

At the same time the monitoring -- 65 engines for another five years, meaning it would take more than 30 years to ensure that they have the full fleets -- full fleets. By contrast, these engine have a history of going out of service -- making them particularly vulnerable to issues -- when they're out of service.

We're also very concerned that the project -- these generators are classified by IDEM as emergency equipment, even though a data center lots of times -- will be -- gas generation system, and this could have a big effect of -- challenges. IDEM should require an opportunity to demonstrate that these generators will truly be limited to a controlled emergency use.

And last, this permit also establishes an important precedent for Indiana's -- future, and those models are going to be replicated throughout the state. Indiana will see thousands of new ones and new iterations of those outside -- planning and public oversight required for projects by the Indiana Utility Regulatory Commission. These are the -- -- things that can be done in the future -- Thank you.

(Time Cutoff)

....

(Testimony during Open Forum)

So, I just wanted to raise -- that this is the first of its kind in Indiana, when it establishes a precedent and that this model -- Indiana has been seen as a -- generation developed outside the comprehensive planning and public oversight typically required for projects regulated -- projects regulated by the IURC, the Indiana Utility Regulatory Commission.

These units -- for a records system. They should not get one permit at a time. We need to establish a transparent and statewide framework for evaluating the -- generation, especially that -- for large data centers before this modeling becomes the standard. Thank you.

(End of Testimony)

IDEM Response to Rebecca TeKolste Verbal Testimony

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 6 – Combined Single Source Evaluation
- IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

No changes to the draft permit were made as a result of these comments.

Katherine Dennis Verbal Testimony and IDEM Responses

On August 6, 2026, during the public hearing, Katherine Dennis provided the following verbal testimony to IDEM, OAQ on the draft Part 70 Administrative Operating Permit.

Katherine Dennis Verbal Testimony

I'm wondering if you can explain for us in a location downstream and downwind from this project -- of this region is truly what we're seeing here -- to manual labor -- I find it very hard to wear a mask while I'm working on a farm -- through the air quality alerts, and every time those air quality alerts occur again, I'm always left wondering, "What can -- what can be done?"

And I come to that question earnestly. I'd really like to -- to make things better, and I just don't see any benefit of what Meta is doing in any of this project. So, I just want to echo that this isn't something that I wanted to -- I feel like this air pollution, water pollution, noise, lighting, and for what benefit? There is so much at stake -- pollution of our waters. So, don't touch this.

(Time Cutoff)

...

(Testimony during Open Forum)

(First Comment)

Thank you for bringing up the point so well, and I think it's speaking to the point that this is such -- sort of a critical moment, and again, don't -- don't feel like it's not a big deal, because it is a big deal. It has huge impacts, and yeah, it could be crushing ones.

So, let's work together, you know, come up with a better solution instead of just letting Meta slap us around and let -- you know, there's a phrase of not like using technology or using technology instead of letting technology use us, yeah.

(End of First Comment)

...

(Second Comment)

I just have a question, and I'm sorry, but this is one that -- I'm just wondering if there was any time where you all would be responding at all or just letting us know, and your thoughts on this. I'm just curious.

(End of Testimony)

IDEM Response to Katherine Dennis Verbal Testimony

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand

No changes to the draft permit were made as a result of these comments.

Tina Oakes Verbal Testimony and Written Comments and IDEM Responses

(a) On August 6, 2026, during the public hearing, Tina Oakes provided the following verbal testimony to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Tina Oakes Verbal Testimony

Thank you. This is Tina Oakes, and I am a resident of Pike Township. And first off, I do want to echo what was said by everyone else.

You know, one of the things is, it seems very odd that they are allowed to approve their permits in view of the existence of the greenhouse gases and the other chemicals such a formaldehyde being released under a certain threshold and not ever put together a master plan, but saying, "Well, when it's all said and done, this is what's going to be released," because that is what is going to happen; right?

Regardless of what happens in Phase 1, Phase 2, Phase 3, at the end of it, this is all going to be combined, and there will -- at least right now, we don't have any information on how much that they said they're going to release in Phase 1.

How much is that actually going to be when they are finished with all of their phases and are up and running, particularly, for instance, how much diesel and gas is stored on-site? How many pollutants are being released to the air?

And so, I'm really -- even before you consider this, you need to ask for, for the citizens, a master plan.

(Time Cutoff)

(b) On August 10, 2026, Tina Oakes submitted written comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Tina Oakes Written Comments

Dear Mr. Jackson,

This is regarding the above-mentioned air permits for the LEAP data center, specifically the Orla, LCC permit no. T 011-50034-00093 and Life Cycle Power permit no. T 011-50087-00094. I have several concerns and requests to ensure adequate safety and protection of the citizens of Indiana in the area

surrounding the data center that could be impacted by the release of harmful substances, including but not limited to gases including greenhouse gases, toxic chemicals, and excessive noise.

1. As both permits are to provide energy to one data center, they should be combined such that the combined amount of harmful substances released is considered in the review (for instance, nitrous oxides, formaldehyde, volatile organic compounds, carbon monoxide, carbon dioxide, methane, etc.).

2. How much fuel will be stored onsite and consumed in phase 1 with the 12 emergency diesel generators and 65 natural gas generators and in the full ~1 GW power generating system? How many more engines will be required and what type of engines? IDEM should require the least polluting, most environmentally friendly engines, and not allow the Meta Data Center to just use the least expensive.

3. The currently proposed engines release much more formaldehyde into the air than some used by other data centers; therefore we request combined health risk modeling for the surrounding areas that could be impacted.

4. Public disclosure and appropriate safety review of the full build out of the full ~1 GW power generating system.

5. Public disclosure of how long the engine will run each day and how many engines.

Thank you,
Concerned Citizen
Tina Oakes

IDEM Response to Tina Oakes Verbal Testimony and Written Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations

No changes to the draft permit were made as a result of these comments.

Megan Anderson Verbal Testimony and Written Comments and IDEM Responses

(a) On August 6, 2026, during the public hearing, Megan Anderson provided the following verbal testimony to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Megan Anderson Verbal Testimony

Hello. This is Megan Anderson. I went to -- I live in Pike Township, and my family lives in Lebanon. I just wanted to say that I am glad that this is being treated as one permitting source implementing new units that are polluting -- a pollution permitting package.

And I do think that poor planning on the part of Meta does not constitute an emergency on the part of the community, and there is no reason the community shoulder this burden of unnecessary pollution when Meta could simply slow down their production schedule or -- as they've said they were ahead and they could get back on the normal track until they have enough electricity. They clearly can't operate if there's not enough electricity, so there's some confusion there.

I also want to have IDEM please detail the adherence to the RICE rules. How, if this is operating over a hundred hours with gas engines, are they adhering to the emergency rules for RICE?

I also wanted to have an explanation of their formaldehyde emission and why they are so high on these units, and if these units are using best available control technology. I also think IDEM needs to detail all of the -- identify the air monitors and demonstrate sufficient monitoring, especially as they're one of many new air polluting sources coming to the lead industrial site.

Again, I just want to point out that, you know, they can't operate their facilities without electricity, and there's no reason that they should be operating now, and so, I encourage you all to deny the permits

Thank you.

(Time Cutoff)

(Testimony during Open Forum)

Hello. This is Megan Anderson again.

I just wanted to put on the record that I did have some issues when I logged in, which I believe I'm using the application on my work laptop. I was not able to be entered into the waiting room, and so, I was not able to get into the speaker form access, and that seems to be a recurring issue just with the way the hearings are conducted on Teams, seeing that you kind of put it on the phone where there's no chat access ahead of the hearing start time.

And so, you know, perhaps IDEM adding more instructions about that or putting the speaker form, you know, I guess with the login. I'm not sure, but there's clearly some issues that are occurring with access, and I wanted to highlight that.

Thank you.

(End of Testimony)

(b) On August 10, 2026, Megan Anderson submitted written comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Megan Anderson Written Comments

Hello,

- Please detail HAPs for other emissions besides formaldehyde after pollution controls in potential to emit on an annual basis.
- Please enter my comments into public record for Orla, LLC (Meta data center) — Permit #T011-50034-00093 & Life Cycle Power — Permit #T011-50087-00094
- Please detail if IDEM anticipates ground level ozone emissions to increase due to any heat that the gas units may emit.
- Please detail how IDEM is accounting for any air emissions for the transportation or refueling of the gas units, or diesel belly tanks.
- Please detail if the RICE rules apply to the gas engines and if not, why are the gas engines exempted from the rules and will they be able to operate in the future on an emergency basis following 2027 if the current permits are granted.

Please enter this IndyStar story into the record:

Meta data center in Lebanon plans temporary off-grid gas facility
Indianapolis Star

Karl Schneider
July 16, 2026, 5:36 a.m. ET

Indiana is considering the state's first off-grid power source to provide electricity temporarily to a Meta data center being built in Lebanon. Texas-based Life Cycle Power submitted an air emissions permit to the Indiana Department of Environmental Management in February detailing plans to supply 134 megawatts of power via gas-fired generators to the data facility. The first buildings are expected to be operational by 2027, and generators would need to be in place in advance of that.

Life Cycle Power's facilities are intended to provide bridge power solely to the data center until a permanent connection to the local utility provider is made.

Geoff Bland, senior vice president with LCP, said the gas generators will be operational through the end of 2027 after which they will be demobilized and moved offsite.

"They're not going to be there indefinitely," Bland said.

LCP's permit application requests placing 65 generators on site, but Bland told IndyStar there will likely only be 32 generators because the data center is closer than anticipated to hooking up to the regional power grid. The air permits caught the attention of consumer watchdog group Citizens Action Coalition, which has called for a statewide moratorium on AI data centers until more protective state polices are in place. Currently 19 counties in the state have enacted mostly temporary moratoriums on approving new facilities.

The permits as written concern CAC's Ben Inskeep, who said he's worried about the pollution that could occur at the site.

"Natural gas power plants emit a lot of different air pollutants ... that generate ground-level ozone or smog, and that of course, is very detrimental to public health, particularly folks with respiratory illnesses, things like asthma," Inskeep said.

Bland acknowledged the generators emit pollutants but said the exhaust technology on each unit greatly diminishes what is emitted. The technology works much like a car's catalytic converter, he said, reducing greenhouse gas emissions and other pollutants.

Using natural gas rather than diesel further decreases harmful emissions, Bland said.

Still, Inskeep said there is at least one good indication that people in the surrounding area could see poorer air quality and increased climate pollution once the generators start running.

"If it wasn't a concern, they wouldn't need to get a permit," Inskeep said.

Meta, which contracted with LCP, complies with all federal, state and local air quality requirements, a spokesperson wrote in an email to IndyStar. These requirements ensure emissions remain lower than state standards set to protect human health.

The two companies worked with IDEM prior to submitting the application to make sure the gas-fired generators remain in compliance with state regulations, the spokesperson wrote. Inskeep noted that Meta seems to favor natural gas over diesel more than do other data center operators such as Google and Amazon, which rely on diesel.

"So far, we have not seen Meta file for hundreds of backup diesel generators, so that's an interesting nuance," Inskeep said.

Inskeep and others noted that operations such as this create upward pressure on natural gas markets,

causing potential affordability impacts for other customers.

Jeff Rissman and Brendan Pierpont, directors at the non-partisan think tank Energy Innovations, said they're seeing this phenomenon across the country. The two said U.S. data centers frequently build out these off-grid gas operations to power their facilities.

While it seems at first glance that such gas operations would not affect ratepayers, there are indirect price impacts on the natural gas market, Rissman told IndyStar.

Besides affecting market prices, the data center facilities no longer contribute to the regional grid. "That in itself could have worse impacts on utility customers because the utility cannot charge (the data centers) to help maintain grid infrastructure," Rissman said.

LCP system's fuel demand will not affect utility customers, Bland said.

"If anything, natural gas in this country is at a very low cost point," Bland said.

While Bland couldn't provide an exact timeline of when to expect the generators to be operational in Lebanon, he said the company can likely get the site set up within a month after IDEM approves the permit application.

Karl Schneider is an IndyStar environment reporter. You can reach him at karl.schneider@indystar.com. Follow him on BlueSky or Twitter @karlstartswithkIndyStar's environmental reporting project is made possible through the generous support of the nonprofit Nina Mason Pulliam Charitable Trust

Thank you
Megan Anderson

IDEM Response to Megan Anderson Verbal Testimony and Written Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 4 – Denial of the Permit

  In regards to the comments regarding the technical issues to participate in the virtual public hearing, IDEM OAQ is aware of these issues and is actively working on improving the technology related to these virtual hearings.

No changes to the draft permit were made as a result of these comments.

Sam Carpenter (on behalf of Hoosier Environmental Council) Comments and IDEM Responses

On August 6, 2026, Sam Carpenter (on behalf of Hoosier Environmental Council) submitted comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Sam Carpenter & Hoosier Environmental Council Comments
See Appendix D to see the entirety of comment.

Below are the questions posed in the comments.

HEC requests that IDEM, before finalizing either permit:

(1) Require that both permits be amended in tandem whenever a change to either facility affects the combined source's potential to emit, that recordkeeping and reporting under both permits be reconciled on a common schedule, and that future permit modification proceedings for either facility provide notice referencing both permit numbers (see Comment 1, below).

(2) Require the applicant to disclose its actual anticipated startup, shutdown, and load-following dispatch pattern for the 65-engine fleet, and either limit the number of startup and shutdown events per engine consistent with the assumptions used to calculate potential to emit, or require short-term ambient air quality modeling based on a realistic cycling operating scenario (see Comment 2, below).

(3) Require a fleet-wide testing and monitoring protocol for the 65 Life Cycle Power generators adequate to assure continuous compliance, in place of the proposed protocol of testing ten of sixty five units, repeated once every five years (see Comment 3, below).

(4) Require ambient air toxics modeling for hazardous air pollutants, particularly formaldehyde, and require the permit to clearly and specifically state the applicable NESHAP-based hazardous air pollutant limits and work-practice standards (see Comment 4, below).

(5) Require the applicant to document, in the public record, the factual and legal basis for classifying the combined facility outside the twenty-eight source categories subject to the lower, 100 ton-per year Prevention of Significant Deterioration major source threshold, including the facility's total heat input in British thermal units per hour (see Comment 5, below).

(6) Require Orla to state, on the record, the specific circumstances under which its diesel generators are expected to operate, consistent with IDEM's obligation to provide the legal and factual basis for applying the emergency-generator provisions (see Comment 6, below).

(7) Require IDEM and the applicants to disclose the factual basis for the 500-hour annual operating assumption used to calculate the Orla emergency generators' potential to emit, and to explain the degradation, startup, loading, and operational assumptions underlying the 25.4-ton NOx and 17.2- ton CO limits (see Comment 7, below).

(8) Require Orla to finalize its emergency generator equipment selection before permit issuance, rather than presenting two parallel, undecided equipment options (see Comment 8, below).

(9) Require the applicant to disclose its anticipated engine cycling pattern and require short-term ambient air quality analysis capable of capturing its localized impacts (see Comment 9, below).

(10) Require the applicant to disclose what assumptions regarding expected emergency-generator operating hours were used in evaluating the facility's operating profile, and what reliability or failure-mode analysis has been performed for its anticipated duty cycle (see Comment 10, below).

IDEM Response to Sam Carpenter & Hoosier Environmental Council Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting

- IDEM Response to General Statement 5 – Bridge Power
- IDEM Response to General Statement 7 – Best Available Control Technology (BACT) and PSD (326 IAC 2-2)
- IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

Response to Comment 1:

Any changes to either permit will be evaluated on a case-by-case basis to determine changes needed to either or both permits. With the current limits that have been established in the permit, the only changes that would trigger the source to become PSD Major is a Significant Source Modification. During this change, IDEM OAQ would reopen and reevaluate both permits.

Response to Comment 2:

The PTE for the 65 engines anticipates startup, shutdown, and load-following dispatch patterns. Additionally, under NESHAP Subpart ZZZZ, these units are required to undergo continuous compliance, are required to minimize the number of startup and shutdown events and limit the idle time during start up to less than 30 minutes. The source still must comply with any other applicable limits during these startup and shutdown events.

Response to Comment 3:

These engines are similar and they should be operating in the same capacity, so additional testing of a larger sample size would not be necessary. Additionally, all generators operated by Life Cycle Power are subject to NESHAP Subpart ZZZZ, which requires the source to conduct semiannual tests on all engines.

Response to Comment 4:

Modeling and tonnage limits are not required for Formaldehyde. The source has accepted all limits and applicable requirements to be a major source of HAPs. All applicable NESHAP requirements for the engines are found in Section E.2 in both Orla, LLC and Life Cycle Power permits. See General Statement 8 - Formaldehyde Potential to Emit, Testing, Limits, and Controls for further information.

Response to Comment 5:

There is no unit at the facility that causes the source to be applicable to the PSD requirements found in the one of twenty-eight sources. The boilers have a MMBtu/hr of 10.80.

The EPA considers steam electric plants to use nuclear or fossil fuels (such as coal, oil and natural gas) to heat water in boilers, which generate steam. The steam is used to drive turbines connected to electric generators. The generators that are utilized by Life Cycle Power are not electric generators that utilize steam to drive turbines, as there are no turbines located at the source. Based on this definition, this source is not classified as a fossil fuel-fired steam electric plant.

Response to Comment 6:

In the initial application, Orla stated that the emergency generators will be used to "provide backup power to safety equipment and administrative office spaces during utility outages" and the fire pumps will be used to "provide power to pump water for fire suppression in the event of a fire". The uses of these generators and fire pumps are sufficient to be considered emergency equipment.

Orla, LLC does not have to justify what qualifies as an emergency to use the generators. NSPS Subpart IIII outlines what qualifies as an emergency. The source will abide by the provisions it is subject to in NSPS Subpart IIII.

Response to Comment 7:

500 hours of operation is used to calculate the potential to emit for all emergency engines. This is based on EPA guidance for units used for emergency purposes. The source requested these limits since these generators will not be used for the entire 500 hours. The source has stated that these units would be used to provide backup power, they will not be used to power the entirety of the data center during utility outages. The source cannot provide an estimate on the "anticipated frequency and duration of use" aside from routine maintenance and testing.

NSPS Subpart IIII (40 CFR 60, Subpart IIII) establishes New Source Performance Standards (NSPS) for stationary compression ignition (CI) internal combustion engines (i.e., diesel engines). This rule is used for engines to show initial and ongoing compliance. This is a common rule used for all engines of this type.

See General Statement 7 and 8 for more information.

Response to Comment 8:

IDEM, OAQ received comments from Orla, LLC requesting to remove the Cummins emergency generators from the draft permit. The aspects of the Caterpillar emergency generators will remain unchanged. The changes to the permit can be found in the Orla LLC responses and comments section.

Response to Comment 9:

The source is not required to conduct a short-term ambient air quality analysis. There are no applicable state or federal rules that require ambient dispersion modeling, air toxics screening, or cumulative impact analysis of the HAP emissions (e.g., Formaldehyde) from this source. The engine cycling for the bridge power is minimized by NESHAP Subpart ZZZZ which requires the source to minimize the startup/shutdown of the generators and limit the idle run time during startup. This sort of limit would not allow the source to engine cycle.

Response to Comment 10:

See Response to Comment 7.

No changes to the draft permit were made as a result of these comments.

Liz Graybiel Comments and IDEM Responses

On August 9, 2026, Liz Graybiel submitted comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Liz Graybiel Comments

Regarding IDEM permit
.
Please deny the air permit. I live in Lebanon and I don’t want the air quality to get worse.

My concerns the on-site gas engines. Fuel math suggests ~500,000 metric tons CO_2/yr at permit

maximum-potential hours. It's my under That these figures are just for phase 1.

Phase 1 includes plans for 77 combustion engines.

Why two permits vs. one cumulative review?

Bridge power: How long will 65 engines run? Why 8,760 hr/yr in Appendix A with no hour caps?

Formaldehyde: 112 tpy — request combined health risk modeling. More details are needed as this is a known health risk factor.

IDEM Response to Liz Graybiel Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 4 – Denial of the Permit
- IDEM Response to General Statement 5 – Bridge Power
- IDEM Response to General Statement 6 – Combined Single Source Evaluation
- IDEM Response to General Statement 7 – Best Available Control Technology (BACT) and PSD (326 IAC 2-2)
- IDEM Response to General Statement 8 – Formaldehyde Potential to Emit, Testing, Limits, and Controls

No changes to the draft permit were made as a result of these comments.

Sean Strawmyer Comments and IDEM Responses

On August 9, 2026, Sean Strawmyer submitted comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Sean Strawmyer Comments

Mr. Jackson,

I am writing to speak out unquestionably against approval of the large number of generators Meta is wanting to use at its data center site in Lebanon, IN. I am concerned about the environmental impacts of this project at a whole, having seen the effects similar projects have had in over communities. I grew up in this area and have lived here my entire life save the years away for college and grad school. My current residence is about 3.5 miles from the Meta site. If we do not have clean air and water, the community is lost: just another tale of undrinkable water, unbreathable air, and cancer at rates far beyond national averages.

I find the idea that no studies are required to get baselines for air and water quality before any actions are taken to be ridiculous. If they are ultimately going to be ramping this up in stages, then the entire project should be considered when determining what studies are needed, instead of allowing them to keep each individual phase below thresholds to sneak through unchecked. Its just a game of technicalities, and an insulting one to the members of this community. Representatives for these companies like to talk about how great these projects (that no one asked for) are going to be for the community and how minimal their impact will be on utility rates, light and noise levels, and air and water quality. Then I say let them prove

it. If these projects are going to continue to be forced upon us, let them pay for all of the proper baselines studies to see where we are starting now. Our electric rates have already increased. It is already never truly dark at our place, anymore, due to all of this industrial development: at least allow us to continue breathing clean air. Please do what is right for the people of this community when making your decisions.

Best regards,
Sean Strawmyer

IDEM Response to Sean Strawmyer Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 2 – Compliance Inspections and Possible Future Violations and Permitting
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand
- IDEM Response to General Statement 4 – Denial of the Permit

No changes to the draft permit were made as a result of these comments.

Sean Crinnigan Comments and IDEM Responses

On August 10, 2026, Sean Crinnigan submitted comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Sean Crinnigan Comments

Greetings:

As a resident of the state of Indiana, I respectfully request both Orla LLC Data Center Permit Number 011-50034-00093 and Life Cycle Power Permit Number 011-50087-00094 NOT be approved due to concerns for air quality and health of Indiana residents.

Thank you.

Sean Crinnigan

IDEM Response to Sean Crinnigan Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 4 – Denial of the Permit

No changes to the draft permit were made as a result of these comments.

Jane Rapinchuk Comments and IDEM Responses

On August 10, 2026, Jane Rapinchuk submitted comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit:

Jane Rapinchuk Comments

Dear Sir,

I am writing to comment on permits T011-50034-00093 and T0-50087-00094 for the Orla/ Life Cycle Power facilities in Lebanon, Boone county. Please enter them into the public record.

I am very concerned about the plan to use gas and diesel generators to power the Meta Data Center, either partially or fully. As a physician, I am always concerned about air quality. The air in Boone County is rarely in the healthy range as it is (usually between 50-70), with our reliance on coal for power, and these permits threaten to make our air quality significantly worse. This causes increased morbidity and mortality for Boone County residents. The research is clear. Increased air pollution causes increased sickness and death, and earlier death for our population. I encourage you to look at the American Lung Association data regarding this.

Additionally, I suffer from asthma, and I expect that increased air pollution will worsen my asthma and those in the county around me, especially vulnerable children and seniors.

Climate change is accelerating, and with increased heating the effects on the toxicity of pollutants goes up substantially. We already have too many days when it is dangerous to go outside for sensitive groups, and we should be working to improve our air quality, not degrade it further. Your job should be to protect our citizens, not make it easy for large companies to make more money at the expense of citizens' health. Please say no to further air pollution and ask Meta to find other clean ways to provide energy for their Data Center needs.

Thank you.

Jane Rapinchuk, MD

IDEM Response to Jane Rapinchuk Comments

Please see the following IDEM responses at the beginning of the ATSD under the General Statements and IDEM Responses section:

- IDEM Response to General Statement 1 – Impact to the Environment and Public Health
- IDEM Response to General Statement 3 – Quality of Life, Noise, Water Quality, Electrical Demand

No changes to the draft permit were made as a result of these comments.

Additional Changes

IDEM, OAQ has decided to make additional revisions to the permit as described below, with deleted language as ~~strikeouts~~ and new language **bolded**.

(a) Added provision to Condition E.2.2 that is applicable to the generators.

(b) Added Table 9 that is applicable to the boilers included in Condition E.3.2.

E.2.2 Stationary Reciprocating Internal Combustion Engines NESHAP [40 CFR Part 63, Subpart ZZZZ] [326 IAC 20-82]

The Permittee shall comply with the following provisions of 40 CFR Part 63, Subpart ZZZZ (included as Attachment B to the operating permit), which are incorporated by reference as 326 IAC 20-82 for the emission unit(s) listed above:

63.6580	What is the purpose of subpart ZZZZ?

63.6585 (a) and (b)	Am I subject to this subpart?
63.6590 (a)(2)(i)	What parts of my plant does this subpart cover?
63.6595 (a)(3) and (c)	When do I have to comply with this subpart?
63.6600 (b)	What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?
63.6605	What are my general requirements for complying with this subpart?
63.6610 (a)	By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?
63.6615	When must I conduct subsequent performance tests?
63.6620 (a), (b)(2), (d), (e), (i), and (j)	What performance tests and other procedures must I use?
63.6625 (b) and (h)	What are my monitoring, installation, collection, operation, and maintenance requirements?
63.6630 (a), (b), and (c)	How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?
63.6635	How do I monitor and collect data to demonstrate continuous compliance?
63.6640 (a), (b), ~~and~~ (d)**, and (e)**	How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?
63.6645 (a)(4), (c), (g), and (h)	What notifications must I submit and when?
63.6650 (a through f) and (i)	What reports must I submit and when?
63.6655 (a), (b), and (d)	What records must I keep?
63.6660	In what form and how long must I keep my records?
63.6665	What parts of the General Provisions apply to me?
63.6670	Who implements and enforces this subpart?
63.6675	What definitions apply to this subpart?
Tables to Subpart ZZZZ of Part 63	
Table 2a	Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions
Table 2b	Operating Limitations for New and Reconstructed 2SLB and CI Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions, Existing CI Stationary RICE >500 HP
Table 3	Subsequent Performance Tests
Table 4	Requirements for Performance Tests

Table 5	Initial Compliance With Emission Limitations, Operating Limitations, and Other Requirements
Table 6	Continuous Compliance With Emission Limitations, and Other Requirements
Table 7	Requirements for Reports
Table 8	Applicability of General Provisions to Subpart ZZZZ

E.3.2 Major Sources: Industrial, Commercial, and Institutional Boilers and Process Heaters NESHAP [40 CFR Part 63, Subpart DDDDD] [326 IAC 20-95]

The Permittee shall comply with the following provisions of 40 CFR Part 63, Subpart DDDDD (included as Attachment C to the operating permit), which are incorporated by reference as 326 IAC 20-95, for the emission unit(s) listed above:

63.7480	What is the purpose of this subpart?
63.7485	Am I subject to this subpart?
63.7490 (a) and (b)	What is the affected source of this subpart?
63.7495 (a) and (d)	When do I have to comply with this subpart?
63.7499 (l)	What are the subcategories of boilers and process heaters?
63.7500 (a), (b), and (e)	What emission limitations, work practice standards, and operating limits must I meet?
63.7505 (a)	What are my general requirements for complying with this subpart?
63.7510 (g)	What are my initial compliance requirements and by what date must I conduct them?
63.7515 (d)	When must I conduct subsequent performance tests, fuel analyses, or tune-ups?
63.7540 (a)(11)	How do I demonstrate continuous compliance with the emission limitations, fuel specifications and work practice standards?
63.7545 (a) and (c)	What notifications must I submit and when?
63.7550 (a), (b), (c)(1), (c)(5)(i-iv), (c)(5)(xi), (c)(5)(xiii - xiv), (c)(5)(xvii), and (h)(3)	What reports must I submit and when?
63.7555 (a)(1)	What records must I keep?
63.7560	In what form and how long must I keep my records?
63.7565	What parts of the General Provisions apply to me?
63.7570	Who implements and enforces this subpart?
63.7575	What definitions apply to this subpart?
Tables to Subpart DDDDD of Part 63	
Table 3, Subcategory 2	Work Practice Standards
Table 9	**Reporting Requirements**
Table 10	Applicability of General Provisions to Subpart DDDDD

IDEM Contact

(a) If you have any questions regarding this permit, please contact Phillip Jackson, Indiana Department Environmental Management, Office of Air Quality, Permits Branch, Indiana Government Center North, 100 North Senate Avenue, Room 13W, Indianapolis, Indiana 46204-2251, or by telephone at (317) 234-0055 or (800) 451-6027, and ask for Phillip Jackson or (317) 234-0055.

(b) A copy of the findings is available on the Internet at: http://www.in.gov/ai/appfiles/idem-caats/

(c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM Air Permits page on the Internet at: https://www.in.gov/idem/airpermit/public-participation/; and the Citizens' Guide to IDEM on the Internet at: https://www.in.gov/idem/about/citizens-guide-to-idem.

Indiana Department of Environmental Management
Office of Air Quality

Appendix A - Public Hearing Transcript

Addendum to the Technical Support Document (ATSD) for a Part 70 Administrative Operating Permit

BEFORE THE INDIANA DEPARTMENT
OF ENVIRONMENTAL MANAGEMENT

\- - -

PUBLIC HEARING REGARDING

ORLA LLC & LIFE CYCLE POWER

Permit Nos. 011-50034-00093 & 011-50087-00094

\- - -

PROCEEDINGS

in the above-captioned matter, before Hearing Officer Heath Hartley, taken before me, Lindy L. Meyer, Jr., a Notary Public in and for the State of Indiana, County of Shelby, via the Teams platform, on Thursday, August 6, 2026 at 6:01 o'clock p.m.

\- - -

ACCURATE REPORTING OF INDIANA, LLC
543 Ponds Pointe Drive
Carmel, Indiana 46032
TELEPHONE: (317) 848-0088
EMAIL: accuratereportingofindiana@gmail.com

APPEARANCES:

ON BEHALF OF IDEM:
Heath Hartley, Hearing Officer
Jenny Acker

SPEAKERS PRESENT:
Phillip Graybiel
Sarah Goss
Lesli Bair
Jeni Jenkins
Rebecca TeKolste
Katherine Dennis
Tina Oakes
Megan Anderson

- - -

6:01 o'clock p.m.
August 6, 2026

- - -

MS. ACKER: Okay. Good evening, everyone, and welcome to the public hearing, and the purpose of this public hearing is to provide a public forum to provide questions and comments regarding the Orla LLC New Source Construction and Title V operating permit and the Life Cycle Power Administrative New Source construction and Title V Operating Permit.

Orla and Life Cycle are a single source, and as such, the combined emissions and operations were considered when determining permit level and rule applicability. Separate Titles V's were issued solely for administrative purposes.

And these permits will authorize the construction and operation of the following new units: Orla will have 12 diesel-fired critical emergency generators providing backup to data servers, two diesel-fired pumps, fire pumps, and 12 fuel tanks, belly tanks, so these are just small tanks mounted to the gen sets. One cycle

will have 65 natural-gas-fired generators, and they will each be equipped CO and NO_x reduction units, and two natural-gas-fired boilers.

As new source construction Part 70 permits, each permit will serve as both the construction and operational permits, and some of the activities that under -- we undertake when drafting an initial permit, emissions and unit descriptions are generated.

Calculations submitted with the application are reviewed for accuracy and updated if necessary. The permit writer cites all state and federal regulations to ensure that a permit contains all applicable requirements.

Limitations are established if necessary, compliance determination and monitoring conditions are created when appropriate, and associated recordkeeping and reporting requirements are considered and included when applicable.

Some of the things we don't deal with: Quality of life, noise, and property value. And we recognize the construction and operation of

this can raise concerns about potential negative impacts with respect to quality of life, noise, and property values. However, IDEM OAQ does not have the authority to evaluate these types of issues as part of the air permit application review process, or to deny an air permit based on concerns about these types of issues.

Also, wetlands, water pollution, and land pollution. Again, the proposed air permit only contains applicable state and federal regulations and rules related to air pollution. The source will be required to obtain any applicable permits from IDEM's Office of Land Quality and IDEM's Office of Water Quality, which will contain all of the applicable state and federal rules and regulations related to land and water pollution.

IDEM permits are legal documents that hold companies and individuals accountable for complying with environmental regulations. Air permits are issued to document the annual potential to emit, or PTE, of various regulated air pollutants from the sources, and to identify all state and federal requirements that apply to

the source for regulating, limiting, reducing, and/or controlling air pollution.

When a facility expands or makes changes to its process, it's required to make sure the permit is modified accordingly. IDEM OAQ does not have the ability to require controls or emission reductions beyond what is legally required in statute, rule and regulation.

And finally, IDEM's air permitting program is SIP approved, meaning EPA has approved our program and delegated air permitting to the State of Indiana. And basically, that says that our program mirrors the federal program, and as such, is deemed protective of human health and protective of the NAAQS, National Ambient Air Quality Standards. Compliance with conditions in the air permit will assure compliance with all applicable state and federal laws and regulations of the Clean Air Act.

With that, I'd like to turn it over to our moderator, Heath Hartley.

THE HEARING OFFICER: Yes. My name is Heath. I'll be the moderator for this public

hearing.

We'll be taking oral testimony at today's hearing. If you'd like to speak, make sure you complete the speaker form. I will be using our speaker forms. I'll call out each speaker, and at that time you can unmute your microphone and provide your testimony.

If you wish to be added to our mailing list of interested parties but do not want to speak, you can indicate that on the speaker form. All speakers will be added to the interested parties list.

A court reporter is attending this hearing and making an official record of all comments and questions. We will use the transcript that is prepared as the official record for this hearing.

IDEM will review all comments and questions received during the hearing that's submitted as part of the public comment period, and after careful consideration and further analysis, if necessary, provide detailed responses in writing as part of the final permitting decision. These written responses

will be in a document called the addendum to the technical support document, ATSD. This addendum will be part of the final permit documents when IDEM issues its final rescission.

All public comments are due by Monday, August 10th. Instructions on how to submit written comments are in the Citizen Summary as well as the public notice documents for this application that are on the IDEM Web site.

We will not be responding to any comments or questions during this hearing. Please note that any entries you make utilizing the chat feature are not considered public comments and will not be responded to in the ATSD.

We have some participants using their phones, and we'll discuss how to speak -- how they can speak in a few minutes.

Any members of the media can e-mail media@idem.in.gov if you have questions.

Each speaker is limited to two minutes. Rather than repeat the previous comments, you can say the name of the speaker whose comments have already been provided, and you can shorten your

speaking time. A sign will be raised at one minute and forty-five seconds to alert you that you have fifteen seconds remaining. After that, we will open up this hearing to participating by phone, and we'll go from there.

We'll call upon the speakers in the order that they were submitted, or on the phone were submitted. For everyone at this hearing, please make to identify yourself before speaking.

(Discussion off the record.)

MS. ACKER: We'd like to add that once we go through the speaker forms, we will have an open forum, so at that point, anyone can raise their hand. We'll call on you in the order we have -- see the hands raised. There's no limits to the amount of time that you can speak during the open forum period, the number of times you can, but you will be limited to two minutes each time.

THE HEARING OFFICER: And now we're ready for the speakers, so first up will be Phillip Graybiel.

Please unmute and go ahead.

MR. GRAYBIEL: Hello. My name is Phil Graybiel. I'm a resident of Pike Township.

When I think about the air permit, I'm concerned about the air quality, not only downwind in Indianapolis, where I live with my Fiancee, Beth Asna, but also in Lebanon, where I grew up and where my aging parents still live. My family's health is most important, and I think -- I don't know whether this air permit should be approved.

The gas engines are like having a gas power plant in my home town. I do not -- and we don't know how many generators will be added at other data center sites, like in El Paso, Texas hundreds of generators have been installed, where they started with a small number like this permit suggests.

And I'm concerned that there's no specific limits regarding how many hours and years that these gas engines may run, and no limit on how many diesel generators will run in an emergency. I'm concerned about the impact of this pollution on my family. The Nox -- the nitrous oxide

limits are 153 tons a year and volatile organic compounds are 185 tons. Both of these can harm human health and make air quality worse.

I'm concerned about the 112 tons per year of formaldehyde, which is a known carcinogen and may cause cancer. I have friends and family who have cancer, and I'm worried that things might get worse for them.

And also, I was wondering: How will IDEM ensure that these so-called emergency generators are not running all of the time because they do not have enough power available in the grid? So, they should not be operating in a community that cannot support such a project in the first place. And I -- please deny this permit for Orla and Life Cycle, A/k/a Meta.

Thank you.

THE HEARING OFFICER: Thank you, Phillip.

Next up is Sarah Goss.

MS. GOSS: Hello. My name is Sarah Goss. I live in Lebanon, so I'm a nearby resident.

These two drafts are one power system. Life Cycle Power is 65 natural gas reciprocating engines, about 134 megawatts, so this is bridge power that's not going to sustain them until the grid catches up. That is not a handful of emergency generators. There's on the order of two and half times of Lebanon's entire summer peak of about 56 megawatts.

IDEM considers the gas plant and the data center as a single source, which is great, but the draft stays under the 250 tons provision that's simply deterioration of nonstop VOC and CO only by asserting tonnage caps, hopefully 121, 155 -- or 155 tons per engines, not by eliminating how many hours they may run. For the required controls, those caps allow almost continuous boiler operation, so these smaller limited numbers do not mean nonuse, they mean continuous bridging power, engineered to stay just under major source review.

Even with those limits, formaldehyde stays enormous, on the order of about 112 tons per year. That makes for a major source of hazardous

air pollutants, reciprocating engines -- toxic -- per megawatt hours of -- turnover. This campus is designed to deliver about one gigawatt.

Phase one is not the whole story. I ask IDEM to evaluate reasonably perceivable expansion, require a clear operating public profile of our town, including many corporate -- reliability dispatch. Would greenhouse gas -- not on the record, and not treating -- running for each generation, like emergency backup.

I will also submit --

MS. ACKER: Your time -- thank you.

THE HEARING OFFICER: Thank you, Sarah.

MS. GOSS: Thank you.

THE HEARING OFFICER: Next up is Lesli Bair.

MS. BAIR: Hi. I'm Lesli Bair, from Zionsville, and I am very concerned about the air pollution.

I do want to say that nobody wants these data centers, and there's many, many videos from across the country on new sites that people have

released, I've got a new site opening in Union, and also videos by some of our neighbors in Lebanon, the current situation, and we've seen brown water and bacteria in water, the noise, the lights, the particulates.

One of the most recent videos is from a citizen in Abilene, Texas, who has to change her air filters every two weeks in her house, and they have -- what's nearby has fewer generators than what is proposed and being built in Lebanon.

The whole AI system is very harmful to the community. It leads to nothing but job losses. AI steals our human creative content, books, cutting spines off of books and stealing art. There's flock cameras tracking everything, they're stealing our data, they're using facial recognition.

And the police are tracking their ex-girlfriends, for example, and we're giving them a tax break for this, with very little in return. In fact, it's just harming us. Very few jobs, the NDA's, tech companies are welfare queens, and I'm very concerned about the amount

of pollution.

THE HEARING OFFICER: Thank you, Lesli.

Next up is Jeni Jenkins.

MS. JENKINS: Hi. Good evening. My name is Jeni Jenkins. I live in Zionsville, and I'm about approximately 13 miles from where this is going to be. It's been the vast majority of the -- I'm speaking on this as a citizen of Zionsville on the entity.

I would ask IDEM -- excuse me -- to address in its written response why Orla and Life Cycle Power can be one source getting divided into two permits, whose combined limits remain just under the threshold for the more rigorous federal review. This project should be evaluated cumulative -- cumulatively, not permit by permit.

I'm also concerned that it's calculation shows that 65 gas engines are to operate 8,760 hours per year, while the permit apparently contains no binding operating hour limit for permit date. That is not the means for temporary bridge power. IDEM should require a cumulative

review, a combined health risk modeling, strict hour limits, and enforceable shutdown data, or substantially revise these permits.

Thank you.

THE HEARING OFFICER: Thank you, Jeni.

Next up is Rebecca.

MS. TEKOLSTE: Hi, there. My name is Rebecca TeKolste. I'm here representing Hoosier Environmental Council, and I live in Indianapolis.

I want to start by echoing the concerns raised by Sarah Goss and Jeni Jenkins, and then I think I want to raise additional concerns that we have with this project.

So, first, we're particularly concerned about the 112 tons of formaldehyde and how hazardous that will be, then we're concerned that these permits can't require any responsive modeling to determine what nearby residents could actually be exposed to. We recommend that IDEM should require that modeling for formaldehyde and also all other hazardous air pollutants.

These approvals also rely on operating functions that may not reflect how this building may actually function. The emissions analysis that they give, the 65 natural gas engines will operate almost continuously, with very few start-ups and shutdowns, but AI data centers have high variables of energy demand, and if these engines cycle on and off to follow that demand, nearby cities can experience repeated short-term spikes in air pollution, and that that has not been evaluated.

At the same time the monitoring -- 65 engines for another five years, meaning it would take more than 30 years to ensure that they have the full fleets -- full fleets. By contrast, these engine have a history of going out of service -- making them particularly vulnerable to issues -- when they're out of service.

We're also very concerned that the project -- these generators are classified by IDEM as emergency equipment, even though a data center lots of times -- will be -- gas generation system, and this could have a big effect of --

challenges. IDEM should require an opportunity to demonstrate that these generators will truly be limited to a controlled emergency use.

And last, this permit also establishes an important precedent for Indiana's -- future, and those models are going to be replicated throughout the state. Indiana will see thousands of new ones and new iterations of those outside -- planning and public oversight required for projects by the Indiana Utility Regulatory Commission. These are the --

MS. ACKER: Thank you.

MS. TEKOLSTE: -- things that can be done in the future --

MS. ACKER: Thank you. Your time is up. You can --

MS. TEKOLSTE: Thank you.

MS. ACKER: -- come back during the open forum. Thanks.

MS. TEKOLSTE: Thank you.

THE HEARING OFFICER: Thank you.

That is all of the speakers that I've got signed up so far. Is there anyone else that

wishes to speak tonight?

MS. ACKER: Yes. We have Katherine Dennis.

Katherine, if you'd like to unmute.

MS. DENNIS: I'm wondering if you can ex (inaudible) --

THE REPORTER: Can she speak up?

MS. DENNIS: I'm wondering if you can explain for us in a location downstream and downwind from this project -- of this region is truly what we're seeing here -- to manual labor -- I find it very hard to wear a mask while I'm working on a farm -- through the air quality alerts, and every time those air quality alerts occur again, I'm always left wondering, "What can -- what can be done?"

And I come to that question earnestly. I'd really like to -- to make things better, and I just don't see any benefit of what Meta is doing in any of this project. So, I just want to echo that this isn't something that I wanted to -- I feel like this air pollution, water pollution, noise, lighting, and for what benefit?

There is so much at stake -- pollution of our waters. So, don't touch this.

THE HEARING OFFICER: Thank you.

MS. DENNIS: So, that's what I have to say.

MS. ACKER: Okay. Lesli, if you'd like to unmute, please.

MS. BAIR: Hi. Thank you. Indiana has some of the worst air quality in the entire country, and this is not going to help. I frequently get air quality alerts on my phone, and I would like you to deny this permit and act on behalf of the citizens of this region and not on behalf of big data.

Thank you.

MS. ACKER: Thank you.

THE HEARING OFFICER: Is there anyone else at this time? Tina? Tina?

MS. OAKES: Thank you. This is Tina Oakes, and I am a resident of Pike Township. And first off, I do want to echo what was said by everyone else.

You know, one of the things is, it seems

very odd that they are allowed to approve their permits in view of the existence of the greenhouse gases and the other chemicals such a formaldehyde being released under a certain threshold and not ever put together a master plan, but saying, "Well, when it's all said and done, this is what's going to be released," because that is what is going to happen; right?

Regardless of what happens in Phase 1, Phase 2, Phase 3, at the end of it, this is all going to be combined, and there will -- at least right now, we don't have any information on how much that they said they're going to release in Phase 1.

How much is that actually going to be when they are finished with all of their phases and are up and running, particularly, for instance, how much diesel and gas is stored on-site? How many pollutants are being released to the air? And so, I'm really -- even before you consider this, you need to ask for, for the citizens, a master plan.

THE HEARING OFFICER: Okay. Thank

you.

MS. OAKES: Thank you.

THE HEARING OFFICER: Is there anyone else this evening?

MS. ACKER: Rebecca?

MS. TEKOLSTE: (Inaudible) then I'll comment again.

MS. ACKER: Absolutely.

MS. TEKOLSTE: So, I just wanted to raise -- that this is the first of its kind in Indiana, when it establishes a precedent and that this model -- Indiana has been seen as a -- generation developed outside the comprehensive planning and public oversight typically required for projects regulated -- projects regulated by the IURC, the Indiana Utility Regulatory Commission.

These units -- for a records system. They should not get one permit at a time. We need to establish a transparent and statewide framework for evaluating the -- generation, especially that -- for large data centers before this modeling becomes the standard.

Thank you.

THE HEARING OFFICER: Thank you.

Katherine?

MS. DENNIS: I'd just like to say thank you (inaudible) --

THE REPORTER: Louder, please.

MS. ACKER: We need you to speak up.

MS. DENNIS: Thank you for bringing up the point so well, and I think it's speaking to the point that this is such -- sort of a critical moment, and again, don't -- don't feel like it's not a big deal, because it is a big deal. It has huge impacts, and yeah, it could be crushing ones.

So, let's work together, you know, come up with a better solution instead of just letting Meta slap us around and let -- you know, there's a phrase of not like using technology or using technology instead of letting technology use us, yeah.

THE HEARING OFFICER: All right. Thank you.

Sarah, go ahead.

MS. GOSS: Thank you.

I just wanted to also bring up that the three-year fuel map on the bridge plant alone is on the order of a half a million tons of CO_2 per year, and that's -- you know, that's usually done with maps, and it's in any the current plan.

And you're sag -- Indiana is sagging -- power project, and treating a 134-megawatt possible bridge as a temporary footnote, and it should get closer scrutiny, as Rebecca was talking about. This is a continuous primary power source or private campus, and this is closer to utility-scale plans. And we need to have a cumulative air analysis, public operating assumptions, not a silent path around this PSD by permitting this.

Thank you.

THE HEARING OFFICER: Okay. Thank you.

Megan, go ahead.

MS. ANDERSON: Hello. This is Megan Anderson. I went to -- I live in Pike Township, and my family lives in Lebanon.

I just wanted to say that I am glad that this is being treated as one permitting source implementing new units that are polluting -- a pollution permitting package.

And I do think that poor planning on the part of Meta does not constitute an emergency on the part of the community, and there is no reason the community shoulder this burden of unnecessary pollution when Meta could simply slow down their production schedule or -- as they've said they were ahead and they could get back on the normal track until they have enough electricity. They clearly can't operate if there's not enough electricity, so there's some confusion there.

I also want to have IDEM please detail the adherence to the RICE rules. How, if this is operating over a hundred hours with gas engines, are they adhering to the emergency rules for RICE?

I also wanted to have an explanation of their formaldehyde emission and why they are so high on these units, and if these units are using best available control technology.

I also think IDEM needs to detail all of the -- identify the air monitors and demonstrate sufficient monitoring, especially as they're one of many new air polluting sources coming to the lead industrial site.

Again, I just want to point out that, you know, they can't operate their facilities without electricity, and there's no reason that they should be operating now, and so, I encourage you all to deny the permits.

Thank you.

THE HEARING OFFICER: Thank you.

Katherine?

MS. DENNIS: I just have a question, and I'm sorry.

MS. ACKER: You need to speak up.

MS. DENNIS: I apologize.

MS. ACKER: That's okay.

MS. DENNIS: I just have a question, and I'm sorry, but this is one that -- I'm just wondering if there was any time where you all would be responding at all or just letting us know, and your thoughts on this. I'm just

curious.

THE HEARING OFFICER: Yes, we'll be responding.

MS. ACKER: We can't respond during the tech -- the hearing, but I will respond to that upon conclusion of this hearing for you; okay?

MS. DENNIS: Okay. Thanks.

THE HEARING OFFICER: Megan, go ahead.

MS. ANDERSON: Hello. This is Megan Anderson again.

I just wanted to put on the record that I did have some issues when I logged in, which I believe I'm using the application on my work laptop. I was not able to be entered into the waiting room, and so, I was not able to get into the speaker form access, and that seems to be a recurring issue just with the way the hearings are conducted on Teams, seeing that you kind of put it on the phone where there's no chat access ahead of the hearing start time.

And so, you know, perhaps IDEM adding more

instructions about that or putting the speaker form, you know, I guess with the login. I'm not sure, but there's clearly some issues that are occurring with access, and I wanted to highlight that.

Thank you.

THE HEARING OFFICER: Okay. Thank you for the comment.

(Discussion off the record.)

MS. ACKER: Katherine Dennis has her hand up.

THE HEARING OFFICER: Katherine, go ahead again.

MS. DENNIS: And I had the same issue, (inaudible). I read up on this, but --

MS. ACKER: Okay. If we have no more speakers -- I see no more hands -- we will conclude this meeting -- or public hearing. I want to thank everybody for attending.

I did say that I would let you know what the next steps are. So, the next steps are going to be we're going to wait to get a transcript. That may take a couple of weeks. I will have the

transcript of this hearing. Also, any comments that we receive written during the public comment period.

The permit writer here, Phil, will put together an Addendum to the Technical Support Document, it's called an ATSD, and we will respond to every comment received. We'll include a copy of the comments received, a copy of the transcript, and again, respond to all comments received, and that will be a part of the final decision.

- - -


Thereupon, the proceedings of August 6, 2026 were concluded at 6:31 o'clock p.m.

- - -

CERTIFICATE

I, Lindy L. Meyer, Jr., the undersigned Court Reporter and Notary Public residing in the City of Shelbyville, Shelby County, Indiana, do hereby certify that the foregoing is a true and correct transcript of the proceedings taken by me on Thursday, August 6, 2026 in this matter and transcribed by me.

Lindy L. Meyer, Jr.

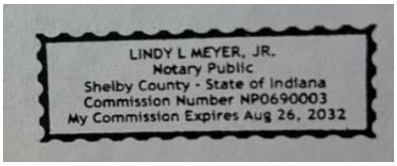

Lindy L. Meyer, Jr.,
Notary Public in and
for the State of Indiana.

My Commission expires August 26, 2032.

Commission No. NP0690003

0

011-50034-00093 [1] - 1:7
011-50087-00094 [1] - 1:7

1

1 [2] - 21:9, 21:14
10th [1] - 8:6
112 [3] - 11:4, 12:22, 16:17
12 [2] - 3:19, 3:22
121 [1] - 12:13
13 [1] - 15:7
134 [1] - 12:3
134-megawatt [1] - 24:8
153 [1] - 11:1
155 [2] - 12:14
185 [1] - 11:2

2

2 [1] - 21:10
2026 [4] - 1:16, 3:1, 29:13, 30:7
2032 [1] - 30:15
250 [1] - 12:11
26 [1] - 30:15

3

3 [1] - 21:10
30 [1] - 17:14
317 [1] - 1:22

4

46032 [1] - 1:22

5

543 [1] - 1:21
56 [1] - 12:8

6

6 [4] - 1:16, 3:1, 29:13, 30:7
65 [5] - 4:1, 12:2, 15:19, 17:4, 17:12
6:01 [2] - 1:17, 3:1
6:31 [1] - 29:13

7

70 [1] - 4:4

8

8,760 [1] - 15:19
848-0088 [1] - 1:22

A

a/k/a [1] - 11:16
Abilene [1] - 14:7
ability [1] - 6:6
able [2] - 27:16, 27:17
above-captioned [1] - 1:12
absolutely [1] - 22:8
access [3] - 27:18, 27:21, 28:4
accordingly [1] - 6:5
accountable [1] - 5:18
accuracy [1] - 4:11
ACCURATE [1] - 1:21
accuratereportingofindiana@gmail.com [1] - 1:23
Acker [1] - 2:3
ACKER [17] - 3:3, 9:11, 13:12, 18:12, 18:15, 18:18, 19:2, 20:6, 20:16, 22:5, 22:8, 23:7, 26:16, 26:18, 27:4, 28:10, 28:16
act [2] - 6:19, 20:12
activities [1] - 4:7
add [1] - 9:11
added [3] - 7:8, 7:11, 10:13
addendum [3] - 8:1, 8:2, 29:5
adding [1] - 27:23
additional [1] - 16:14
address [1] - 15:12
adherence [1] - 25:16
adhering [1] - 25:18
administrative [2] - 3:9, 3:15
aging [1] - 10:7
ahead [7] - 9:23, 23:23, 24:20, 25:11, 27:10, 27:22, 28:13
AI [3] - 14:11, 14:13, 17:6
air [30] - 5:5, 5:6, 5:9, 5:11, 5:19, 5:22, 6:2, 6:9, 6:11, 6:15, 6:17, 6:19, 10:3, 10:4, 10:9, 11:3, 13:1, 13:19, 14:8, 16:23, 17:10, 19:13, 19:14, 19:22, 20:9, 20:11, 21:19, 24:14, 26:2, 26:4
alert [1] - 9:2
alerts [3] - 19:14, 20:11
allow [1] - 12:16
allowed [1] - 21:1
almost [2] - 12:16, 17:5
alone [1] - 24:3
Ambient [1] - 6:15
amount [2] - 9:16, 14:23
analysis [3] - 7:21, 17:3, 24:14
ANDERSON [2] - 24:21, 27:11
Anderson [3] - 2:8, 24:22, 27:12
annual [1] - 5:20
apologize [1] - 26:17
APPEARANCES [1] - 2:1
applicability [1] - 3:14
applicable [6] - 4:14, 4:20, 5:10, 5:12, 5:15, 6:18
application [4] - 4:11, 5:5, 8:9, 27:15
apply [1] - 5:23
appropriate [1] - 4:17
approvals [1] - 17:1
approve [1] - 21:1
approved [3] - 6:10, 10:10
art [1] - 14:14
Asna [1] - 10:6
asserting [1] - 12:13
associated [1] - 4:18
assumptions [1] - 24:15
assure [1] - 6:17
ATSD [3] - 8:2, 8:14, 29:6
attending [2] - 7:13, 28:19
August [6] - 1:16, 3:1, 8:6, 29:13, 30:7, 30:15
authority [1] - 5:4
authorize [1] - 3:17
available [2] - 11:12, 25:23

B

backup [2] - 3:20, 13:10
bacteria [1] - 14:4
Bair [3] - 2:6, 13:17, 13:18
BAIR [2] - 13:18, 20:8
based [1] - 5:6
becomes [1] - 22:23
BEFORE [1] - 1:1
behalf [2] - 20:13, 20:14
BEHALF [1] - 2:2
belly [1] - 3:22
benefit [2] - 19:19, 19:23
best [1] - 25:23
Beth [1] - 10:6
better [2] - 19:18, 23:16
beyond [1] - 6:7
big [4] - 17:23, 20:14, 23:12
binding [1] - 15:21
boiler [1] - 12:17
boilers [1] - 4:3
books [2] - 14:13, 14:14
break [1] - 14:20
bridge [4] - 12:3, 15:23, 24:3, 24:9
bridging [1] - 12:19
bring [1] - 24:2
bringing [1] - 23:8
brown [1] - 14:4
building [1] - 17:2
built [1] - 14:10
burden [1] - 25:8

C

calculation [1] - 15:18
calculations [1] - 4:10
cameras [1] - 14:15
campus [2] - 13:2, 24:12
cancer [2] - 11:6, 11:7
cannot [1] - 11:14
caps [2] - 12:13, 12:16
captioned [1] - 1:12
carcinogen [1] - 11:5
careful [1] - 7:20
Carmel [1] - 1:22
catches [1] - 12:5
center [3] - 10:14, 12:10, 17:22
centers [3] - 13:22, 17:6, 22:22
certain [1] - 21:4
CERTIFICATE [1] - 30:1
certify [1] - 30:5
challenges [1] - 18:1
change [1] - 14:7
changes [1] - 6:3
chat [2] - 8:12, 27:21
chemicals [1] - 21:3
cites [1] - 4:12
cities [1] - 17:9
citizen [2] - 14:7, 15:9
Citizen [1] - 8:7
citizens [2] - 20:13, 21:21
City [1] - 30:4
classified [1] - 17:20
Clean [1] - 6:19
clear [1] - 13:6
clearly [2] - 25:13, 28:3
closer [2] - 24:10, 24:13
CO [2] - 4:2, 12:12
CO2 [1] - 24:4
combined [4] - 3:12, 15:14, 16:1, 21:11
coming [1] - 26:4
comment [5] - 7:19, 22:7, 28:8, 29:2, 29:7
comments [12] - 3:6, 7:14, 7:17, 8:5, 8:7, 8:10, 8:13, 8:21, 8:22, 29:1, 29:8, 29:9
Commission [3] - 18:11, 30:15, 30:16
commission [1] - 22:17
community [4] - 11:13, 14:12, 25:7, 25:8
companies [2] - 5:18, 14:22
complete [1] - 7:4
compliance [3] - 4:16, 6:16, 6:17
complying [1] - 5:19
compounds [1] - 11:2
comprehensive [1] - 22:13
concerned [10] - 10:4, 10:18, 10:22, 11:4, 13:19, 14:23, 15:18, 16:16, 16:18, 17:19
concerns [4] - 5:1, 5:7, 16:12, 16:14
conclude [1] - 28:18
concluded [1] - 29:13
conclusion [1] - 27:6
conditions [2] - 4:17, 6:16
conducted [1] - 27:20
confusion [1] - 25:14
consider [1] - 21:20
consideration [1] -

7:20
considered [3] - 3:13, 4:19, 8:13
considers [1] - 12:9
constitute [1] - 25:6
construction [6] - 3:7, 3:9, 3:18, 4:4, 4:6, 4:23
contain [1] - 5:14
contains [3] - 4:14, 5:10, 15:21
content [1] - 14:13
continuous [3] - 12:17, 12:19, 24:11
continuously [1] - 17:5
contrast [1] - 17:15
control [1] - 25:23
controlled [1] - 18:3
controlling [1] - 6:2
controls [2] - 6:6, 12:16
copy [2] - 29:8
corporate [1] - 13:7
correct [1] - 30:6
Council [1] - 16:10
country [2] - 13:23, 20:10
County [2] - 1:15, 30:4
couple [1] - 28:23
court [1] - 7:13
Court [1] - 30:3
created [1] - 4:17
creative [1] - 14:13
critical [2] - 3:19, 23:11
crushing [1] - 23:14
cumulative [3] - 15:17, 15:23, 24:14
cumulatively [1] - 15:17
curious [1] - 27:1
current [2] - 14:3, 24:6
cutting [1] - 14:14
cycle [5] - 3:8, 3:23, 12:2, 15:13, 17:8
CYCLE [1] - 1:6
Cycle [2] - 3:11, 11:16

D

data [10] - 3:20, 10:14, 12:9, 13:22, 14:16, 16:2, 17:6, 17:21, 20:14, 22:22
date [1] - 15:22
deal [3] - 4:21, 23:12, 23:13
decision [2] - 7:23, 29:11
deemed [1] - 6:14
delegated [1] - 6:11
deliver [1] - 13:3
demand [2] - 17:7, 17:8
demonstrate [2] - 18:2, 26:2
Dennis [3] - 2:7, 19:3, 28:10
DENNIS [10] - 19:5, 19:8, 20:4, 23:4, 23:8, 26:14, 26:17, 26:19, 27:8, 28:14
deny [4] - 5:6, 11:15, 20:12, 26:10
DEPARTMENT [1] - 1:1
descriptions [1] - 4:9
designed [1] - 13:3
detail [2] - 25:15, 26:1
detailed [1] - 7:21
deterioration [1] - 12:12
determination [1] - 4:16
determine [1] - 16:20
determining [1] - 3:13
developed [1] - 22:13
diesel [4] - 3:19, 3:21, 10:21, 21:18
diesel-fired [2] - 3:19, 3:21
discuss [1] - 8:16
discussion [1] - 28:9
Discussion [1] - 9:10
dispatch [1] - 13:8
divided [1] - 15:13
document [4] - 5:20, 8:1, 8:2, 29:6
documents [3] - 5:17, 8:3, 8:8
done [4] - 18:14, 19:16, 21:7, 24:5
down [1] - 25:9
downstream [1] - 19:9
downwind [2] - 10:5, 19:10
draft [1] - 12:11
drafting [1] - 4:8
drafts [1] - 12:1
Drive [1] - 1:21
due [1] - 8:5
during [6] - 7:18, 8:11, 9:17, 18:18, 27:4, 29:2

E

e-mail [1] - 8:18
earnestly [1] - 19:17
echo [2] - 19:21, 20:21
echoing [1] - 16:12
effect [1] - 17:23
EI [1] - 10:14
electricity [3] - 25:12, 25:14, 26:8
eliminating [1] - 12:15
EMAIL [1] - 1:23
emergency [9] - 3:20, 10:21, 11:10, 12:6, 13:10, 17:21, 18:3, 25:6, 25:18
emission [2] - 6:7, 25:21
emissions [3] - 3:12, 4:8, 17:3
emit [1] - 5:21
encourage [1] - 26:9
end [1] - 21:10
energy [1] - 17:7
enforceable [1] - 16:2
engine [1] - 17:16
engineered [1] - 12:19
engines [10] - 10:11, 10:20, 12:3, 12:14, 13:1, 15:19, 17:4, 17:8, 17:13, 25:17
enormous [1] - 12:22
ensure [3] - 4:13, 11:10, 17:14
entered [1] - 27:16
entire [2] - 12:7, 20:9
entity [1] - 15:10
entries [1] - 8:12
ENVIRONMENTAL [1] - 1:1
environmental [1] - 5:19
Environmental [1] - 16:10
EPA [1] - 6:10
equipment [1] - 17:21
equipped [1] - 4:2
especially [2] - 22:21, 26:3
establish [1] - 22:20
established [1] - 4:15
establishes [2] - 18:4, 22:11
evaluate [2] - 5:4, 13:5
evaluated [2] - 15:16, 17:11
evaluating [1] - 22:21
evening [3] - 3:3, 15:5, 22:4
ex [2] - 14:19, 19:6
ex-girlfriends [1] - 14:19
example [1] - 14:19
excuse [1] - 15:11
existence [1] - 21:2
expands [1] - 6:3
expansion [1] - 13:6
experience [1] - 17:9
expires [1] - 30:15
explain [1] - 19:9
explanation [1] - 25:20
exposed [1] - 16:21

F

facial [1] - 14:16
facilities [1] - 26:7
facility [1] - 6:3
fact [1] - 14:21
family [3] - 10:23, 11:6, 24:23
family's [1] - 10:8
far [1] - 18:23
farm [1] - 19:13
feature [1] - 8:13
federal [7] - 4:13, 5:10, 5:15, 5:23, 6:13, 6:18, 15:16
few [3] - 8:17, 14:21, 17:5
fewer [1] - 14:9
Fiancee [1] - 10:6
fifteen [1] - 9:3
filters [1] - 14:8
final [4] - 7:22, 8:3, 8:4, 29:10
finally [1] - 6:9
finished [1] - 21:16
fire [1] - 3:21
fired [4] - 3:19, 3:21, 4:1, 4:3
first [5] - 9:21, 11:14, 16:16, 20:21, 22:10
five [2] - 9:2, 17:13
fleets [2] - 17:15
flock [1] - 14:15
follow [1] - 17:8
following [1] - 3:18
footnote [1] - 24:9
foregoing [1] - 30:5
form [4] - 7:4, 7:10, 27:18, 28:2
formaldehyde [6] - 11:5, 12:21, 16:17, 16:22, 21:4, 25:21
forms [2] - 7:5, 9:12
forty [1] - 9:2
forty-five [1] - 9:2
forum [4] - 3:6, 9:13, 9:17, 18:19
framework [1] - 22:20
frequently [1] - 20:11
friends [1] - 11:6
fuel [2] - 3:22, 24:3
full [2] - 17:15
function [1] - 17:3
functions [1] - 17:2
future [2] - 18:5, 18:14

G

gas [13] - 4:1, 4:3, 10:11, 10:20, 12:2, 12:9, 13:8, 15:19, 17:4, 17:22, 21:18, 25:17
gases [1] - 21:3
gen [1] - 3:23
generated [1] - 4:9
generation [4] - 13:10, 17:22, 22:13, 22:21
generators [10] - 3:20, 4:1, 10:13, 10:15, 10:21, 11:10, 12:6, 14:9, 17:20, 18:2
gigawatt [1] - 13:3
girlfriends [1] - 14:19
glad [1] - 25:1
Goss [4] - 2:5, 11:20, 11:22, 16:13
GOSS [3] - 11:21, 13:15, 24:1
GRAYBIEL [1] - 10:1
Graybiel [3] - 2:5, 9:22, 10:2
great [1] - 12:10
greenhouse [2] - 13:8, 21:3
grew [1] - 10:7
grid [2] - 11:12, 12:5
guess [1] - 28:2

H

half [2] - 12:7, 24:4
hand [2] - 9:14, 28:11
handful [1] - 12:5
hands [2] - 9:15, 28:17
hard [1] - 19:12
harm [1] - 11:2
harmful [1] - 14:11
harming [1] - 14:21
Hartley [3] - 1:13, 2:2, 6:21
hazardous [3] - 12:23, 16:18, 16:23
health [4] - 6:14, 10:8, 11:3, 16:1
hearing [15] - 3:4, 3:5, 7:1, 7:3, 7:13, 7:16,

7:18, 8:11, 9:4, 9:8, 27:5, 27:6, 27:22, 28:18, 29:1
HEARING [21] - 1:5, 6:22, 9:20, 11:18, 13:13, 13:16, 15:2, 16:5, 18:21, 20:3, 20:17, 21:23, 22:3, 23:2, 23:21, 24:18, 26:12, 27:2, 27:9, 28:7, 28:12
Hearing [2] - 1:12, 2:2
hearings [1] - 27:19
Heath [4] - 1:13, 2:2, 6:21, 6:23
hello [4] - 10:1, 11:21, 24:21, 27:11
help [1] - 20:10
hereby [1] - 30:5
hi [4] - 13:18, 15:5, 16:8, 20:8
high [2] - 17:7, 25:22
highlight [1] - 28:4
history [1] - 17:16
hold [1] - 5:17
home [1] - 10:12
Hoosier [1] - 16:9
hopefully [1] - 12:13
hour [2] - 15:21, 16:2
hours [5] - 10:19, 12:15, 13:2, 15:20, 25:17
house [1] - 14:8
huge [1] - 23:13
human [3] - 6:14, 11:3, 14:13
hundred [1] - 25:17
hundreds [1] - 10:15

I

IDEM [18] - 2:2, 5:3, 5:17, 6:5, 7:17, 8:4, 8:9, 11:9, 12:9, 13:5, 15:11, 15:23, 16:21, 17:21, 18:1, 25:15, 26:1, 27:23
IDEM's [3] - 5:13, 6:9
identify [3] - 5:22, 9:9, 26:2
impact [1] - 10:22
impacts [2] - 5:2, 23:13
implementing [1] - 25:3
important [2] - 10:8, 18:5
inaudible [3] - 19:6, 22:6, 23:5
inaudible) [1] - 28:15
include [1] - 29:7
included [1] - 4:19
including [1] - 13:7
INDIANA [2] - 1:1, 1:21
Indiana [12] - 1:15, 1:22, 6:12, 18:7, 18:10, 20:8, 22:11, 22:12, 22:16, 24:7, 30:4, 30:13
Indiana's [1] - 18:5
Indianapolis [2] - 10:5, 16:11
indicate [1] - 7:10
individuals [1] - 5:18
industrial [1] - 26:5
information [1] - 21:12
initial [1] - 4:8
installed [1] - 10:15
instance [1] - 21:17
instead [2] - 23:16, 23:19
instructions [2] - 8:6, 28:1
interested [2] - 7:9, 7:11
issue [2] - 27:19, 28:15
issued [2] - 3:15, 5:20
issues [6] - 5:5, 5:7, 8:4, 17:18, 27:14, 28:3
iterations [1] - 18:8
IURC [1] - 22:16

J

Jeni [5] - 2:6, 15:4, 15:6, 16:6, 16:13
JENKINS [1] - 15:5
Jenkins [4] - 2:6, 15:4, 15:6, 16:13
Jenny [1] - 2:3
job [1] - 14:12
jobs [1] - 14:22
Jr [3] - 1:14, 30:2, 30:11

K

Katherine [7] - 2:7, 19:2, 19:4, 23:3, 26:13, 28:10, 28:12
kind [2] - 22:10, 27:20
known [1] - 11:5

L

labor [1] - 19:12
land [3] - 5:8, 5:13, 5:16
laptop [1] - 27:16
large [1] - 22:22
last [1] - 18:4
laws [1] - 6:18
lead [1] - 26:5
leads [1] - 14:12
least [1] - 21:11
Lebanon [5] - 10:6, 11:22, 14:3, 14:10, 24:23
Lebanon's [1] - 12:7
left [1] - 19:15
legal [1] - 5:17
legally [1] - 6:7
Lesli [5] - 2:6, 13:17, 13:18, 15:3, 20:6
letting [3] - 23:16, 23:19, 26:22
level [1] - 3:14
LIFE [1] - 1:6
life [4] - 3:8, 4:22, 5:2, 11:16
Life [3] - 3:11, 12:2, 15:12
lighting [1] - 19:23
lights [1] - 14:5
limit [2] - 10:20, 15:21
limitations [1] - 4:15
limited [4] - 8:20, 9:18, 12:18, 18:3
limiting [1] - 6:1
limits [6] - 9:16, 10:19, 11:1, 12:21, 15:14, 16:2
Lindy [3] - 1:13, 30:2, 30:11
list [2] - 7:9, 7:12
live [6] - 10:5, 10:7, 11:22, 15:6, 16:10, 24:22
lives [1] - 24:23
LLC [3] - 1:6, 1:21, 3:7
location [1] - 19:9
logged [1] - 27:14
login [1] - 28:2
losses [1] - 14:12
louder [1] - 23:6

M

mail [1] - 8:18
mailing [1] - 7:8
major [2] - 12:20, 12:23
majority [1] - 15:8
MANAGEMENT [1] - 1:1
manual [1] - 19:11
map [1] - 24:3
maps [1] - 24:6
mask [1] - 19:12
master [2] - 21:5, 21:22
matter [2] - 1:12, 30:7
mean [2] - 12:18
meaning [2] - 6:10, 17:13
means [1] - 15:22
media [1] - 8:18
media@idem.in.gov [1] - 8:19
meeting [1] - 28:18
Megan [5] - 2:8, 24:20, 24:21, 27:9, 27:11
megawatt [1] - 13:2
megawatts [2] - 12:3, 12:8
members [1] - 8:18
meta [3] - 23:17, 25:6, 25:9
Meta [2] - 11:16, 19:19
Meyer [3] - 1:14, 30:2, 30:11
microphone [1] - 7:6
might [1] - 11:7
miles [1] - 15:7
million [1] - 24:4
minute [1] - 9:2
minutes [3] - 8:17, 8:20, 9:18
mirrors [1] - 6:13
model [1] - 22:12
modeling [4] - 16:1, 16:20, 16:22, 22:23
models [1] - 18:6
moderator [2] - 6:21, 6:23
modified [1] - 6:5
moment [1] - 23:11
Monday [1] - 8:5
monitoring [3] - 4:16, 17:12, 26:3
monitors [1] - 26:2
most [2] - 10:8, 14:6
mounted [1] - 3:23
MR [1] - 10:1
MS [43] - 3:3, 9:11, 11:21, 13:12, 13:15, 13:18, 15:5, 16:8, 18:12, 18:13, 18:15, 18:17, 18:18, 18:20, 19:2, 19:5, 19:8, 20:4, 20:6, 20:8, 20:16, 20:19, 22:2, 22:5, 22:6, 22:8, 22:9, 23:4, 23:7, 23:8, 24:1, 24:21, 26:14, 26:16, 26:17, 26:18, 26:19, 27:4, 27:8, 27:11, 28:10, 28:14, 28:16

N

NAAQS [1] - 6:15
name [6] - 6:22, 8:22, 10:1, 11:21, 15:6, 16:8
National [1] - 6:15
natural [4] - 4:1, 4:3, 12:2, 17:4
natural-gas-fired [2] - 4:1, 4:3
NDA's [1] - 14:22
nearby [4] - 11:22, 14:9, 16:20, 17:9
necessary [3] - 4:12, 4:15, 7:21
need [5] - 21:21, 22:19, 23:7, 24:13, 26:16
needs [1] - 26:1
negative [1] - 5:1
neighbors [1] - 14:2
new [10] - 3:7, 3:9, 3:18, 4:4, 13:23, 14:1, 18:8, 25:3, 26:4
next [6] - 11:20, 13:16, 15:4, 16:7, 28:21
nitrous [1] - 10:23
nobody [1] - 13:21
noise [4] - 4:22, 5:2, 14:4, 19:23
nonstop [1] - 12:12
nonuse [1] - 12:18
normal [1] - 25:11
Nos [1] - 1:7
Notary [3] - 1:14, 30:3, 30:12
note [1] - 8:11
nothing [1] - 14:12
notice [1] - 8:8
NOx [1] - 4:2
nox [1] - 10:23
NP0690003 [1] - 30:16
number [2] - 9:17, 10:16
numbers [1] - 12:18

O

o'clock [3] - 1:17, 3:1, 29:13
OAKES [2] - 20:19, 22:2
Oakes [2] - 2:8, 20:20
OAQ [2] - 5:3, 6:5

obtain [1] - 5:12
occur [1] - 19:15
occurring [1] - 28:4
odd [1] - 21:1
OF [3] - 1:1, 1:21, 2:2
Office [2] - 5:13, 5:14
OFFICER [20] - 6:22, 9:20, 11:18, 13:13, 13:16, 15:2, 16:5, 18:21, 20:3, 20:17, 21:23, 22:3, 23:2, 23:21, 24:18, 26:12, 27:2, 27:9, 28:7, 28:12
Officer [2] - 1:13, 2:2
official [2] - 7:14, 7:16
ON [1] - 2:2
on-site [1] - 21:18
once [1] - 9:12
one [12] - 3:23, 9:1, 12:1, 13:3, 13:4, 14:6, 15:13, 20:23, 22:19, 25:2, 26:3, 26:20
ones [2] - 18:8, 23:14
open [4] - 9:4, 9:13, 9:17, 18:19
opening [1] - 14:1
operate [4] - 15:19, 17:5, 25:13, 26:7
operating [8] - 3:8, 11:13, 13:6, 15:21, 17:1, 24:14, 25:17, 26:9
Operating [1] - 3:10
operation [3] - 3:18, 4:23, 12:17
operational [1] - 4:6
operations [1] - 3:13
opportunity [1] - 18:1
oral [1] - 7:2
order [5] - 9:6, 9:14, 12:6, 12:22, 24:4
organic [1] - 11:1
ORLA [1] - 1:6
Orla [5] - 3:7, 3:11, 3:19, 11:15, 15:12
outside [2] - 18:9, 22:13
oversight [2] - 18:9, 22:14
oxide [1] - 10:23

P

p.m [3] - 1:17, 3:1, 29:13
package [1] - 25:4
parents [1] - 10:7
part [8] - 4:4, 5:5, 7:19, 7:22, 8:3, 25:6, 25:7, 29:10
participants [1] - 8:15
participating [1] - 9:4
particularly [3] - 16:16, 17:17, 21:17
particulates [1] - 14:5
parties [2] - 7:9, 7:12
Paso [1] - 10:14
path [1] - 24:15
peak [1] - 12:8
people [1] - 13:23
per [6] - 11:4, 12:14, 12:22, 13:2, 15:20, 24:4
perceivable [1] - 13:5
perhaps [1] - 27:23
period [3] - 7:19, 9:17, 29:3
permit [24] - 3:8, 3:14, 4:5, 4:8, 4:12, 4:13, 5:5, 5:6, 5:9, 6:5, 6:17, 8:3, 10:3, 10:9, 10:16, 11:15, 15:17, 15:20, 15:22, 18:4, 20:12, 22:19, 29:4
Permit [2] - 1:7, 3:10
permits [11] - 3:17, 4:5, 4:6, 5:12, 5:17, 5:20, 15:14, 16:3, 16:19, 21:2, 26:10
permitting [6] - 6:9, 6:11, 7:23, 24:16, 25:2, 25:4
phase [1] - 13:4
Phase [4] - 21:9, 21:10, 21:14
phases [1] - 21:16
Phil [2] - 10:2, 29:4
Phillip [3] - 2:5, 9:22, 11:19
phone [4] - 9:5, 9:7, 20:11, 27:21
phones [1] - 8:16
phrase [1] - 23:18
Pike [3] - 10:2, 20:20, 24:22
place [1] - 11:14
plan [3] - 21:6, 21:22, 24:6
planning [3] - 18:9, 22:14, 25:5
plans [1] - 24:13
plant [3] - 10:12, 12:9, 24:3
platform [1] - 1:16
point [4] - 9:13, 23:9, 23:10, 26:6
Pointe [1] - 1:21
police [1] - 14:18
pollutants [4] - 5:22, 13:1, 16:23, 21:19
polluting [2] - 25:3, 26:4
pollution [14] - 5:8, 5:9, 5:11, 5:16, 6:2, 10:22, 13:20, 15:1, 17:10, 19:22, 19:23, 20:1, 25:4, 25:9
Ponds [1] - 1:21
poor [1] - 25:5
possible [1] - 24:9
potential [2] - 5:1, 5:21
POWER [1] - 1:6
power [11] - 3:9, 10:12, 11:12, 12:1, 12:2, 12:4, 12:19, 15:13, 15:23, 24:8, 24:12
precedent [2] - 18:5, 22:11
prepared [1] - 7:16
PRESENT [1] - 2:4
previous [1] - 8:21
primary [1] - 24:11
private [1] - 24:12
PROCEEDINGS [1] - 1:11
proceedings [2] - 29:12, 30:6
process [2] - 5:6, 6:4
production [1] - 25:10
profile [1] - 13:7
program [4] - 6:9, 6:11, 6:13
project [7] - 11:14, 15:16, 16:15, 17:20, 19:10, 19:20, 24:8
projects [3] - 18:10, 22:15
property [2] - 4:22, 5:3
proposed [2] - 5:9, 14:10
protective [2] - 6:14, 6:15
provide [4] - 3:5, 3:6, 7:7, 7:21
provided [1] - 8:23
providing [1] - 3:20
provision [1] - 12:11
PSD [1] - 24:15
PTE [1] - 5:21
public [14] - 3:4, 3:5, 3:6, 6:23, 7:19, 8:5, 8:8, 8:13, 13:6, 18:9, 22:14, 24:14, 28:18, 29:2
PUBLIC [1] - 1:5
Public [3] - 1:14, 30:3, 30:12
pumps [2] - 3:21
purpose [1] - 3:5
purposes [1] - 3:16
put [4] - 21:5, 27:13, 27:21, 29:4
putting [1] - 28:1

Q

quality [11] - 4:22, 5:2, 5:13, 5:14, 6:16, 10:4, 11:3, 19:13, 19:14, 20:9, 20:11
queens [1] - 14:23
questions [5] - 3:6, 7:15, 7:18, 8:11, 8:19

R

raise [4] - 5:1, 9:14, 16:14, 22:10
raised [3] - 9:1, 9:15, 16:13
rather [1] - 8:21
read [1] - 28:15
ready [1] - 9:21
really [2] - 19:18, 21:20
reason [2] - 25:7, 26:8
reasonably [1] - 13:5
Rebecca [5] - 2:7, 16:7, 16:9, 22:5, 24:10
receive [1] - 29:2
received [4] - 7:18, 29:7, 29:8, 29:10
recent [1] - 14:6
reciprocating [2] - 12:2, 13:1
recognition [1] - 14:17
recognize [1] - 4:23
recommend [1] - 16:21
record [6] - 7:14, 7:16, 9:10, 13:9, 27:13, 28:9
recordkeeping [1] - 4:18
records [1] - 22:18
recurring [1] - 27:19
reducing [1] - 6:1
reduction [1] - 4:2
reductions [1] - 6:7
reflect [1] - 17:2
REGARDING [1] - 1:5
regarding [2] - 3:7, 10:19
regardless [1] - 21:9
region [2] - 19:10, 20:13
regulated [3] - 5:21, 22:15
regulating [1] - 6:1
regulation [1] - 6:8
regulations [5] - 4:13, 5:10, 5:16, 5:19, 6:18
Regulatory [2] - 18:10, 22:16
related [2] - 5:11, 5:16
release [1] - 21:13
released [4] - 14:1, 21:4, 21:7, 21:19
reliability [1] - 13:8
rely [1] - 17:1
remain [1] - 15:14
remaining [1] - 9:3
repeat [1] - 8:21
repeated [1] - 17:9
replicated [1] - 18:6
Reporter [1] - 30:3
REPORTER [2] - 19:7, 23:6
reporter [1] - 7:13
reporting [1] - 4:18
REPORTING [1] - 1:21
representing [1] - 16:9
require [6] - 6:6, 13:6, 15:23, 16:19, 16:22, 18:1
required [6] - 5:12, 6:4, 6:8, 12:16, 18:9, 22:14
requirements [3] - 4:14, 4:19, 5:23
rescission [1] - 8:4
resident [3] - 10:2, 11:23, 20:20
residents [1] - 16:20
residing [1] - 30:3
respect [1] - 5:2
respond [4] - 27:4, 27:5, 29:7, 29:9
responded [1] - 8:14
responding [3] - 8:10, 26:22, 27:3
response [1] - 15:12
responses [2] - 7:22, 7:23
responsive [1] - 16:19
return [1] - 14:21
review [5] - 5:6, 7:17, 12:20, 15:16, 16:1
reviewed [1] - 4:11
revise [1] - 16:3

RICE [2] - 25:16, 25:19
rigorous [1] - 15:15
risk [1] - 16:1
room [1] - 27:17
rule [2] - 3:14, 6:8
rules [4] - 5:11, 5:15, 25:16, 25:18
run [3] - 10:20, 10:21, 12:15
running [3] - 11:11, 13:9, 21:17

S

sag [1] - 24:7
sagging [1] - 24:7
Sarah [6] - 2:5, 11:20, 11:21, 13:14, 16:13, 23:23
scale [1] - 24:13
schedule [1] - 25:10
scrutiny [1] - 24:10
seconds [2] - 9:2, 9:3
see [4] - 9:15, 18:7, 19:19, 28:17
seeing [2] - 19:11, 27:20
separate [1] - 3:14
serve [1] - 4:5
servers [1] - 3:21
service [2] - 17:17, 17:18
sets [1] - 3:23
Shelby [2] - 1:15, 30:4
Shelbyville [1] - 30:4
short [1] - 17:9
short-term [1] - 17:9
shorten [1] - 8:23
shoulder [1] - 25:8
shows [1] - 15:19
shutdown [1] - 16:2
shutdowns [1] - 17:6
sign [1] - 9:1
signed [1] - 18:23
silent [1] - 24:15
simply [2] - 12:12, 25:9
single [2] - 3:11, 12:10
SIP [1] - 6:10
site [4] - 8:9, 14:1, 21:18, 26:5
sites [2] - 10:14, 13:23
situation [1] - 14:3
slap [1] - 23:17
slow [1] - 25:9
small [2] - 3:23, 10:16
smaller [1] - 12:17
so-called [1] - 11:10
solely [1] - 3:15
solution [1] - 23:16
sorry [2] - 26:15, 26:20
sort [1] - 23:10
source [12] - 3:7, 3:9, 3:11, 4:4, 5:11, 6:1, 12:10, 12:20, 12:23, 15:13, 24:12, 25:2
sources [2] - 5:22, 26:4
speaker [9] - 7:4, 7:5, 7:10, 8:20, 8:22, 9:12, 27:18, 28:1
SPEAKERS [1] - 2:4
speakers [5] - 7:11, 9:6, 9:21, 18:22, 28:17
speaking [4] - 9:1, 9:9, 15:9, 23:9
specific [1] - 10:18
spikes [1] - 17:10
spines [1] - 14:14
stake [1] - 20:1
standard [1] - 22:23
standards [1] - 6:16
start [3] - 16:12, 17:6, 27:22
start-ups [1] - 17:6
started [1] - 10:16
state [6] - 4:12, 5:10, 5:15, 5:23, 6:18, 18:7
State [3] - 1:14, 6:11, 30:13
statewide [1] - 22:20
statute [1] - 6:8
stay [1] - 12:19
stays [2] - 12:11, 12:21
stealing [2] - 14:14, 14:16
steals [1] - 14:13
steps [2] - 28:21
still [1] - 10:7
stored [1] - 21:18
story [1] - 13:4
strict [1] - 16:1
submit [2] - 8:6, 13:11
submitted [4] - 4:10, 7:19, 9:7, 9:8
substantially [1] - 16:3
sufficient [1] - 26:3
suggests [1] - 10:17
Summary [1] - 8:7
summer [1] - 12:7
support [3] - 8:2, 11:14, 29:5
sustain [1] - 12:4
system [4] - 12:1, 14:11, 17:23, 22:18

T

tanks [3] - 3:22, 3:23
tax [1] - 14:20
Teams [1] - 1:15
teams [1] - 27:20
tech [2] - 14:22, 27:5
technical [2] - 8:2, 29:5
technology [4] - 23:18, 23:19, 25:23
TeKolste [2] - 2:7, 16:9
TEKOLSTE [6] - 16:8, 18:13, 18:17, 18:20, 22:6, 22:9
TELEPHONE [1] - 1:22
temporary [2] - 15:22, 24:9
term [1] - 17:9
testimony [2] - 7:2, 7:7
Texas [2] - 10:14, 14:7
THE [23] - 1:1, 6:22, 9:20, 11:18, 13:13, 13:16, 15:2, 16:5, 18:21, 19:7, 20:3, 20:17, 21:23, 22:3, 23:2, 23:6, 23:21, 24:18, 26:12, 27:2, 27:9, 28:7, 28:12
Thereupon [1] - 29:12
they've [1] - 25:10
thoughts [1] - 26:23
thousands [1] - 18:7
three [1] - 24:3
three-year [1] - 24:3
threshold [2] - 15:15, 21:5
throughout [1] - 18:7
Thursday [2] - 1:16, 30:7
Tina [4] - 2:8, 20:18, 20:19
Title [1] - 3:8
title [1] - 3:10
titles [1] - 3:15
today's [1] - 7:2
together [3] - 21:5, 23:15, 29:5
tonight [1] - 19:1
tonnage [1] - 12:13
tons [8] - 11:1, 11:2, 11:4, 12:11, 12:14, 12:22, 16:17, 24:4
touch [1] - 20:2
town [2] - 10:12, 13:7
Township [3] - 10:2, 20:20, 24:22
toxic [1] - 13:1
track [1] - 25:12
tracking [2] - 14:15, 14:18
transcribed [1] - 30:8
transcript [5] - 7:15, 28:22, 29:1, 29:9, 30:6
transparent [1] - 22:20
treated [1] - 25:2
treating [2] - 13:9, 24:8
true [1] - 30:5
truly [2] - 18:2, 19:11
turn [1] - 6:20
turnover [1] - 13:2
two [8] - 3:21, 4:3, 8:20, 9:18, 12:1, 12:7, 14:8, 15:14
types [2] - 5:4, 5:7
typically [1] - 22:14

U

under [5] - 4:7, 12:11, 12:20, 15:15, 21:4
undersigned [1] - 30:2
undertake [1] - 4:7
Union [1] - 14:1
unit [1] - 4:8
units [6] - 3:19, 4:3, 22:18, 25:3, 25:22
unmute [4] - 7:6, 9:23, 19:4, 20:7
unnecessary [1] - 25:8
up [19] - 9:4, 9:21, 10:7, 11:20, 12:5, 13:16, 15:4, 16:7, 18:16, 18:23, 19:7, 21:17, 23:7, 23:9, 23:15, 24:2, 26:16, 28:11, 28:15
updated [1] - 4:11
ups [1] - 17:6
utility [1] - 24:13
Utility [2] - 18:10, 22:16
utility-scale [1] - 24:13
utilizing [1] - 8:12

V

V's [1] - 3:15
value [1] - 4:22
values [1] - 5:3
variables [1] - 17:7
various [1] - 5:21
vast [1] - 15:8
via [1] - 1:15
videos [3] - 13:22, 14:2, 14:6
view [1] - 21:2
VOC [1] - 12:12
volatile [1] - 11:1
vulnerable [1] - 17:17

W

wait [1] - 28:22
waiting [1] - 27:17
wants [1] - 13:21
water [6] - 5:8, 5:14, 5:16, 14:4, 19:22
waters [1] - 20:2
wear [1] - 19:12
Web [1] - 8:9
weeks [2] - 14:8, 28:23
welcome [1] - 3:4
welfare [1] - 14:22
wetlands [1] - 5:8
whole [2] - 13:4, 14:11
wish [1] - 7:8
wishes [1] - 19:1
wondering [5] - 11:9, 19:5, 19:8, 19:15, 26:21
worried [1] - 11:7
worse [2] - 11:3, 11:8
worst [1] - 20:9
writer [2] - 4:12, 29:4
writing [1] - 7:22
written [4] - 7:23, 8:7, 15:12, 29:2

Y

year [6] - 11:1, 11:4, 12:23, 15:20, 24:3, 24:5
years [3] - 10:19, 17:13, 17:14
yourself [1] - 9:9

Z

Zionsville [3] - 13:19, 15:6, 15:10

Indiana Department of Environmental Management
Office of Air Quality

Appendix B - Public Comment

Addendum to the Technical Support Document (ATSD) for a Part 70 Administrative Operating Permit

Source Background and Description

Source Name:	**Life Cycle Power**
Source Location:	**3602 West SR 32, Lebanon, IN 46052**
County:	**Boone**
SIC Code:	**4911 (Electric Services)**
Operation Permit No.:	**T 011-50087-00094**
Permit Reviewer:	**Phillip Jackson**

On July 6, 2026, Jodi Stewart submitted mailed comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit.

The comments are included below in their entirety.

Clint Woods (Commissioner)
IDEM
Office of Air Quality Permits Branch
Indiana Government
Center North 100 N. Senate Avenue Room 13 W
Indianapolis, Indiana 46204-2251

Comments

011-50034-00093
CC: Phillip

July 6, 2026

Received
State of Indiana

JUL 0 9 2026
Dept of Environmental Mgmt.
Office of Air Quality

Mr. Woods,

It has been brought to my attention that the Orla LLC project in Lebanon, Boone County, Indiana has recently applied for Air permits, Permit Number 011-50034-00093.

The employee listed as actively signing off on public notices and managing these permits for the Orla LLC shows Phillip Jackson, an Environmental Manager for IDEM since early 2024.

The people assembled, and determined this project directly infringes on Our guaranteed Indiana Constitutional rights, Article 1 Sec. 1, and Article 1 Sec. 31. "All political power is inherent in the People (Indiana Constitution Article 1 Section 1) and that the People have a right to lawfully instruct their government (Indiana Constitution Article 1 Section 31) and that entities, including corporations and bodies politic, are created with the permission of the People and are obligated to act in good faith and with due regard solely for the People's benefit."

Enclosed, you will find 2 Judicial Notices that We The People served to various elected Government servants both State and Federal on this Data Center Project. Elected Government servants were instructed to inform all agencies to cease and desist using any further Public money for this project, and to preserve the Peoples Natural Resources. To date we have received no response to either notice served, showing any government authority to use public money for non-public purposes, or that the people do not have a right to clean air, pure water, and to the preservation of the natural, scenic, historic and esthetic values of the environment. ..public natural resources are the common property of all the people, including generations yet to come.

Question: Where in the Indiana Constitution is there a grant of authority to use public money for non-public purposes?

Question: Where in the Indiana Constitution is there a grant of authority to use the People's natural resources for unauthorized purposes such as economic development funded with public money?

It is, therefore, my wish, that you provide remedy by immediately ceasing and desisting using public money for non-public purposes and by providing public notice to cease and desist such use of public money to all departments of all state and local governments within the State of Indiana.

Thank you for your immediate attention to this unlawful matter.

Jodi Stewart, one of The People

Notice and Demand to Cease and Desist Using Public Money for Non-Public Purposes Such as Economic Development
Notice to Agent is Notice to Principal and Notice to Principal is Notice to Agent

To: Indiana Governor Eric Holcomb; Indiana House of Representatives (All Members); Indiana Senate (All Members); Indiana Attorney General Todd Rokita; Indiana Supreme Court
Cc: City of Lebanon Common Council Members; City of Lebanon Mayor Matt Gentry; Chief Judge Tanya Walton Pratt, United States District Court for the Southern District of Indiana; Chief Judge Holly A. Brady, United States District Court for the Northern District of Indiana; Chief Judge Diane S. Sykes, United States Court of Appeals for the Seventh Circuit; Associate Justice Amy Coney Barrett, Supreme Court of the United States; Indiana Governor-Elect Mike Braun; Indiana Lieutenant Governor-Elect Micah Beckwith

I, Jodi Stewart, one of the People (as seen in the **Indiana Constitution, Article 1, Section 1**), (Republican in form), Sui Juris, do serve you, this Notice, by Necessity, that you do provide immediate due care:
Please take notice that all political power is inherent in the People (Indiana Constitution Article 1 Section 1) and that the People have a right to lawfully instruct their government (Indiana Constitution Article 1 Section 31) and that entities, including corporations and bodies politic, are created with the permission of the People and are obligated to act in good faith and with due regard solely for the People's benefit. (See evidence below)
Maxims of Law: Good faith demands that what is agreed upon shall be done.
Maxims of Law: The welfare of the people is the supreme law; And

Please take further notice that all government servants have an unavoidable obligation to use public money for public purposes and that the use of public money for a purpose without constitutional authority is an unofficial act for which there is no immunity (**Trump v. United States, 603 U.S. 593 (2024)**). In Black's Law Dictionary 1st edition, taxes are defined as "burdens or charges imposed by the legislature upon persons or property to raise money for **public purposes**" and in Black's Law Dictionary 2nd edition, **public purpose** is defined as "in the law of taxation,.. .this is a term.. .to distinguish the objects for which, according to settled usage, the government is to provide, from those which, by the like usage, are left to private interest, inclination, or liberality." Authority granted in the constitutions must be used exactly as specified without any departure. Furthermore, if the constitutions do not expressly grant such authority, it does not exist. (Excerpts) (See evidence below) (Bolded for emphasis)
Maxims of Law: From the words of the law there must be no departure.
Maxims of Law: The expression of one thing is the exclusion of another; And

Please take further notice that according to settled usage and the text, history, and tradition in constitutions, economic development is not a public purpose. (See evidence below)

North Dakota Constitution Article I Section 16: ...a public use or a **public purpose** does not include public benefits of economic development, including an increase in tax base, tax revenues, employment, or general economic health. (Excerpt) (Bolded for emphasis) (**See also Louisiana Constitution Article I Section 4**)

Loan Association v. Topeka, 87 U.S. 655 (1874): We have established, we think, beyond cavil that there can be no lawful tax which is not laid for a public purpose. It may not be easy to draw the line in all cases so as to decide what is a public purpose. ..in the case before us...there is no difficulty in holding that this is not such a public purpose as we have been considering. If it be said that a benefit results to the local public of a town by establishing manufactures, the same may be said of any other business or pursuit which employs capital or labor...No line can be drawn in favor of the manufacturer which would not open the coffers of the public treasury to the importunities of two-thirds of the businessmen of the city or town. (Excerpt) (Bolded for emphasis) (**See also Parkersburg v. Brown, 106 U.S. 487 (1883)** and **Cole v. La Grange, 113 U.S. 1 (1885))**; And

Please take further notice that the fact that public money has already been used for non-public purposes creates no validity to continue to use public money for such purposes. (See evidence below)
Maxims of Law: Things invalid from the beginning cannot be made valid by subsequent act.

Loan Association v. Topeka, 87 U.S. 655 (1874): If the legislature was without power...and its statute.. .is void, payment of interest, which was equally unauthorized, cannot create. ..a power to levy taxes resting on.. .the fact that they have once been illegally levied for that purpose.
(Excerpt)
Question: Where in the Indiana Constitution is there a grant of authority to use public money for non-public purposes? Failure to show this constitutional provision means you understand and agree that public money cannot be used for non-public purposes.

It is, therefore, my wish, order, and demand that you provide remedy by immediately ceasing and desisting using public money for non-public purposes and by providing public notice to cease and desist such use of public money to all departments of all state and local governments within the State of Indiana. If you believe that government has been granted power to use public money for non-public purposes, please show the constitutional grants of authority within five (5) days, by sworn affidavit, under penalty of perjury, or you agree that this practice is unlawful and that failure to openly express the same is done with full knowledge, malice, and intent and shall be evidence in this court of record, heard by an arbitrator of my choice. All responses not submitted under penalty of perjury are non-responses. (Any response from an attorney not directly addressed by this notice will be considered a non-response)
This notice is sent in the peace and love of Jesus Christ that you provide due care to those who hold all political power, the People.

Jodi Stewart

Autograph 7/6/2026 Date

Maxims of Law: One lawfully commanding must be obeyed. Maxims of Law: Judicial notice is a form of evidence.

Judicial Notice and Demand to Conserve The People's Natural Resources
Notice to Agent is Notice to Principal and Notice to Principal is Notice to Agent

I, Jodi Stewart, one of the People as seen in the 50 State Constitutions, (Republican in form), Sui Juris, do present you, this Notice, by Necessity, that you and your agents may provide immediate due care:

Please take notice that all political power is inherent in the People (**Indiana Constitution Article 1 Section 1**) and that the People have a right to lawfully instruct their government (**Indiana Constitution Article 1 Section 31**) and that entities, including corporations and bodies politic (government), are created with the permission of the People and are obligated to act in good faith and with due regard solely for the People's benefit. (See evidence below)

Maxim of Law: Good faith demands that what is agreed upon shall be done.
Maxim of Law: The welfare of the people is the supreme law; And

Please take further notice that beginning on November 26, 2024 the People have served over one hundred (100) notices to local and state government officers, instructing elected officers, as the People's government servants, to provide remedy in order to cease and desist using public money for non-public purposes such as economic development and showing claims, each of which were supported by the express-written constitutional text, the highest law, and maxims of law (which are automatically implied in any contract and universally accepted as being true rules and principles of law). This notice also instructed State government servants to provide public notice to all departments of all state and local governments within the State of Indiana and gave specific amounts of time to rebut or contradict the law and claims provided by the People. The People received no public response that in any way followed the terms stated in the notice. The People recognize that all noticed government servants have tacitly acquiesced to such claims. The notice was read into the public record during the Lebanon City Council meeting December 9, 2024 (see evidence at the following link: https://www.youtube.com/watch?v=ds2-jnGtVRw#t=18m44s); And

Please take further notice that all 50 State Constitutions and the Constitution of the United States of America are the highest law and that the People's natural resources,

such as water, belong to them and that the government exists to preserve such resources for the benefit of the People. (See evidence below).

Pennsylvania Constitution Article 1 Section 27 - Natural Resources and the Public Estate: The people have a right to clean air, pure water, and to the preservation of the natural, scenic, historic and esthetic values of the environment...public natural resources are the common property of all the people, including generations yet to come. (Excerpt)

Hawaii Constitution Article 11 Section 1 - Conservation and Development of Resources: All public natural resources are held in trust by the State for the benefit of the people. (Excerpt) (See also Louisiana Constitution Article 9 Section 1, Rhode Island Constitution Article 1 Section 17, Alaska Constitution Article 8 Section 2, Montana Constitution Article 9 Section 1, Michigan Constitution Article 4 Section 52, North Carolina Constitution Article 14 Section 5, Texas Constitution Article 16 Section 59, and Virginia Constitution Article 11 Section 1); And

Please take further notice that the conservation of the People's natural resources is an unavoidable obligation and the use of the People's natural resources for unauthorized purposes is an unofficial act for which there is no immunity (**See Trump v. United States, 603 U.S. (2024))**.

Question: Where in the Indiana Constitution is there a grant of authority to use the People's natural resources for unauthorized purposes such as economic development funded with public money? Failure to show this constitutional provision means you understand and agree that the People's natural resources cannot be utilized for unauthorized uses and such resources must be conserved solely for constitutionally authorized purposes.

Please take final Notice it is my wish, order, and demand that you provide remedy by immediately ceasing and desisting using the People's natural resources for unauthorized purposes such as economic development funded with public money and by providing public notice of the same to all departments of all state and local governments within the State of Indiana. This order and demand includes the use of eminent domain to provide the People's natural resources for such unauthorized purposes.

If you believe that the government has been granted power to use the People's natural resources for unauthorized purposes, please respond by showing the constitutional grants of authority, or you agree that this practice is unlawful. Furthermore, please respond if you disagree with any of the claims in this Notice. All responses shall be made within five (5) days receipt of this Notice by sworn affidavit, point by point, under penalty of perjury, or you agree by tacit acquiescence to all claims herein, and this notice shall stand as evidence against you in all courts of record, that no court may rehear this matter, that this matter may be heard by an arbitrator of my choice, and that if remedy, as instructed, is not given, the People, to whom you swore an oath, will

recognize it as being done purposely, with full knowledge, malice, and intent. All responses not sworn under penalty of perjury are considered non-responses. This notice is sent in the peace and love of Jesus Christ that you provide due care to those who hold all political power, the People.

7/6/2026 _____ Autograph Jodi Stewart

Date

Maxim of Law: One lawfully commanding must be obeyed.

Maxim of Law: Judicial notice is a form of evidence.

You may respond by email:

Distribution list:
Indiana Governor Mike Braun
Indiana House of Representatives (All Members)
Indiana Senate (All Members)
Indiana Attorney General Todd Rokita
Indiana Supreme Court
Boone County Area Plan Commission
Boone County Council
Cc: City of Lebanon Common Council
City of Lebanon Mayor Matt Gentry
City of Lebanon Health Department
Boone County Health Department Board Members
City of Lebanon Utility Board Members
City of Lebanon Code Enforcement Officer Makada Love
IDEM Commissioner Clint Woods
Chief Judge Tanya Walton Pratt, United States District Court for the Southern District of Indiana; Chief Judge Holly A. Brady, United States District Court for the Northern District of Indiana; Chief Judge Diane S. Sykes, United States Court of Appeals for the Seventh Circuit;
Associate Justice Amy Coney Barrett, Supreme Court of the United States;

Stewart
4548 W. 50 S.
Lebanon, IN
46052

PLACE STICKER AT TOP OF ENVELOPE TO THE RIGHT OF THE RETURN ADDRESS, FOLD AT DOTTED LINE

CERTIFIED MAIL®

9589 0710 5270 2894 7655 81

Retail

INDIANAPOLIS IN

JUL 26

UNITED STATES POSTAL SERVICE®

46204

RDC 99

U.S. POSTAGE PAID
FCM LETTER
LEBANON, IN 46052
JUL 06, 2026

$6.37

S2324N502578-12

I.D.E.M.
Attn: Clint Woods
100 N. Senate Ave. Room 13W
Indpls. IN.
46204-2251

Received
State of Indiana
JUL 09 2026
Dept of Environmental Mgmt
Office of Air Quality

46204-221099

Indiana Department of Environmental Management
Office of Air Quality

Appendix C - Public Comment

Addendum to the Technical Support Document (ATSD) for a Part 70 Administrative Operating Permit

Source Background and Description

Source Name:	**Life Cycle Power**
Source Location:	**3602 West SR 32, Lebanon, IN 46052**
County:	**Boone**
SIC Code:	**4911 (Electric Services)**
Operation Permit No.:	**T 011-50087-00094**
Permit Reviewer:	**Phillip Jackson**

On August 5, 2026, Jodi Stewart submitted mailed comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit.

The comments are included below in their entirety.

Public Comments
011-50034-00093
011-50087-00094
August 2, 2026
cc: Phillip Jackson

Received
State of Indiana

AUG 05 2026

Dept of Environmental Mgmt.
Office of Air Quality

Phillip Jackson (Manager)
IDEM
Office of Air Quality Branch
Indiana Government Center North
100 N. Senate Avenue Room 13W
Indianapolis, IN 46204-2251

Mr. Jackson,

On July 6th, 2026 1 wrote to Commissioner Woods and served Judicial Notices outlining the People's guaranteed Constitutional rights. See enclosed documents.

Mr. Woods has not responded, so therefore has tacit acquiesced to all claims in the notices as being true, and correct.

You are being served the exact same Judicial notices, with the same amount of time to rebut any of the claims provided in the notice, or you will also tacit acquiesce to all claims made in the notice and We The People in Lebanon, IN. will recognize the approval and issuing of Air Permits to the Orla LLC project #011-50034-00093 as unlawful and with full knowledge, malice, and intent that you are infringing on the guaranteed Constitutional Rights of the People in Lebanon,

Judicial Notices, not rebutted, stand as evidence against you in all courts of record, and Mr. Woods was instructed to inform all Government agencies or agents working for The People to cease and desist supporting the use of Public money for non-public purposes and to conserve the quality of the People's Natural Resources.

Question: Where in the Indiana Constitution is there a grant of authority to use the People's natural resources for unauthorized purposes such as economic development funded with public money?

Thank you,

Jodi Stewart

Jodi Stewart, one of the People

July 6, 2026

Clint Woods (Commissioner)
IDEM
Office of Air Quality Permits Branch
Indiana Government Center North
100 N. Senate Avenue Room 13 W
Indianapolis, Indiana 46204-2251

Mr. Woods,

It has been brought to my attention that the Orla LLC project in Lebanon, Boone County, Indiana has recently applied for Air permits, Permit Number 011-50034-00093.

The employee listed as actively signing off on public notices and managing these permits for the Orla LLC shows Phillip Jackson, an Environmental Manager for IDEM since early 2024.

The people assembled, and determined this project directly infringes on Our guaranteed Indiana Constitutional rights, Article 1 Sec. 1, and Article 1 Sec. 31. "All political power is inherent in the People (Indiana Constitution Article 1 Section 1) and that the People have a right to lawfully instruct their government (Indiana Constitution Article 1 Section 31) and that entities, including corporations and bodies politic, are created with the permission of the People and are obligated to act in good faith and with due regard solely for the People's benefit."

Enclosed, you will find 2 Judicial Notices that We The People served to various elected Government servants both State and Federal on this Data Center Project. Elected Government servants were instructed to inform all agencies to cease and desist using any further Public money for this project, and to preserve the Peoples Natural Resources. To date we have received no response to either notice served, showing any government authority to use public money for non-public purposes, or that the people do not have a right to clean air, pure water, and to the preservation of the natural, scenic,

historic and esthetic values of the environment...public natural resources are the common property of all the people, including generations yet to come.

Question: Where in the Indiana Constitution is there a grant of authority to use public money for non-public purposes?

Question: Where in the Indiana Constitution is there a grant of authority to use the People's natural resources for unauthorized purposes such as economic development funded with public money?

It is, therefore, my wish, that you provide remedy by immediately ceasing and desisting using public money for non-public purposes and by providing public notice to cease and desist such use of public money to all departments of all state and local governments within the State of Indiana.

Thank you for your immediate attention to this unlawful matter.



Jodi Stewart, one of The People

Judicial Notice and Demand to Conserve The People's Natural Resources
Notice to Agent is Notice to Principal and Notice to Principal is Notice to Agent

I, Jodi Stewart, one of the People as seen in the 50 State Constitutions, (Republican in form), Sui Juris, do present you, Phillip Jackson this Notice, by Necessity, that you and your agents may provide immediate due care:

Please take notice that all political power is inherent in the People (**Indiana Constitution Article 1 Section 1**) and that the People have a right to lawfully instruct their government (**Indiana Constitution Article 1 Section 31**) and that entities, including corporations and bodies politic (government), are created with the permission of the People and are obligated to act in good faith and with due regard solely for the People's benefit. (See evidence below)

Maxim of Law: Good faith demands that what is agreed upon shall be done.
Maxim of Law: The welfare of the people is the supreme law; And

Please take further notice that beginning on November 26, 2024 the People have served over one hundred (100) notices to local and state government officers, instructing elected officers, as the People's government servants, to provide remedy in order to cease and desist using public money for non-public purposes such as economic development and showing claims, each of which were supported by the express-written constitutional text, the highest law, and maxims of law (which are automatically implied in any contract and universally accepted as being true rules and principles of law). This notice also instructed State government servants to provide public notice to all departments of all state and local governments within the State of Indiana and gave specific amounts of time to rebut or contradict the law and claims provided by the People. The People received no public response that in any way followed the terms stated in the notice. The People recognize that all noticed government servants have tacitly acquiesced to such claims. The notice was read into the public record during the Lebanon City Council meeting December 9, 2024 (see evidence at the following link: https://www.youtube.com/watch?v=ds2-jnGtVRw#t=18m44s); And

Please take further notice that all 50 State Constitutions and the Constitution of the United States of America are the highest law and that the People's natural resources, such as water, belong to them and that the government exists to preserve such resources for the benefit of the People. (See evidence below).

Pennsylvania Constitution Article 1 Section 27 - Natural Resources and the Public Estate: The people have a right to clean air, pure water, and to the preservation of the natural, scenic, historic and esthetic values of the environment. ..public natural resources are the common property of all the people, including generations yet to come. (Excerpt)

Hawaii Constitution Article 11 Section 1 - Conservation and Development of Resources: All public natural resources are held in trust by the State for the benefit of the people. (Excerpt) (See also Louisiana Constitution Article 9 Section 1, Rhode Island Constitution Article 1 Section 17, Alaska Constitution Article 8 Section 2, Montana Constitution Article 9 Section 1, Michigan Constitution Article 4 Section 52, North Carolina Constitution Article 14 Section 5, Texas Constitution Article 16 Section 59, and Virginia Constitution Article 11 Section 1); And

Please take further notice that the conservation of the People's natural resources is an unavoidable obligation and the use of the People's natural resources for unauthorized purposes is an unofficial act for which there is no immunity (**See Trump v. United States, 603 U.S. (2024))**.

Question: Where in the Indiana Constitution is there a grant of authority to use the People's natural resources for unauthorized purposes such as economic development funded with public money? Failure to show this constitutional provision means you understand and agree that the People's natural resources cannot be utilized for unauthorized uses and such resources must be conserved solely for constitutionally authorized purposes.

Please take final Notice it is my wish, order, and demand that you provide remedy by immediately ceasing and desisting using the People's natural resources for unauthorized purposes such as economic development funded with public money and by providing public notice of the same to all departments of all state and local governments within the State of Indiana. This order and demand includes the use of eminent domain to provide the People's natural resources for such unauthorized purposes.

If you believe that the government has been granted power to use the People's natural resources for unauthorized purposes, please respond by showing the constitutional grants of authority, or you agree that this practice is unlawful. Furthermore, please respond if you disagree with any of the claims in this Notice. All responses shall be made within five (5) days receipt of this Notice by sworn affidavit, point by point, under penalty of perjury, or you agree by tacit acquiescence to all claims herein, and this notice shall stand as evidence against you in all courts of record, that no court may rehear this matter, that this matter may be heard by an arbitrator of my choice, and that if remedy, as instructed, is not given, the People, to whom you swore an oath, will recognize it as being done purposely, with full knowledge, malice, and intent. All responses not sworn under penalty of perjury are considered non-responses. This notice is sent in the peace and love of Jesus Christ that you provide due care to those who hold all political power, the People.

8/2/2026 Autograph Jodi Stewart

Date

Maxim of Law: One lawfully commanding must be obeyed.
Maxim of Law: Judicial notice is a form of evidence.

You may respond by email: jstewart62767@gmail.com

Distribution list:
Indiana Governor Mike Braun
Indiana House of Representatives (All Members)
Indiana Senate (All Members)
Indiana Attorney General Todd Rokita
Indiana Supreme Court
Boone County Area Plan Commission
Boone County Council
Cc: City of Lebanon Common Council
City of Lebanon Mayor Matt Gentry
City of Lebanon Health Department
Boone County Health Department Board Members
City of Lebanon Utility Board Members
City of Lebanon Code Enforcement Officer Makada Love
IDEM Commissioner Clint Woods
IDEM Manager Phillip Jackson
DNR Director Alan Morrison New Director Kevin Mahan
Ryan Ottinger Water and Wastewater Operations Manager
Chief Judge Tanya Walton Pratt, United States District Court for the Southern District of Indiana; Chief Judge Holly A. Brady, United States District Court for the Northern District of Indiana; Chief Judge Diane S. Sykes, United States Court of Appeals for the Seventh Circuit;
Associate Justice Amy Coney Barrett, Supreme Court of the United States;

Notice and Demand to Cease and Desist Using Public Money for Non-Public Purposes Such as Economic Development
Notice to Agent is Notice to Principal and Notice to Principal is Notice to Agent

To: Indiana Governor Eric Holcomb; Indiana House of Representatives (All Members); Indiana Senate (All Members); Indiana Attorney General Todd Rokita; Indiana Supreme Court
Cc: City of Lebanon Common Council Members; City of Lebanon Mayor Matt Gentry; Chief Judge Tanya Walton Pratt, United States District Court for the Southern District of Indiana; Chief Judge Holly A. Brady, United States District Court for the Northern District of Indiana; Chief Judge Diane S. Sykes, United States Court of Appeals for the Seventh Circuit; Associate Justice Amy Coney Barrett, Supreme Court of the United States;

Indiana Governor-Elect Mike Braun; Indiana Lieutenant Governor-Elect Micah Beckwith, Clint Woods, IDEM Commissioner, Phillip Jackson IDEM Manager

I, Jodi Stewart, one of the People (as seen in the **Indiana Constitution, Article 1, Section 1**), (Republican in form), Sui Juris, do serve you, Philip Jackson this Notice, by Necessity, that you do provide immediate due care:

Please take notice that all political power is inherent in the People (Indiana Constitution Article 1 Section 1) and that the People have a right to lawfully instruct their government (Indiana Constitution Article 1 Section 31) and that entities, including corporations and bodies politic, are created with the permission of the People and are obligated to act in good faith and with due regard solely for the People's benefit. (See evidence below)
Maxims of Law: Good faith demands that what is agreed upon shall be done.
Maxims of Law: The welfare of the people is the supreme law; And

Please take further notice that all government servants have an unavoidable obligation to use public money for public purposes and that the use of public money for a purpose without constitutional authority is an unofficial act for which there is no immunity (**Trump v. United States, 603 U.S. 593 (2024)**). In Black's Law Dictionary 1st edition, taxes are defined as "burdens or charges imposed by the legislature upon persons or property to raise money for **public purposes**" and in Black's Law Dictionary 2nd edition, **public purpose** is defined as "in the law of taxation,.. .this is a term.. .to distinguish the objects for which, according to settled usage, the government is to provide, from those which, by the like usage, are left to private interest, inclination, or liberality." Authority granted in the constitutions must be used exactly as specified without any departure. Furthermore, if the constitutions do not expressly grant such authority, it does not exist. (Excerpts) (See evidence below) (Bolded for emphasis)
Maxims of Law: From the words of the law there must be no departure.
Maxims of Law: The expression of one thing is the exclusion of another; And

Please take further notice that according to settled usage and the text, history, and tradition in constitutions, economic development is not a public purpose. (See evidence below)

North Dakota Constitution Article I Section 16: ...a public use or a **public purpose** does not include public benefits of economic development, including an increase in tax base, tax revenues, employment, or general economic health. (Excerpt) (Bolded for emphasis) (**See also Louisiana Constitution Article I Section 4**)

Loan Association vu Topeka, 87 U.S. 655 (1874): We have established, we think, beyond cavil that there can be no lawful tax which is not laid for a **public purpose**. It may not be easy to draw the line in all cases so as to decide what is a public purpose...in the case before us...there is no difficulty in holding that this is not such a **public purpose** as we have been considering. If it be said that a benefit results to the local public of a town by establishing manufactures, the same may be said of any other business or pursuit which employs capital or labor...No line can be drawn in favor of the

manufacturer which would not open the coffers of the public treasury to the importunities of two-thirds of the businessmen of the city or town. (Excerpt) (Bolded for emphasis) (**See also Parkersburg v. Brown, 106 U.S. 487 (1883) and Cole v. La Grange, 113 U.S. 1 (1885)**); And

Please take further notice that the fact that public money has already been used for non-public purposes creates no validity to continue to use public money for such purposes. (See evidence below)
Maxims of Law: Things invalid from the beginning cannot be made valid by subsequent act.

Loan Association v. Topeka, 87 U.S. 655 (1874): If the legislature was without power...and its statute...is void, payment of interest, which was equally unauthorized, cannot create...a power to levy taxes resting on...the fact that they have once been illegally levied for that purpose. (Excerpt)
Question: Where in the Indiana Constitution is there a grant of authority to use public money for non-public purposes? Failure to show this constitutional provision means you understand and agree that public money cannot be used for non-public purposes.

It is, therefore, my wish, order, and demand that you provide remedy by immediately ceasing and desisting using public money for non-public purposes and by providing public notice to cease and desist such use of public money to all departments of all state and local governments within the State of Indiana. If you believe that government has been granted power to use public money for non-public purposes, please show the constitutional grants of authority within five (5) days, by sworn affidavit, under penalty of perjury, or you agree that this practice is unlawful and that failure to openly express the same is done with full knowledge, malice, and intent and shall be evidence in this court of record, heard by an arbitrator of my choice. All responses not submitted under penalty of perjury are non-responses. (Any response from an attorney not directly addressed by this notice will be considered a non-response)
This notice is sent in the peace and love of Jesus Christ that you provide due care to those who hold all political power, the People.

Josh Stewart Autograph 8/2/2026 Date

Maxims of Law: One lawfully commanding must be obeyed. Maxims of Law: Judicial notice is a form of evidence.

Stewart 4548 W. 500 S
Lebanon, IN
46052


CERTIFIED MAIL



9589 0710 5270 0039 5856 43

Retail





46204

RDC 99

U.S. POSTAGE PAID
FCM LETTER
LEBANON, IN 46052
AUG 03, 2026


$6.66

S2324N502578-5

IDEM
Attn: Phillip Jackson
Office of Air Quality Branch
100 N. Senate Ave. Room 13W
Indpls, IN.
46204-2251

Received
State of Indiana
AUG 05 2026
Dept of Environmental Mgmt
Office of Air Quality

4620422210 C020



Indiana Department of Environmental Management
Office of Air Quality

Appendix D - Public Comment

Addendum to the Technical Support Document (ATSD) for a Part 70 Administrative Operating Permit

Source Background and Description

Source Name:	**Life Cycle Power**
Source Location:	**3602 West SR 32, Lebanon, IN 46052**
County:	**Boone**
SIC Code:	**4911 (Electric Services)**
Operation Permit No.:	**T 011-50087-00094**
Permit Reviewer:	**Phillip Jackson**

On August 6, 2026, Sam Carpenter, on behalf of the Hoosier Environmental Council, submitted mailed comments to IDEM, OAQ on the draft Part 70 Administrative Operating Permit.

The comments are included below in their entirety.

HOOSIER ENVIRONMENTAL COUNCIL
3951 N. Meridian Street, Suite 100, Indianapolis, IN 46208
(317) 685-8800 | hecweb.org | comments@hecweb.org

August 6, 2026

VIA ELECTRONIC MAIL (PJackso@idem.IN.gov)

Phillip Jackson
Indiana Department of Environmental Management
Office of Air Quality – Permits Branch
100 North Senate Avenue, MC 61-53, Room 1003 Indianapolis,
IN 46204-2251

RE: Public Comments on Proposed Title V and Construction Permits
Life Cycle Power, Permit No. T 011-50087-00094
Orla, LLC, Permit No. T 011-50034-00093 Boone
County, Indiana

Dear Mr. Jackson:

The Hoosier Environmental Council ("HEC") submits the following comments regarding the draft Title V operating permits and associated construction permits proposed for Life Cycle Power ("Life Cycle Power") and Orla, LLC ("Orla") in Lebanon, Boone County, Indiana. HEC is Indiana's largest statewide environmental advocacy organization and has a direct interest in ensuring that Indiana's air permitting decisions adequately protect the health and welfare of Hoosiers, including residents near the data centers and associated power-generation infrastructure now being sited across central Indiana.

These comments are submitted within the public comment period IDEM has established for both permits, which closes on August 10, 2026. HEC intends to participate in the joint public hearing scheduled for August 6, 2026, and respectfully requests that these written comments be entered into the administrative record for both permit proceedings.

SUMMARY OF COMMENTS AND REQUESTED ACTIONS

HEC requests that IDEM, before finalizing either permit:

1. Require that both permits be amended in tandem whenever a change to either facility affects the combined source's potential to emit, that recordkeeping and reporting under both permits be reconciled on a common schedule, and that future permit modification proceedings for either facility provide notice referencing both permit numbers (see Comment 1, below).
2. Require the applicant to disclose its actual anticipated startup, shutdown, and load-following dispatch pattern for the 65-engine fleet, and either limit the number of startup and shutdown events per engine consistent with the assumptions used to calculate potential to emit, or require short-term ambient air quality modeling based on a realistic cycling operating scenario (see Comment 2, below).

3. Require a fleet-wide testing and monitoring protocol for the 65 Life Cycle Power generators adequate to assure continuous compliance, in place of the proposed protocol of testing ten of sixtyfive units, repeated once every five years (see Comment 3, below).

4. Require ambient air toxics modeling for hazardous air pollutants, particularly formaldehyde, and require the permit to clearly and specifically state the applicable NESHAP-based hazardous air pollutant limits and work-practice standards (see Comment 4, below).

5. Require the applicant to document, in the public record, the factual and legal basis for classifying the combined facility outside the twenty-eight source categories subject to the lower, 100 ton-peryear Prevention of Significant Deterioration major source threshold, including the facility's total heat input in British thermal units per hour (see Comment 5, below).

6. Require Orla to state, on the record, the specific circumstances under which its diesel generators are expected to operate, consistent with IDEM's obligation to provide the legal and factual basis for applying the emergency-generator provisions (see Comment 6, below).

7. Require IDEM and the applicants to disclose the factual basis for the 500-hour annual operating assumption used to calculate the Orla emergency generators' potential to emit, and to explain the degradation, startup, loading, and operational assumptions underlying the 25.4-ton NOx and 17.2ton CO limits (see Comment 7, below).

8. Require Orla to finalize its emergency generator equipment selection before permit issuance, rather than presenting two parallel, undecided equipment options (see Comment 8, below).

9. Require the applicant to disclose its anticipated engine cycling pattern and require short-term ambient air quality analysis capable of capturing its localized impacts (see Comment 9, below).

10. Require the applicant to disclose what assumptions regarding expected emergency-generator operating hours were used in evaluating the facility's operating profile, and what reliability or failure-mode analysis has been performed for its anticipated duty cycle (see Comment 10, below).

COMMENT 1: THE PERMITS SHOULD PROVIDE FOR COORDINATED AMENDMENT AND RECORDKEEPING GIVEN IDEM'S SINGLE-SOURCE DETERMINATION

IDEM's own technical support documents for both permits determine that Life Cycle Power and Orla constitute a single facility for purposes of major source review and Title V applicability. Specifically, IDEM has found that Orla owns the parcel on which both facilities sit and leases a portion of it to Life Cycle Power; that the two entities lack common ownership but satisfy IDEM's common-control test because Life Cycle Power was built for the purpose of, and delivers approximately 95 percent of its output to, Orla; and that a support-facility relationship independently exists because Orla "cannot operate" without power supplied by Life Cycle Power. Having reached that conclusion, IDEM nonetheless proposes to issue two administratively separate permits, describing the Life Cycle Power permit as issued "solely for administrative purposes."

HEC agrees with IDEM's single-source finding, which appears well-supported on this record: treating Life Cycle Power and Orla as a single source is preferable to permitting them as separate sources, which would allow each facility to operate just under the 250 ton-per-year Prevention of Significant Deterioration threshold individually, rather than requiring their combined emissions to remain under that limit. HEC does

ask IDEM to ensure that administrative separation does not, in practice, obscure the cumulative emissions picture, weaken enforcement, or split public review of what all parties agree is a single, integrated power and computing operation. HEC requests that IDEM confirm, in the final permits or an accompanying record, that: (a) both permits will be amended in tandem whenever a change to either facility affects the combined source's potential to emit; (b) recordkeeping and reporting under both permits will be reconciled on a common schedule so that combined emissions can be verified on an ongoing basis rather than reconstructed after the fact, consistent with Title V's purpose of consolidating a source's existing air pollution requirements into a single document to facilitate compliance monitoring, see Sierra Club v. Leavitt, 368 F.3d 1300, 1302 (11th Cir. 2004); and (c) any future permit modification proceeding for either facility will provide notice referencing both permit numbers, given the interdependence IDEM itself has found.

LIFE CYCLE POWER PERMIT (T 011-50087-00094)

COMMENT 2: The Permit Does Not Limit Startup, Shutdown, or Load-Following Events for the 65Engine Fleet

The potential-to-emit calculations underlying the Life Cycle Power permit's annual tonnage limits model each of the 65 engines as operating in essentially continuous, baseload service: 8,695 of 8,760 hours per year, with startups and shutdowns occurring only eight times per year per engine, tied to scheduled maintenance at roughly 1,000-hour intervals. The application's own supporting calculations state, however, that "the operating scenarios represented in the table are for maximum potential emissions estimation purposes only" and "shall not be used to limit the maximum hours of operation, number of SUSD events, or amount of natural gas firing." No provision of either draft permit imposes such a limit either: neither permit caps the number of startup or shutdown events per engine, nor sets any hourly or short-term emission rate limit, nor restricts ramp rate.

HEC requests that IDEM require a permit condition limiting startup and shutdown events per engine consistent with the assumptions used to calculate potential to emit, or, in the alternative, require the applicant to justify why no such limit is warranted. The implications of this gap for data center load variability and equipment reliability are addressed further in Comment 9 below.

COMMENT 3: The Proposed Testing Protocol Does Not Assure Continuous Compliance Across a 65Unit Fleet

The permit authorizes 65 individual Caterpillar G3516H natural gas engines (2,763 hp / 2,060 kW each), each equipped with its own selective catalytic reduction (SCR) and oxidation catalyst system. The compliance demonstration in the draft permit requires performance testing of only a "representative sample of ten (10)" of the 65 units within 180 days of the startup of that group, with retesting of a new sample of ten units "once every five (5) years" thereafter (Draft Permit Condition D.1.7, citing 326 IAC 2-1.1-11).

At that rate, IDEM would not obtain direct stack-test data on every individual engine's control performance for more than three decades, since covering all 65 units even once would take roughly 6.5 testing cycles at five years apiece. In the interim, compliance for any untested engine rests entirely on the inference that it performs identically to whichever ten units were most recently sampled, notwithstanding that each unit's SCR and oxidation catalyst can degrade, be damaged, or be improperly maintained independently of its 64 sister units. 326 IAC 2-7-5(3) requires that, where an applicable requirement does not itself specify periodic testing, a Title V permit's monitoring provisions be sufficient to yield reliable data that are representative of the source's compliance. HEC does not believe a testing schedule that would take decades to test the full

fleet satisfies that standard, regardless if the stated goal is for grid interconnection and removal of the engines at the end of 2027. HEC requests that IDEM require a testing frequency and sample size proportional to the number of units — for example, annual testing of a rotating sample sufficient to cover the full fleet within a five-year period.

COMMENT 4: Hazardous Air Pollutant Emissions Warrant Ambient Modeling, and the Permit Should Clearly State the Applicable NESHAP Limits

IDEM's technical support document calculates the facility's controlled, source-wide potential to emit formaldehyde, a human carcinogen, at 111.95 tons per year, more than eleven times the 10 ton-per-year threshold that itself defines major-source status for a single hazardous air pollutant. Combined hazardous air pollutant potential to emit is calculated at 136.21 tons per year, more than five times the 25 ton-per-year combined-HAP major source threshold.

The permit does not itself state an enforceable numeric limit on the facility's hazardous air pollutant emissions. Because the facility is a major source of HAPs, however, it is independently subject to the technology- and work-practice-based standards in NESHAP Subparts ZZZZ and DDDDD: a formaldehyde emission limit applies to Life Cycle Power's engines under 40 CFR Part 63, Subpart ZZZZ, Table 2a (line 2), and a biennial tune-up work-practice standard applies to the regasification boilers under 40 CFR 63.7540(a)(11). The draft permit incorporates these standards only by citing the underlying regulations rather than stating the specific applicable limits and requirements. Nor does the administrative record reflect that any ambient dispersion modeling or air toxics screening has been performed to characterize resulting exposure at nearby residences and other occupied structures, notwithstanding the original application's own acknowledgment, at page 3-1, that such modeling might be warranted. Given the proximity to residents and the Eli Lilly facility, HEC requests that IDEM require, prior to final permit issuance, ambient air quality modeling for formaldehyde and other significant hazardous air pollutants emitted by the facility, sufficient to characterize exposure at the nearest residences and other sensitive receptors. HEC also requests that IDEM restate the applicable NESHAP limits and work-practice standards directly in the permit itself; HEC recognizes that IDEM's authority to impose HAP limits beyond these federal standards may be limited, but to the extent such authority exists, HEC requests that IDEM consider an enforceable annual tonnage limit on total facility-wide hazardous air pollutant emissions comparable in kind to the tonnage limits already imposed on NOx, VOC, and CO.

COMMENT 5: IDEM Should Document the Basis for Its Determination That the Facility Falls Outside the Twenty-Eight Source Categories

The draft permit treats this facility as subject to a 250 ton-per-year Prevention of Significant Deterioration major source threshold rather than the 100 ton-per-year threshold applicable to the 28 source categories enumerated at 326 IAC 2-2-1(ff). Category (ff)(1)(A) applies to "[f]ossil fuel-fired steam electric plants of more than two hundred fifty million (250,000,000) British thermal units per hour heat input." The technical support document states only that the facility is not within that category, without explaining whether that conclusion rests on the facility not qualifying as a "fossil fuel-fired steam electric plant," on the facility's heat input falling below 250 million BTU/hr, or on some other basis — and without stating the facility's total heat input in BTU/hr at all, a figure necessary to make that determination. 326 IAC 2-7-8(d) requires IDEM to provide a technical support document that sets forth the legal and factual basis for draft Part 70 permit conditions. Given that this facility is, functionally, a fossil-fuel combustion electric generating operation of substantial scale — with a combined nameplate capacity of approximately 134 megawatts —

HEC requests that IDEM's technical support document state: (1) whether the facility is excluded from category (ff)(1)(A) because it does not qualify as a "fossil fuel-fired steam electric plant," because its heat input does not exceed 250 million BTU/hr, or both; and (2) the facility's calculated total heat input in BTU/hr supporting that conclusion.

ORLA, LLC PERMIT (T 011-50034-00093)

COMMENT 6: The "Emergency" Classification of a 39-Megawatt Generator Fleet Warrants Further Justification

The Orla permit authorizes twelve diesel-fired generators, each rated at approximately 4,350 to 4,376 brake horsepower (a combined nameplate capacity of roughly 39 megawatts), classified and regulated as "emergency" units under 40 CFR Part 60, Subpart IIII, and 40 CFR Part 63, Subpart ZZZZ. Under 40 CFR 60.4211(f) and 40 CFR 63.6640(f), an engine retains its emergency classification, and the reduced regulatory burden that comes with it, only if its operation is limited to genuine emergencies, maintenance and readiness testing, and the limited categories of non-emergency operation allowed within the federal rule's 100-hour annual allowance; an engine operated outside those bounds "will not be considered an emergency engine" and must instead meet the more stringent requirements applicable to non-emergency units.

This is not a generic backup power arrangement. The primary power source for the co-located data center is, by design, an off-site utility grid connection that does not yet exist; in its place, Life Cycle Power's fleet of 65 new reciprocating engines is expected to provide primary power for a period that is not clearly defined but is likely to span multiple years, on a first-of-its-kind basis for this developer, drawing on a fuel supply chain, trucked liquefied natural gas, on-site regasification, and pipeline gas not yet connected, with more potential points of interruption than a conventional utility feed. As discussed in Comment 10 below, the reliability of that fleet may itself be affected by the load-following cycling it is expected to perform. HEC does not suggest that IDEM has misapplied the emergency-engine rules as written. HEC does ask IDEM to require the applicant to state, on the record, the specific circumstances under which Orla's diesel generators are expected to operate, and to confirm that the facility's actual anticipated reliance on those generators is consistent with genuine emergency use rather than routine or foreseeable supplementation of an admittedly novel primary power arrangement. Under 326 IAC 2-7-8(d), IDEM must provide a technical support document setting forth the legal and factual basis for draft permit conditions; HEC requests that IDEM treat the basis for applying the emergency-generator provisions to Orla's fleet as part of that required showing, rather than assuming the classification is self-evident from the equipment type alone.

COMMENT 7: IDEM Should Reconcile the 500-Hour Planning Basis With the Applicable Federal Standard

IDEM's own technical support document calculates the "unrestricted" potential to emit for Orla's emergency generators using an assumed 500 hours of operation per year, five times the 100-hour combined ceiling for maintenance, testing, and limited non-emergency use that ordinarily applies to emergency engines under 40 CFR 60.4211(f) and 40 CFR 63.6640(f). The technical support document further acknowledges that operating at the full 500 hours would push the combined facility's potential emissions above the Prevention of Significant Deterioration major source threshold, which is why the permit instead caps total annual emissions from the twelve generators at 25.4 tons of NOx and 17.2 tons of CO, in lieu of a fixed hour limit.

HEC does not object to the use of an annual tonnage limit as an enforcement mechanism. HEC does request that IDEM disclose the specific factual basis for using a 500-hour planning assumption in the first instance, since that figure exceeds what the federal emergency-engine framework itself would allow for legitimate maintenance, testing, and limited non-emergency operation. If the 500-hour figure reflects an anticipated need for backup power beyond routine testing, that anticipated need should be documented and considered in evaluating whether these units are properly classified as "emergency" generators at all, consistent with Comment 6 above and Comment 10 below.

The 25.4-ton NOx and 17.2-ton CO limits illustrate why the assumptions built into the compliance determination equations matter: the technical support document states directly that these limits exist specifically to keep the combined facility under the Prevention of Significant Deterioration threshold, meaning the two figures function as a regulatory boundary rather than an independently derived air-quality judgment. The current record indicates a margin of roughly 60 to 90 tons per year between the combined facility's calculated potential to emit and the 250 ton-per-year threshold for each PSD-regulated pollutant, which appears to leave reasonable room for the Orla units to remain within their individual limits; HEC does not ask IDEM to revisit that margin here. HEC does request that IDEM require the applicant to document: (1) what assumptions regarding catalyst or control-equipment degradation over time were incorporated into the compliance determination equations used to calculate emissions against these limits, given that such equations typically apply a fixed, rated emissions factor to actual operating hours without independently accounting for performance degradation over the equipment's service life; (2) what startup and loading assumptions underlie the emissions calculations supporting these limits; (3) what operational assumptions, including anticipated frequency and duration of use, were used to support the 25.4-ton and 17.2-ton figures; and (4) whether any uncertainty or sensitivity analysis was performed to test how much these assumptions could vary before the PSD-avoidance conclusion would no longer hold.

COMMENT 8: The Permit Should Not Issue Until Generator Equipment Is Finalized

The draft permit presents parallel emission unit descriptions for two different generator models — a Caterpillar C175-16 and a Cummins C3000 D6e — without indicating which the applicant will actually install. Because emission factors, and therefore enforceable limits, differ between the two options, HEC requests that IDEM require the applicant to finalize its equipment selection before the permit is issued, so that the public and IDEM alike are evaluating an enforceable, as-built permit rather than two hypothetical configurations. The technical support document states that both generator options will be permitted, with the applicant to submit a later application to remove whichever option is not selected. HEC requests that IDEM explain the legal and technical basis for authorizing two complete, alternative equipment configurations simultaneously rather than requiring a finalized selection before initial permit issuance, and describe what mechanism will ensure the unselected configuration is formally and enforceably removed. Under 326 IAC 2-7-8(d), that explanation should form part of the technical support document's required legal and factual basis for the permit's conditions.

VARIABLE DATA CENTER LOAD AND THE RISK OF INCREASED RELIANCE ON DIESEL BACKUP

COMMENT 9: Data Center Load Variability May Require Far More Frequent Engine Cycling Than the Permit's Emissions Estimates Assume

This facility is not expected to serve a flat, continuous load. It exists to power a data center campus of a kind now documented to produce substantial, short-timescale power demand fluctuations, particularly

where AI training or inference workloads are involved; published grid-reliability research has recorded load swings of hundreds of megawatts within seconds to minutes, and gigawatt-scale swings within tens of seconds, at comparable AI data center sites (North American Electric Reliability Corp., 2026 State of Reliability (2026)). Reciprocating engines of the kind proposed here are frequently selected for behind-the meter data center power precisely because they can start, stop, and ramp quickly enough to track that kind of variable load, unlike combined-cycle turbines. If Life Cycle Power in practice operates its fleet by cycling individual engines online and offline, or up and down in load, to track the data center's real-time demand, the number of startup and shutdown events discussed in Comment 2 above — and the corresponding uncontrolled emissions, which the application's own factors show at several times the controlled rate for NOx, CO, and VOC — could be far higher than the permit's own potential-to-emit calculations assume.

HEC's concern here is not primarily that this would cause the facility to exceed its annual tonnage caps, since the modeled contribution from startup and shutdown events is small relative to those caps even at several times the assumed frequency. It is that neither draft permit, nor either technical support document, includes any hourly, daily, or other short-term ambient air quality analysis that would capture the specific risk this pattern creates: short-term spikes in ambient NOx, CO, and VOC concentrations near the site, concentrated in time around each startup and shutdown event, rather than the smooth, continuous-operation profile the annual-average analysis implicitly assumes.

COMMENT 10: Frequent Cycling Also Increases the Risk of Engine Malfunction, Which Could Increase Reliance on Orla's "Emergency" Diesel Generators

The reliability implications of a load-following dispatch pattern extend beyond emissions control performance. Repeated starting, stopping, and thermal cycling is well documented to accelerate component wear and failure relative to steady, continuous operation: published analyses of power plant cycling have found that generator rotor components designed to withstand on the order of 10,000 starts can show crack initiation within as few as 200 to 300 starts once moved from baseload to cyclic duty (Bill Moore, Is Your Generator Fit for Cyclic Duty?, Modern Power Systems (Feb. 23, 2024)), and industry literature on catalyst systems confirms that frequent starts and wider load swings place substantially greater strain on control equipment than the steady-state conditions those systems were designed around (Emissions Catalyst Issues for Fast-Start Combined Cycle Power Plants, POWER Magazine (July 1, 2016)). HEC raises this concern because increased wear resulting from frequent cycling may affect emissions-control performance, maintenance frequency, reliability, and resulting dependence on emergency generation — each of which bears directly on this air permitting proceeding.

HEC recognizes that a fleet of 65 individual engines offers some redundancy against the failure of any single unit. That redundancy does not fully resolve this concern if the engines are being cycled together, or in overlapping groups, to track a shared and highly variable data center load: in that scenario, wear and potential malfunction are not independent, random events spread evenly across the fleet, but a common stressor acting on many units at once, in direct response to the same load swings the facility exists to serve.

This matters directly for the Orla, LLC permit. Orla's twelve diesel-fired generators are authorized as "emergency" backup, discussed in Comment 6 above, and Life Cycle Power's fleet is the data center's sole source of power absent a utility grid connection. Recent reporting has documented instances in which data centers relying on behind-the-meter gas generation experienced generator outages requiring extended emergency diesel generator operation (Katie Fehrenbacher, Off-grid data centers aren't the panacea that some AI firms hoped, Axios, July 27, 2026). While this does not establish that similar events will occur at

the proposed facility, it demonstrates that extended reliance on emergency generation is a foreseeable operating scenario that warrants evaluation. If frequent cycling increases the rate of unplanned engine outages or malfunctions across the Life Cycle Power fleet beyond what the near-baseload operating assumption underlying its permit contemplates, the practical result could be more frequent, and less genuinely "emergency," reliance on Orla's diesel generators to make up the shortfall. HEC requests that IDEM require the applicants to disclose: (1) what assumptions regarding expected emergency-generator operating hours were used in evaluating the facility's operating profile; (2) the anticipated frequency of engine starts, stops, and load changes across the 65-unit fleet under normal data center operation; (3) any reliability or failure-mode analysis performed for that anticipated duty cycle; and (4) how that anticipated duty cycle was reconciled, if at all, with the operating assumptions used to calculate potential to emit for both permits and to justify the emergency classification of Orla's generators.

CONCLUSION

HEC appreciates IDEM's consideration of these comments and requests that IDEM address each item above, in writing, before either permit is finalized. HEC further requests that it be added to the service list for any subsequent notices, responsiveness summaries, or proceedings related to either permit number referenced above.

Respectfully submitted,

Sam Carpenter
Executive Director
Hoosier Environmental Council

Indiana Department of Environmental Management
Office of Air Quality

Technical Support Document (TSD) for a Part 70 Administrative Operating Permit

Source Description and Location	
Source Name:	**Life Cycle Power**
Source Location:	**3602 West SR 32, Lebanon, IN 46052**
County:	**Boone**
SIC Code:	**4911 (Electric Services)**
Operation Permit No.:	**T 011-50087-00094**
Permit Reviewer:	**Phillip Jackson**

Source Definition

The following plants are considered in the source determination:

(a) Orla, LLC (011-00093), 3062 West SR 32, Lebanon, IN 46052 - This source owns and operates a stationary Data Center.

(b) Life Cycle Power (011-00094), 3602 West SR 32, Lebanon, IN 46052 - This source is a stationary greenfield power generating facility.

Orla, LLC owns the entire parcel of land that both Plants reside on but is leasing out a section of the parcel to Life Cycle Power.

IDEM's Nonrule Policy Documents Air-005 applies to the definition of "major source" in 326 IAC 2-7-1(20). IDEM's Nonrule Policy Document Air-006 provides additional policy guidance to permitting on-site contractors. All of IDEM's nonrule policy documents are available at https://www.in.gov/idem/resources/nonrule-policies/effective-nonrule-policies/ on IDEM's website.

IDEM, OAQ has examined whether these plants are part of the same Part 70 major source. The term "major source" is defined at 326 Indiana Administrative Code 2-7-1(20). The Indiana Administrative Code is available at http://www.in.gov/legislative/iac/iac_title?iact=326 on the Internet. In order for these plants to be considered as a major source under 326 IAC 2-7-1(20)(B) and (C), all three of the following criteria must be met:

(a) The plants must have common ownership and/or control;

(b) The plants must have the same two-digit Standard Industrial Classification (SIC) Code or one must serve as a support facility to the other; and

(c) The plants must be located on the same, contiguous or adjacent properties.

First Criteria - Common Ownership or Control:
The first criteria to be considered is whether these plants are under common ownership or control. NPD Air-005 states:

Common ownership may exist in several forms.
- If a third party has ownership of fifty-one percent (51%) or more in each of two (2) or more entities, common ownership exists.
- If two (2) or more entities share common corporate officers, in whole or in substantial part, who are responsible for the day-to-day operations of the entities, common ownership exists.

- If one entity has fifty-one percent (51%) or greater ownership of another entity, common ownership exists.

  Life Cycle Power resides on the land that Orla, LLC owns, but there is no shared ownership (no common corporate officers, no common owner, etc). Common ownership does not exist.

Common Control Test:
Absent common ownership, common control may still exist. NPD Air-005 sets out two independent tests to determine if common control exists when there is no common ownership. Both tests examine the relationship between an auxiliary activity and a primary activity. If either test is satisfied, common control exists.

a. Two-pronged Test to Determine Common Control:
The first test common control test determines whether one plant or facility performs an activity which directly serves the purpose of the primary activity and whether the owner or operator of the primary activity has a major role in the day-to-day operations of the other plant's or facility activity.

1st Prong
Whether the plant's or facility's activity directly serves the purpose of a primary activity by supplying a necessary raw material to the primary activity or performing an integral part of the production process for the primary activity.

2nd Prong
Day-to-day control of the plant or facility activity by the primary activity may be evidenced by several factors, including:
- Is a majority of the output of the plant or facility provided to the primary activity?
- Can the plant or facility contract to provide its products/services to a third-party without the consent of the primary activity?
- Can the primary activity assume control of the auxiliary activity under certain circumstances?
- Is the plant or facility required to complete periodic reports to the primary activity?

If one or a combination of these questions is answered affirmatively, common control may exist.

Life Cycle cannot provide electricity to the grid or other sources. Lifecyle is being constructed solely for the purpose of providing electricity to Orla, LLC. The Orla, LLC plant cannot operate without electricity from the Life Cycle Power plant. Life Cycle Power directly serves the purpose of Orla, LLC's operation by providing an integral part to Orla, LLC's operation, therefore the 1st prong of the common control is satisfied.

Since the Two-pronged Test is sufficient, the But/For Test is not required.

Common Control Test - Conclusion:
Since Life Cycle Power provides an integral part of Orla. LLC's operation, common control exists, therefore, the two (2) plants meet the first criteria of the source definition.

Second Criteria - Common SIC Code or Support Facility:
The second criteria is whether either of the plants have a common two-digit Standard Industrial Classification (SIC) Code or if one plant serves as a support facility for the other plant. The Standard Industrial Classification Manual of 1987 sets out how to determine the proper SIC Code for each type of business. More information about SIC Codes is available at https://www.osha.gov/data/sic-manual on the Internet. The SIC Code is determined by looking at the principal product or activity of each plant.

(a) Orla, LLC operations falls under the two-digit SIC Code 73 for Business Services.

(b) Life Cycle Power operations falls under the two-digit SIC Code 49 for Electric, Gas, and Stationary Services.

The two plants do not have the same two-digit SIC Code. Therefore, the support facility relationship must be determined.

Support Facility Relationship
A plant is a support facility to another plant if it dedicates 50% or more of its output to the other plant.

The Life Cycle Power plant provides 100% of its output of electricity to the Orla, LLC plant.
The Orla, LLC plant provides 0% of its output to Life Cycle Power plant.

The Orla, LLC plant cannot operate without Life Cycle Power plant, since it provides an essential function. Therefore, Life Cycle Power plant is a support facility to the Orla, LLC plant.

Based on the 100% reliance of Orla, LLC to the output of the Life Cycle Power, this plant is considered a support facility. Therefore, the two (2) plants meet the second criteria of the source definition.

Third Criteria - Same, Contiguous, or Adjacent Properties:
The third and last criteria of the major source definition is whether the plants are on the same, contiguous or adjacent properties. Plants located on properties that share a common property border are contiguous.

Both Orla, LLC and Life Cycle Power are located on the same property. Therefore, the two (2) plants meet the third criteria of the source definition.

Source Determination - Final Conclusion Under 326 IAC 2-7-1(20)(B) and (C):
IDEM, OAQ finds that the plants meet all three criteria of the major source definition. Therefore, the plants are part of the same Part 70 major source.

Existing Approvals

There have been no previous approvals issued to this source.

County Attainment Status

The source is located in Boone County.

Pursuant to amendments to Indiana Code IC 13-17-3-14, effective July 1, 2023, a federal regulation that classifies or amends a designation of attainment, nonattainment, or unclassifiable for any area in Indiana under the federal Clean Air Act is effective and enforceable in Indiana on the effective date of the federal regulation.

Pollutant	Designation
SO_2	Unclassifiable or attainment effective April 9, 2018, for the 2010 primary 1-hour SO_2 standard. Better than national secondary standards effective March 3, 1978.
CO	Unclassifiable or attainment effective November 15, 1990.
O_3	Unclassifiable or attainment effective January 16, 2018, for the 2015 8-hour ozone standard.
$PM_{2.5}$	Unclassifiable or attainment effective April 15, 2015, for the 2012 annual $PM_{2.5}$ standard.
$PM_{2.5}$	Unclassifiable or attainment effective December 13, 2009, for the 2006 24-hour $PM_{2.5}$ standard.
PM_{10}	Unclassifiable effective November 15, 1990.
NO_2	Unclassifiable or attainment effective January 29, 2012, for the 2010 NO_2 standard.
Pb	Unclassifiable or attainment effective December 31, 2011, for the 2008 lead standard.

(a) Ozone Standards
Volatile organic compounds (VOC) and Nitrogen Oxides (NO_x) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone. Therefore, VOC and NO_x emissions are considered when

evaluating the rule applicability relating to ozone. Boone County has been designated as attainment or unclassifiable for ozone. Therefore, VOC and NO_x emissions were reviewed pursuant to the requirements of Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

(b) $PM_{2.5}$
Boone County has been classified as attainment for $PM_{2.5}$. Therefore, direct $PM_{2.5}$, SO_2, and NOx emissions were reviewed pursuant to the requirements of Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

(c) Other Criteria Pollutants
Boone County has been classified as attainment or unclassifiable in Indiana for all the other criteria pollutants. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

Fugitive Emissions

Since this type of operation is not one (1) of the twenty-eight (28) listed source categories under 326 IAC 2-2-1(ff)(1), 326 IAC 2-3-2(g), or 326 IAC 2-7-1(20)(B), and there is no applicable New Source Performance Standard or National Emission Standard for Hazardous Air Pollutants that was in effect on August 7, 1980, fugitive emissions are not counted toward the determination of PSD, Emission Offset, and Part 70 Permit applicability.

The fugitive emissions of hazardous air pollutants (HAP) are counted toward the determination of Part 70 Permit applicability and source status under Section 112 of the Clean Air Act (CAA).

Greenhouse Gas (GHG) Emissions

On June 23, 2014, in the case of *Utility Air Regulatory Group v. EPA*, cause no. 12-1146, (available at https://www.supremecourt.gov/opinions/opinions.aspx) the United States Supreme Court ruled that the U.S. EPA does not have the authority to treat greenhouse gases (GHGs) as an air pollutant for the purpose of determining operating permit applicability or PSD Major source status. On July 24, 2014, the U.S. EPA issued a memorandum to the Regional Administrators outlining next steps in permitting decisions in light of the Supreme Court's decision. U.S. EPA's guidance states that U.S. EPA will no longer require PSD or Title V permits for sources "previously classified as 'Major' based solely on greenhouse gas emissions."

The Indiana Environmental Rules Board adopted the GHG regulations required by U.S. EPA at 326 IAC 2-2-1(zz), pursuant to Ind. Code § 13-14-9-8(h) (Section 8 rulemaking). A rule, or part of a rule, adopted under Section 8 is automatically invalidated when the corresponding federal rule, or part of the rule, is invalidated. Due to the United States Supreme Court Ruling, IDEM, OAQ cannot consider GHG emissions to determine operating permit applicability or PSD applicability to a source or modification.

Background and Description of Emission Units and Pollution Control Equipment

The Office of Air Quality (OAQ) has reviewed an application, submitted by Life Cycle Power on February 20, 2026, relating to the construction of a new stationary greenfield power generating facility.

The following is a list of the new emission units and pollution control device(s):

(a) Sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, approved in 2026 for construction, each with a rated maximum capacity of 2,763 horsepower, using selective catalytic reduction (SCR) and oxidation catalysts as controls for NOx, VOC, and CO respectively, and exhausting outdoors.

Under NSPS 40 CFR 60, Subpart JJJJ, these generators are affected sources.
Under NESHAP 40 CFR 63, Subpart ZZZZ, these generators are affected sources.

(b) Two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, approved in 2026 for construction, each with a rated maximum heat index capacity of 5.4 MMBtu/hr, and exhausting outdoors.

Under NESHAP 40 CFR 63, Subpart DDDDD, these regasification boilers are affected sources.

Enforcement Issues

There are no pending enforcement actions related to this source.

Emission Calculations

See Appendix A of this Technical Support Document for detailed emission calculations.

Permit Level Determination – Part 70 New Source Construction

Pursuant to 326 IAC 2-7-1(28), Potential to Emit is defined as "the maximum capacity of a stationary source to emit any air pollutant under its physical and operational design. Any physical or operational limitation on the capacity of a source to emit an air pollutant, including air pollution control equipment and restrictions on hours of operation or type or amount of material combusted, stored, or processed shall be treated as part of its design if the limitation is enforceable by the U.S. EPA."

The following table is used to determine the appropriate permit level under 326 IAC 2-7. This table reflects the unrestricted potential emissions of the source. If the control equipment has been determined to be integral, the table reflects the potential to emit (PTE) after consideration of the integral control device.

	Unrestricted Potential Emissions (ton/year)								
	PM[1]	**PM_{10}[1]**	**$PM_{2.5}$[1, 2]**	**SO_2**	**NO_X**	**VOC**	**CO**	**Single HAP[3]**	**Total HAPs**
Total PTE of Orla, LLC	4.37	5.51	5.36	0.39	111.09	27.79	76.46	0.07 (Benzene)	0.15
Total PTE of Life Cycle Power	0.84	47.54	47.54	2.80	1,739.86	1,215.68	3,474.90	248.91 (Formaldehyde)	337.80
Total PTE Fugitives	0.16	0.03	0.01	-	-	-	-	-	-
Total PTE of Entire Source	5.37	53.08	52.90	3.19	1,850.95	1,243.47	3,551.36	248.91 (Formaldehyde)	337.95
Title V Major Source Thresholds	NA	100	100	100	100	100	100	10	25
PSD Major Source Thresholds	250	250	250	250	250	250	250	--	--

[1]Under the Part 70 Permit program (40 CFR 70), PM_{10} and $PM_{2.5}$, not particulate matter (PM), are each considered as a "regulated air pollutant."

[2]$PM_{2.5}$ listed is direct $PM_{2.5}$.

[3]Single highest source-wide HAP

*Fugitive HAP emissions are always included in the source-wide emissions.

Appendix A of this TSD reflects the detailed unrestricted potential emissions of the source.

(a) The potential to emit (as defined in 326 IAC 2-7-1(28)) of NOx VOC, and CO from the entire source are each equal to or greater than the Title V major source threshold levels. Therefore, the source is subject to the provisions of 326 IAC 2-7 and will be issued a Part 70 Operating Permit.

(b) The potential to emit (as defined in 326 IAC 2-7-1(28)) of any single HAP is equal to or greater than ten (10) tons per year and/or the potential to emit (as defined in 326 IAC 2-7-1(28)) of a combination of HAPs is equal to or greater than twenty-five (25) tons per year. Therefore, the source is subject to the provisions of 326 IAC 2-7 and will be issued a Part 70 Operating Permit.

PTE of the Entire Source After Issuance

The table below summarizes the after issuance source-wide potential to emit, reflecting all limits, of the emission units. Any control equipment is considered federally enforceable only after issuance of the Part 70 New Source Review Permit, and only to the extent that the effect of the control equipment is made practically enforceable in the permit. If the control equipment has been determined to be integral, the table reflects the potential to emit (PTE) after consideration of the integral control device.

	Source-Wide Emissions After Issuance (ton/year)								
	PM[1]	**PM_{10}[1]**	**$PM_{2.5}$[1, 2]**	**SO_2**	**NO_X**	**VOC**	**CO**	**Single HAP[3]**	**Total HAPs**
Total PTE of Orla, LLC	4.37	5.51	5.36	0.39	25.99	27.79	18.12	0.07 (Benzene)	0.15
Total PTE of Life Cycle Power	0.84	47.54	47.54	2.80	126.68	156.75	161.53	111.95 (Formaldehyde)	136.06
Total PTE Fugitives	0.16	0.03	0.01	-	-	-	-	-	-
Total PTE of Entire Source	5.37	53.08	52.91	3.19	152.67	184.54	179.65	111.95 (Formaldehyde)	136.21
Title V Major Source Thresholds	NA	100	100	100	100	100	100	10	25
PSD Major Source Thresholds	250	250	250	250	250	250	250	--	--

[1]Under the Part 70 Permit program (40 CFR 70), PM_{10} and $PM_{2.5}$, not particulate matter (PM), are each considered as a "regulated air pollutant."

[2]$PM_{2.5}$ listed is direct $PM_{2.5}$.

[3]Single highest source-wide HAP.

*Fugitive HAP emissions are always included in the source-wide emissions.

Appendix A of this TSD reflects the detailed potential to emit of the entire source after issuance.

The source opted to take limit(s) in order to render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable to this source. See Technical Support Document (TSD) State Rule Applicability - Entire Source section, 326 IAC 2-2 (PSD) for more information regarding the limit(s).

(a) This new source is not a major stationary source, under PSD (326 IAC 2-2), because the emissions of each PSD regulated pollutant are less than the PSD major source thresholds. Therefore, pursuant to 326 IAC 2-2, the PSD requirements do not apply.

(b) This source is a major source of HAP, as defined in 40 CFR 63.2, because HAP emissions are equal to or greater than ten (10) tons per year for a single HAP and equal to or greater than twenty-five (25) tons per year for a combination of HAPs. Therefore, this source is a major source under Section 112 of the Clean Air Act (CAA).

Federal Rule Applicability Determination

Federal rule applicability for this source has been reviewed as follows:

New Source Performance Standards (NSPS):

(a) The sixty-five (65) natural gas-fired generators are subject to the New Source Performance Standards for Stationary Spark Ignition Internal Combustion Engines 40 CFR 60, Subpart JJJJ and 326 IAC 12, because these units are stationary spark ignition internal combustion engines with a maximum engine power greater than 500 hp, and were manufactured after July 1, 2007.

Emission Unit ID	Capacity (Bhp)	Capacity (KW)	Tier
GEN1 through GEN65	2,763	2,060	Tier 4

The sixty-five (65) natural gas-fired generators are subject to the following portions of Subpart JJJJ.

60.4230 (a)(4)(i) and (6)	Am I subject to this subpart?
60.4233 (e)	What emission standards must I meet if I am an owner or operator of a stationary SI internal combustion engine?
60.4234	How long must I meet the emission standards if I am an owner or operator of a stationary SI internal combustion engine?
60.4236	What is the deadline for importing or installing stationary SI ICE produced in previous model years?
60.4243 (b)(1)	What are my compliance requirements if I am an owner or operator of a stationary SI internal combustion engine?
60.4244	What test methods and other procedures must I use if I am an owner or operator of a stationary SI internal combustion engine?
60.4245 (a), (c), (d), (f through j)	What are my notification, reporting, and recordkeeping requirements if I am an owner or operator of a stationary SI internal combustion engine?
60.4246	What General Provisions and confidential information provisions apply to me?
60.4248	What definitions apply to this subpart?
Tables to Subpart JJJJ of Part 60	
Table 1	NO_X, CO, and VOC Emission Standards for Stationary Non-Emergency SI Engines ≥100 HP (Except Gasoline and Rich Burn LPG), Stationary SI Landfill/Digester Gas Engines, and Stationary Emergency Engines >25 HP
Table 2	Requirements for Performance Tests
Table 3	Applicability of General Provisions to Subpart JJJJ

The requirements of 40 CFR Part 60, Subpart A – General Provisions, which are incorporated as 326 IAC 12-1, apply to the sixty-five (65) natural gas-fired generators except as otherwise specified in 40 CFR 60, Subpart JJJJ.

(b) There are no other New Source Performance Standards (40 CFR Part 60) and 326 IAC 12 included in the permit for this proposed new source.

National Emission Standards for Hazardous Air Pollutants (NESHAP):

(a) The sixty-five (65) natural gas-fired generators are subject to the National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines 40 CFR 63,

Subpart ZZZZ which is incorporated by reference as 326 IAC 20-82, because these units are stationary internal combustion engines, manufactured after December 19, 2002, and located at a major source of HAP emissions.

Emission Unit ID	Capacity (Bhp)	Capacity (KW)	Tier
GEN1 through GEN65	2,763	2,060	Tier 4

The sixty-five (65) natural gas-fired generators is subject to the following portions of Subpart ZZZZ:

63.6580	What is the purpose of subpart ZZZZ?
63.6585 (a) and (b)	Am I subject to this subpart?
63.6590 (a)(2)(i)	What parts of my plant does this subpart cover?
63.6595 (a)(3) and (c)	When do I have to comply with this subpart?
63.6600 (b)	What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?
63.6605	What are my general requirements for complying with this subpart?
63.6610 (a)	By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?
63.6615	When must I conduct subsequent performance tests?
63.6620 (a), (b)(2), (d), (e), (i), and (j)	What performance tests and other procedures must I use?
63.6625 (b) and (h)	What are my monitoring, installation, collection, operation, and maintenance requirements?
63.6630 (a), (b), and (c)	How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?
63.6635	How do I monitor and collect data to demonstrate continuous compliance?
63.6640 (a), (b), and (d)	How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?
63.6645 (a)(4), (c), (g), and (h)	What notifications must I submit and when?
63.6650 (a through f) and (i)	What reports must I submit and when?
63.6655 (a), (b), and (d)	What records must I keep?
63.6660	In what form and how long must I keep my records?
63.6665	What parts of the General Provisions apply to me?
63.6670	Who implements and enforces this subpart?
63.6675	What definitions apply to this subpart?
Tables to Subpart ZZZZ of Part 63	
Table 2a	Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions
Table 2b	Operating Limitations for New and Reconstructed 2SLB and CI Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions, Existing CI Stationary RICE >500 HP

Table 3	Subsequent Performance Tests
Table 4	Requirements for Performance Tests
Table 5	Initial Compliance With Emission Limitations, Operating Limitations, and Other Requirements
Table 6	Continuous Compliance With Emission Limitations, and Other Requirements
Table 7	Requirements for Reports
Table 8	Applicability of General Provisions to Subpart ZZZZ

The requirements of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated as 326 IAC 20-1, apply to the sixty-five (65) natural gas-fired generators except as otherwise specified in 40 CFR 63, Subpart ZZZZ.

(b) The two (2) natural gas-fired regasification boilers are subject to the National Emission Standards for Hazardous Air Pollutants for Major Sources: Industrial, Commercial, and Institutional Boilers and Process Heaters 40 CFR 63, Subpart DDDDD which is incorporated by reference as 326 IAC 20-95, because these emission units are boilers, located at a major source of HAPs, and constructed after June 4, 2010.

The two (2) natural gas-fired regasification boilers are subject to the following portions of Subpart DDDDD:

63.7480	What is the purpose of this subpart?
63.7485	Am I subject to this subpart?
63.7490 (a) and (b)	What is the affected source of this subpart?
63.7495 (a) and (d)	When do I have to comply with this subpart?
63.7499 (l)	What are the subcategories of boilers and process heaters?
63.7500 (a), (b), and (e)	What emission limitations, work practice standards, and operating limits must I meet?
63.7505 (a)	What are my general requirements for complying with this subpart?
63.7510 (g)	What are my initial compliance requirements and by what date must I conduct them?
63.7515 (d)	When must I conduct subsequent performance tests, fuel analyses, or tune-ups?
63.7540 (a)(11)	How do I demonstrate continuous compliance with the emission limitations, fuel specifications and work practice standards?
63.7545 (a) and (c)	What notifications must I submit and when?
63.7550 (a), (b), (c)(1), (c)(5)(i-iv), (c)(5)(xi), (c)(5)(xiii - xiv), (c)(5)(xvii), and (h)(3)	What reports must I submit and when?
63.7555 (a)(1)	What records must I keep?
63.7560	In what form and how long must I keep my records?
63.7565	What parts of the General Provisions apply to me?
63.7570	Who implements and enforces this subpart?
63.7575	What definitions apply to this subpart?
Tables to Subpart DDDDD of Part 63	
Table 3, Subcategory 2	Work Practice Standards
Table 10	Applicability of General Provisions to Subpart DDDDD

The requirements of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated as 326 IAC 20-1, apply to the two (2) natural gas-fired regasification boilers except as otherwise specified in 40 CFR 63, Subpart DDDDD.

(c) There are no other National Emission Standards for Hazardous Air Pollutants under 40 CFR 63, 326 IAC 14 and 326 IAC 20 included for this proposed new source.

Compliance Assurance Monitoring (CAM):

(a) Pursuant to 40 CFR 64.2, Compliance Assurance Monitoring (CAM) is applicable to each pollutant-specific emission unit that meets the following criteria:

(1) has a potential to emit before controls equal to or greater than the major source threshold for the regulated pollutant involved;

(2) is subject to an emission limitation or standard for that pollutant (or a surrogate thereof); and

(3) uses a control device, as defined in 40 CFR 64.1, to comply with that emission limitation or standard.

(b) Pursuant to 40 CFR 64.2(b)(1)(i), emission limitations or standards proposed after November 15, 1990 pursuant to a NSPS or NESHAP under Section 111 or 112 of the Clean Air Act are exempt from the requirements of CAM. Therefore, an evaluation was not conducted for any emission limitations or standards proposed after November 15, 1990 pursuant to a NSPS or NESHAP under Section 111 or 112 of the Clean Air Act.

The following table is used to identify the applicability of CAM to each emission unit and each emission limitation or standard for a specified pollutant based on the criteria specified under 40 CFR 64.2:

Emission Unit/Pollutant	Control Device	Applicable Emission Limitation	Uncontrolled PTE (tons/year)	Controlled PTE (tons/year)	CAM Applicable (Y/N)	Large Unit (Y/N)
Sixty Five (65) Generators (GEN1 - GEN65) /PM10 and PM2.5	SCR/ OC Control System	-	-	-	N 2	
Sixty Five (65) Generators (GEN1 - GEN65) / VOC	SCR/ OC Control System	326 IAC 2-2	<100 (Each generator)	<100 (Each generator)	N [1]	-
Sixty Five (65) Generators (GEN1 - GEN65) / NOx	SCR/ OC Control System	326 IAC 2-2	<100 (Each generator)	<100 (Each generator)	N [1]	-
Sixty Five (65) Generators (GEN1 - GEN65) / CO	SCR/ OC Control System	326 IAC 2-2	<100 (Each generator)	<100 (Each generator)	N [1]	-

Under the Part 70 Permit program (40 CFR 70), PM is not a regulated air pollutant.

Uncontrolled PTE (tpy) and controlled PTE (tpy) are evaluated against the Major Source Threshold for each pollutant. Major Source Threshold for regulated air pollutants (PM10, PM2.5, SO2, NOx, VOC and CO) is 100 tpy, for a single HAP ten (10) tpy, and for total HAPs twenty-five (25) tpy.

N [1] CAM does not apply because each emission unit emits uncontrolled PTE less than the major source threshold.

N [2] CAM does not apply because there is no applicable emission limitation.

Controls: OC = Oxidation Catalyst, SCR = Selective Catalytic Reduction

Emission units without air pollution controls are not subject to CAM. Therefore, they are not listed.

Based on this evaluation, the requirements of 40 CFR Part 64, CAM, are not applicable to any of the units as part of this new source construction permit.

State Rule Applicability - Entire Source

State rule applicability for this source has been reviewed as follows:

326 IAC 2-2 (PSD)
PSD applicability is discussed under the PTE of the Entire Source After Issuance section of this document.

The source-wide unlimited NOx, VOC and CO emissions are greater than 250 tons/year. The Permittee has elected to set enforceable limits in order to remain a minor source of PSD. Therefore, they are not subject to the requirements of 326 IAC 2-2 (PSD) and Best Available Control Technology (BACT).

The permit includes tons per year (tpy) emission limits. There is no specific limit on operating hours. This cumulative mass limit remains enforceable during all operations

CO Minor Source Limits

In order to render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable, the Permittee shall comply with the following:

(a) The total CO emissions from the sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, shall not exceed one hundred fifty five (155) tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

Compliance with these limits, combined with the potential to emit CO from all other emission units at this source, shall limit the source-wide total potential to emit of CO to less than 250 tons per twelve (12) consecutive month period, and shall render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable.

VOC Minor Source Limits

In order to render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable, the Permittee shall comply with the following:

(a) The total VOC emissions from the sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, shall not exceed one hundred fifty five (155) tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

Compliance with these limits, combined with the potential to emit VOC from all other emission units at this source, shall limit the source-wide total potential to emit of VOC to less than 250 tons per twelve (12) consecutive month period, and shall render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable.

NOx Minor Source Limits

In order to render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable, the Permittee shall comply with the following:

(a) The total NOx emissions from the sixty-five (65) natural gas-fired Caterpillar G3516H generators, identified as GEN1 through GEN65, shall not exceed one hundred twenty one (121) tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

Compliance with these limits, combined with the potential to emit NOx from all other emission units at this source, shall limit the source-wide total potential to emit of NOc to less than 250 tons per twelve (12) consecutive month period, and shall render the requirements of 326 IAC 2-2 (Prevention of Significant Deterioration (PSD)) not applicable.

326 IAC 2-4.1 (Major Sources of Hazardous Air Pollutants (HAP))
The provisions of 326 IAC 2-4.1 apply to any owner or operator who constructs or reconstructs a major source of hazardous air pollutants (HAP), as defined in 40 CFR 63.41, after July 27, 1997, unless the major source has been specifically regulated under or exempted from regulation under a NESHAP that was issued pursuant to Section 112(d), 112(h), or 112(j) of the Clean Air Act (CAA) and incorporated under 40 CFR 63. On and after June 29, 1998, 326 IAC 2-4.1 is intended to implement the requirements of Section 112(g)(2)(B) of the Clean Air Act (CAA).

The operation of this source (approved in 2026 for construction) will emit equal to or greater than ten (10) tons per year for a single HAP and equal to or greater than twenty-five (25) tons per year for a combination of HAPs. Therefore, 326 IAC 2-4.1 would apply to this source. However, pursuant to 326 IAC 2-4.1-1(b)(2), because this source is specifically regulated under NESHAP 40 CFR 63, Subpart ZZZZ and DDDDD, which was issued pursuant to Section 112(d), 112(h), or 112(j) of the CAA, this source is exempt from the requirements of 326 IAC 2-4.1.

326 IAC 2-6 (Emission Reporting)
This source is subject to the requirements of 326 IAC 2-6 (Emission Reporting), since it is required to have an operating permit under 326 IAC 2-7, Part 70 Permit Program. Pursuant to 326 IAC 2-6-3(a)(2), the Permittee shall submit triennially, by July 1, an emission statement covering the previous calendar year in accordance with the compliance schedule in 326 IAC 2-6-3. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4.

326 IAC 2-7-6(5) (Annual Compliance Certification)
The U.S. EPA Federal Register 79 FR 54978 notice does not exempt Title V Permittees from the requirements of 40 CFR 70.6(c)(5)(iv) or 326 IAC 2-7-6(5)(D), but the submittal of the Title V annual compliance certification to IDEM satisfies the requirement to submit the Title V annual compliance certifications to EPA. IDEM does not intend to revise any permits since the requirements of 40 CFR 70.6(c)(5)(iv) or 326 IAC 2-7-6(5)(D) still apply, but Permittees can note on their Title V annual compliance certifications that submission to IDEM has satisfied reporting to EPA per Federal Register 79 FR 54978. This only applies to Title V Permittees and Title V compliance certifications.

326 IAC 5-1 (Opacity Limitations)
This source is subject to the opacity limitations specified in 326 IAC 5-1-2(1)

326 IAC 6-4 (Fugitive Dust Emissions Limitations)
Pursuant to 326 IAC 6-4 (Fugitive Dust Emissions Limitations), the source shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4.

326 IAC 6-5 (Fugitive Particulate Matter Emission Limitations)
This source is not subject to the requirements of 326 IAC 6-5, because the source has potential fugitive particulate emissions of less than twenty-five (25) tons per year.

326 IAC 6.5 (Particulate Matter Limitations Except Lake County)
Pursuant to 326 IAC 6.5-1-1(a), this source (located in Boone County) is not subject to the requirements of 326 IAC 6.5 because it is not located in one of the following counties: Clark, Dearborn, Dubois, Howard, Marion, St. Joseph, Vanderburgh, Vigo or Wayne.

326 IAC 6.8 (Particulate Matter Limitations for Lake County)
Pursuant to 326 IAC 6.8-1-1(a), this source (located in Boone County) is not subject to the requirements of 326 IAC 6.8 because it is not located in Lake County.

State Rule Applicability – Individual Facilities

State rule applicability for this source has been reviewed as follows:

Natural gas-fired Generators (GEN1 through GEN65)

326 IAC 6-2-1 (Particulate Emission Limitations for Sources of Indirect Heating)
Pursuant to 326 IAC 6-2-1(a), the sixty-five (65) natural gas-fired generators are not subject to the requirements of 326 IAC 6-3 since these units are not sources of indirect heating.

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)
The sixty-five (65) natural gas-fired generators are each exempt from the requirements of 326 IAC 6-3 because, pursuant to 326 IAC 1-2-59, liquid and gaseous fuels and combustion air are not considered as part of the process weight.

326 IAC 7-1.1 Sulfur Dioxide Emission Limitations
The sixty-five (65) natural gas-fired generators are not subject to 326 IAC 326 IAC 7-1.1 because they have a potential to emit (or limited potential to emit) sulfur dioxide (SO2) of less than 25 tons per year or 10 pounds per hour.

326 IAC 8-1-6 (VOC Rules: General Reduction Requirements for New Facilities)
The sixty-five (65) natural gas-fired generators are not subject to the requirements of 326 IAC 8-1-6 because the unlimited VOC potential emissions for each unit is less than twenty-five (25) tons per year.

326 IAC 9-1 (Carbon Monoxide Emission Limits)
The requirements of 326 IAC 9-1 do not apply to the sixty-five (65) natural gas-fired generators, because this source does not operate a catalyst regeneration petroleum cracking system or a petroleum fluid coker, grey iron cupola, blast furnace, basic oxygen steel furnace, or other ferrous metal smelting equipment.

326 IAC 10-3 (Nitrogen Oxide Reduction Program for Specific Source Categories)
The requirements of 326 IAC 10-3 do not apply to the sixty-five (65) natural gas-fired generators since these units are not blast furnace gas-fired boilers, Portland cement kilns, or facilities specifically listed under 326 IAC 10-3-1(a)(2).

Natural gas-fired regasification boilers (Boiler 1 and 2)

326 IAC 6-2-1 (Particulate Emission Limitations for Sources of Indirect Heating) Pursuant to 326 IAC 6-2-1(d), the two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, which received permit to construct after September 21, 1983 are subject to the requirements of 326 IAC 6-2-4. Pursuant to 326 IAC 6-2-4, the PM emissions from the following units shall be limited to Pt pounds per MMBtu heat input, as follows:

Indirect Heating Units Which Began Operation After September 21, 1983						
Facility	Construction Date (Removal Date)	Operating Capacity (MMBtu/hr)	Q (MMBtu/hr)	Calculated Pt (lb/MMBtu)	Particulate Limitation, (Pt) (lb/MMBtu)	PM PTE based on AP-42 (lb/MMBtu)
Units Operating Prior to 9/21/1983			--	--	--	--
Boiler 1	approved in 2026 for construction	5.4	10.8	0.6	0.6	0.0019
Boiler 2	approved in 2026 for construction	5.4				
Where: Q = Includes the capacity (MMBtu/hr) of the new unit(s) and the capacities for those unit(s) which were in operation at the source at the time the new unit(s) was constructed. Note: Emission units shown in strikethrough were subsequently removed from the source. The effect of removing these units on "Q" is shown in the year the boiler was removed.						

The particulate matter emissions (Pt) shall be limited by the following equation:

$$Pt = \frac{1.09}{Q^{0.26}}$$

Where:

Pt = Pounds of particulate matter emitted per million British thermal units (lb/MMBtu).

Q = Total source maximum operating capacity rating in MMBtu/hr heat input. The maximum operating capacity rating is defined as the maximum capacity at which the facility is operated or the nameplate capacity, whichever is specified in the facility's permit application, except when some lower capacity is contained in the facility's operation permit; in which case, the capacity specified in the operation.

Based on the above calculations, each of the two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, are able to comply with this limitation.

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)
Pursuant to 326 IAC 6-3-1(b)(1), the two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, are exempt from the requirements of 326 IAC 6-3.

326 IAC 7-1.1 (Sulfur Dioxide Emission Limitations)
The two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, are not subject to 326 IAC 326 IAC 7-1.1 because they have a potential to emit (or limited potential to emit) sulfur dioxide (SO2) of less than 25 tons per year or 10 pounds per hour.

326 IAC 8-1-6 (VOC Rules: General Reduction Requirements for New Facilities)
Even though, the two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, were constructed after January 1, 1980, they are not subject to the requirements of 326 IAC 8-1-6 because their unlimited VOC potential emissions are less than twenty-five (25) tons per year.

326 IAC 9-1 (Carbon Monoxide Emission Limits)
The requirements of 326 IAC 9-1 do not apply to the two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, because this source does not operate a catalyst regeneration petroleum

cracking system or a petroleum fluid coker, grey iron cupola, blast furnace, basic oxygen steel furnace, or other ferrous metal smelting equipment.

326 IAC 10-3 (Nitrogen Oxide Reduction Program for Specific Source Categories)
The requirements of 326 IAC 10-3 do not apply to the two (2) natural gas-fired regasification boilers, identified as Boiler 1 and 2, since these units are not blast furnace gas-fired boilers, Portland cement kilns, or facilities specifically listed under 326 IAC 10-3-1(a)(2).

Compliance Determination and Monitoring Requirements

Permits issued under 326 IAC 2-7 are required to assure that sources can demonstrate compliance with all applicable state and federal rules on a continuous basis. All state and federal rules contain compliance provisions; however, these provisions do not always fulfill the requirement for a continuous demonstration. When this occurs, IDEM, OAQ, in conjunction with the source, must develop specific conditions to satisfy 326 IAC 2-7-5. As a result, Compliance Determination Requirements are included in the permit. The Compliance Determination Requirements in Section D of the permit are those conditions that are found directly within state and federal rules and the violation of which serves as grounds for enforcement action.

If the Compliance Determination Requirements are not sufficient to demonstrate continuous compliance, they will be supplemented with Compliance Monitoring Requirements, also in Section D of the permit. Unlike Compliance Determination Requirements, failure to meet Compliance Monitoring conditions would serve as a trigger for corrective actions and not grounds for enforcement action. However, a violation in relation to a compliance monitoring condition will arise through a source's failure to take the appropriate corrective actions within a specific time period.

(a) The Compliance Determination Requirements applicable to this source are as follows:

(1) In order to comply with the NOx emission limitation under 326 IAC 2-2, the total monthly NOx emissions shall be determined using the following equation for GEN1 to GEN65:

NE = Uncontrolled NOx + Controlled NOx
= $[(NGLOAD_U \times OP_u)(NEF_U) + (NGLOAD_C \times OP_C)(NEF_C)] / 454$ g/lb / 2,000 lbs/ton

Where:

NE = Total NOx Emissions, tons per month
= Uncontrolled NOx emissions + Controlled NOx emissions

$NGLOAD_U$ = Total Uncontrolled Engine Operating Load, bhp per month
OP_U = Total Uncontrolled Engine Operating Hours, hours per month
NEF_U = Uncontrolled Emission Factors for NOx
= 1.0 grams per bhp-hr, or a value determined from the latest stack test.

NOx emissions are considered uncontrolled until the SCR reaches an operating temperature of 572°F.

$NGLOAD_C$ = Total Controlled Engine Operating Load, bhp per month
OP_C = Total Controlled Engine Operating Hours, hours per month
NEF_C = Controlled Emission Factors for NOx,
= 0.07 grams per bhp-hr or a value determined from the latest stack test.

NOx emissions are considered controlled after the SCR of the emissions control system reaches a minimum operating temperature of 572°F.

(2) In order to comply with the VOC emission limitation under 326 IAC 2-2, the total monthly VOC emissions shall be determined using the following equation for GEN1 to GEN65:

VE = [(NGLOAD$_U$ x OP$_u$)(VEF$_U$) + (NGLOAD$_C$ x OP$_C$)(VEF$_C$)] / 454 g/lb / 2,000 lbs/ton

Where:

VE = Uncontrolled VOC Emissions + Controlled VOC Emissions, tons per month

NGLOAD$_U$ = Total Uncontrolled Engine Operating Load, bhp per month
OP$_U$ = Total Uncontrolled Engine Operating Hours, hours per month
VEF$_U$ = Uncontrolled Emission Factors for VOC
= 0.7 grams per bhp-hr or a value determined from the latest stack test.

VOC emissions are considered uncontrolled when the Oxidation Catalyst is not operational.

NGLOAD$_C$ = Total Controlled Engine Operating Load, bhp per month
OP$_C$ = Total Controlled Engine Operating Hours, hours per month
VEF$_C$ = Controlled Emission Factors for VOC
= 0.09 grams per bhp-hr or a value determined from the latest stack test.

(3) In order to comply with the CO emission limitation under 326 IAC 2-2, the total monthly CO emissions shall be determined using the following equation for GEN1 to GEN65:

CE = [(NGLOAD$_U$ x OP$_u$)(CEF$_U$) + (NGLOAD$_C$ x OP$_C$)(CEF$_C$)] / 454 g/lb /2,000 lbs/ton

Where:

CE = Uncontrolled CO Emissions + Controlled CO Emissions, tons per month

NGLOAD$_U$ = Total Uncontrolled Engine Operating Load, bhp per month
OP$_U$ = Total Uncontrolled Engine Operating Hours, hours per month
CEF$_U$ = Uncontrolled Emission Factors for CO
= 2.0 grams per bhp-hr or a value determined from the latest stack test

CO emissions are considered uncontrolled when the Oxidation Catalyst is not operational.

NGLOAD$_C$ = Total Controlled Engine Operating Load, bhp per month
OP$_C$ = Total Controlled Engine Operating Hours, hours per month
CEF$_C$ = Controlled Emission Factors for CO
= 0.09 grams per bhp-hr or a value determined from the latest stack test

(4) NOx

In order to assure compliance with the requirements of 326 IAC 2-2, and for the Permittee to consider the NOx emissions to be after control, the associated emissions control systems for each of the generators (GEN1 to GEN65) shall be in operation and control NOx emissions from each of the generators (GEN1 to GEN65) at all times any of the generators (GEN1 to GEN65) are in operation and the catalyst bed exhaust temperature of the SCR reaches a minimum temperature of 572°F.

(5) VOC and CO

In order to assure compliance with the requirements of 326 IAC 2-2, the associated emissions control system for each of the generators (GEN1 to GEN65) shall be in operation and control CO and VOC emissions from each of the generators (GEN1 to GEN65) at all times any of the generators (GEN1 to GEN65) are in operation.

Testing Requirements:

Summary of Testing Requirements					
Emission Unit	**Control Device**	**Timeframe for Testing**	**Pollutant/ Parameter**	**Frequency of Testing**	**Authority**
GEN1 to GEN65	SCR/OC Control Systems for each Engine	180*	NOx	every 5 years***	326 IAC 2-2
			VOC		
		180**	CO	Semi-annually****	326 IAC 2-2 326 IAC 2-4.1 NESHAP ZZZZ
			Formaldehyde		

*No later than 180 days after initial startup for a representative sample of ten (10) natural gas-fired generators.
**No later than 180 days after initial startup for all sixty five (65) natural gas-fired generators
***Repeat testing shall be done for a representative sample of ten (10) natural gas-fired generators that have not previously been tested, every 5 years until all units have been tested.
****Semi-annual testing is required for all sixty five (65) natural gas-fired generators for CO and Formaldehyde since this source is a major source of HAPs. Testing shall be performed and reported based on the requirements of NESHAP ZZZZ 63.6650 (b)(1) - (4).

These control devices for the sixty-five (65) natural gas-fired generators (GEN1 to GEN65) must operate continuously to assure compliance with 40 CFR 63 (NESHAP ZZZZ)

(b) The Compliance Monitoring Requirements applicable to this source are as follows:

Control Device	**Type of Parametric Monitoring**	**Frequency**	**Range or Specification**
SCR/OC Control Systems for each Engine (GEN1-GEN65)	Catalyst bed exhaust temperature	Continuous	At or above 572°F at all times for NOx to be considered controlled. *
	Urea Treatment	Continuous	Normal or abnormal
*Note: Compliance monitoring parameter value(s) or specification(s) from the most recent compliant stack test will be specified in the stack test report available via IDEM's Virtual File Cabinet (VFC). To access VFC, please go to: https://www.in.gov/idem/ and enter VFC in the search box. You will then have the option to search for permit documents using a variety of criteria.			

These monitoring conditions are necessary because the Control Systems for the sixty-five (65) natural gas-fired generators (GEN1 to GEN65) must operate properly to assure compliance with 326 IAC 2-2 (PSD).

Control Device	**Type of Continuous Monitor (Pollutant Monitored)**	**Applicable Rule or Authority**
SCR/OC Control Systems for each Engine (GEN1-GEN65)	CPMS (CO and Formaldehyde)	40 CFR 63 (NESHAP ZZZZ)

Conclusion and Recommendation

Unless otherwise stated, information used in this review was derived from the application and additional information submitted by the applicant. An application for the purposes of this review was received on February 20, 2026.

The construction and operation of this source shall be subject to the conditions of the attached proposed New Source Construction and Part 70 Operating Permit No. T 011-50087-000094. The staff recommends to the Commissioner that the New Source Construction and Part 70 Operating Permit be approved.

IDEM Contact

(a) If you have any questions regarding this permit, please contact Phillip Jackson, Indiana Department Environmental Management, Office of Air Quality, Permits Branch, Indiana Government Center North, 100 North Senate Avenue, Room 13W, Indianapolis, Indiana 46204-2251, or by telephone at (317) 234-0055 or (800) 451-6027, and ask for Phillip Jackson or (317) 234-0055.

(b) A copy of the findings is available on the Internet at: http://www.in.gov/ai/appfiles/idem-caats/

(c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM Air Permits page on the Internet at: https://www.in.gov/idem/airpermit/public-participation/; and the Citizens' Guide to IDEM on the Internet at: https://www.in.gov/idem/resources/citizens-guide-to-idem/.

Appendix A: Emissions Calculations
Emissions Summary

Source Name: Life Cycle Power
Source Location: 3602 West SR 32, Lebanon, IN 46052
Part 70 Administrative Operating Permit No.: T011-50087-00094
Permit Reviewer: Phillip Jackson

Uncontrolled Potential Emissions (tons/year)										
Emission Unit	**PM**	**PM_{10}**	**$PM_{2.5}$ ***	**SO_2**	**NOx**	**VOC**	**CO**	**Single HAP ****		**Total HAPs ****
Orla, LLC	4.37	5.51	5.36	0.39	111.09	27.79	76.46	0.07	Benzene	0.15
Life Cycle Power	0.84	47.54	47.54	2.80	1739.86	1215.68	3474.90	248.91	Formaldehyde	337.80
Total Emissions Excluding Fugitives	**5.21**	**53.05**	**52.90**	**3.19**	**1,850.95**	**1,243.47**	**3,551.36**	**248.91**	**Formaldehyde**	**337.95**
Fugitive Emissions										
Paved Roads	0.16	0.03	0.01	-	-	-	-	-		-
Total Including Fugitives	**5.37**	**53.08**	**52.91**	**3.19**	**1,850.95**	**1,243.47**	**3,551.36**	**248.91**	**Formaldehyde**	**337.95**

** PM2.5 listed is direct PM2.5*

***Fugitve HAP emissions are always included in the source-wide emissions*

Limited Potential Emissions (tons/year)										
Emission Unit	**PM**	**PM_{10}**	**$PM_{2.5}$ ***	**SO_2**	**NOx**	**VOC**	**CO**	**Single HAP ****		**Total HAPs ****
Orla, LLC	4.37	5.51	5.36	0.39	25.99	27.79	18.12	0.07	Benzene	0.15
Life Cycle Power	0.84	47.54	47.54	2.80	126.68	156.75	161.53	111.95	Formaldehyde	136.06
Total Emissions Excluding Fugitives	**5.21**	**53.05**	**52.90**	**3.19**	**152.67**	**184.54**	**179.65**	**111.95**	**Formaldehyde**	**136.21**
Fugitive Emissions										
Paved Roads	0.16	0.03	0.01	-	-	-	-	-		-
Total Including Fugitives	**5.37**	**53.08**	**52.91**	**3.19**	**152.67**	**184.54**	**179.65**	**111.95**	**Formaldehyde**	**136.21**

** PM2.5 listed is direct PM2.5*

***Fugitve HAP emissions are always included in the source-wide emissions*

Shaded cells represent limited emissions.

Appendix A: Emissions Calculations
Emissions Summary

Source Name: Life Cycle Power
Source Location: 3602 West SR 32, Lebanon, IN 46052
Part 70 Administrative Operating Permit No.: T011-50087-00094
Permit Reviewer: Phillip Jackson

Uncontrolled Potential Emissions (tons/year)										
Emission Unit	**PM**	**PM_{10}**	**$PM_{2.5}$ ***	**SO_2**	**NOx**	**VOC**	**CO**	**Single HAP ****		**Total HAPs ****
Sixty five (65) G3516H Engines (GEN1 - GEN65)	0.36	47.07	47.07	2.77	1734.18	1213.93	3468.37	248.83	Formaldehyde	337.72
Regasification Boilers	0.47	0.47	0.47	0.03	5.68	1.75	6.53	8.35E-02	Hexane	8.75E-02
Total Emissions:	**0.84**	**47.54**	**47.54**	**2.80**	**1,739.86**	**1,215.68**	**3,474.90**	**248.91**	**Formaldehyde**	**337.80**

** PM2.5 listed is direct PM2.5*

***Fugitve HAP emissions are always included in the source-wide emissions*

Limited Potential Emissions (tons/year)										
Emission Unit	**PM**	**PM_{10}**	**$PM_{2.5}$ ***	**SO_2**	**NOx**	**VOC**	**CO**	**Single HAP ****		**Total HAPs ****
Sixty five (65) G3516H Engines (GEN1 - GEN65)	0.36	47.07	47.07	2.77	121.00	155.00	155.00	111.95	Formaldehyde	135.97
Regasification Boilers	0.47	0.47	0.47	0.03	5.68	1.75	6.53	8.35E-02	Hexane	8.75E-02
Total Emissions Excluding Fugitives	**0.84**	**47.54**	**47.54**	**2.80**	**126.68**	**156.75**	**161.53**	**111.95**	**Formaldehyde**	**136.06**

** PM2.5 listed is direct PM2.5*

***Fugitve HAP emissions are always included in the source-wide emissions*

Shaded cells represent limited emissions.

Appendix A: Emission Calculations
Reciprocating Internal Combustion Engines - Natural Gas
4-Stroke Lean-Burn (4SLB) Engines

Source Name: Life Cycle Power
Source Location: 3602 West SR 32, Lebanon, IN 46052
Part 70 Administrative Operating Permit No.: T011-50087-00094
Permit Reviewer: Phillip Jackson

The engine will be required to perform stack testing to comply with the emission standards in 40 CFR 60, Subpart JJJJ, New Source Performance Standards (NSPS) for Stationary Spark Ignition Internal Combustion Engines. Therefore, the NSPS Subpart JJJJ emission standards for NOx, VOC, and CO are used as the emission factors to determine the potential to emit (PTE).

Potential to Emit (PTE)

NSPS Subpart JJJJ Emission Standards based on a: 2026 model year non-emergency engine

Unit ID	Maximum Break Horsepower (bhp)
G3516H Engine GEN 1 through GEN 65	2763

Total Output Horsepower Rating (bhp)	2763	
Brake Specific Fuel Consumption (BSFC) (Btu/bhp-hr)	5991	
Maximum Hours Operated per Year (hr/yr)	8760	(non-emerency generator)
Potential Fuel Usage (MMBtu/yr)	145005	
High Heat Value (MMBtu/MMscf)	1020	
Potential Fuel Usage (MMcf/yr)	142.16	

	Pollutant						
Criteria Pollutants	PM*	PM10*	PM2.5*	SO2	NOx	VOC	CO
AP-42 Emission Factor (lb/MMBtu)	7.71E-05	9.99E-03	9.99E-03	5.88E-04			
40 CFR 60 (NSPS), Subpart JJJJ, Emission Standard (g/hp-hr)					1.0	0.7	2.0
Potential Emissions ton/year							
Based on AP-42 lb/MMBtu Emission Factor	0.01	0.72	0.72	0.04			
Based on g/hp-hr NSPS JJJJ Emission Standard					26.68	18.68	53.36
Potential Emission in tons/yr	**0.01**	**0.72**	**0.72**	**0.04**	**26.68**	**18.68**	**53.36**
Potential Emission in tons/yr for sixty five (65) engines	**0.36**	**47.07**	**47.07**	**2.77**	**1734.18**	**1213.93**	**3468.37**

*PM emission factor is for filterable PM-10. PM10 emission factor is filterable PM10 + condensable PM.
PM2.5 emission factor is filterable PM2.5 + condensable PM.

Hazardous Air Pollutants (HAPs)

Pollutant	AP-42 Emission Factor (lb/MMBtu)	Potential Emissions (tons/yr)	Potential Emissions (tons/yr) for sixty five (65) engines
Acetaldehyde	8.36E-03	0.61	39.40
Acrolein	5.14E-03	0.37	24.22
Benzene	4.40E-04	0.03	2.07
Biphenyl	2.12E-04	0.02	1.00
1,3-Butadiene	2.67E-04	0.02	1.26
Formaldehyde	5.28E-02	3.83	248.83
Methanol	2.50E-03	0.18	11.78
Hexane	1.10E-03	0.08	5.18
Toluene	4.08E-04	0.03	1.92
2,2,4-Trimethylpentane	2.50E-04	0.02	1.18
Xylene	1.84E-04	0.01	0.87
	Total	**5.20**	**337.72**

HAP pollutants consist of the eleven highest HAPs included in AP-42 Table 3.2-2.

Methodology
PM, PM10, PM2.5, SO2, and HAP Emission Factors are from AP-42 (Supplement F, July 2000), Table 3.2-2
NOx, VOC, and CO emission rates based on 40 CFR 60 (NSPS), Subpart JJJJ, Emission Standard
Potential Fuel Usage (MMBtu/yr) = [Total Output Horsepower Rating (hp)] * [Brake Specific Fuel Consumption (Btu/hp-hr)] * [Maximum Hours Operated per Year (hr/yr)] / [1000000 Btu/MMBtu]
Potential Emissions (tons/yr) Based on AP-42 lb/MMBtu Emission Factor = [Potential Fuel Usage (MMBtu/yr)] * [AP-42 Emission Factor (lb/MMBtu)] / [2000 lb/ton]
Potential Emissions (tons/yr) Based on g/hp-hr NSPS JJJJ Emission Standard = [Total Output Horsepower Rating (bhp)] * [40 CFR 60 (NSPS), Subpart JJJJ, Emission Standard (g/hp-hr)] * [Maximum Hours Operated per Year (hr/yr)] * [lb/453.6 g] * [ton/2000 lbs]

Appendix A: Emissions Calculations
Natural Gas Combustion (≤ 100 MMBtu/hr)
Regasification Boilers

Source Name: Life Cycle Power
Source Location: 3602 West SR 32, Lebanon, IN 46052
Part 70 Administrative Operating Permit No.: T011-50087-00094
Permit Reviewer: Phillip Jackson

Boilers	MMBtu/hr
Boiler 1	5.4
Boiler 2	5.4
Total:	10.8

Heat Input Capacity MMBtu/hr	HHV mmBtu / mmscf	Potential Throughput MMCF/yr
10.80	1020	92.8

	Pollutant						
	PM*	PM10*	direct PM2.5*	SO2 (3)	NOx	VOC	CO
Emission Factor in lb/MMCF (1)	10.2	10.2	10.2	0.6	122.40 **see below	37.74	140.76
Potential Emission in tons/yr	0.47	0.47	0.47	0.03	5.68	1.75	6.53

1. Emission factorss per manufacturer emission data
2. PM emissions given as PM_{15}; PM_{10} and $PM_{2.5}$ assumed equal to PM - Filterable
3. Emission factor per manufacturer emission data is negligible; estimated from AP-42 instead; EF (lb/MMBtu) = EF (lb/MMscf) / 1020 (MMBtu/MMs

Methodology
All emission factors are based on normal firing.
MMBtu = 1,000,000 Btu; MMCF = 1,000,000 Cubic Feet of Gas
Emission Factors are from AP 42, Chapter 1.4, Tables 1.4-1, 1.4-2, 1.4-3, SCC #1-02-006-02, 1-01-006-02, 1-03-006-02, and 1-03-006-03
Potential Throughput (MMCF) = Heat Input Capacity (MMBtu/hr) x 8,760 hrs/yr x 1 MMCF/1,020 MMBtu
Potential Emission (tons/yr) = Potential Throughput (MMCF/yr) x Emission Factor (lb/MMCF)/2,000 lb/ton

Hazardous Air Pollutants (HAPs)

	HAPs - Organics				
	Benzene	Dichlorobenzene	Formaldehyde	Hexane	Toluene
Emission Factor in lb/MMcf	2.1E-03	1.2E-03	7.5E-02	1.8E+00	3.4E-03
Potential Emission in tons/yr	9.7E-05	5.6E-05	3.5E-03	8.3E-02	1.6E-04

	HAPs - Metals				
	Lead	Cadmium	Chromium	Manganese	Nickel
Emission Factor in lb/MMcf	5.0E-04	1.1E-03	1.4E-03	3.8E-04	2.1E-03
Potential Emission in tons/yr	2.3E-05	5.1E-05	6.5E-05	1.8E-05	9.7E-05

Potential Emission of Combined HAPs (tons/yr)	**8.8E-02**	
Potential Emission of Highest Single HAP (tons/yr)	**8.3E-02**	**Hexane**

Methodology
Methodology is the same as above.
The five highest organic and metal HAPs emission factors are provided above.
Additional HAPs emission factors are available in AP-42, Chapter 1.4.

Appendix A: Emission Calculations
Fugitive Dust Emissions - Paved Roads

Source Name: Life Cycle Power
Source Location: 3602 West SR 32, Lebanon, IN 46052
Part 70 Administrative Operating Permit No.: T011-50087-00094
Permit Reviewer: Phillip Jackson

Paved Roads at Industrial Site
The following calculations determine the amount of emissions created by paved roads, based on 8,760 hours of use and AP-42, Ch 13.2.1 (1/2011).

Vehicle Informtation (provided by source)

Type	Maximum number of vehicles per day	Number of one-way trips per day per vehicle	Maximum trips per day (trip/day)	Maximum Weight of Loaded Vehicle (tons/trip)	Total Weight driven per day (ton/day)	Maximum one-way distance (feet/trip)	Maximum one-way distance (mi/trip)	Maximum one-way miles (miles/day)	Maximum one-way miles (miles/yr)
Fuel delivery trucks (entering plant) (one-way trip)	0.04	1.0	0.04	40.0	1.53	13545	2.565	0.1	35.9
Fuel delivery trucks (leaving plant) (one-way trip)	0.04	1.0	0.04	20.0	0.77	13545	2.565	0.1	35.9
Generator contractor vehicle (entering plant) (one-way trip)	0.47	1.0	0.47	2.0	0.93	13545	2.565	1.2	437.0
Generator contractor vehicle (leaving plant) (one-way trip)	0.47	1.0	0.47	2.0	0.93	13545	2.565	1.2	437.0
		Totals	**1.0**		**4.2**			**2.6**	**945.76**

Average Vehicle Weight Per Trip = 4.1 tons/trip
Average Miles Per Trip = 2.57 miles/trip

Unmitigated Emission Factor, Ef = [k * (sL)^0.91 * (W)^1.02] (Equation 1 from AP-42 13.2.1)

	PM	PM10	PM2.5	
where k =	0.011	0.0022	0.00054	lb/VMT = particle size multiplier (AP-42 Table 13.2.1-1)
W =	4.1	4.1	4.1	tons = average vehicle weight
sL =	9.7	9.7	9.7	g/m^2 = silt loading value for paved roads at iron and steel production facilities - Table 13.2.1-3)

Taking natural mitigation due to precipitation into consideration, Mitigated Emission Factor, Eext = E * [1 - (p/4N)] (Equation 2 from AP-42 13.2.1)
Mitigated Emission Factor, Eext = Ef * [1 - (p/4N)]
where p = 125 days of rain greater than or equal to 0.01 inches (see Fig. 13.2.1-2)
N = 365 days per year

	PM	PM10	PM2.5	
Unmitigated Emission Factor, Ef =	0.369	0.074	0.0181	lb/mile
Mitigated Emission Factor, Eext =	0.338	0.068	0.0166	lb/mile

Process	Mitigated PTE of PM (Before Control) (tons/yr)	Mitigated PTE of PM10 (Before Control) (tons/yr)	Mitigated PTE of PM2.5 (Before Control) (tons/yr)
Fuel delivery trucks (entering plant) (one-way trip)	0.01	0.00	0.00
Fuel delivery trucks (leaving plant) (one-way trip)	0.01	0.00	0.00
Generator contractor vehicle (entering plant) (one-way trip)	0.07	0.01	0.00
Generator contractor vehicle (leaving plant) (one-way trip)	0.07	0.01	0.00
Totals	**0.16**	**0.03**	**0.01**

Methodology

Total Weight driven per day (ton/day)	= [Maximum Weight of Loaded Vehicle (tons/trip)] * [Maximum trips per day (trip/day)]
Maximum one-way distance (mi/trip)	= [Maximum one-way distance (feet/trip) / [5280 ft/mile]
Maximum one-way miles (miles/day)	= [Maximum trips per year (trip/day)] * [Maximum one-way distance (mi/trip)]
Average Vehicle Weight Per Trip (ton/trip)	= SUM[Total Weight driven per day (ton/day)] / SUM[Maximum trips per day (trip/day)]
Average Miles Per Trip (miles/trip)	= SUM[Maximum one-way miles (miles/day)] / SUM[Maximum trips per year (trip/day)]
Unmitigated PTE (tons/yr)	= [Maximum one-way miles (miles/yr)] * [Unmitigated Emission Factor (lb/mile)] * (ton/2000 lbs)
Mitigated PTE (Before Control) (tons/yr)	= [Maximum one-way miles (miles/yr)] * [Mitigated Emission Factor (lb/mile)] * (ton/2000 lbs)
Mitigated PTE (After Control) (tons/yr)	= [Mitigated PTE (Before Control) (tons/yr)] * [1 - Dust Control Efficiency]

Abbreviations
PM = Particulate Matter
PM10 = Particulate Matter (<10 um)
PM2.5 = Particle Matter (<2.5 um)
PTE = Potential to Emit

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • Fax (317) 233-6647 • www.idem.IN.gov

Mike Braun
Governor

Clint Woods
Commissioner

SENT VIA U.S. MAIL: CONFIRMED DELIVERY AND SIGNATURE REQUESTED

TO: Geoff Bland
Life Cycle Power
10603 W Sam Houston Pkwy N
Houston, TX 77064

DATE: September 25, 2026

FROM: Jenny Acker, Branch Chief
Permits Branch
Office of Air Quality

SUBJECT: Final Decision
TV Administrative Permit
011-50087-00094

This notice is to inform you that a final decision has been issued for the air permit application referenced above.

Our records indicate that you are the contact person for this application. However, if you are not the appropriate person within your company to receive this document, please forward it to the correct person. In addition, the Notice of Decision has been sent to the OAQ Permits Branch Interested Parties List and, if applicable, the Consultant/Agent and/or Responsible Official/Authorized Individual.

The original signature page is enclosed for your convenience. The final decision and supporting materials are available electronically at:

IDEM's online searchable database: https://www.in.gov/apps/idem/caats/ . Choose Search Option **by Permit Number**, then enter permit 50087

and

IDEM's Virtual File Cabinet (VFC): A copy of the issued permit is also available via IDEM's Virtual File Cabinet (VFC) located at https://www.in.gov/idem/legal/public-records/virtual-file-cabinet/. Click on the Virtual File Cabinet button. Click on the "Search" dropdown menu in the upper left corner and select "OAQ Permit" from the list of options. Select "Public" in the "Security group" dropdown menu. Type the five-digit permit number 50087 in the Permit # search field, select "Final" in the "Permit Type" dropdown menu, then click the search button at the top or bottom of the webpage. The search will return the final issued permit and any applicable mailing list.

If you have requested to receive a hard copy of these documents, the final decision and supporting documents for the air permit application referenced above are enclosed. If applicable, this packet contains the original, signed, permit documents.

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit. If you think you have received this document in error, or have difficulty accessing the documents online, please contact Joanne Smiddie-Brush of my staff at 1-800-451-6027 (ext 3-0185), or via e-mail at jbrush@idem.IN.gov.

Visit **on.IN.gov/survey** or scan the QR code to provide feedback.
We appreciate your input!

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • Fax (317) 233-6647 • www.idem.IN.gov

Mike Braun
Governor

Clint Woods
Commissioner

September 25, 2026

TO: Lebanon Public Library

From: Jenny Acker, Branch Chief
Permits Branch
Office of Air Quality

Subject: **Important Information for Display Regarding a Final Determination**

Applicant Name: **Life Cycle Power**
Permit Number: **011-50087-00094**

You previously received information to make available to the public during the public comment period of a draft permit. Enclosed is a copy of the final decision and supporting materials for the same project. Please place the enclosed information along with the information you previously received. To ensure that your patrons have ample opportunity to review the enclosed permit, **we ask that you retain this document for at least 60 days.**

The applicant is responsible for placing a copy of the application in your library. If the permit application is not on file, or if you have any questions concerning this public review process, please contact Joanne Smiddie-Brush, OAQ Permits Administration Section at 1-800-451-6027, extension 3-0185.

Enclosures
Final Library 1/13/2025

Visit on.IN.gov/survey or scan the QR code to provide feedback.
We appreciate your input!

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • Fax (317) 233-6647 • www.idem.IN.gov

Mike Braun
Governor

Clint Woods
Commissioner

September 25, 2026
Life Cycle Power
011-50087-00094

To: Interested Parties

This notice is to inform you that a final decision has been issued for the air permit application referenced above. This notice is for informational purposes only. You are not required to take any action.

You are receiving this notice because you asked to be on IDEM's notification list for this company and/or county; or because your property is nearby the company being permitted; or because you represent a local/regional government entity.

The enclosed Notice of Decision Letter provides additional information about the final permit decision.

The final decision is available on the IDEM website at: https://www.in.gov/apps/idem/caats/. To view the document, choose Search Option by **Permit Number**, then enter permit 50087

The final decision is also available via IDEM's Virtual File Cabinet (VFC) located at https://www.in.gov/idem/legal/public-records/virtual-file-cabinet/. Click on the Virtual File Cabinet button. Click on the "Search" dropdown menu in the upper left corner and select "OAQ Permit" from the list of options. Select "Public" in the "Security group" dropdown menu. Type the five-digit permit number 50087 in the Permit # search field, select "Final" in the "Permit Type" dropdown menu, then click the search button at the top or bottom of the webpage. The search will return the final issued permit and any applicable mailing list.

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit.

Please Note: *If you would like to be removed from the Air Permits mailing list, please contact Joanne Smiddie-Brush with the Air Permits Administration Section at 1-800-451-6027, ext. 3-0185 or via e-mail at JBRUSH@IDEM.IN.GOV. If you have recently moved and this Notice has been forwarded to you, please notify us of your new address and if you wish to remain on the mailing list. Mail that is returned to IDEM by the Post Office with a forwarding address in a different county will be removed from our list unless otherwise requested.*

Enclosure
Final Interested Parties Cover Letter

Mail Code 61-53

IDEM Staff	JLSCOTT 9/25/2026 Page 1 of 2 Life Cycle Power 011-50087-00094 Final		
Name and address of Sender	▶	Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: **CERTIFICATE OF MAILING ONLY**

AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee Remarks
1		Geoff Bland Life Cycle Power 10603 W Sam Houston Pkwy N Houston TX 77064 (Source CAATS) Sent via FedEx Express Saver									
2		Thomas Riggs CEO Life Cycle Power 10603 W Sam Houston Pkwy N Houston TX 77064 *(RO CAATS)*									
3		Boone County Commissioners 127 W Main St Ste 400 Lebanon IN 46052 *(Local Official)*									
4		Boone County Health Department 116 W Washington St, Ste B202 Lebanon IN 46052-2174 *(Health Department)*									
5		Daryl & Lois Hoffman 7750 N CR 75 E Lizton IN 46149 *(Affected Party)*									
6		Lebanon Public Library 104 E Washington St Lebanon IN 46052-2298 *(Library)*									
7		Lebanon City Council and Mayors Office 401 S Meridian St Lebanon IN 46052 *(Local Official)*									
8		Lynn and Jenni Jenkins Or Current Resident 1730 S 950 E Zionsville IN 46077 *(Affected Party)*									
9		Kathy Linton The Lebanon Reporter 117 E Washington St Lebanon IN 46052 *(Affected Party)*									
10		Indiana Economic Development Corp 1 N Capitol Ave Ste 700 Indianapolis IN 46204 *(Affected Party)*									
11		Rebecca TeKolste 2114 Barth Ave Indianapolis IN 46203 *(Affected Party)*									
12		Hine K A Farms Inc 4570 W SR 32 Lebanon IN 46052 *(Affected Party)*									
13		Megan Anderson Sierra Club 1100 W 42nd St Ste 345 Indianapolis IN 46208 (Affected Party)									
14		Christina Blesic Or Current Resident 2955 W 50 N Lebanon IN 46052 *(Affected Party)*									
15		David & Terry Lynn Benge Or Current Resident 2963 W 50 N Lebanon IN 46052 *(Affected Party)*									

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is $50,000 per piece subject to a limit of $50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is $500. The maximum indemnity payable is $25,000 for registered mail, sent with optional postal insurance. See ***Domestic Mail Manual*** **R900, S913**, and **S921** for limitations of coverage on inured and COD mail. See ***International Mail Manual*** for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.

FACSIMILIE OF PS Form 3877

Mail Code 61-53

IDEM Staff	JLSCOTT 9/25/2026 Page 2 of 2 Life Cycle Power 011-50087-00094 Final		AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender	▶	Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: **CERTIFICATE OF MAILING ONLY**

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee Remarks
1		Eli Lilly & Company 893 S Deleware St Indianapolis IN 46285 (Affected Party)									
2		Robert Stephen & Deb Wilhoite Or Current Resident 2975 W 50 N Lebanon IN 46052 *(Affected Party)*									
3		Angela Humphress Or Current Resident 3675 W 200 N Lebanon IN 46052 *(Affected Party)*									
4		Joshua R & Brooke Potter Or Current Resident 4430 W 200 N Lebanon IN 46052 *(Affected Party)*									
5		Paul & Phyllis Nicely Or Current Resident 4590 W 200 N Lebanon IN 46052 *(Affected Party)*									
6		Capgrow Holding JV Sub V LLC 4150 International Plz Fort Worth TX 76109 *(Affected Party)*									
7		Anu Krishnan Trinity Consultants 8900 Keystone Crossing Ste 1070 Indianapolis IN 46240 *(Consultant)*									
8		Megan Anderson and Phillip Graybiel Or Current Resident 3610 Sommersworth Ln Indianapolis IN 46228 *(Affected Party)*									
9		Sarah Goss Ecoethic Creative LLC 1319 Citation Cir S Lebanon IN 46052 *(Affected Party)*									
10		Lesli Bair Or Current Resident 11553 Clarkston Rd Zionsville IN 46077 *(Affected Party)*									
11		Jodi Stewart Or Current Resident 4548 W 50 S Lebanon IN 46052 *(Affected Party)*									
12		Sam Carpenter Hoosier Environmental Council 3951 N Meridian Ste 100 Indianapolis IN 46208 *(Affected Party)*									
13		Liz Graybiel Or Current Resident 507 E Main St Lebanon In 46052 (Affected Party)									
14		Sean Crinnigan Or Current Resident 5420 Gambel Rd Indianapolis IN 46221 *(Affected Party)*									
15		Jane Rapinchuck Or Current Resident 9095 Pebblepointe Cir Zionsville IN 46077 *(Affected Party)*									

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is $50,000 per piece subject to a limit of $50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is $500. The maximum indemnity payable is $25,000 for registered mail, sent with optional postal insurance. See ***Domestic Mail Manual*** **R900, S913**, and **S921** for limitations of coverage on inured and COD mail. See ***International Mail Manual*** for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.

FACSIMILIE OF PS Form 3877