INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

TO: Interested Parties / Applicant

DATE: July 13, 2010

RE: Gary Material Supply LLC / 089-28804-00551

FROM: Matthew Stuckey, Branch Chief
Permits Branch
Office of Air Quality

Notice of Decision: Approval – Effective Immediately

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the enclosed matter. Pursuant to IC 13-15-5-3, this permit is effective immediately, unless a petition for stay of effectiveness is filed and granted, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

If you wish to challenge this decision, IC 4-21.5-3-7 and IC 13-15-6-1(b) or IC 13-15-6-1(a) require that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Office of Environmental Adjudication, 100 North Senate Avenue, Government Center North, Suite N 501E, Indianapolis, IN 46204.

For an **initial Title V Operating Permit**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **thirty (30)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(b).

For a **Title V Operating Permit renewal**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **fifteen (15)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(a).

The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

(1) the date the document is delivered to the Office of Environmental Adjudication (OEA);
(2) the date of the postmark on the envelope containing the document, if the document is mailed to OEA by U.S. mail; or
(3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OEA by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

Recycled Paper An Equal Opportunity Employer *Please Recycle*

(1) the name and address of the person making the request;
(2) the interest of the person making the request;
(3) identification of any persons represented by the person making the request;
(4) the reasons, with particularity, for the request;
(5) the issues, with particularity, proposed for considerations at any hearing; and
(6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

Pursuant to 326 IAC 2-7-18(d), any person may petition the U.S. EPA to object to the issuance of an initial Title V operating permit, permit renewal, or modification within sixty (60) days of the end of the forty-five (45) day EPA review period. Such an objection must be based only on issues that were raised with reasonable specificity during the public comment period, unless the petitioner demonstrates that it was impractible to raise such issues, or if the grounds for such objection arose after the comment period.

To petition the U.S. EPA to object to the issuance of a Title V operating permit, contact:

U.S. Environmental Protection Agency
401 M Street
Washington, D.C. 20406

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.

Enclosures
FNTVOP.dot12/3/07

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

Part 70 Operating Permit
OFFICE OF AIR QUALITY

Gary Material Supply, LLC
3210 Watling St.
East Chicago, Indiana 46312

(herein known as the Permittee) is hereby authorized to construct and operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this permit.

The Permittee must comply with all conditions of this permit. Noncompliance with any provisions of this permit is grounds for enforcement action; permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Noncompliance with any provision of this permit, except any provision specifically designated as not federally enforceable, constitutes a violation of the Clean Air Act. It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. An emergency does constitute an affirmative defense in an enforcement action provided the Permittee complies with the applicable requirements set forth in Section B, Emergency Provisions.

This permit is issued in accordance with 326 IAC 2 and 40 CFR Part 70 Appendix A and contains the conditions and provisions specified in 326 IAC 2-7 as required by 42 U.S.C. 7401, et. seq. (Clean Air Act as amended by the 1990 Clean Air Act Amendments), 40 CFR Part 70.6, IC 13-15 and IC 13-17.

Operation Permit No.: T089-28804-00551	
Issued by: Chrystal A. Wagner, Section Chief Permits Branch Office of Air Quality	Issuance Date: July 13, 2010 Expiration Date: July 13, 2015

TABLE OF CONTENTS

A. SOURCE SUMMARY 3
- A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]
- A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)] [326 IAC 2-7-5(15)]
- A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-7-4(c)] [326 IAC 2-7-5(15)]
- A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

B. GENERAL CONDITIONS 3
- B.1 Definitions [326 IAC 2-7-1]
- B.2 Revocation of Permits [326 IAC 2-1.1-9(5)]
- B.3 Affidavit of Construction [326 IAC 2-5.1-3(h)] [326 IAC 2-5.1-4]
- B.4 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)] [IC 13-15-3-6(a)]
- B.5 Term of Conditions [326 IAC 2-1.1-9.5]
- B.6 Enforceability [326 IAC 2-7-7] [IC 13-17-12]
- B.7 Severability [326 IAC 2-7-5(5)]
- B.8 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]
- B.9 Duty to Provide Information [326 IAC 2-7-5(6)(E)]
- B.10 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]
- B.11 Annual Compliance Certification [326 IAC 2-7-6(5)]
- B.12 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)] [326 IAC 1-6-3]
- B.13 Emergency Provisions [326 IAC 2-7-16]
- B.14 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]
- B.15 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]
- B.16 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]
- B.17 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]
- B.18 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]
- B.19 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12] [40 CFR 72]
- B.20 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)] [326 IAC 2-7-12(b)(2)]
- B.21 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]
- B.22 Source Modification Requirement [326 IAC 2-7-10.5]
- B.23 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]
- B.24 Transfer of Ownership or Operational Control [326 IAC 2-7-11]
- B.25 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]
- B.26 Advanced Source Modification Approval [326 IAC 2-7-5(16)] [326 IAC 2-7-10.5]
- B.27 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

C. SOURCE OPERATION CONDITIONS 3

Emission Limitations and Standards [326 IAC 2-7-5(1)]
- C.1 Opacity [326 IAC 5-1]
- C.2 Open Burning [326 IAC 4-1] [IC 13-17-9]
- C.3 Incineration [326 IAC 4-2] [326 IAC 9-1-2]
- C.4 Fugitive Dust Emissions [326 IAC 6-4]
- C.5 Fugitive Particulate Matter Emissions [326 IAC 6.8-10-3]
- C.6 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

Testing Requirements [326 IAC 2-7-6(1)]
C.7 Performance Testing [326 IAC 3-6]

Compliance Requirements [326 IAC 2-1.1-11]
C.8 Compliance Requirements [326 IAC 2-1.1-11]

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]
C.9 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]
C.10 Continuous Compliance Plan [326 IAC 6.8-8-1] [326 IAC 6.8-8-8]
C.11 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]
C.12 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]
C.13 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]
C.14 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]
C.15 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5] [326 IAC 2-7-6]

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]
C.16 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)] [326 IAC 2-6]
C.17 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6] [326 IAC 2-2] [326 IAC 2-3]
C.18 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11] [326 IAC 2-2]

Stratospheric Ozone Protection
C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

D. EMISSIONS UNIT OPERATION CONDITIONS 283

Emission Limitations and Standards [326 IAC 2-7-5(1)]
D.1.1 PSD and Nonattainment NSR Minor Limit [326 IAC 2-2] [326 IAC 2-1.1-5]
D.1.2 Particulate Matter Less Than 10 Microns in Diameter (PM_{10}) [326 IAC 6.8-1-2]
D.1.3 Preventive Maintenance Plan [326 IAC 2-7-5(13)]
D.1.4 Particulate Matter (PM) [326 IAC 6.8-10]

Compliance Determination Requirements
D.1.5 Particulate Control [326 IAC 2-2]
D.1.6 Particulate Matter (PM) [326 IAC 6.8-10] [326 IAC 2-2]

Compliance Monitoring Requirements [326 IAC 2-7-5(1)] [326 IAC 2-7-6(1)]
D.1.7 Visible Emissions Notations

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]
D.1.8 Record Keeping Requirements
D.1.9 Reporting Requirements

Certification 33
Emergency Occurrence Report 34
Quarterly Report 36
Quarterly Deviation and Compliance Monitoring Report 37
Attachment A - Fugitive Dust Control Plan 39

SECTION A SOURCE SUMMARY

This permit is based on information requested by the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ). The information describing the source contained in conditions A.1 through A.3 is descriptive information and does not constitute enforceable conditions. However, the Permittee should be aware that a physical change or a change in the method of operation that may render this descriptive information obsolete or inaccurate may trigger requirements for the Permittee to obtain additional permits or seek modification of this permit pursuant to 326 IAC 2, or change other applicable requirements presented in the permit application.

A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]

The Permittee owns and operates a stationary steel mill contractor.

Source Address:	3210 Watling St., East Chicago, Indiana 46312
Mailing Address:	P.O. Box 1039, Crown Point, IN 46308
General Source Phone Number:	219-663-0052
SIC Code:	1739
County Location:	Lake
Source Location Status:	Nonattainment for 8-hour ozone standard Nonattainment for $PM_{2.5}$ standard Attainment for all other criteria pollutants
Source Status:	Part 70 Operating Permit Program Major Source, under PSD Rules Major Source, Section 112 of the Clean Air Act 1 of 28 Source Categories

A.2 Source Determination [326 IAC 2-7-1(22)]

ArcelorMittal USA, Inc. is an integrated steel mill consisting of a source with on-site contractors:

(a) ArcelorMittal USA, Inc. (Plant ID 089-00316), the primary operation, is located at 1 3210 Watling St., East Chicago, Indiana; and

(b) Gary Material Supply, LLC (Plant ID 089-00551), an on-site contractor (a crushing and screening operation), is located at 3210 Watling St., East Chicago, Indiana.

IDEM has determined that Gary Material Supply, LLC is under the common control of ArcelorMittal USA, Inc., and therefore will be considered one (1) source, as defined by 326 IAC 2-7-1(22), based on this contractual control. Therefore, the term “source” in the Part 70 documents refers to both ArcelorMittal USA, Inc., and Gary Material Supply, LLC. as one (1) source.

A Separate Part 70 Operating permit will be issued to Gary Material Supply, LLC solely for administrative purposes. For permitting purposes, Gary Material Supply, LLC is assigned Permit No. T089-28804-00551.

A.3 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)] [326 IAC 2-7-5(15)]

This stationary source consists of the following emission units and pollution control devices:

(a) One (1) crusher, approved for construction in 2009, with a nominal throughput capacity of 175 tons of steel mill slag per hour;

(b) One (1) screen process, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(c) Four (4) conveyors, consisting of four (4) transfer points, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(d) Material handling and storage piles, with a maximum capacity of 175 tons per hour (material handling), and storage capacity of 10,000 tons;

(e) One diesel engine, approved for installation in 2009, with a maximum heat input capacity of 150 kW, and constructed before January 1, 2005; and

(f) One (1) seven (7) yard front end loader loading the raw material.

A.4 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)] [326 IAC 2-7-4(c)] [326 IAC 2-7-5(15)]

This stationary source does not currently have any insignificant activities, as defined in 326 IAC 2-7-1(21) that are specifically regulated.

A.5 Part 70 Permit Applicability [326 IAC 2-7-2]

This stationary source is required to have a Part 70 permit by 326 IAC 2-7-2 (Applicability) because:

(a) It is a major source, as defined in 326 IAC 2-7-1(22);

(b) It is a source in a source category designated by the United States Environmental Protection Agency (U.S. EPA) under 40 CFR 70.3 (Part 70 - Applicability).

A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

This stationary source is required to have a Part 70 permit by 326 IAC 2-7-2 (Applicability) because:

(a) It is a major source, as defined in 326 IAC 2-7-1(22);

(b) It is a source in a source category designated by the United States Environmental Protection Agency (U.S. EPA) under 40 CFR 70.3 (Part 70 - Applicability).

SECTION B GENERAL CONDITIONS

B.1 Definitions [326 IAC 2-7-1]

Terms in this permit shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-7) shall prevail.

B.2 Revocation of Permits [326 IAC 2-1.1-9(5)]

Pursuant to 326 IAC 2-1.1-9(5)(Revocation of Permits), the Commissioner may revoke this permit if construction is not commenced within eighteen (18) months after receipt of this approval or if construction is suspended for a continuous period of one (1) year or more.

B.3 Affidavit of Construction [326 IAC 2-5.1-3(h)] [326 IAC 2-5.1-4]

This document shall also become the approval to operate pursuant to 326 IAC 2-5.1-4 when prior to the start of operation, the following requirements are met:

(a) The attached Affidavit of Construction shall be submitted to the Office of Air Quality (OAQ), verifying that the emission units were constructed as proposed in the application or the permit. The emission units covered in this permit may begin operating on the date the Affidavit of Construction is postmarked or hand delivered to IDEM if constructed as proposed.

(b) If actual construction of the emission units differs from the construction proposed in the application, the source may not begin operation until the permit has been revised pursuant to 326 IAC 2 and an Operation Permit Validation Letter is issued.

(c) The Permittee shall attach the Operation Permit Validation Letter received from the Office of Air Quality (OAQ) to this permit.

B.4 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]

(a) This permit, T089-28804-00551, is issued for a fixed term of five (5) years from the issuance date of this permit, as determined in accordance with IC 4-21.5-3-5(f) and IC 13-15-5-3. Subsequent revisions, modifications, or amendments of this permit do not affect the expiration date of this permit or of permits issued pursuant to Title IV of the Clean Air Act and 326 IAC 21 (Acid Deposition Control).

(b) If IDEM, OAQ, upon receiving a timely and complete renewal permit application, fails to issue or deny the permit renewal prior to the expiration date of this permit, this existing permit shall not expire and all terms and conditions shall continue in effect, including any permit shield provided in 326 IAC 2-7-15, until the renewal permit has been issued or denied.

B.5 Term of Conditions [326 IAC 2-1.1-9.5]

Notwithstanding the permit term of a permit to construct, a permit to operate, or a permit modification, any condition established in a permit issued pursuant to a permitting program approved in the state implementation plan shall remain in effect until:

(a) the condition is modified in a subsequent permit action pursuant to Title I of the Clean Air Act; or

(b) the emission unit to which the condition pertains permanently ceases operation.

B.6 Enforceability [326 IAC 2-7-7] [IC 13-17-12]

Unless otherwise stated, all terms and conditions in this permit, including any provisions designed to limit the source's potential to emit, are enforceable by IDEM, the United States Environmental Protection Agency (U.S. EPA) and by citizens in accordance with the Clean Air Act.

B.7 Severability [326 IAC 2-7-5(5)]

The provisions of this permit are severable; a determination that any portion of this permit is invalid shall not affect the validity of the remainder of the permit.

B.8 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]

This permit does not convey any property rights of any sort or any exclusive privilege.

B.9 Duty to Provide Information [326 IAC 2-7-5(6)(E)]

(a) The Permittee shall furnish to IDEM, OAQ, within a reasonable time, any information that IDEM, OAQ may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. Upon request, the Permittee shall also furnish to IDEM, OAQ copies of records required to be kept by this permit.

(b) For information furnished by the Permittee to IDEM, OAQ, the Permittee may include a claim of confidentiality in accordance with 326 IAC 17.1. When furnishing copies of requested records directly to U. S. EPA, the Permittee may assert a claim of confidentiality in accordance with 40 CFR 2, Subpart B.

B.10 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]

(a) A certification required by this permit meets the requirements of 326 IAC 2-7-6(1) if:

(i) it contains a certification by a "responsible official" as defined by 326 IAC 2-7-1(34), and

(ii) the certification is based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

(b) The Permittee may use the attached Certification Form, or its equivalent with each submittal requiring certification. One (1) certification may cover multiple forms in one (1) submittal.

(c) A "responsible official" is defined at 326 IAC 2-7-1(34).

B.11 Annual Compliance Certification [326 IAC 2-7-6(5)]

(a) The Permittee shall annually submit a compliance certification report which addresses the status of the source's compliance with the terms and conditions contained in this permit, including emission limitations, standards, or work practices. The initial certification shall cover the time period from the date of final permit issuance through December 31 of the same year. All subsequent certifications shall cover the time period from January 1 to December 31 of the previous year, and shall be submitted no later than April 15 of each year to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V
Air and Radiation Division, Air Enforcement Branch - Indiana (AE-17J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

(b) The annual compliance certification report required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ, on or before the date it is due.

(c) The annual compliance certification report shall include the following:

(1) The appropriate identification of each term or condition of this permit that is the basis of the certification;

(2) The compliance status;

(3) Whether compliance was continuous or intermittent;

(4) The methods used for determining the compliance status of the source, currently and over the reporting period consistent with 326 IAC 2-7-5(3); and

(5) Such other facts, as specified in Sections D of this permit, as IDEM, OAQ may require to determine the compliance status of the source.

The submittal by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

B.12 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)][326 IAC 1-6-3]

(a) If required by specific condition(s) in Section D of this permit, the Permittee shall prepare and maintain Preventive Maintenance Plans (PMPs) no later than ninety (90) days after issuance of this permit or ninety (90) days after initial start-up, whichever is later, including the following information on each facility:

(1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;

(2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and

(3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

If, due to circumstances beyond the Permittee's control, the PMPs cannot be prepared and maintained within the above time frame, the Permittee may extend the date an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003

Indianapolis, Indiana 46204-2251

The PMP extension notification does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

The Permittee shall implement the PMPs.

(b) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Permittee to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions. The PMPs and their submittal do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) To the extent the Permittee is required by 40 CFR Part 60/63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

B.13 Emergency Provisions [326 IAC 2-7-16]

(a) An emergency, as defined in 326 IAC 2-7-1(12), is not an affirmative defense for an action brought for noncompliance with a federal or state health-based emission limitation.

(b) An emergency, as defined in 326 IAC 2-7-1(12), constitutes an affirmative defense to an action brought for noncompliance with a technology-based emission limitation if the affirmative defense of an emergency is demonstrated through properly signed, contemporaneous operating logs or other relevant evidence that describe the following:

(1) An emergency occurred and the Permittee can, to the extent possible, identify the causes of the emergency;

(2) The permitted facility was at the time being properly operated;

(3) During the period of an emergency, the Permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards or other requirements in this permit;

(4) For each emergency lasting one (1) hour or more, the Permittee notified IDEM, OAQ, or Northwest Regional Office within four (4) daytime business hours after the beginning of the emergency, or after the emergency was discovered or reasonably should have been discovered;

Telephone Number: 1-800-451-6027 (ask for Office of Air Quality, Compliance and Enforcement Branch), or
Telephone Number: 317-233-0178 (ask for Office of Air Quality, Compliance and Enforcement Branch)
Facsimile Number: 317-233-6865
Northwest Regional Office phone: (219) 757-0265; fax: (219) 757-0267.

(5) For each emergency lasting one (1) hour or more, the Permittee submitted the attached Emergency Occurrence Report Form or its equivalent, either by mail or facsimile to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality

100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

within two (2) working days of the time when emission limitations were exceeded due to the emergency.

The notice fulfills the requirement of 326 IAC 2-7-5(3)(C)(ii) and must contain the following:

(A) A description of the emergency;

(B) Any steps taken to mitigate the emissions; and

(C) Corrective actions taken.

The notification which shall be submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(6) The Permittee immediately took all reasonable steps to correct the emergency.

(c) In any enforcement proceeding, the Permittee seeking to establish the occurrence of an emergency has the burden of proof.

(d) This emergency provision supersedes 326 IAC 1-6 (Malfunctions). This permit condition is in addition to any emergency or upset provision contained in any applicable requirement.

(e) The Permittee seeking to establish the occurrence of an emergency shall make records available upon request to ensure that failure to implement a PMP did not cause or contribute to an exceedance of any limitations on emissions. However, IDEM, OAQ may require that the Preventive Maintenance Plans required under 326 IAC 2-7-4(c)(9) be revised in response to an emergency.

(f) Failure to notify IDEM, OAQ by telephone or facsimile of an emergency lasting more than one (1) hour in accordance with (b)(4) and (5) of this condition shall constitute a violation of 326 IAC 2-7 and any other applicable rules.

(g) If the emergency situation causes a deviation from a technology-based limit, the Permittee may continue to operate the affected emitting facilities during the emergency provided the Permittee immediately takes all reasonable steps to correct the emergency and minimize emissions.

B.14 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]

(a) Pursuant to 326 IAC 2-7-15, the Permittee has been granted a permit shield. The permit shield provides that compliance with the conditions of this permit shall be deemed compliance with any applicable requirements as of the date of permit issuance, provided that either the applicable requirements are included and specifically identified in this permit or the permit contains an explicit determination or concise summary of a determination that other specifically identified requirements are not applicable. The Indiana statutes from IC 13 and rules from 326 IAC, referenced in conditions in this permit, are those applicable at the time the permit was issued. The issuance or possession of this permit shall not alone constitute a defense against an alleged violation of any law, regulation or standard, except for the requirement to obtain a Part 70 permit

under 326 IAC 2-7 or for applicable requirements for which a permit shield has been granted.

This permit shield does not extend to applicable requirements which are promulgated after the date of issuance of this permit unless this permit has been modified to reflect such new requirements.

(b) If, after issuance of this permit, it is determined that the permit is in nonconformance with an applicable requirement that applied to the source on the date of permit issuance, IDEM, OAQ, shall immediately take steps to reopen and revise this permit and issue a compliance order to the Permittee to ensure expeditious compliance with the applicable requirement until the permit is reissued. The permit shield shall continue in effect so long as the Permittee is in compliance with the compliance order.

(c) No permit shield shall apply to any permit term or condition that is determined after issuance of this permit to have been based on erroneous information supplied in the permit application. Erroneous information means information that the Permittee knew to be false, or in the exercise of reasonable care should have been known to be false, at the time the information was submitted.

(d) Nothing in 326 IAC 2-7-15 or in this permit shall alter or affect the following:

(1) The provisions of Section 303 of the Clean Air Act (emergency orders), including the authority of the U.S. EPA under Section 303 of the Clean Air Act;

(2) The liability of the Permittee for any violation of applicable requirements prior to or at the time of this permit's issuance;

(3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act; and

(4) The ability of U.S. EPA to obtain information from the Permittee under Section 114 of the Clean Air Act.

(e) This permit shield is not applicable to any change made under 326 IAC 2-7-20(b)(2) (Sections 502(b)(10) of the Clean Air Act changes) and 326 IAC 2-7-20(c)(2) (trading based on State Implementation Plan (SIP) provisions).

(f) This permit shield is not applicable to modifications eligible for group processing until after IDEM, OAQ, has issued the modifications. [326 IAC 2-7-12(c)(7)]

(g) This permit shield is not applicable to minor Part 70 permit modifications until after IDEM, OAQ, has issued the modification. [326 IAC 2-7-12(b)(8)]

B.15 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]

(a) All terms and conditions of permits established prior to T089-28804-00551 and issued pursuant to permitting programs approved into the state implementation plan have been either:

(1) incorporated as originally stated,

(2) revised under 326 IAC 2-7-10.5, or

(3) deleted under 326 IAC 2-7-10.5.

(b) Provided that all terms and conditions are accurately reflected in this combined permit, all previous registrations and permits are superseded by this combined new source review and part 70 operating permit, except for permits issued pursuant to Title IV of the Clean Air Act and 326 IAC 21 (Acid Deposition Control)

B.16 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]

The Permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least nine (9) months prior to the date of expiration of the source's existing permit, consistent with 326 IAC 2-7-3 and 326 IAC 2-7-4(a).

B.17 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]

(a) This permit may be modified, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a Part 70 Operating Permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any condition of this permit. [326 IAC 2-7-5(6)(C)] The notification by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(b) This permit shall be reopened and revised under any of the circumstances listed in IC 13-15-7-2 or if IDEM, OAQ determines any of the following:

(1) That this permit contains a material mistake.

(2) That inaccurate statements were made in establishing the emissions standards or other terms or conditions.

(3) That this permit must be revised or revoked to assure compliance with an applicable requirement. [326 IAC 2-7-9(a)(3)]

(c) Proceedings by IDEM, OAQ to reopen and revise this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening and revision shall be made as expeditiously as practicable. [326 IAC 2-7-9(b)]

(d) The reopening and revision of this permit, under 326 IAC 2-7-9(a), shall not be initiated before notice of such intent is provided to the Permittee by IDEM, OAQ at least thirty (30) days in advance of the date this permit is to be reopened, except that IDEM, OAQ may provide a shorter time period in the case of an emergency. [326 IAC 2-7-9(c)]

B.18 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]

(a) The application for renewal shall be submitted using the application form or forms prescribed by IDEM, OAQ and shall include the information specified in 326 IAC 2-7-4. Such information shall be included in the application for each emission unit at this source, except those emission units included on the trivial or insignificant activities list contained in 326 IAC 2-7-1(21) and 326 IAC 2-7-1(40). The renewal application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Request for renewal shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(b) A timely renewal application is one that is:

(1) Submitted at least nine (9) months prior to the date of the expiration of this permit; and

(2) If the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(c) If the Permittee submits a timely and complete application for renewal of this permit, the source's failure to have a permit is not a violation of 326 IAC 2-7 until IDEM, OAQ takes final action on the renewal application, except that this protection shall cease to apply if, subsequent to the completeness determination, the Permittee fails to submit by the deadline specified, pursuant to 326 IAC 2-7-4(a)(2)(D), in writing by IDEM, OAQ any additional information identified as being needed to process the application.

B.19 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12] [40 CFR 72]

(a) Permit amendments and modifications are governed by the requirements of 326 IAC 2-7-11 or 326 IAC 2-7-12 whenever the Permittee seeks to amend or modify this permit.

(b) Pursuant to 326 IAC 2-7-11(b) and 326 IAC 2-7-12(a), administrative Part 70 operating permit amendments and permit modifications for purposes of the acid rain portion of a Part 70 permit shall be governed by regulations promulgated under Title IV of the Clean Air Act. [40 CFR 72]

(c) Any application requesting an amendment or modification of this permit shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(d) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.20 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)][326 IAC 2-7-12(b)(2)]

(a) No Part 70 permit revision or notice shall be required under any approved economic incentives, marketable Part 70 permits, emissions trading, and other similar programs or processes for changes that are provided for in a Part 70 permit.

(b) Notwithstanding 326 IAC 2-7-12(b)(1) and 326 IAC 2-7-12(c)(1), minor Part 70 permit modification procedures may be used for Part 70 modifications involving the use of economic incentives, marketable Part 70 permits, emissions trading, and other similar approaches to the extent that such minor Part 70 permit modification procedures are explicitly provided for in the applicable State Implementation Plan (SIP) or in applicable requirements promulgated or approved by the U.S. EPA.

B.21 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]

(a) The Permittee may make any change or changes at the source that are described in 326 IAC 2-7-20(b),(c), or (e) without a prior permit revision, if each of the following conditions is met:

(1) The changes are not modifications under any provision of Title I of the Clean Air Act;

(2) Any preconstruction approval required by 326 IAC 2-7-10.5 has been obtained;

(3) The changes do not result in emissions which exceed the limitations provided in this permit (whether expressed herein as a rate of emissions or in terms of total emissions);

(4) The Permittee notifies the:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V
Air and Radiation Division, Regulation Development Branch - Indiana (AR-18J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

in advance of the change by written notification at least ten (10) days in advance of the proposed change. The Permittee shall attach every such notice to the Permittee's copy of this permit; and

(5) The Permittee maintains records on-site, on a rolling five (5) year basis, which document all such changes and emission trades that are subject to 326 IAC 2-7-20(b),(c), or (e). The Permittee shall make such records available, upon reasonable request, for public review.

Such records shall consist of all information required to be submitted to IDEM, OAQ in the notices specified in 326 IAC 2-7-20(b)(1), (c)(1), and (e)(2).

(b) The Permittee may make Section 502(b)(10) of the Clean Air Act changes (this term is defined at 326 IAC 2-7-1(36)) without a permit revision, subject to the constraint of 326 IAC 2-7-20(a). For each such Section 502(b)(10) of the Clean Air Act change, the required written notification shall include the following:

(1) A brief description of the change within the source;

(2) The date on which the change will occur;

(3) Any change in emissions; and

(4) Any permit term or condition that is no longer applicable as a result of the change.

The notification which shall be submitted is not considered an application form, report or compliance certification. Therefore, the notification by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) Emission Trades [326 IAC 2-7-20(c)]
The Permittee may trade emissions increases and decreases at the source, where the applicable SIP provides for such emission trades without requiring a permit revision, subject to the constraints of Section (a) of this condition and those in 326 IAC 2-7-20(c).

(d) Alternative Operating Scenarios [326 IAC 2-7-20(d)]
The Permittee may make changes at the source within the range of alternative operating scenarios that are described in the terms and conditions of this permit in accordance with 326 IAC 2-7-5(9). No prior notification of IDEM, OAQ, or U.S. EPA is required.

(e) Backup fuel switches specifically addressed in, and limited under, Section D of this permit shall not be considered alternative operating scenarios. Therefore, the notification requirements of part (a) of this condition do not apply.

(f) This condition does not apply to emission trades of SO_2 or NO_X under 326 IAC 21 or 326 IAC 10-4.

B.22 Source Modification Requirement [326 IAC 2-7-10.5]

A modification, construction, or reconstruction is governed by the requirements of 326 IAC 2.

B.23 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]

Upon presentation of proper identification cards, credentials, and other documents as may be required by law, and subject to the Permittee’s right under all applicable laws and regulations to assert that the information collected by the agency is confidential and entitled to be treated as such, the Permittee shall allow IDEM, OAQ, U.S. EPA, or an authorized representative to perform the following:

(a) Enter upon the Permittee's premises where a Part 70 source is located, or emissions related activity is conducted, or where records must be kept under the conditions of this permit;

(b) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, have access to and copy any records that must be kept under the conditions of this permit;

(c) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, inspect any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit;

(d) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, sample or monitor substances or parameters for the purpose of assuring compliance with this permit or applicable requirements; and

(e) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, utilize any photographic, recording, testing, monitoring, or other equipment for the purpose of assuring compliance with this permit or applicable requirements.

B.24 Transfer of Ownership or Operational Control [326 IAC 2-7-11]

(a) The Permittee must comply with the requirements of 326 IAC 2-7-11 whenever the Permittee seeks to change the ownership or operational control of the source and no other change in the permit is necessary.

(b) Any application requesting a change in the ownership or operational control of the source shall contain a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new Permittee. The application shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.25 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]

(a) The Permittee shall pay annual fees to IDEM, OAQ within thirty (30) calendar days of receipt of a billing. Pursuant to 326 IAC 2-7-19(b), if the Permittee does not receive a bill from IDEM, OAQ the applicable fee is due April 1 of each year.

(b) Except as provided in 326 IAC 2-7-19(e), failure to pay may result in administrative enforcement action or revocation of this permit.

(c) The Permittee may call the following telephone numbers: 1-800-451-6027 or 317-233-4230 (ask for OAQ, Billing, Licensing, and Training Section), to determine the appropriate permit fee.

B.26 Advanced Source Modification Approval [326 IAC 2-7-5(16)] [326 IAC 2-7-10.5]

(a) The requirements to obtain a source modification approval under 326 IAC 2-7-10.5 or a permit modification under 326 IAC 2-7-12 are satisfied by this permit for the proposed emission units, control equipment or insignificant activities in Sections A.2 and A.3.

(b) Pursuant to 326 IAC 2-1.1-9 any permit authorizing construction may be revoked if construction of the emission unit has not commenced within eighteen (18) months from

the date of issuance of the permit, or if during the construction, work is suspended for a continuous period of one (1) year or more.

B.27 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

For the purpose of submitting compliance certifications or establishing whether or not the Permittee has violated or is in violation of any condition of this permit, nothing in this permit shall preclude the use, including the exclusive use, of any credible evidence or information relevant to whether the Permittee would have been in compliance with the condition of this permit if the appropriate performance or compliance test or procedure had been performed.

SECTION C SOURCE OPERATION CONDITIONS

Entire Source

Emission Limitations and Standards [326 IAC 2-7-5(1)]

C.1 Opacity [326 IAC 5-1]

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-1 (Applicability) and 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

(a) Opacity shall not exceed an average of twenty percent (20%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.

(b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

C.2 Open Burning [326 IAC 4-1] [IC 13-17-9]

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

C.3 Incineration [326 IAC 4-2] [326 IAC 9-1-2]

The Permittee shall not operate an incinerator except as provided in 326 IAC 4-2 or in this permit. The Permittee shall not operate a refuse incinerator or refuse burning equipment except as provided in 326 IAC 9-1-2 or in this permit.

C.4 Fugitive Dust Emissions [326 IAC 6-4]

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions). 326 IAC 6-4-2(4) is not federally enforceable.

C.5 Fugitive Particulate Matter Emissions [326 IAC 6.8-10-3]

Pursuant to 326 IAC 6.8-10-3 (formerly 326 IAC 6-1-11.1) (Lake County Fugitive Particulate Matter Control Requirements), the particulate matter emissions from source wide activities shall meet the following requirements:

(a) The average instantaneous opacity of fugitive particulate emissions from a paved road shall not exceed ten percent (10%).

(b) The average instantaneous opacity of fugitive particulate emissions from an unpaved road shall not exceed ten percent (10%).

(c) The opacity of fugitive particulate emissions from exposed areas shall not exceed ten percent (10%) on a six (6) minute average.

(d) The opacity of fugitive particulate emissions from continuous transfer of material onto and out of storage piles shall not exceed ten percent (10%) on a three (3) minute average.

(e) The opacity of fugitive particulate emissions from storage piles shall not exceed ten percent (10%) on a six (6) minute average.

(f) There shall be a zero (0) percent frequency of visible emission observations of a material during the inplant transportation of material by truck or rail at any time.

(g) The opacity of fugitive particulate emissions from the inplant transportation of material by front end loaders and skip hoists shall not exceed ten percent (10%).

(h) Material processing facilities shall include the following:

(1) There shall be a zero (0) percent frequency of visible emission observations from a building enclosing all or part of the material processing equipment, except from a vent in the building.

(2) The PM_{10} emissions from building vents shall not exceed twenty-two thousandths (0.022) grains per dry standard cubic foot and ten percent (10%) opacity.

(3) The PM_{10} stack emissions from a material processing facility shall not exceed twenty-two thousandths (0.022) grains per dry standard cubic foot and ten percent (10%) opacity.

(4) The opacity of fugitive particulate emissions from the material processing facilities, except a crusher at which a capture system is not used, shall not exceed ten percent (10%) opacity.

(5) The opacity of fugitive particulate emissions from a crusher at which a capture system is not used shall not exceed fifteen percent (15%).

(i) The opacity of particulate emissions from dust handling equipment shall not exceed ten percent (10%).

(j) Material transfer limits shall be as follows:

(1) The average instantaneous opacity of fugitive particulate emissions from batch transfer shall not exceed ten percent (10%).

(2) Where adequate wetting of the material for fugitive particulate emissions control is prohibitive to further processing or reuse of the material, the opacity shall not exceed ten percent (10%), three (3) minute average.

(3) Slag and kish handling activities at integrated iron and steel plants shall comply with the following particulate emissions limits:

(A) The opacity of fugitive particulate emissions from transfer from pots and trucks into pits shall not exceed twenty percent (20%) on a six (6) minute average.

(B) The opacity of fugitive particulate emissions from transfer from pits into front end loaders and from transfer from front end loaders into trucks shall comply with the fugitive particulate emission limits in 326 IAC 6.8-10-3(9).

(k) Any facility or operation not specified in 326 IAC 6.8-10-3 shall meet a twenty percent (20%), three (3) minute average opacity standard.

The Permittee shall achieve these limits by controlling fugitive particulate matter emissions according to the attached Fugitive Dust Control Plan.

C.6 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

(a) Notification requirements apply to each owner or operator. If the combined amount of regulated asbestos containing material (RACM) to be stripped, removed or disturbed is at least 260 linear feet on pipes or 160 square feet on other facility components, or at least thirty-five (35) cubic feet on all facility components, then the notification requirements of 326 IAC 14-10-3 are mandatory. All demolition projects require notification whether or not asbestos is present.

(b) The Permittee shall ensure that a written notification is sent on a form provided by the Commissioner at least ten (10) working days before asbestos stripping or removal work or before demolition begins, per 326 IAC 14-10-3, and shall update such notice as necessary, including, but not limited to the following:

(1) When the amount of affected asbestos containing material increases or decreases by at least twenty percent (20%); or

(2) If there is a change in the following:

(A) Asbestos removal or demolition start date;

(B) Removal or demolition contractor; or

(C) Waste disposal site.

(c) The Permittee shall ensure that the notice is postmarked or delivered according to the guidelines set forth in 326 IAC 14-10-3(2).

(d) The notice to be submitted shall include the information enumerated in 326 IAC 14-10-3(3).

All required notifications shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

The notice shall include a signed certification from the owner or operator that the information provided in this notification is correct and that only Indiana licensed workers and project supervisors will be used to implement the asbestos removal project. The notifications do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(e) Procedures for Asbestos Emission Control
The Permittee shall comply with the applicable emission control procedures in 326 IAC 14-10-4 and 40 CFR 61.145(c). Per 326 IAC 14-10-1, emission control requirements are applicable for any removal or disturbance of RACM greater than three (3) linear feet on pipes or three (3) square feet on any other facility components or a total of at least 0.75 cubic feet on all facility components.

(f) Demolition and Renovation
The Permittee shall thoroughly inspect the affected facility or part of the facility where the demolition or renovation will occur for the presence of asbestos pursuant to 40 CFR 61.145(a).

(g) Indiana Licensed Asbestos Inspector
The Permittee shall comply with 326 IAC 14-10-1(a) that requires the owner or operator, prior to a renovation/demolition, to use an Indiana Licensed Asbestos Inspector to thoroughly inspect the affected portion of the facility for the presence of asbestos. The requirement to use an Indiana Licensed Asbestos inspector is not federally enforceable.

Testing Requirements [326 IAC 2-7-6(1)]

C.7 Performance Testing [326 IAC 3-6]

(a) For performance testing required by this permit, a test protocol, except as provided elsewhere in this permit, shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

no later than thirty-five (35) days prior to the intended test date. The protocol submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(b) The Permittee shall notify IDEM, OAQ of the actual test date at least fourteen (14) days prior to the actual test date. The notification submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) Pursuant to 326 IAC 3-6-4(b), all test reports must be received by IDEM, OAQ not later than forty-five (45) days after the completion of the testing. An extension may be granted by IDEM, OAQ if the Permittee submits to IDEM, OAQ a reasonable written explanation not later than five (5) days prior to the end of the initial forty-five (45) day period.

Compliance Requirements [326 IAC 2-1.1-11]

C.8 Compliance Requirements [326 IAC 2-1.1-11]

The commissioner may require stack testing, monitoring, or reporting at any time to assure compliance with all applicable requirements by issuing an order under 326 IAC 2-1.1-11. Any monitoring or testing shall be performed in accordance with 326 IAC 3 or other methods approved by the commissioner or the U. S. EPA.

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

C.9 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]

Unless otherwise specified in this permit, for all monitoring requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or of initial start-up, whichever is later, to begin such monitoring. If due to circumstances beyond the Permittee's control, any monitoring equipment required by this permit cannot be installed and operated no later than ninety (90) days after permit issuance or the date of initial startup, whichever is later, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification which shall be submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Unless otherwise specified in the approval for the new emission unit(s), compliance monitoring for new emission units or emission units added through a source modification shall be implemented when operation begins.

C.10 Continuous Compliance Plan [326 IAC 6.8-8-1] [326 IAC 6.8-8-8]

(a) Pursuant to 326 IAC 326 IAC 6.8-8-1, the source (ArcelorMittal USA, Inc.) shall submit to IDEM and maintain at source a copy of the Continuous Compliance Plan (CCP). The source (ArcelorMittal USA, Inc.) shall perform the inspections, monitoring and record keeping in accordance with the information in 326 IAC 6.8-8-5 through 326 IAC 6.8-8-7 or applicable procedures in the CCP.

(b) Pursuant to 326 IAC 6.8-8-8, the source (ArcelorMittal USA, Inc.) shall update the CCP, as needed, retain a copy of any changes and updates to the CCP at the source and make the updated CCP available for inspection by the department. The source (ArcelorMittal USA, Inc.) shall submit the updated CCP, if required to IDEM, OAQ within thirty (30) days of the update.

(c) Pursuant to 326 IAC 6.8-8, failure to submit a CCP, maintain all information required by the CCP at the source, or submit update to a CCP is a violation of 326 IAC 6.8-8.

C.11 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

(a) When required by any condition of this permit, an analog instrument used to measure a parameter related to the operation of an air pollution control device shall have a scale such that the expected maximum reading for the normal range shall be no less than twenty percent (20%) of full scale.

(b) The Permittee may request that the IDEM, OAQ approve the use of an instrument that does not meet the above specifications provided the Permittee can demonstrate that an alternative instrument specification will adequately ensure compliance with permit conditions requiring the measurement of the parameters.

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]

C.12 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]

Pursuant to 326 IAC 1-5-2 (Emergency Reduction Plans; Submission):

(a) The Permittee shall prepare written emergency reduction plans (ERPs) consistent with safe operating procedures.

(b) These ERPs shall be submitted for approval to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

no later than 180 days from the date on which this source commences operation.

The ERP does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) If the ERP is disapproved by IDEM, OAQ, the Permittee shall have an additional thirty (30) days to resolve the differences and submit an approvable ERP.

(d) These ERPs shall state those actions that will be taken, when each episode level is declared, to reduce or eliminate emissions of the appropriate air pollutants.

(e) Said ERPs shall also identify the sources of air pollutants, the approximate amount of reduction of the pollutants, and a brief description of the manner in which the reduction will be achieved.

(f) Upon direct notification by IDEM, OAQ that a specific air pollution episode level is in effect, the Permittee shall immediately put into effect the actions stipulated in the approved ERP for the appropriate episode level. [326 IAC 1-5-3]

C.13 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]

If a regulated substance, as defined in 40 CFR 68, is present at a source in more than a threshold quantity, the Permittee must comply with the applicable requirements of 40 CFR 68.

C.14 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]

Upon detecting an excursion where a response step is required by the D Section or an exceedance of a limitation in this permit:

(a) The Permittee shall take reasonable response steps to restore operation of the emissions unit (including any control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing excess emissions.

(b) The response shall include minimizing the period of any startup, shutdown or malfunction. The response may include, but is not limited to, the following:

(1) initial inspection and evaluation;

(2) recording that operations returned or are returning to normal without operator action (such as through response by a computerized distribution control system); or

(3) any necessary follow-up actions to return operation to normal or usual manner of operation.

(c) A determination of whether the Permittee has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include, but is not limited to, the following:

(1) monitoring results;

(2) review of operation and maintenance procedures and records; and/or

(3) inspection of the control device, associated capture system, and the process.

(d) Failure to take reasonable response steps shall be considered a deviation from the permit.

(e) The Permittee shall record the reasonable response steps taken.

C.15 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]

(a) When the results of a stack test performed in conformance with Section C - Performance Testing, of this permit exceed the level specified in any condition of this permit, the Permittee shall submit a description of its response actions to IDEM, OAQ, no later than seventy-five (75) days after the date of the test.

(b) A retest to demonstrate compliance shall be performed no later than one hundred eighty (180) days after the date of the test. Should the Permittee demonstrate to IDEM, OAQ that retesting in one hundred eighty (180) days is not practicable, IDEM, OAQ may extend the retesting deadline

(c) IDEM, OAQ reserves the authority to take any actions allowed under law in response to noncompliant stack tests.

The response action documents submitted pursuant to this condition do require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

C.16 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]

Pursuant to 326 IAC 2-6-3(a)(1), the Permittee shall submit by July 1 of each year an emission statement covering the previous calendar year. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4(c) and shall meet the following requirements:

(1) Indicate estimated actual emissions of all pollutants listed in 326 IAC 2-6-4(a);

(2) Indicate estimated actual emissions of regulated pollutants as defined by 326 IAC 2-7-1(32) (“Regulated pollutant, which is used only for purposes of Section 19 of this rule”) from the source, for purpose of fee assessment.

The statement must be submitted to:

Indiana Department of Environmental Management
Technical Support and Modeling Section, Office of Air Quality
100 North Senate Avenue
MC 61-50 IGCN 1003
Indianapolis, Indiana 46204-2251

The emission statement does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

C.17 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6] [326 IAC 2-2][326 IAC 2-3]

(a) Records of all required monitoring data, reports and support information required by this permit shall be retained for a period of at least five (5) years from the date of monitoring sample, measurement, report, or application. These records shall be physically present or electronically accessible at the source location for a minimum of three (3) years. The records may be stored elsewhere for the remaining two (2) years as long as they are available upon request. If the Commissioner makes a request for records to the Permittee, the Permittee shall furnish the records to the Commissioner within a reasonable time.

(b) Unless otherwise specified in this permit, for all record keeping requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or the date of initial start-up, whichever is later, to begin such record keeping.

(c) If there is a reasonable possibility (as defined in 40 CFR 51.165(a)(6)(vi)(A), 40 CFR 51.165(a)(6)(vi)(B), 40 CFR 51.166(r)(6)(vi)(a), and/or 40 CFR 51.166(r)(6)(vi)(b)) that a “project” (as defined in 326 IAC 2-2-1(qq) and/or 326 IAC 2-3-1(ll)) at an existing emissions unit, other than projects at a source with a Plantwide Applicability Limitation (PAL), which is not part of a “major modification” (as defined in 326 IAC 2-2-1(ee) and/or 326 IAC 2-3-1(z)) may result in significant emissions increase and the Permittee elects to utilize the “projected actual emissions” (as defined in 326 IAC 2-2-1(rr) and/or 326 IAC 2-3-1(mm)), the Permittee shall comply with following:

(1) Before beginning actual construction of the “project” (as defined in 326 IAC 2-2-1(qq) and/or 326 IAC 2-3-1(ll)) at an existing emissions unit, document and maintain the following records:

(A) A description of the project.

(B) Identification of any emissions unit whose emissions of a regulated new source review pollutant could be affected by the project.

(C) A description of the applicability test used to determine that the project is not a major modification for any regulated NSR pollutant, including:

(i) Baseline actual emissions;

(ii) Projected actual emissions;

(iii) Amount of emissions excluded under section 326 IAC 2-2-1(rr)(2)(A)(iii) and/or 326 IAC 2-3-1 (mm)(2)(A)(iii); and

(iv) An explanation for why the amount was excluded, and any netting calculations, if applicable.

(d) If there is a reasonable possibility (as defined in 40 CFR 51.165(a)(6)(vi)(A) and/or 40 CFR 51.166(r)(6)(vi)(a)) that a “project” (as defined in 326 IAC 2-2-1(qq) and/or

326 IAC 2-3-1(ll)) at an existing emissions unit, other than projects at a source with a Plantwide Applicability Limitation (PAL), which is not part of a “major modification” (as defined in 326 IAC 2-2-1(ee) and/or 326 IAC 2-3-1(z)) may result in significant emissions increase and the Permittee elects to utilize the “projected actual emissions” (as defined in 326 IAC 2-2-1(rr) and/or 326 IAC 2-3-1(mm)), the Permittee shall comply with following:

(1) Monitor the emissions of any regulated NSR pollutant that could increase as a result of the project and that is emitted by any existing emissions unit identified in (1)(B) above; and

(2) Calculate and maintain a record of the annual emissions, in tons per year on a calendar year basis, for a period of five (5) years following resumption of regular operations after the change, or for a period of ten (10) years following resumption of regular operations after the change if the project increases the design capacity of or the potential to emit that regulated NSR pollutant at the emissions unit.

C.18 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11] [326 IAC 2-2]

(a) The Permittee shall submit the attached Quarterly Deviation and Compliance Monitoring Report or its equivalent. Any deviation from permit requirements, the date(s) of each deviation, the cause of the deviation, and the response steps taken must be reported except that a deviation required to be reported pursuant to an applicable requirement that exists independent of this permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. This report shall be submitted not later than thirty (30) days after the end of the reporting period. The Quarterly Deviation and Compliance Monitoring Report shall include a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34). A deviation is an exceedance of a permit limitation or a failure to comply with a requirement of the permit.

(b) The address for report submittal is:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(c) Unless otherwise specified in this permit, any notice, report, or other submission required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

(d) The first report shall cover the period commencing on the date of issuance of this permit or the date of initial start-up, whichever is later, and ending on the last day of the reporting period. Reporting periods are based on calendar years, unless otherwise specified in this permit. For the purpose of this permit, “calendar year” means the twelve (12) month period from January 1 to December 31 inclusive.

(e) If the Permittee is required to comply with the recordkeeping provisions of (d) in Section C - General Record Keeping Requirements for any “project” (as defined in 326 IAC 2-2-1 (qq) and/or 326 IAC 2-3-1 (ll)) at an existing emissions unit, and the project meets the following criteria, then the Permittee shall submit a report to IDEM, OAQ:

(1) The annual emissions, in tons per year, from the project identified in (c)(1) in Section C- General Record Keeping Requirements exceed the baseline actual emissions, as documented and maintained under Section C- General Record Keeping Requirements (c)(1)(C)(i), by a significant amount, as defined in 326 IAC 2-2-1 (xx) and/or 326 IAC 2-3-1 (qq), for that regulated NSR pollutant, and

(2) The emissions differ from the preconstruction projection as documented and maintained under Section C - General Record Keeping Requirements (c)(1)(C)(ii).

(f) The report for project at an existing emissions unit shall be submitted no later than sixty (60) days after the end of the year and contain the following:

(1) The name, address, and telephone number of the major stationary source.

(2) The annual emissions calculated in accordance with (d)(1) and (2) in Section C - General Record Keeping Requirements.

(3) The emissions calculated under the actual-to-projected actual test stated in 326 IAC 2-2-2(d)(3) and/or 326 IAC 2-3-2(c)(3).

(4) Any other information that the Permittee wishes to include in this report such as an explanation as to why the emissions differ from the preconstruction projection.

Reports required in this part shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

(g) The Permittee shall make the information required to be documented and maintained in accordance with (c) in Section C- General Record Keeping Requirements available for review upon a request for inspection by IDEM, OAQ. The general public may request this information from the IDEM, OAQ under 326 IAC 17.1.

Stratospheric Ozone Protection

C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

Pursuant to 40 CFR 82 (Protection of Stratospheric Ozone), Subpart F, except as provided for motor vehicle air conditioners in Subpart B, the Permittee shall comply with applicable standards for recycling and emissions reduction.

SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

(a) One (1) crusher, approved for construction in 2009, with a nominal throughput capacity of 175 tons of steel mill slag per hour;

(b) One (1) screen process, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(c) Four (4) conveyors, consisting of four (4) transfer points, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(d) Material handling and storage piles, with a maximum capacity of 175 tons per hour (material handling), and storage capacity of 10,000 tons;

(e) One diesel engine, approved for installation in 2009, with a maximum heat input capacity of 150 kW, and constructed before January 1, 2005; and

(f) One (1) seven (7) yard front end loader loading the raw material.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.1.1 PSD and Nonattainment NSR Minor Limit [326 IAC 2-2] [326 IAC 2-1.1-5]

Pursuant to 326 IAC 2-2 (PSD) and 326 IAC 2-1.1-5 (Nonattainment NSR):

(a) The total amount of slag processed shall be less than 595,680 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

(b) The moisture content of the slag processed shall not be less than 0.92%.

Compliance with these limitations will ensure that the potential to emit from this modification is less than twenty-five (25) tons of PM per year, less than fifteen (15) tons of PM_{10} per year, and less than ten (10) tons of $PM_{2.5}$ per year. Therefore, the requirements of 326 IAC 2-2 (PSD) and 326 IAC 2-1.1-5 (Nonattainment NSR) are rendered not applicable.

D.1.2 Particulate Matter Less Than 10 Microns in Diameter (PM_{10}) [326 IAC 6.8-1-2]

Pursuant to 326 IAC 6.8-1-2 (Particulate Matter Limitations for Lake County), the following emission units shall not exceed 0.03 grains per dry standard cubic foot (gr/dscf) of particulate matter less than ten (10) microns in diameter (PM_{10}):

The one (1) crusher, entire screen process, four (4) conveyors (entire process included material handling), storage piles, truck loading & unloading, and transporting (road emissions).

D.1.3 Preventive Maintenance Plan [326 IAC 2-7-5(13)]

A Preventive Maintenance Plan, in accordance with Section B - Preventive Maintenance Plan, of this permit, is required for these facilities.

D.1.4 Particulate Matter (PM) [326 IAC 6.8-10]

Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter), compliance with the opacity limits specified in Condition C.5 shall be achieved by controlling fugitive particulate matter emissions according to the attached Fugitive Dust Control Plan (FDCP) (included as Attachment A of this permit). If it is determined that the control procedures specified in the FDCP do not demonstrate compliance with the fugitive emission limitations, IDEM, OAQ may request that the FDCP be revised and submitted for approval.

Compliance Determination Requirements

D.1.5 Particulate Control

In order to ensure compliance with Conditions D.1.1 and D.1.2, the Permittee shall apply an initial application of water or a mixture of water and wetting agent to control the PM, PM_{10} and $PM_{2.5}$ emissions from the crushing and screening operations. The suppressant shall be applied in a manner and at a frequency sufficient to ensure compliance with Conditions D.1.1 and D.1.2. If weather conditions preclude the use of wet suppression, the Permittee shall perform chemical analysis on the metallurgical material to ensure it has a moisture content of at least 0.92 percent of the process stream by weight or greater. The Permittee shall submit to IDEM, OAQ the method for moisture content analysis for approval.

D.1.6 Particulate Matter (PM) [326 IAC 6.8-10] [326 IAC 2-2]

Opacity from the activities shall be determined as follows:

(a) Paved Roads and Parking Lots
The average instantaneous opacity shall be the average of twelve (12) instantaneous opacity readings, taken for four (4) vehicle passes, consisting of three (3) opacity readings for each vehicle pass. The three (3) opacity readings for each vehicle pass shall be taken as follows:

(1) The first will be taken at the time of emission generation.

(2) The second will be taken five (5) seconds later.

(3) The third will be taken five (5) seconds later or ten (10) seconds after the first.

The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.

(b) Unpaved Roads and Parking
The fugitive particulate emissions from unpaved roads shall be controlled by the implementation of a work program and work practice under the fugitive dust control plan.

(c) Batch Transfer
The average instantaneous opacity shall consist of the average of three (3) opacity readings taken five (5) seconds, ten (10) seconds, and fifteen (15) seconds after the end of one (1) batch loading or unloading operation. The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume.

(d) Continuous Transfer
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9. The opacity readings shall be taken at least four (4) feet from the point of origin.

(e) Wind Erosion from Storage Piles
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9, except that the opacity shall be observed at approximately four (4) feet from the surface at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. The limitations may not apply during periods when application of fugitive particulate control measures are either ineffective or unreasonable due to sustained very high wind speeds. During such periods, the company must continue to implement all reasonable fugitive particulate control measures and maintain records documenting the application of measures and the basis for a claim that meeting the opacity limitation was not reasonable given prevailing wind conditions.

(f) Wind Erosion from Exposed Areas
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9.

(g) Material Transported by Truck or Rail
Compliance with this limitation shall be determined by 40 CFR 60, Appendix A, Method 22, except that the observation shall be taken at approximately right angles to the prevailing wind from the leeward side of the truck or railroad car. Material transported by truck or rail that is enclosed and covered shall be considered in compliance with the in plant transportation requirement.

(h) Material Transported by Front End Loader or Skip Hoist
Compliance with this limitation shall be determined by the average of three (3) opacity readings taken at five (5) second intervals. The three (3) opacity readings shall be taken as follows:

(1) The first will be taken at the time of emission generation.

(2) The second will be taken five (5) seconds later.

(3) The third will be taken five (5) seconds later or ten (10) seconds after the first.

The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand at least fifteen (15) feet from the plume approximately and at right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.

(i) Material Processing Limitations
Compliance with all opacity limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 9. Compliance with all visible emissions limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 22. Compliance with all particulate matter limitations from material processing equipments shall be determined using 40 CFR 60, Appendix A, Method 5 or 17.

Compliance Monitoring Requirements [326 IAC 2-7-5(1)] [326 IAC 2-7-6(1)]

D.1.7 Visible Emissions Notations

(a) Visible emissions notations of the screen and the conveyor transfer points shall be performed once per day during normal daylight operations. A trained employee will record whether emissions are normal or abnormal.

(b) For processes operated continuously, "normal" means those conditions prevailing, or expected to prevail, eighty percent (80%) of the time the process is in operation, not counting startup or shut down time.

(c) In the case of batch or discontinuous operations, readings shall be taken during that part of the operation that would normally be expected to cause the greatest emissions.

(d) A trained employee is an employee who has worked at the plant at least one (1) month and has been trained in the appearance and characteristics of normal visible emissions for that specific process.

(e) If abnormal emissions are observed, the Permittee shall take reasonable steps in accordance with Section C-Response to Excursions or Exceedances. Failure to take response steps in accordance with Section C- Response to Excursions or Exceedances shall be considered a deviation from this permit.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.1.8 Record Keeping Requirements

(a) To document compliance with Condition D.1.1(a), the Permittee shall maintain monthly records of the amount of slag processed.

(b) To document compliance with Condition D.1.5, the Permittee shall maintain records as needed of the chemical analysis of the metallurgical material.

(c) To document compliance with Condition D.1.7, the Permittee shall maintain records of visible emission notations of the screen and the conveyor transfer points once per day. The Permittee shall include in its daily record when a visible emission notation is not taken and the reason for the lack of visible emission notation (e.g. the process did not operate that day).

(d) Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter):

The source shall keep the following documentation to show compliance with each of its control measures and control practices:

(1) A map or diagram showing the location of all emission sources controlled, including the location, identification, length, and width of roadways.

(2) For each application of water or chemical solution to roadways, the following shall be recorded:

(A) The name and location of the roadway controlled;

(B) Application rate;

(C) Time of each application;

(D) Width of each application;

(E) Identification of each method of application;

(F) Total quantity of water or chemical used for each application;

(G) For each application of chemical solution, the concentration and identity of the chemical; and

(H) The material data safety sheets for each chemical.

(3) For application of physical or chemical control agents not covered by 326 IAC 6.8-10-1, the following:

(A) The name of the agent;

(B) Location of application;

(C) Application rate;

(D) Total quantity of agent used;

(E) If diluted, percent of concentration; and

(F) The material data safety sheets for each chemical.

(4) A log recording incidents when control measures were not used and a statement of explanation.

(5) Copies of all records required by this section shall be submitted to the department within twenty (20) working days of a written request by the department.

(e) All records shall be maintained in accordance with Section C - General Record Keeping Requirements, of this permit.

D.1.9 Reporting Requirements

(a) Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter), a quarterly report shall be submitted, stating the following:

(1) The dates any required control measures were not implemented.

(2) A listing of those control measures.

(3) The reasons that the control measures were not implemented.

(4) Any corrective action taken.

(b) A quarterly summary of the information to document compliance with Condition D.1.1 shall be submitted using the reporting forms located at the end of this permit, or their equivalent, within thirty (30) days after the end of the quarter being reported.

(c) These reports shall be submitted to the addresses listed in Section C - General Reporting Requirements, of this permit, within thirty (30) days after the end of the quarter being reported. The reports submitted by the Permittee do require the certification by the “responsible official” as defined by 326 IAC 2-7-1(34).

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
PART 70 OPERATING PERMIT
CERTIFICATION

Source Name:	Gary Material Supply, LLC
Source Address:	3210 Watling St., East Chicago, Indiana 46312
Mailing Address:	P.O. Box 1039, Crown Point, IN 46308
Part 70 Permit No.:	T089-28804-00551

This certification shall be included when submitting monitoring, testing reports/results or other documents as required by this permit.

Please check what document is being certified:

☐ Annual Compliance Certification Letter

☐ Test Result (specify)

☐ Report (specify)

☐ Notification (specify)

☐ Affidavit (specify)

☐ Other (specify)

I certify that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.
Signature:
Printed Name:
Title/Position:
Phone:
Date:

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
Phone: (317) 233-0178
Fax: (317) 233-6865

PART 70 OPERATING PERMIT
EMERGENCY OCCURRENCE REPORT

Source Name: Gary Material Supply, LLC
Source Address: 3210 Watling St., East Chicago, Indiana 46312
Mailing Address: P.O. Box 1039, Crown Point, IN 46308
Part 70 Permit No.: T089-28804-00551

This form consists of 2 pages **Page 1 of 2**

☐ This is an emergency as defined in 326 IAC 2-7-1(12) • The Permittee must notify the Office of Air Quality (OAQ), within four (**4**) business hours (1-800-451-6027 or 317-233-0178, ask for Compliance Section); and • The Permittee must submit notice in writing or by facsimile within two (**2**) working days (Facsimile Number: 317-233-6865), and follow the other requirements of 326 IAC 2-7-16.

If any of the following are not applicable, mark N/A

Facility/Equipment/Operation:
Control Equipment:
Permit Condition or Operation Limitation in Permit:
Description of the Emergency:
Describe the cause of the Emergency:

If any of the following are not applicable, mark N/A **Page 2 of 2**

Date/Time Emergency started:
Date/Time Emergency was corrected:
Was the facility being properly operated at the time of the emergency? Y N
Type of Pollutants Emitted: TSP, PM-10, SO_2, VOC, NO_X, CO, Pb, other:
Estimated amount of pollutant(s) emitted during emergency:
Describe the steps taken to mitigate the problem:
Describe the corrective actions/response steps taken:
Describe the measures taken to minimize emissions:
If applicable, describe the reasons why continued operation of the facilities are necessary to prevent imminent injury to persons, severe damage to equipment, substantial loss of capital investment, or loss of product or raw materials of substantial economic value:

Form Completed by:_____

Title / Position: _____

Date:_____

Phone: _____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH

Part 70 Quarterly Report

Source Name: Gary Material Supply, LLC
Source Address: 3210 Watling St., East Chicago, Indiana 46312
Mailing Address: P.O. Box 1039, Crown Point, IN 46308
Part 70 Permit No.: T089-28804-00551
Facility: Crushing and Screening Operation
Parameter: amount of slag processed
Limit: less than 595,680 tons per twelve (12) consecutive month period with compliance demonstrated at the end of each month

QUARTER : YEAR:

Month	Column 1	Column 2	Column 1 + Column 2
	This Month	Previous 11 Months	12 Month Total
Month 1			
Month 2			
Month 3			

☐ No deviation occurred in this quarter.

☐ Deviation/s occurred in this quarter.
Deviation has been reported on:

Submitted by: _____
Title / Position: _____
Signature: _____
Date: _____
Phone: _____

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
PART 70 OPERATING PERMIT
QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT

Source Name: Gary Material Supply, LLC
Source Address: 3210 Watling St., East Chicago, Indiana 46312
Mailing Address: P.O. Box 1039, Crown Point, IN 46308
Part 70 Permit No.: T089-28804-00551

Months: _____ to _ Year: _____

This report shall be submitted quarterly based on a calendar year. Any deviation from the requirements of this permit, the date(s) of each deviation, the probable cause of the deviation, and the response steps taken must be reported. A deviation required to be reported pursuant to an applicable requirement that exists independent of the permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. Additional pages may be attached if necessary. If no deviations occurred, please specify in the box marked "No deviations occurred this reporting period".	
☐ NO DEVIATIONS OCCURRED THIS REPORTING PERIOD.	
☐ THE FOLLOWING DEVIATIONS OCCURRED THIS REPORTING PERIOD	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	**Duration of Deviation:**
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Form Completed by:_____

Title / Position: _____

Date:_____

Phone: _____

Indiana Department of Environmental Management
Office of Air Quality

Attachment A to a
Part 70 Operating Permit for
Gary Material Supply, LLC

Particulate Emission Control Plan

Water Spray System for Dust Control

Emission units CO-1 (Crushing Operation) and R-1 (Unpaved Roadways)

Emission units CO-1 (Crushing Operation) and R-1 (Unpaved Roadways)

Identification of Responsibility

Responsibility for the implementation of dust control and for inspecting, maintaining, and repairing of this water spray system for dust control shall be with the superintendent of the plant operation. While the inspection, maintenance, and repair of these units may not necessarily be done by the superintendent, he(she) shall see that appropriate inspections of the system are done and any repair or maintenance required shall be accomplished by a plant employee or a subcontractor.

Control of Particulate Emissions

Particulate emissions are in the form of dusts generated from the crushing of aggregate material and the unpaved plant roadways. When dusts and emissions are generated such that they would be visible or in violation of the permit, the facility superintendent shall cause water to be applied to the crusher and/or the unpaved roadways, and any other facility process so as to prevent dusts from being emitted.

Items and Conditions to be Inspected:

1. Water spray pressure and volume providing adequate coverage of process and material.
2. Hose and piping condition and leaks.
3. Water supply adequate.
4. Visible dust emissions that may occur from controlled equipment
5. Visible dust emissions from roads, piles, non-controlled equipment.

Schedule for Inspections:

1. Daily, during start-up of processing.
2. At least 2 times daily, for controlled processes.
3. At least twice daily, for roads, piles, non-controlled equipment.

Replacement parts in inventory:

1. Spray nozzles
2. Water hoses
3. Hose fittings

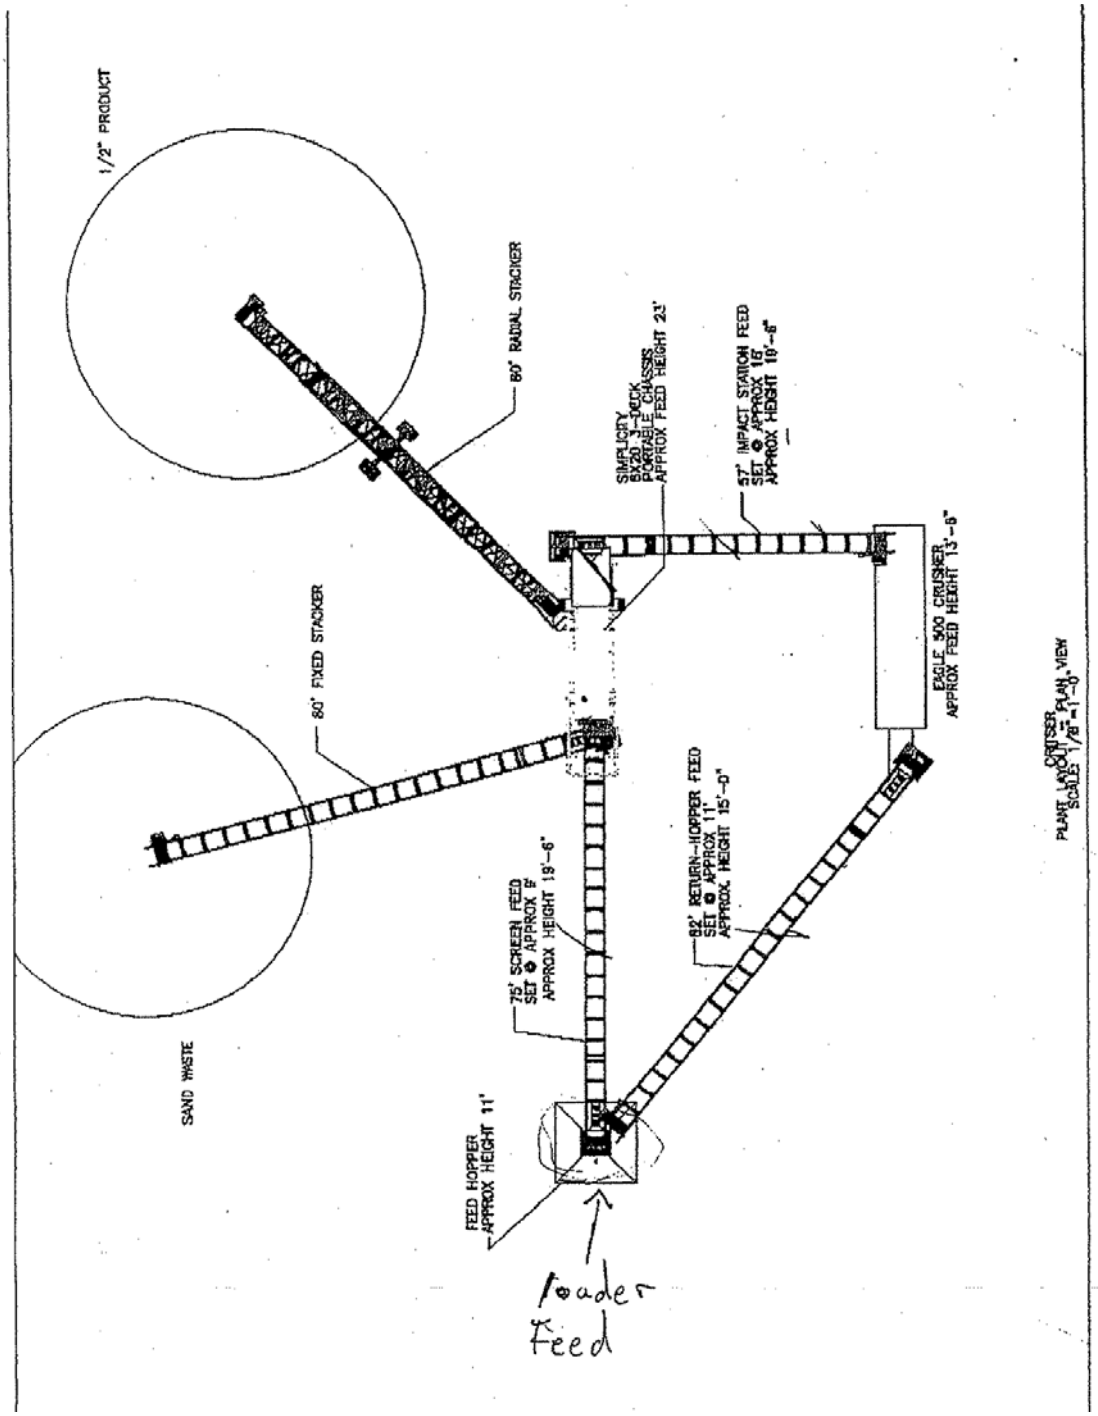
1/2" PRODUCT
80' RADIAL STACKER
SIMPLICITY
SX20-1 WOOK
PORTABLE CHASSIS
APPROX FEED HEIGHT 23'
57' IMPACT STATION FEED
SET @ APPROX 16'
APPROX HEIGHT 10'-6"
EAGLE 500 CRUSHER
APPROX FEED HEIGHT 13'-6"
80' FIXED STACKER
PLANT LAYOUT
SCALE: 1/8"=1'-0"
CRUSHER
PLAN VIEW
62' RETURN-HOPPER FEED
SET @ APPROX 11'
APPROX HEIGHT 15'-0"
75' SCREEN FEED
SET @ APPROX 8'
APPROX HEIGHT 19'-6"
SAND WASTE
FEED HOPPER
APPROX HEIGHT 11'
Loader
Feed

Indiana Department of Environmental Management
Office of Air Quality

Addendum to the
Technical Support Document for a
Part 70 Significant Source Modification
and an
Administrative Part 70 Operating Permit

Source Description and Location

Source Name:	Gary Material Supply, LLC
Source Location:	3210 Watling St., East Chicago, Indiana 46312
County:	Lake
SIC Code:	1731
Significant Source Modification No.:	089-28753-00551
Part 70 Operating Permit No.:	T089-28804-00551
Permit Reviewer:	APT

On May 10, 2010, the Office of Air Quality (OAQ) had a notice published in the The Post Tribune in Merrillville, Indiana and The Times, in Munster, Indiana, stating that Gary Material Supply, LLC, had applied for a Significant Source Modification to the Part 70 Operating Permit for ArcelorMittal USA, Inc. (Plant ID 089-00316) and an administrative Title V Operating Permit a stationary crushing and screening operation. The notice also stated that OAQ proposed to issue the Significant Source Modification and the Administrative Title V Operating permit for this operation and provided information on how the public could review the proposed permits and other documentation. Finally, the notice informed interested parties that there was a period of thirty (30) days to provide comments on whether or not these permits should be issued as proposed.

No public comments were received during the notice period, however, IDEM, OAQ has amended the permitting documents as follows:

Changes to the permit are noted as follows: ~~struck~~ language has been deleted; **bold** language has been added. If necessary, the Table of Contents will be modified to reflect these changes.

Necessary changes will be noted in this addendum only, as no changes will be made to the TSD.

Change 1 The Significant Source Modification (SSM), was published with an incorrect permit number on the cover page and in the header. The description of the permitting action in the header has also been updated as part of this correction.

Header for SSM No. 089-28753-00551

Cover Page for SSM No. 089-28753-00551

Significant Source Modification No.: T089-~~28804-~~**28753-**00551	
Issued by: Chrystal A. Wagner, Section Chief Permits Branch Office of Air Quality	Issuance Date:

Change 2 The Significant Source Modification (SSM) and the Administrative Title V permits were published with the source's former name and address in Section A.2, Source Determination. Both permits have been corrected as follows:

A.2 Source Determination [326 IAC 2-7-1(22)]

ArcelorMittal USA, Inc. is an integrated steel mill consisting of a source with on-site contractors:

(a) ArcelorMittal USA, Inc. (Plant ID 089-00316), the primary operation, is located at 1 3210 Watling St., East Chicago, Indiana; and

(b) ~~Critser Companies~~ **Gary Material Supply, LLC** (Plant ID 089-00551), an on-site contractor (a crushing and screening operation), is located at **3210 Watling St., East Chicago,** I~~1 North Broadway, Gary~~, Indiana.

IDEM has determined that ~~Critser Companies, Inc.~~ **Gary Material Supply, LLC** is under the common control of ArcelorMittal USA, Inc., and therefore will be considered one (1) source, as defined by 326 IAC 2-7-1(22), based on this contractual control. Therefore, the term "source" in the Part 70 documents refers to both ArcelorMittal USA, Inc., and ~~Critser Companies, Inc~~. **Gary Material Supply, LLC** as one (1) source.

A Separate Part 70 Operating permit will be issued to ~~Critser Companies, Inc.~~ **Gary Material Supply, LLC** solely for administrative purposes. For permitting purposes, ~~Critser Companies, Inc.~~ **Gary Material Supply, LLC** is assigned Permit No. T089-28804-00551.

Change 3 On June 2 the Air Pollution Control Board voted an emergency rule to move Lake and Porter Counties to attainment status for the 8-hour ozone standard effective June 4, 2010. This rulemaking ends the need for Emission Offset review under the 1-hour ozone standard and the 25 ton/year avoidance limits that go with it for those counties. The requirements of these permits are not affected by this rulemaking at this time. As a result, no changes have been made to the permits.

Change 4 IDEM, OAQ has clarified the language for the Continuous Compliance Plan for Contactors and the parent company in both the SSM and the Administrative Title V permits as follows:

C.10 Continuous Compliance Plan [326 IAC 6.8-8-1] [326 IAC 6.8-8-8]

(a) Pursuant to 326 IAC 326 IAC 6.8-8-1, the **source (ArcelorMittal USA, Inc.)** ~~Permittee~~ shall submit to IDEM and maintain at source a copy of the Continuous Compliance Plan (CCP). The **source (ArcelorMittal USA, Inc.)** ~~Permittee~~ shall perform the inspections, monitoring and record keeping in accordance with the information in 326 IAC 6.8-8-5 through 326 IAC 6.8-8-7 or applicable procedures in the CCP.

(b) Pursuant to 326 IAC 6.8-8-8, the **source (ArcelorMittal USA, Inc.)** ~~Permittee~~ shall update the CCP, as needed, retain a copy of any changes and updates to the CCP at the source and make the updated CCP available for inspection by the department. The **source (ArcelorMittal USA, Inc.)** ~~Permittee~~ shall submit the updated CCP, if required to IDEM, OAQ within thirty (30) days of the update.

(c) Pursuant to 326 IAC 6.8-8, failure to submit a CCP, maintain all information required by the CCP at the source, or submit update to a CCP is a violation of 326 IAC 6.8-8.

Indiana Department of Environmental Management
Office of Air Quality

Technical Support Document (TSD) for a
Part 70 Significant Source Modification
and
Part 70 Operating Permit

Source Description and Location

Source Name:	Gary Material Supply, LLC
Source Location:	3210 Watling St., East Chicago, Indiana 46312
County:	Lake
SIC Code:	1731
Significant Source Modification No.:	089-28753-00551
Part 70 Operating Permit No.:	T089-28804-00551
Permit Reviewer:	APT

Source Definition

ArcelorMittal USA, Inc.is an integrated steel mill consisting of a source with on-site contractors:

(a) ArcelorMittal USA, Inc. (Plant ID 089-00316), the primary operation, is located at 3210 Watling St., East Chicago, Indiana; and

(b) Gary Material Supply, LLC (Plant ID 089-00551), an on-site contractor (a crushing and screening operation), is located at 3210 Watling St., East Chicago, Indiana.

IDEM has determined that Gary Material Supply, LLC is under the common control of ArcelorMittal USA, Inc., and therefore will be considered one (1) source, as defined by 326 IAC 2-7-1(22), based on this contractual control. Therefore, the term “source” in the Part 70 documents refers to both ArcelorMittal USA, Inc., and Gary Material Supply, LLC as one (1) source.

A Separate Part 70 Operating permit will be issued to Gary Material Supply, LLC solely for administrative purposes. For permitting purposes, Gary Material Supply, LLC is assigned Permit No. T089-28804-00551.

Existing Approvals

There have been no previous approvals issued to Gary Material Supply, LLC at this existing Part 70 source.

County Attainment Status

The source is located in Lake County.

Pollutant	Designation
SO_2	Better than national standards.
CO	Attainment effective February 18, 2000, for the part of the city of East Chicago bounded by Columbus Drive on the north; the Indiana Harbor Canal on the west; 148th Street, if extended, on the south; and Euclid Avenue on the east. Unclassifiable or attainment effective November 15, 1990, for the remainder of East Chicago and Lake County.
O_3	Nonattainment Subpart 2 Moderate effective June 15, 2004, for the 8-hour ozone standard.[1]
PM_{10}	Attainment effective March 11, 2003, for the cities of East Chicago, Hammond, Whiting, and Gary. Unclassifiable effective November 15, 1990, for the remainder of Lake County.
NO_2	Cannot be classified or better than national standards.
Pb	Not designated.
[1]Nonattainment Severe 17 effective November 15, 1990, for the Chicago-Gary-Lake County area for the 1-hour ozone standard which was revoked effective June 15, 2005. Basic nonattainment designation effective federally April 5, 2005, for $PM_{2.5}$.	

(a) Ozone Standards

(1) On October 25, 2006, the Indiana Air Pollution Control Board finalized a rule revision to 326 IAC 1-4-1 revoking the one-hour ozone standard in Indiana.

(2) On September 6, 2007, the Indiana Air Pollution Control Board finalized a temporary emergency rule to re-designate Allen, Clark, Elkhart, Floyd, LaPorte, and St. Joseph Counties as attainment for the 8-hour ozone standard.

(3) On November 9, 2007, the Indiana Air Pollution Control Board finalized a temporary emergency rule to re-designate Boone, Hamilton, Hancock, Hendricks, Johnson, Madison, Marion, Morgan, and Shelby Counties as attainment for the 8-hour ozone standard.

(4) Volatile organic compounds (VOC) and Nitrogen Oxides (NOx) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone.

(i) 1-hour ozone standard

On December 22, 2006, the United States Court of Appeals, District of Columbia, issued a decision which served to partially vacate and remand the U.S. EPA's final rule for implementation of the eight-hour National Ambient Air quality Standard for ozone. *South Coast Air Quality Mgmt. Dist. v. EPA*, 472 F.3d 882 (D.C. Cir., December 22, 2006), *rehearing denied* 2007 U.S. App. LEXIS 13748 (D.C. Cir., June 8, 2007). The U.S. EPA has instructed IDEM to issue permits in accordance with its interpretation of the *South Coast* decision as follows: Gary-Lake-Porter County was previously designated as a severe non-attainment area prior to revocation of the one-hour ozone standard, therefore, pursuant to the anti-backsliding provisions of the Clean Air Act, any new or existing source must be subject to the major source applicability cut-offs and offset ratios under the area's previous one-hour standard designation. This means that a source must achieve the Lowest Achievable Emission Rate (LAER) if it exceeds 25 tons per year of VOC emissions and must offset any increase in VOC emissions by a decrease of 1.3 times that amount.

On January 26, 1996, in 40 CFR 52.777(i), the U.S. EPA granted a waiver of the requirements of Section 182(f) of the CAA for Lake and Porter Counties, including the lower NO_x threshold for nonattainment new source review. Therefore, VOC emissions alone are considered when evaluating the rule applicability relating to the 1-hour ozone standards. Therefore, VOC emissions were reviewed pursuant to the requirements for Emission Offset, 326 IAC 2-3. See the State Rule Applicability for the source section.

(ii) 8-hour ozone standard

VOC and NO_x emissions are considered when evaluating the rule applicability relating to the 8-hour ozone standard. Lake County has been designated as nonattainment for the 8-hour ozone standard. Therefore, VOC and NO_x emissions were reviewed pursuant to the requirements for Emission Offset, 326 IAC 2-3. See the State Rule Applicability – Entire Source section.

(b) $PM_{2.5}$
U.S. EPA, in the Federal Register Notice 70 FR 943, dated January 5, 2005, has designated Lake County as nonattainment for $PM_{2.5}$. On March 7, 2005, the Indiana Attorney General's Office, on behalf of IDEM, filed a lawsuit with the Court of Appeals for the District of Columbia Circuit challenging U.S. EPA's designation of nonattainment areas without sufficient data. However, in order to ensure that sources are not potentially liable for a violation of the Clean Air Act, the OAQ is following the U.S. EPA's New Source Review Rule for $PM_{2.5}$ promulgated on May 8, 2008, and effective on July 15, 2008. Therefore, direct $PM_{2.5}$ and SO_2 emissions were reviewed pursuant to the requirements of Nonattainment New Source Review, 326 IAC 2-1.1-5. See the State Rule Applicability – Entire Source section.

(c) Other Criteria Pollutants
Lake County has been classified as attainment or unclassifiable in Indiana for all other criteria pollutants. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

(d) Since this source is classified as an integrated steel mill, it is considered one (1) of the twenty-eight (28) listed source categories, as specified in 326 IAC 2-2-1(gg)(1).

(e) Fugitive Emissions
Since this type of operation is in one (1) of the twenty-eight (28) listed source categories under 326 IAC 2-2 or 326 IAC 2-3, fugitive emissions are counted toward the determination of PSD and Emission Offset applicability.

Description of Proposed Modification

The Office of Air Quality (OAQ) has reviewed a modification application, submitted by Gary Material Supply, LLC (Plant ID 089-00551), on December 15, 2009, relating to the addition of a crushing and screening operation to ArcelorMittal USA, Inc.(Plant ID 089-00316). The following is a list of the proposed emission units:

(a) One (1) crusher, approved for construction in 2009, with a nominal throughput capacity of 175 tons of steel mill slag per hour;

(b) One (1) screen process, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(c) Four (4) conveyors, consisting of four (4) transfer points, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(d) Material handling and storage piles, with a maximum capacity of 175 tons per hour (material handling), and storage capacity of 10,000 tons;

(e) One diesel engine, approved for installation in 2009, with a maximum heat input capacity of 150 kW, and constructed before January 1, 2005;

(f) One (1) seven-yard front end loader loading the raw material;

(g) One (1) 500 gallon diesel fuel tank; and

(h) One (1) water pump (<25 hp) for dust control.

Enforcement Issues

There are no pending enforcement actions.

Emission Calculations

See Appendix A of this Technical Support Document for detailed emission calculations.

Permit Level Determination – Part 70

Pursuant to 326 IAC 2-1.1-1(16), Potential to Emit is defined as "the maximum capacity of a stationary source or emission unit to emit any air pollutant under its physical and operational design. Any physical or operational limitation on the capacity of a source to emit an air pollutant, including air pollution control equipment and restrictions on hours of operation or type or amount of material combusted, stored, or processed shall be treated as part of its design if the limitation is enforceable by the U. S. EPA, IDEM, or the appropriate local air pollution control agency."

The following table is used to determine the appropriate permit level under 326 IAC 2-7-10.5. This table reflects the PTE before controls. Control equipment is not considered federally enforceable until it has been required in a federally enforceable permit.

PTE Before Controls of the Modification	
Pollutant	**Potential To Emit** (ton/yr)
PM	63.38
PM_{10}	31.80
$PM_{2.5}$	31.35
SO_2	0.65
VOC	0.80
CO	2.12
NO_X	9.85

This source modification is subject to 326 IAC 2-7-10.5(f)(4), because the potential to emit of particulate matter (PM), particulate matter less than ten microns (PM_{10}), and particulate matter less than two and one-half microns ($PM_{2.5}$) is each greater than twenty-five (25) tons per year before control. Therefore, the addition of the new emission units will be completed as a significant source modification.

Additionally, this modification would normally require a significant permit modification issued pursuant to 326 IAC 2-7-12(d) because the modification requires significant changes in existing Part 70 permit terms and conditions. However, ArcelorMittal USA, Inc, and Gary Material Supply, LLC have requested that this operation receive its own Title V Operating Permit in lieu of a significant permit modification to ArcelorMittal USA, Inc.'s Operating Permit. An administrative Title V Operating Permit will be issued to Gary Material Supply, LLC because it is locating at a Title V source. Therefore, pursuant to 326 IAC 2-7, an administrative Title V Operating Permit is being issued.

Permit Level Determination – PSD, Emission Offset, and Nonattainment NSR

The table below summarizes the potential to emit, reflecting all limits, of the emission units. Any control equipment is considered federally enforceable only after issuance of the Part 70 source modification, and only to the extent that the effect of the control equipment is made practically enforceable in the permit.

Process / Emission Unit	**PM**	**PM_{10}**	**$PM_{2.5}$**	**SO_2**	**NO_X**	**VOC**	**CO**
Combustion	0.69	0.69	0.69	0.65	9.85	0.8	0.69
Material handling	5.15	5.15	5.15	-------	-------	-------	-------
Storage	0.41	0.41	0.41	-------	-------	-------	-------
Crushing	1.6	0.71	0.71	-------	-------	-------	-------
Screening	7.45	7.45	7.45	-------	-------	-------	-------
Conveying	0.89	0.33	0.33	-------	-------	-------	-------
Truck unloading	0.03	0.03	0.03	-------	-------	-------	-------
Unpaved Roads	1.87	0.5	0.05	-------	-------	-------	-------
Tanks	-------	-------	-------	-------	-------	1.0	-------
Total for Modification	18.09	10.41	9.96	0.70	9.90	1.80	2.20
PSD Significant Level	**25**	**15**	**---**	**40**	**---**	**---**	**100**
Emission Offset Significant Level	**---**	**---**	**---**	**---**	**40****	**25***	**---**
Nonattainment NSR Significant Level	**---**	**---**	**10**	**40**	**40**	**---**	**---**

* The December 1993 rule change to the LAER/Emission Offset requirements lowered the threshold of the level of emissions that trigger review as a major modification for severe nonattainment areas from 40 to 25 tons per year of VOCs.
** On January 26, 1996, in 40 CFR 52.777(i), the U.S. EPA granted a waiver of the requirements of Section 182(f) of the CAA for Lake and Porter Counties, including the lower NO_x threshold for nonattainment new source review. Therefore, VOC emissions alone are considered when evaluating the rule applicability relating to the 1-hour ozone standards.

(a) The September 14, 2006 Federal Register proposed a ruling for the New Source Review (NSR) program, clarifying for sources and permitting authorities three (3) aspects of the NSR program that pertain to how to determine what emissions increases and decreases to consider in determining major NSR applicability for modified sources. Aggregation groups together multiple, related physical or operational changes into a single project. These activities should be aggregated for the purposes of the NSR applicability determination only in cases where there is a substantial relationship among the activities,

either from a technical or an economic standpoint. This modification does not require aggregating multiple emission increases and/or decreases as the crushing and screening operation has not undergone any modifications in the prior three (3) years.

(b) Since this source is considered a major PSD and Nonattainment NSR source and the unrestricted potential to emit of this modification is greater than twenty-five (25) tons of PM per year, fifteen (15) tons of PM_{10} per year, and ten (10) tons of $PM_{2.5}$ per year, this source has elected to limit the potential to emit of this modification as follows:

(1) The slag input to the crushing and screening operations, approved for construction in 2009, shall be less than 595,680 tons per twelve (12) consecutive month period, with compliance determined at the end of each month.

(2) The total amount of slag processed shall not exceed 595,680 tons per twelve (12) consecutive month period based on a moisture content of 0.92% for the slag. Therefore, the moisture content of the slag processed shall not be less than 0.92%.

(3) Pursuant to 326 IAC 6.8 (Particulate Matter Limitations for Lake County), fugitive particulate matter emissions shall be controlled according to the facility Fugitive Dust Control Plan.

Compliance with these emission limits will ensure that the potential to emit from this modification is less than twenty-five (25) tons of PM per year, fifteen (15) tons of PM_{10} per year, and ten (10) tons of $PM_{2.5}$ per year and, therefore, will render the requirements of 326 IAC 2-2 and 326 IAC 2-1.1-5 not applicable.

(c) This modification to an existing major stationary source is not major because the emissions increase is less than the PSD significant levels. Therefore, pursuant to 326 IAC 2-2, the PSD requirements do not apply.

(d) This modification to an existing major stationary source is not major because the emissions increase is less than the Emission Offset and Nonattainment NSR significant levels. Therefore, pursuant to 326 IAC 2-3 and 326 IAC 2-1.1-5, the Emission Offset and Nonattainment NSR requirements do not apply.

VOC De Minimis Determination

Effective November 15, 1990, Lake County is classified as a severe nonattainment area for ozone. Since ArcelorMittal USA, Inc, is located in Lake County, the proposed modification must be evaluated to determine if it is a significant modification in terms of 326 IAC 2-3 by determining if the VOC emissions increase is de minimis. [326 IAC 2-3-1(z)]

(a) De minimis means a VOC increase that does not exceed twenty-five (25) tons per year when the net emissions increases from the proposed modification are aggregated with all other net emissions increases from the source over a five (5) consecutive calendar year period prior to, and including, the year of the modification. [326 IAC 2-3-1(q)]

(b) The total emissions increases from this project are less than two (2) tons per year or less than eleven (11) pounds per day. Pursuant to 326 IAC 2-1.1-3(h)(2)(D), the VOC de minimis determination is not necessary because the VOC emissions increase from this project is less than fifteen (15) pounds per day.

Federal Rule Applicability Determination

NSPS:

(a) This source is not subject to the requirements of the New Source Performance Standard

for Metallic Mineral Processing Plants (40 CFR 60.380, Subpart LL) because the operations are not producing metallic mineral concentrates from ore. None of this slag crushing and/or screening operation is performed in a mine or pit.

(b) This source is not subject to the requirements of the New Source Performance Standard for Nonmetallic Mineral Processing Plants (40 CFR 60.670, Subpart OOO) because the slag material being crushed does not meet the definition of a nonmetallic mineral pursuant to 40 CFR 60.671.

(c) The diesel engine / generator is not subject to the requirements of the New Source Performance Standard for Stationary Compression Ignition Internal Combustion Engines (40 CFR 60, Subpart IIII) because the generator's compression ignition (CI) internal combustion engine (ICE) was constructed prior to 2005, and thus prior to the applicability date of July 7, 2005.

(d) This source is not subject to the New Source Performance Standard (NSPS), 40 CFR 60, Subpart Kb (326 IAC 12) - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for which Construction, Reconstruction, or Modification Commenced After July 23, 1984. The one 500 gallon diesel fuel storage tank is exempt from the General Provisions (Part 60, Subpart A) and from the limits of this subpart because it has a maximum capacity less than 75 m^3 (19,817 gallons). Therefore, these requirements are not included in the permit.

NESHAP:

(d) The diesel engine / generator is not subject to the National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines (40 CFR 63, Subpart ZZZZ) because it is an existing compression ignition (CI) staionary RICE with a site rating of less than 500 brake HP.

CAM:

(e) Pursuant to 40 CFR 64.2, Compliance Assurance Monitoring (CAM) is applicable to each new or modified pollutant-specific emission unit that meets the following criteria:

(1) has a potential to emit before controls equal to or greater than the Part 70 major source threshold for the pollutant involved;

(2) is subject to an emission limitation or standard for that pollutant; and

(3) uses a control device, as defined in 40 CFR 64.1, to comply with that emission limitation or standard.

Wet suppression is the only form of control utilized at this source as part of this modification, which is considered a passive form of control. Passive controls do not meet the definition of a control device for the purpose of 40 CFR 64.2, Compliance Assurance Monitoring (CAM). Therefore, the requirements of 40 CFR Part 64, (CAM) are not applicable to any of the new units as part of this modification.

State Rule Applicability Determination

326 IAC 1-5-2 (Emergency Reduction Plans)
The source is subject to 326 IAC 1-5-2.

326 IAC 2-1.1-5 (Nonattainment New Source Review)
The source is taking limits to make this a significant modification under 326 IAC 2-1.1-5. Nonattainment New Source Review (NSR) applicability is discussed in greater detail under the Permit Level Determination – PSD, Emission Offset, and Nonattainment NSR section.

326 IAC 2-2 (PSD)

The source is taking limits to make this a significant modification under 326 IAC 2-2. PSD applicability is discussed in greater detail under the Permit Level Determination – PSD, Emission Offset, and Nonattainment NSR section.

326 IAC 2-4.1 (Major Sources of Hazardous Air Pollutants (HAP))

This specific crushing and screening operation will emit less than ten (10) tons per year for a single HAP and less than twenty-five (25) tons per year for a combination of HAPs. Therefore, this rule does not apply to this modification.

326 IAC 2-6 (Emission Reporting)

Since this source is located in Lake County and has a potential to emit NO_X greater than or equal to twenty-five (25) tons per year, an emission statement covering the previous calendar year must be submitted by July 1 of each year. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4.

326 IAC 4-1 (Open Burning)

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

326 IAC 5-1 (Opacity Limitations)

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

(a) Opacity shall not exceed an average of twenty percent (20%) any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.

(b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

326 IAC 6-3-2 (Particulate Emission Limitations for Manufacturing Processes)

This modification is not subject to the requirements of 326 IAC 6-3 because the facility is subject to the requirements of 326 IAC 6.8-1-2 (Lake County: PM_{10} Emission Requirements). Pursuant to the applicability requirements (326 IAC 6-3-1(c)), if any limitation established by this rule is inconsistent with applicable limitations contained in 326 IAC 6.8-1 (Lake County: PM_{10} Emission Requirements), 326 IAC 12 (New Source Performance Standards), or 326 IAC 20 (Hazardous Air Pollutants), then the limitations contained in 326 IAC 6.8-1, 326 IAC 12, or 326 IAC 20 prevail.

326 IAC 6-4 (Fugitive Dust Emissions)

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions).

326 IAC 6-5 (Fugitive Particulate Matter Emission Limitations)

This modification is not subject to the requirements of 326 IAC 6-5 because the facility is located in Lake County and is subject to the requirements of 326 IAC 6.8-8 (Lake County: Continuous Compliance Plan).

326 IAC 6.8-1-2 (Lake County: PM_{10} Emission Requirements)

Pursuant to 326 IAC 6.8-1-2(a), the following emission units shall not exceed 0.03 gr/dscf of particulate matter less than ten microns in diameter (PM_{10}):

(a) One (1) crusher, approved for construction in 2009, with a nominal throughput capacity of 175 tons of steel mill slag per hour;

(b) One (1) screen process, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(c) Four (4) conveyors, consisting of four (4) transfer points, approved for construction in 2009, with a nominal throughput capacity of 350 tons of steel mill slag per hour;

(d) Material handling and storage piles, with a maximum capacity of 175 tons per hour (material handling), and storage capacity of 10,000 tons;

(e) One diesel engine, approved for installation in 2009, with a maximum heat input capacity of 150 kW, and constructed before January 1, 2005; and

(g) One (1) seven-yard front end loader loading the raw material.

326 IAC 6.8-8 (Lake County: Continuous Compliance Plan)

Pursuant to 326 IAC 6.8-8-1(17), the Permittee shall submit to IDEM, and maintain at the source, a copy of the Continuous Compliance Plan. The Permittee shall perform the inspections, monitoring, and record keeping requirements as specified in 326 IAC 6.8-8-7. The Permittee shall update the CCP (as needed), retain a copy on site, and make the updated CCP available for inspection as specified in 326 IAC 6.8-8-8.

326 IAC 6.8-10 (Lake County Fugitive Particulate Matter)

(a) Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter), the particulate matter emissions from source wide activities shall meet the following requirements:

(1) The average instantaneous opacity of fugitive particulate emissions from a paved road shall not exceed ten percent (10%).

(2) The average instantaneous opacity of fugitive particulate emissions from an unpaved road shall not exceed ten percent (10%).

(3) The average instantaneous opacity of fugitive particulate emissions from batch transfer shall not exceed ten percent (10%).

(4) The opacity of fugitive particulate emissions from continuous transfer of material onto and out of storage piles shall not exceed ten percent (10%) on a three (3) minute average.

(5) The opacity of fugitive particulate emissions from storage piles shall not exceed ten percent (10%) on a six (6) minute average.

(6) There shall be a zero (0) percent frequency of visible emission observations of a material during the in plant transportation of material by truck or rail at any time.

(7) The opacity of fugitive particulate emissions from the in plant transportation of material by front end loaders and skip hoists shall not exceed ten percent (10%).

(8) There shall be a zero (0) percent frequency of visible emission observations from a building enclosing all or part of the material processing equipment, except from a vent in the building.

(9) The PM_{10} emissions from building vents shall not exceed twenty-two thousandths (0.022) grains per dry standard cubic foot and ten percent (10%) opacity.

(10) The opacity of particulate emissions from dust handling equipment shall not exceed ten percent (10%).

(11) Any facility or operation not specified in 326 IAC 6.8-10-3 shall meet a twenty

percent (20%), three (3) minute average opacity standard.

(12) PM_{10} emissions from each material processing stack shall not exceed 0.022 grains per dry standard cubic foot and ten percent (10%) opacity.

(13) Fugitive particulate matter from the material processing facilities shall not exceed ten percent (10%) opacity.

(14) Slag and kish handling activities at integrated iron and steel plants shall comply with the following particulate emissions limits:

(A) The opacity of fugitive particulate emissions from transfer from pots and trucks into pits shall not exceed twenty percent (20%) on a six (6) minute average.

(B) The opacity of fugitive particulate emissions from transfer from pits into front end loaders and from transfer from front end loaders into trucks shall comply with the fugitive particulate emission limits in 326 IAC 6.8-10-3(9).

Material processing facilities include crushers, screens, grinders, mixers, dryers, belt conveyors, bucket elevators, bagging operations, storage bins, and truck or railroad car loading stations.

(b) Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter), The Permittee shall achieve compliance with the opacity limits by controlling fugitive particulate matter emissions according to the attached Fugitive Dust Control Plan (FDCP). If it is determined that the control procedures specified in the FDCP do not demonstrate compliance with the fugitive emission limitations, IDEM, OAQ may request that the FDCP be revised and submitted for approval.

326 IAC 7-1.1-1 (Sulfur Dioxide Emission Limitations)
The diesel engine / generator has a potential to emit less than twenty-five (25) tons per year of sulfur dioxide. Therefore, 326 IAC 7-1.1-1 does not apply.

326 IAC 8-1-6 (BACT)
The diesel engine / generator has a potential to emit less than twenty-five (25) tons per year of VOC. Therefore, 326 IAC 8-1-6 does not apply.

326 IAC 9 (Carbon Monoxide Emission Limits)
No emission limit has been established for this source type pursuant to 326 IAC 9-1-2. Therefore, 326 IAC 9 does not apply.

326 IAC 10-5 (Nitrogen Oxide Reduction Program for Internal Combustion Engines (ICE))
The diesel engine / generator does not meet the definition of a "large NO_x SIP Call engine" pursuant to 326 IAC 10-5-2(4). Therefore, 326 IAC 10-5 does not apply.

Compliance Determination and Monitoring Requirements

Permits issued under 326 IAC 2-7 are required to ensure that sources can demonstrate compliance with all applicable state and federal rules on a continuous basis. All state and federal rules contain compliance provisions; however, these provisions do not always fulfill the requirement for a continuous demonstration. When this occurs, IDEM, OAQ, in conjunction with the source, must develop specific conditions to satisfy 326 IAC 2-7-5. As a result, Compliance Determination Requirements are included in the permit. The Compliance Determination Requirements in Section D of the permit are those conditions that are found directly within state and federal rules and the violation of which serves as grounds for enforcement action.

If the Compliance Determination Requirements are not sufficient to demonstrate continuous compliance, they will be supplemented with Compliance Monitoring Requirements, also in Section D of the permit.

Unlike Compliance Determination Requirements, failure to meet Compliance Monitoring conditions would serve as a trigger for corrective actions and not grounds for enforcement action. However, a violation in relation to a compliance monitoring condition will arise through a source's failure to take the appropriate corrective actions within a specific time period.

The Compliance Determination and Monitoring Requirements applicable to this modification are as follows:

(a) Particulate Control
In order to ensure compliance with the requirements of 326 IAC 2-2 (PSD), 326 IAC 2-1.1-5, and 326 IAC 6.8-1-2, the Permittee shall apply an initial application of water or a mixture of water and wetting agent to control the PM, PM_{10} and $PM_{2.5}$ emissions from the crusher and the conveyors. The suppressant shall be applied in a manner and at a frequency sufficient to ensure compliance with 326 IAC 2-2 (PSD), 326 IAC 2-1.1-5, and 326 IAC 6.8-1-2. If weather conditions preclude the use of wet suppression, the Permittee shall perform chemical analysis on the metallurgical material to ensure it has a moisture content greater than 0.92 percent of the process stream by weight. The Permittee shall submit to IDEM, OAQ the method for moisture content analysis for approval.

(b) Opacity from the activities shall be determined as follows:

(1) Paved Roads and Parking Lots
The average instantaneous opacity shall be the average of twelve (12) instantaneous opacity readings, taken for four (4) vehicle passes, consisting of three (3) opacity readings for each vehicle pass. The three (3) opacity readings for each vehicle pass shall be taken as follows:

(A) The first will be taken at the time of emission generation.

(B) The second will be taken five (5) seconds later.

(C) The third will be taken five (5) seconds later or ten (10) seconds after the first.

The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.

(2) Unpaved Roads and Parking
The fugitive particulate emissions from unpaved roads shall be controlled by the implementation of a work program and work practice under the fugitive dust control plan.

(3) Batch Transfer
The average instantaneous opacity shall consist of the average of three (3) opacity readings taken five (5) seconds, ten (10) seconds, and fifteen (15) seconds after the end of one (1) batch loading or unloading operation. The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume.

(4) Continuous Transfer
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9. The opacity readings shall be taken at least four (4) feet from the point of origin.

(5) Wind Erosion from Storage Piles
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9, except that the opacity shall be observed at approximately four (4) feet from the surface at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. The limitations may not apply during periods when applications of fugitive particulate control measures are either

ineffective or unreasonable due to sustained very high wind speeds. During such periods, the company must continue to implement all reasonable fugitive particulate control measures and maintain records documenting the application of measures and the basis for a claim that meeting the opacity limitation was not reasonable given prevailing wind conditions.

(6) Wind Erosion from Exposed Areas
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9.

(7) Material Transported by Truck or Rail
Compliance with this limitation shall be determined by 40 CFR 60, Appendix A, Method 22, except that the observation shall be taken at approximately right angles to the prevailing wind from the leeward side of the truck or railroad car. Material transported by truck or rail that is enclosed and covered shall be considered in compliance with the in plant transportation requirement.

(8) Material Transported by Front End Loader or Skip Hoist
Compliance with this limitation shall be determined by the average of three (3) opacity readings taken at five (5) second intervals. The three (3) opacity readings shall be taken as follows:

(A) The first will be taken at the time of emission generation.

(B) The second will be taken five (5) seconds later.

(C) The third will be taken five (5) seconds later or ten (10) seconds after the first.

The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand at least fifteen (15) feet from the plume approximately and at right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.

(9) Material Processing Limitations
Compliance with all opacity limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 9. Compliance with all visible emissions limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 22. Compliance with all particulate matter limitations from material processing equipments shall be determined using 40 CFR 60, Appendix A, Method 5 or 17.

(c) Visible Emissions Notations

(1) Visible emissions notations of the slag crushing and screening operations listed in Section D.1 shall be performed once per day during normal daylight operations. A trained employee will record whether emissions are normal or abnormal.

(2) For processes operated continuously, "normal" means those conditions prevailing, or expected to prevail, eighty percent (80%) of the time the process is in operation, not counting startup or shut down time.

(3) In the case of batch or discontinuous operations, readings shall be taken during that part of the operation that would normally be expected to cause the greatest emissions.

(4) A trained employee is an employee who has worked at the plant at least one (1) month and has been trained in the appearance and characteristics of normal visible emissions for that specific process.

(5) If abnormal emissions are observed, the Permittee shall take reasonable steps in accordance with Section C-Response to Excursions or Exceedances. Failure to take

response steps in accordance with Section C- Response to Excursions or Exceedances shall be considered a deviation from this permit.

These compliance determination and monitoring conditions are necessary because fugitive dust must be properly controlled to ensure compliance with 326 IAC 2-2 (PSD), 326 IAC 2-1.1-5 (Nonattainment NSR), 326 IAC 6-4 (Fugitive Dust Emissions), 326 IAC 6.8 (Particulate Matter Limitations for Lake County), and 326 IAC 2-7 (Part 70).

Conclusion and Recommendation

The construction and operation of this proposed modification shall be subject to the conditions of the attached proposed Part 70 Significant Source Modification No. T089-28753-00551 and Part 70 Operating Permit No. T089-28804-00551. The staff recommends to the Commissioner that this Part 70 Significant Source Modification and Administrative Part 70 Operating Permit be approved.

Appendix A: Emission Calculations

Emissions Summary

Company Name: Gary Material Supply, LLC
Address City IN Zip: 3210 Watling St., East Chicago, Indiana 46312
Significant Source Modification No.: 089-28753-00551
Administrative Title V No.: T089-28804-00551
Reviewer: APT
Date: 12/29/09

*Uncontrolled Emissions in tons/year

Process	PM	PM_{10}	$PM_{2.5}$	SO_2	NOx	VOC	CO	Single HAP	Combined HAPs
Combustion	0.69	0.69	0.69	0.65	9.85	0.80	2.12	0.0026	0.0087
Material handling	13.26	13.26	13.26	----------	----------	----------	----------	----------	----------
Storage	0.41	0.41	0.41	----------	----------	----------	----------	----------	----------
Crushing	4.14	1.84	1.84	----------	----------	----------	----------	----------	----------
Screening	38.33	13.34	13.34	----------	----------	----------	----------	----------	----------
Conveying	4.60	1.69	1.69	----------	----------	----------	----------	----------	----------
Truck unloading	0.08	0.08	0.08	----------	----------	----------	----------	----------	----------
Unpaved Roads	1.87	0.50	0.05	----------	----------	----------	----------	----------	----------
Tanks	----------	----------	----------	----------	----------	0.000175	----------	----------	----------
Total	**63.38**	**31.80**	**31.35**	**0.65**	**9.85**	**0.80**	**2.12**	**0.0026**	**0.0087**

* Uncontrolled emissions are figured using the worst case scenario or the method yielding the highest emission rate.

Controlled Emissions in tons/year

Process	PM	PM_{10}	$PM_{2.5}$	SO_2	NOx	VOC	CO	Single HAP	Combined HAPs
Combustion	0.69	0.69	0.69	0.65	9.85	0.80	2.12	0.0026	0.0087
Material handling	4.14	4.14	4.14	----------	----------	----------	----------	----------	----------
Storage	0.12	0.12	0.12	----------	----------	----------	----------	----------	----------
Crushing	0.92	0.41	0.08	----------	----------	----------	----------	----------	----------
Screening	3.37	1.13	0.08	----------	----------	----------	----------	----------	----------
Conveying	0.21	0.07	0.02	----------	----------	----------	----------	----------	----------
Truck unloading	0.01	0.01	0.01	----------	----------	----------	----------	----------	----------
Unpaved Roads	0.19	0.05	0.00	----------	----------	----------	----------	----------	----------
Tanks	----------	----------	----------	----------	----------	0.000175	----------	----------	----------
Total	**9.66**	**6.64**	**5.15**	**0.65**	**9.85**	**0.80**	**2.12**	**0.003**	**0.009**

Limited Emissions in tons/year

Process	PM	PM_{10}	$PM_{2.5}$	SO_2	NOx	VOC	CO	Single HAP	Combined HAPs
Combustion	0.69	0.69	0.69	0.65	9.85	0.80	2.12	0.0026	0.0087
Material handling	5.15	5.15	5.15	----------	----------	----------	----------	----------	----------
Storage	0.41	0.41	0.41	----------	----------	----------	----------	----------	----------
Crushing	1.60	0.71	0.71	----------	----------	----------	----------	----------	----------
Screening	7.45	2.59	2.59	----------	----------	----------	----------	----------	----------
Conveying	0.89	0.33	0.33	----------	----------	----------	----------	----------	----------
Truck unloading	0.03	0.03	0.03	----------	----------	----------	----------	----------	----------
Unpaved Roads	1.87	0.50	0.05	----------	----------	----------	----------	----------	----------
Tanks	----------	----------	----------	----------	----------	0.000175	----------	----------	----------
Total	18.09	10.41	9.96	0.65	9.85	0.80	2.12	0.0026	0.0087
Threshold	**25**	**15**	**10**	**40**	**40**	**25**	**100**	----------	----------

Limited to stay below major modification thresholds for PSD and Nonattainment NSR

Limited aggregate to be processed = 595,680 tons/ yr, with a minimum moisture content of 0.92%

Appendix A: Emission Calculations
Reciprocating Internal Combustion Engines - Diesel Fuel
Output Rating (<=600 HP)
Maximum Input Rate (<=4.2 MMBtu/hr)

Company Name: Gary Material Supply, LLC
Address City IN Zip: 3210 Watling St., East Chicago, Indiana 46312
Significant Source Modification No.: 089-28753-00551
Administrative Title V No.: T089-28804-00551
Reviewer: APT
Date: 12/29/09

A. Emissions calculated based on heat input capacity (MMBtu/hr)

Heat Input Capacity (MMBtu/hr)	0.5
Maximum Hours Operated per Year	8760
Potential Throughput (MMBtu/yr)	4,468

	Pollutant						
	PM*	PM10*	PM2.5*	SO2	NOx	VOC	CO
Emission Factor in lb/MMBtu	0.31	0.31	0.31	0.29	4.41	0.36	0.95
Potential Emission in tons/yr	0.69	0.69	0.69	0.65	9.85	0.80	2.12

*PM and PM2.5 emission factors are assumed to be equivalent to PM10 emission factors. No information was given regarding which method was used to determine the factor or the fraction of PM10 which is condensable.

Hazardous Air Pollutants (HAPs)

	Pollutant							
	Benzene	Toluene	Xylene	1,3-Butadiene	Formaldehyde	Acetaldehyde	Acrolein	Total PAH HAPs***
Emission Factor in lb/MMBtu	9.33E-04	4.09E-04	2.85E-04	3.91E-05	1.18E-03	7.67E-04	9.25E-05	1.68E-04
Potential Emission in tons/yr	2.08E-03	9.14E-04	6.37E-04	8.73E-05	2.64E-03	1.71E-03	2.07E-04	3.75E-04

Potential Emission of Total HAPs (tons/yr)	**8.65E-03**

Methodology
Emission Factors are from AP42 (Supplement B 10/96), Tables 3.3-1 and 3.3-2

Potential Throughput (MMBtu/yr) = [Heat Input Capacity (MMBtu/hr)] * [Maximum Hours Operated per Year]
Potential Emission (tons/yr) = [Potential Throughput (MMBtu/yr)] * [Emission Factor (lb/MMBtu)] / [2,000 lb/ton]

Appendix A: Emission Calculations
Crushing and Screening Operations

Company Name: Gary Material Supply, LLC
Address City IN Zip: 3210 Watling St., East Chicago, Indiana 46312
Significant Source Modification No.: 089-28753-00551
Administrative Title V No.: T089-28804-00551
Reviewer: APT
Date: 12/29/09

Uncontrolled (Using Mean data for silt content and moisture of slag)

Operation Type	Maximum Capacity (tons/hr)	Emission Factor (lb PM / ton)	Emission Factor (lb PM_{10} / ton)	Emission Factor (lb $PM_{2.5}$ / ton)	PTE of PM (tpy)	PTE of PM_{10} (tpy)	PTE of $PM_{2.5}$ (tpy)
Material Handling	175	0.0173	0.0173	0.0173	13.26045	13.26045	13.26045
	Maximum Capacity (tons)	Emission Factor (lb PM / acre/ day)	Emission Factor (lb PM_{10} / acre/ day)	Emission Factor (lb $PM_{2.5}$ / acre/ day)			
Storage	10,000	6.13	6.13	6.13	0.41	0.41	0.41
				Uncontrolled TOTAL	**13.67**	**13.67**	**13.67**

Controlled (Source provided data for silt content and moisture of slag / controlled values)

Operation Type	Maximum Capacity (tons/hr)	Emission Factor (lb PM / ton)	Emission Factor (lb PM_{10} / ton)	Emission Factor (lb $PM_{2.5}$ / ton)	PTE of PM (tpy)	PTE of PM_{10} (tpy)	PTE of $PM_{2.5}$ (tpy)
Material Handling	175	0.0054	0.0054	0.0054	4.1391	4.1391	4.1391
	Maximum Capacity (tons)	Emission Factor (lb PM / acre/ day)	Emission Factor (lb PM_{10} / acre/ day)	Emission Factor (lb $PM_{2.5}$ / acre/ day)			
Storage	10,000	1.85	1.85	1.85	0.12	0.12	0.12
				Controlled TOTAL	**4.26**	**4.26**	**4.26**

Methodology
PTE (tpy) = max capacity (tons/hr) x emission factor (lb/ton) x 8760 hrs/yr / 2000 lbs/ton

Source provided data for silt content

Ef = 1.7*(s/1.5)*(365-p)/235*(f/15)
= 1.85 lb/acre/day
where s = 1.6 % silt content of material
p = 125 days of rain greater than or equal to 0.01 inches
f = 15 % of wind greater than or equal to 12 mph

Ep (storage) = Ef*sc*(40 cuft/ton)/(2000 lb/ton)/(43560 sqft/acre)/(25 ft)*(365 day/yr)
= 0.12 tons/yr
where sc = 10,000 tons storage capacity

Using Mean data for silt content

Ef = 1.7*(s/1.5)*(365-p)/235*(f/15)
= 6.13 lb/acre/day
where s = 5.3 % silt content of material
p = 125 days of rain greater than or equal to 0.01 inches
f = 15 % of wind greater than or equal to 12 mph

Ep (storage) = Ef*sc*(40 cuft/ton)/(2000 lb/ton)/(43560 sqft/acre)/(25 ft)*(365 day/yr)
= 0.41 tons/yr
where sc = 10,000 tons storage capacity

The following calculations determine the amount of emissions created by truck
loading and unloading of aggregate, based on 8760 hours of use and AP-42, Ch 13.2.4 (Fifth edition, 1/95).

Source provided data for moisture of slag

Ef = k*(0.0032)* (U/5)^1.3/(M/2)^1.4
= 0.0054 lb/ton
where k = 0.74 (particle size multiplier)
U = 10 mile/hr mean wind speed
M = 2.1 % material moisture content

Using Mean data for moisture of slag

Ef = k*(0.0032)* (U/5)^1.3/(M/2)^1.4
= 0.0173 lb/ton
where k = 0.74 (particle size multiplier)
U = 10 mile/hr mean wind speed
M = 0.92 % material moisture content

Appendix A: Emission Calculations
Crushing and Screening Operations

Company Name: Gary Material Supply, LLC
Address City IN Zip: 3210 Watling St., East Chicago, Indiana 46312
Significant Source Modification No.: 089-28753-00551
Administrative Title V No.: T089-28804-00551
Reviewer: APT
Date: 12/29/2009

Uncontrolled

Operation Type	Maximum Capacity (tons/hr)	Emission Factor (lb PM / ton)	Emission Factor (lb PM_{10} / ton)	Emission Factor (lb $PM_{2.5}$ / ton)*	PTE of PM (tpy)	PTE of PM_{10} (tpy)	PTE of $PM_{2.5}$ (tpy)
Crushing	175	0.0054	0.0024	0.0024	4.1391	1.8396	1.8396
Screening	350	0.025	0.0087	0.0087	38.325	13.3371	13.3371
Conveyor transfer point (4)	350	0.003	0.0011	0.0011	4.599	1.6863	1.6863
Truck unloading	175	0.0001	0.0001	0.0001	0.07665	0.07665	0.07665
				TOTAL	**47.14**	**16.94**	**16.94**

*Emission factors for crushing and conveying for $PM_{2.5}$ have not been developed, therefore, assume PM_{10} equals $PM_{2.5}$.

Controlled

Operation Type	Maximum Capacity (tons/hr)	Emission Factor (lb PM / ton)	Emission Factor (lb PM_{10} / ton)	Emission Factor (lb $PM_{2.5}$ / ton)	PTE of PM (tpy)	PTE of PM_{10} (tpy)	PTE of $PM_{2.5}$ (tpy)
Crushing	175	0.0012	0.00054	0.0001	0.9198	0.41391	0.07665
Screening	350	0.0022	0.00074	0.00005	3.3726	1.13442	0.07665
Conveyor transfer point (4)	350	0.00014	0.000046	0.000013	0.21462	0.07052	0.019929
Truck unloading	175	0.000016	0.000016	0.000016	0.012264	0.01226	0.012264
				TOTAL	**4.52**	**1.63**	**0.19**

Methodology
PTE for particulates (tons/yr) = Max capacity (tons/hr) * emission factor (lb/ton) * 8760 (hrs/yr) * 1 ton/2000 lbs

Emission Factors are from AP-42, Chapter 11.19.2 - Crushed Stone Processing, Table 11.19.2-2. (08/04)
SCC 3-05-020-31, 3-05-020-06, 3-05-030-03, 3-05-020-02, 03

Appendix A: Emission Calculations
Fugitive Emissions From Paved and Unpaved Roads

Company Name: Gary Material Supply, LLC
Address City IN Zip: 3210 Watling St., East Chicago, Indiana 46312
Significant Source Modification No.: 089-28753-00551
Administrative Title V No.: T089-28804-00551
Reviewer: APT
Date: 12/29/09

1. Unpaved Road Emission Factors: AP-42

Using AP-42, Section 13.2.2 Unpaved Roads, November 2006, the PM/PM10/PM2.5 emission factors for unpaved roads can be estimated from the following equation:

lbs/VMT Equation: $E = k\,(s/12)^a\,(W/3)^b\,[(365 - P)/365]$

Where:

Particle size multiplier	k	4.9	dimensionless (PM-30 or TSP)	1.5	dimensionless PM-10
		0.15	dimensionless PM-2.5		
surface material silt content (%)	s	6	Table 13.2.2-1		
mean vehicle weight	W	30.00	tons		
Equation constants	a	0.7	PM-30 or TSP Table 13.2.2-2	0.9	PM-10 Table 13.2.2-2
		0.9	PM-2.5 Table 13.2.2-3		
	b	0.45	PM-2.5 Table 13.2.2-2	0.45	PM-10 Table 13.2.2-2
		0.45	PM-30 or TSP Table 13.2.2-3		
days with at least 0.01" precipitation	P	135	Figure 13.2.2-1		

PM Emission Factor =	$(4.9) \times (6/12)^{0.7} \times (42.5/3)^{0.45}$ [(365-135)/365] =	**5.36**	lbs/mile
PM10 Emission Factor =	$(1.5) \times (6/12)^{0.9} \times (42.5/3)^{0.45}$ [(365-135)/365] =	**1.43**	lbs/mile
PM2.5 Emission Factor =	$(0.15) \times (6/12)^{0.9} \times (42.5/3)^{0.45}$ [(365-135)/365] =	**0.14**	lbs/mile

2. Potential to Emit (PTE) of PM/PM10 from unpaved Roads:

Vehicle Type	Ave Weight of Vehicles (tons)	Maximum Trip Number (trips/yr)	Round Trip Distance (mile/trip)	Vehicle Mile Traveled (VMT) (miles/yr)	Traffic Component (%)	Component Vehicle Weight (tons)	PTE of PM (tons/yr)	PTE of PM_{10} (tons/yr)	PTE of $PM_{2.5}$ (tons/yr)
Loader	25.0	7,000	0.05	350	50.0%	12.50	0.9	0.25	0.02
Loader	35.0	7,000	0.05	350	50.0%	17.50	0.9	0.25	0.02
Total				**700**	**100%**	**30.0**	**1.9**	**0.5**	**0.05**

Methodology

Total Vehicle Emissions (tons/yr) = Unpaved Total VMT (miles/yr) x PM/PM10 Emission Factors x 1 ton/2000 lbs

6. Potential to Emit (PTE) of PM/PM10/PM2.5 after Control from Unpaved Roads:

The source will use periodic application of water and high material moistures to control the fugitive dust emissions.
The control efficiency from the application is assumed to be 90%.

PTE of PM after Control =	1.9 tons/yr x (1-90%) =	**0.19**	**tons/yr**
PTE of PM10 after Control =	0.50 tons/yr x (1-90%) =	**0.05**	**tons/yr**
PTE of PM2.5 after Control =	5.00E-02 tons/yr x (1-90%) =	**0.00**	**tons/yr**

Appendix A: Emission Calculations
Individual Tank Emissions Totals (Summary from TANKS 4.0 Report)

Company Name:	Gary Material Supply, LLC
Address City IN Zip:	3210 Watling St., East Chicago, Indiana 46312
Significant Source Modification No.:	089-28753-00551
Administrative Title V No.:	T089-28804-00551
Reviewer:	APT
Date:	12/29/09

One 500-Gallon Diesel Storage Tank

Components	Working Loss	Breathing Loss	VOC Emissions (lbs/yr)	Total VOC Emissions (tons/yr)
Distilillate fuel oil no. 2	0.28	0.07	0.35	0.000175

Emissions estimated by the source; using U.S. EPA's Tanks 4.0

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

SENT VIA U.S. MAIL: CONFIRMED DELIVERY AND SIGNATURE REQUESTED

TO: Bill Critser
Gary Material Supply LLC
POB 1039
Crown Point, IN 46308

DATE: July 13, 2010

FROM: Matt Stuckey, Branch Chief
Permits Branch
Office of Air Quality

SUBJECT: Final Decision
Part 70
089-28804-00551

Enclosed is the final decision and supporting materials for the air permit application referenced above. Please note that this packet contains the original, signed, permit documents.

The final decision is being sent to you because our records indicate that you are the contact person for this application. However, if you are not the appropriate person within your company to receive this document, please forward it to the correct person.

A copy of the final decision and supporting materials has also been sent via standard mail to:
OAQ Permits Branch Interested Parties List

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit. If you think you have received this document in error, please contact Joanne Smiddie-Brush of my staff at 1-800-451-6027 (ext 3-0185), or via e-mail at jbrush@idem.IN.gov.

Final Applicant Cover letter.dot 11/30/07

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
We Protect Hoosiers and Our Environment.

Mitchell E. Daniels Jr.
Governor

Thomas W. Easterly
Commissioner

100 North Senate Avenue
Indianapolis, Indiana 46204
(317) 232-8603
Toll Free (800) 451-6027
www.idem.IN.gov

July 13, 2010

TO: East Chicago Public Library

From: Matthew Stuckey, Branch Chief
Permits Branch
Office of Air Quality

Subject: **Important Information for Display Regarding a Final Determination**

Applicant Name: Gary Material Supply LLC
Permit Number: 089-28804-00551

You previously received information to make available to the public during the public comment period of a draft permit. Enclosed is a copy of the final decision and supporting materials for the same project. Please place the enclosed information along with the information you previously received. To ensure that your patrons have ample opportunity to review the enclosed permit, **we ask that you retain this document for at least 60 days.**

The applicant is responsible for placing a copy of the application in your library. If the permit application is not on file, or if you have any questions concerning this public review process, please contact Joanne Smiddie-Brush, OAQ Permits Administration Section at 1-800-451-6027, extension 3-0185.

Enclosures
Final Library.dot 11/30/07

Mail Code 61-53

IDEM Staff	CDENNY 07/13/2010 Gary Material Supply, LLC 089-28804-00551 (final)			AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender	▶	Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: **CERTIFICATE OF MAILING ONLY**	

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee Remarks
1		Bill Crister Gary Material Supply, LLC PO Box 1039 Crown Point IN 46308 (Source CAATS) VIA CONFIRMED DELIVERY									
2		East Chicago City Council 4525 Indianapolis Blvd East Chicago IN 46312 *(Local Official)*									
3		East Chicago Public Library 2401 E Columbus Dr East Chicago IN 46312-2998 *(Library)*									
4		Gary - Hobart Water Corp 650 Madison St, P.O. Box M486 Gary IN 46401-0486 *(Affected Party)*									
5		Lake County Health Department-Gary 1145 W. 5th Ave Gary IN 46402-1795 *(Health Department)*									
6		WJOB / WZVN Radio 6405 Olcott Ave Hammond IN 46320 *(Affected Party)*									
7		Laurence A. McHugh Barnes & Thornburg 100 North Michigan South Bend IN 46601-1632 *(Affected Party)*									
8		Shawn Sobocinski 3229 E. Atlanta Court Portage IN 46368 *(Affected Party)*									
9		Ms. Carolyn Marsh Lake Michigan Calumet Advisory Council 1804 Oliver St Whiting IN 46394-1725 *(Affected Party)*									
10		Mark Coleman 9 Locust Place Ogden Dunes IN 46368 *(Affected Party)*									
11		Mr. Chris Hernandez Pipefitters Association, Local Union 597 8762 Louisiana St., Suite G Merrillville IN 46410 *(Affected Party)*									
12		Craig Hogarth 7901 West Morris Street Indianapolis IN 46231 *(Affected Party)*									
13		Lake County Commissioners 2293 N. Main St, Building A 3rd Floor Crown Point IN 46307 (Local Official)									
14		Anthony Copeland 2006 E. 140th Street East Chicago IN 46312 *(Affected Party)*									
15		Barbara G. Perez 506 Lilac Street East Chicago IN 46312 *(Affected Party)*									

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is $50,000 per piece subject to a limit of $50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is $500. The maximum indemnity payable is $25,000 for registered mail, sent with optional postal insurance. See ***Domestic Mail Manual*** **R900, S913**, and **S921** for limitations of coverage on inured and COD mail. See ***International Mail Manual*** for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
14			

FACSIMILIE OF PS Form 3877

Mail Code 61-53

IDEM Staff	CDENNY 07/13/2010 Gary Material Supply, LLC 089-28804-00551 (final)			AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender	▶	Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: **CERTIFICATE OF MAILING ONLY**	

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee Remarks
1		Robert 3733 Parrish Avenue East Chicago IN 46312 (Affected Party)									
2		Ms. Karen Kroczek 8212 Madison Ave Munster IN 46321-1627 *(Affected Party)*									
3		Calumet Township Trustee 31 E 5th Avenue Gary IN 46402 *(Affected Party)*									
4		Joseph Hero 11723 S Oakridge Drive St. John IN 46373 *(Affected Party)*									
5		Gary City Council 401 Broadway # 209 Gary IN 46402 *(Local Official)*									
6											
7											
8											
9											
10											
11											
12											
13											
14											
15											

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is $50,000 per piece subject to a limit of $50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is $500. The maximum indemnity payable is $25,000 for registered mail, sent with optional postal insurance. See ***Domestic Mail Manual*** **R900, S913**, and **S921** for limitations of coverage on inured and COD mail. See ***International Mail Manual*** for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
5			

FACSIMILIE OF PS Form 3877