



# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
**Governor**

*Thomas W. Easterly*  
**Commissioner**

100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

TO: Interested Parties / Applicant

DATE: December 9, 2011

RE: Republic Services of Indiana, LP d/b/a National Serv-all Landfill / 003-30376-00257

FROM: Matthew Stuckey, Branch Chief  
Permits Branch  
Office of Air Quality

## Notice of Decision: Approval – Effective Immediately

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the enclosed matter. Pursuant to IC 13-15-5-3, this permit is effective immediately, unless a petition for stay of effectiveness is filed and granted, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

If you wish to challenge this decision, IC 4-21.5-3-7 and IC 13-15-6-1(b) or IC 13-15-6-1(a) require that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Office of Environmental Adjudication, 100 North Senate Avenue, Government Center North, Suite N 501E, Indianapolis, IN 46204.

For an **initial Title V Operating Permit**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **thirty (30)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(b).

For a **Title V Operating Permit renewal**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **fifteen (15)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(a).

The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

- (1) the date the document is delivered to the Office of Environmental Adjudication (OEA);
- (2) the date of the postmark on the envelope containing the document, if the document is mailed to OEA by U.S. mail; or
- (3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OEA by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

- (1) the name and address of the person making the request;
- (2) the interest of the person making the request;
- (3) identification of any persons represented by the person making the request;
- (4) the reasons, with particularity, for the request;
- (5) the issues, with particularity, proposed for considerations at any hearing; and
- (6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

Pursuant to 326 IAC 2-7-18(d), any person may petition the U.S. EPA to object to the issuance of an initial Title V operating permit, permit renewal, or modification within sixty (60) days of the end of the forty-five (45) day EPA review period. Such an objection must be based only on issues that were raised with reasonable specificity during the public comment period, unless the petitioner demonstrates that it was impracticable to raise such issues, or if the grounds for such objection arose after the comment period.

To petition the U.S. EPA to object to the issuance of a Title V operating permit, contact:

U.S. Environmental Protection Agency  
401 M Street  
Washington, D.C. 20406

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.



# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
Governor

*Thomas W. Easterly*  
Commissioner

100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

## Part 70 Operating Permit Renewal OFFICE OF AIR QUALITY


Republic Services of Indiana, LP  
d/b/a  
National Serv-all Landfill

6231 McBeth Road  
Fort Wayne, Indiana 46809

(herein known as the Permittee) is hereby authorized to operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this permit.

**The Permittee must comply with all conditions of this permit. Noncompliance with any provisions of this permit is grounds for enforcement action; permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Noncompliance with any provision of this permit, except any provision specifically designated as not federally enforceable, constitutes a violation of the Clean Air Act. It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. An emergency does constitute an affirmative defense in an enforcement action provided the Permittee complies with the applicable requirements set forth in Section B, Emergency Provisions.**

This permit is issued in accordance with 326 IAC 2 and 40 CFR Part 70 Appendix A and contains the conditions and provisions specified in 326 IAC 2-7 as required by 42 U.S.C. 7401, et. seq. (Clean Air Act as amended by the 1990 Clean Air Act Amendments), 40 CFR Part 70.6, IC 13-15 and IC 13-17.

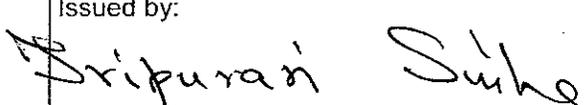Operation Permit No.: T 003-30376-00257	
Issued by:  Tripurari P. Sinha, Ph. D., Section Chief Permits Branch Office of Air Quality	Issuance Date: December 9, 2011 Expiration Date: December 9, 2016

## TABLE OF CONTENTS

<b>A. SOURCE SUMMARY</b> .....	<b>4</b>
A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]	
A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)] [326 IAC 2-7-5(15)]	
A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-7-4(c)] [326 IAC 2-7-5(15)]	
A.4 Part 70 Permit Applicability [326 IAC 2-7-2]	
<b>B. GENERAL CONDITIONS</b> .....	<b>5</b>
B.1 Definitions [326 IAC 2-7-1]	
B.2 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)] [IC 13-15-3-6(a)]	
B.3 Term of Conditions [326 IAC 2-1.1-9.5]	
B.4 Enforceability [326 IAC 2-7-7] [IC 13-17-12]	
B.5 Severability [326 IAC 2-7-5(5)]	
B.6 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]	
B.7 Duty to Provide Information [326 IAC 2-7-5(6)(E)]	
B.8 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]	
B.9 Annual Compliance Certification [326 IAC 2-7-6(5)]	
B.10 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)] [326 IAC 1-6-3]	
B.11 Emergency Provisions [326 IAC 2-7-16]	
B.12 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]	
B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]	
B.14 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]	
B.15 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]	
B.16 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]	
B.17 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]	
B.18 Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)] [326 IAC 2-7-12(b)(2)]	
B.19 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]	
B.20 Source Modification Requirement [326 IAC 2-7-10.5]	
B.21 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]	
B.22 Transfer of Ownership or Operational Control [326 IAC 2-7-11]	
B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]	
B.24 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]	
<b>C. SOURCE OPERATION CONDITIONS</b> .....	<b>16</b>
<b>Emission Limitations and Standards [326 IAC 2-7-5(1)]</b>	
C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]	
C.2 Opacity [326 IAC 5-1]	
C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]	
C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]	
C.5 Fugitive Dust Emissions [326 IAC 6-4]	
C.6 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]	
<b>Testing Requirements [326 IAC 2-7-6(1)]</b>	
C.7 Performance Testing [326 IAC 3-6]	
<b>Compliance Requirements [326 IAC 2-1.1-11]</b>	
C.8 Compliance Requirements [326 IAC 2-1.1-11]	

**Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]**

- C.9 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]
- C.10 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

**Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]**

- C.11 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]
- C.12 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]
- C.13 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]
- C.14 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5] [326 IAC 2-7-6]

**Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]**

- C.15 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)] [326 IAC 2-6]
- C.16 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]
- C.17 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11]

**Stratospheric Ozone Protection**

- C.18 Compliance with 40 CFR 82 and 326 IAC 22-1

**D.1 EMISSIONS UNIT OPERATION CONDITIONS..... 22**

**Emission Limitations and Standards [326 IAC 2-7-5(1)]**

- D.1.1 Cold Cleaner Operation (VOC) [326 IAC 8-3-2]
- D.1.2 Cold Cleaner Degreaser Operation and Control [326 IAC 8-3-5]

**E.1 FACILITY OPERATION CONDITIONS ..... 24**

**New Source Performance Standards**

- E.1.1 General Provisions Relating to NSPS WWW [326 IAC 12][40 CFR Part 60, Subpart A]
- E.1.2 Standards of Performance for Municipal Solid Waste Landfills [326 IAC 12][326 IAC 8.1] [40 CFR Part 60, Subpart WWW]
- E.1.3 Operational Standards for Collection and Control Systems [40 CFR 60.753][326 IAC 12] [326 IAC 8.1]

**E.2 EMISSIONS UNIT OPERATION CONDITIONS ..... 26**

**National Emission Standards for Hazardous Air Pollutants**

- E.2.1 General Provisions Relating to NESHAP AAAA [326 IAC 20-67] [40 CFR Part 63, Subpart AAAA]
- E.2.2 National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills [326 IAC 20-67][40 CFR Part 63, Subpart AAAA]

**E.3 EMISSIONS UNIT OPERATION CONDITIONS ..... 27**

**National Emission Standards for Asbestos**

- E.3.1 General Provisions Relating to National Emission Standards for Asbestos [326 IAC 14] [40 CFR Part 61, Subpart M]
- E.3.2 National Emission Standards for Asbestos [326 IAC 14-2][40 CFR Part 61, Subpart M]

**Certification ..... 28**

**Emergency Occurrence Report ..... 29**

**Quarterly Deviation and Compliance Monitoring Report..... 31**

**Attachment A - 40 CFR 60, Subpart WWW, Standards of Performance for Municipal Solid Waste Landfills**

**Attachment B - 40 CFR 63, Subpart AAAA, National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills**

**Attachment C - 40 CFR 61, Subpart M, National Emission Standards for Asbestos**

## SECTION A SOURCE SUMMARY

This permit is based on information requested by the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ). The information describing the source contained in conditions A.1 through A.3 is descriptive information and does not constitute enforceable conditions. However, the Permittee should be aware that a physical change or a change in the method of operation that may render this descriptive information obsolete or inaccurate may trigger requirements for the Permittee to obtain additional permits or seek modification of this permit pursuant to 326 IAC 2, or change other applicable requirements presented in the permit application.

### A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]

---

The Permittee owns and operates a stationary municipal solid waste landfill.

Source Address:	6231 McBeth Road, Fort Wayne, Indiana 46809
General Source Phone Number:	(260) 478-0300
SIC Code:	4953
County Location:	Allen
Source Location Status:	Attainment for all criteria pollutants
Source Status:	Part 70 Operating Permit Program Major Source, under PSD Minor Source, Section 112 of the Clean Air Act Not 1 of 28 Source Categories

### A.2 Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)][326 IAC 2-7-5(15)]

---

This stationary source consists of the following emission units and pollution control devices:

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M] [40 CFR 63, Subpart AAAA]
- (b) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW] [40 CFR 63, Subpart AAAA]

### A.3 Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-7-4(c)][326 IAC 2-7-5(15)]

---

This stationary source also includes the following insignificant activities which are specifically regulated, as defined in 326 IAC 2-7-1(21):

- (a) Three (3) crystal clean parts washers with a solvent consumption of 240 gallons per year, constructed after 1990; [326 IAC 8-3-2] [326 IAC 8-3-5]

### A.4 Part 70 Permit Applicability [326 IAC 2-7-2]

---

This stationary source is required to have a Part 70 permit by 326 IAC 2-7-2 (Applicability) because:

- (a) It is a major source, as defined in 326 IAC 2-7-1(22);
- (b) It is a source in a source category designated by the United States Environmental Protection Agency (U.S. EPA) under 40 CFR 70.3 (Part 70 - Applicability).

## SECTION B GENERAL CONDITIONS

### B.1 Definitions [326 IAC 2-7-1]

---

Terms in this permit shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-7) shall prevail.

### B.2 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]

---

- (a) This permit, T 003-30376-00257, is issued for a fixed term of five (5) years from the issuance date of this permit, as determined in accordance with IC 4-21.5-3-5(f) and IC 13-15-5-3. Subsequent revisions, modifications, or amendments of this permit do not affect the expiration date of this permit.
- (b) If IDEM, OAQ, upon receiving a timely and complete renewal permit application, fails to issue or deny the permit renewal prior to the expiration date of this permit, this existing permit shall not expire and all terms and conditions shall continue in effect, including any permit shield provided in 326 IAC 2-7-15, until the renewal permit has been issued or denied.

### B.3 Term of Conditions [326 IAC 2-1.1-9.5]

---

Notwithstanding the permit term of a permit to construct, a permit to operate, or a permit modification, any condition established in a permit issued pursuant to a permitting program approved in the state implementation plan shall remain in effect until:

- (a) the condition is modified in a subsequent permit action pursuant to Title I of the Clean Air Act; or
- (b) the emission unit to which the condition pertains permanently ceases operation.

### B.4 Enforceability [326 IAC 2-7-7] [IC 13-17-12]

---

Unless otherwise stated, all terms and conditions in this permit, including any provisions designed to limit the source's potential to emit, are enforceable by IDEM, the United States Environmental Protection Agency (U.S. EPA) and by citizens in accordance with the Clean Air Act.

### B.5 Severability [326 IAC 2-7-5(5)]

---

The provisions of this permit are severable; a determination that any portion of this permit is invalid shall not affect the validity of the remainder of the permit.

### B.6 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]

---

This permit does not convey any property rights of any sort or any exclusive privilege.

### B.7 Duty to Provide Information [326 IAC 2-7-5(6)(E)]

---

- (a) The Permittee shall furnish to IDEM, OAQ, within a reasonable time, any information that IDEM, OAQ may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. Upon request, the Permittee shall also furnish to IDEM, OAQ copies of records required to be kept by this permit.
- (b) For information furnished by the Permittee to IDEM, OAQ, the Permittee may include a claim of confidentiality in accordance with 326 IAC 17.1. When furnishing copies of requested records directly to U. S. EPA, the Permittee may assert a claim of confidentiality in accordance with 40 CFR 2, Subpart B.

B.8 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]

- (a) A certification required by this permit meets the requirements of 326 IAC 2-7-6(1) if:
- (1) it contains a certification by a "responsible official" as defined by 326 IAC 2-7-1(34), and
  - (2) the certification states that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.
- (b) The Permittee may use the attached Certification Form, or its equivalent with each submittal requiring certification. One (1) certification may cover multiple forms in one (1) submittal.
- (c) A "responsible official" is defined at 326 IAC 2-7-1(34).

B.9 Annual Compliance Certification [326 IAC 2-7-6(5)]

- (a) The Permittee shall annually submit a compliance certification report which addresses the status of the source's compliance with the terms and conditions contained in this permit, including emission limitations, standards, or work practices. All certifications shall cover the time period from January 1 to December 31 of the previous year, and shall be submitted no later than July 1 of each year to:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V  
Air and Radiation Division, Air Enforcement Branch - Indiana (AE-17J)  
77 West Jackson Boulevard  
Chicago, Illinois 60604-3590

- (b) The annual compliance certification report required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (c) The annual compliance certification report shall include the following:
- (1) The appropriate identification of each term or condition of this permit that is the basis of the certification;
  - (2) The compliance status;
  - (3) Whether compliance was continuous or intermittent;
  - (4) The methods used for determining the compliance status of the source, currently and over the reporting period consistent with 326 IAC 2-7-5(3); and

- (5) Such other facts, as specified in Sections D of this permit, as IDEM, OAQ may require to determine the compliance status of the source.

The submittal by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

B.10 Preventive Maintenance Plan [326 IAC 2-7-5(1),(3) and (13)][326 IAC 2-7-6(1) and (6)][326 IAC 1-6-3]

---

- (a) A Preventive Maintenance Plan meets the requirements of 326 IAC 1-6-3 if it includes, at a minimum:

- (1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;
- (2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and
- (3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

The Permittee shall implement the PMPs.

- (b) If required by specific condition(s) in Section D of this permit where no PMP was previously required, the Permittee shall prepare and maintain Preventive Maintenance Plans (PMPs) no later than ninety (90) days after issuance of this permit or ninety (90) days after initial start-up, whichever is later, including the following information on each facility:

- (1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;
- (2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and
- (3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

If, due to circumstances beyond the Permittee's control, the PMPs cannot be prepared and maintained within the above time frame, the Permittee may extend the date an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

The PMP extension notification does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

The Permittee shall implement the PMPs.

- (c) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Permittee to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions. The PMPs and their submittal do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).
- (d) To the extent the Permittee is required by 40 CFR Part 60/63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

B.11 Emergency Provisions [326 IAC 2-7-16]

- (a) An emergency, as defined in 326 IAC 2-7-1(12), is not an affirmative defense for an action brought for noncompliance with a federal or state health-based emission limitation.
- (b) An emergency, as defined in 326 IAC 2-7-1(12), constitutes an affirmative defense to an action brought for noncompliance with a technology-based emission limitation if the affirmative defense of an emergency is demonstrated through properly signed, contemporaneous operating logs or other relevant evidence that describe the following:
  - (1) An emergency occurred and the Permittee can, to the extent possible, identify the causes of the emergency;
  - (2) The permitted facility was at the time being properly operated;
  - (3) During the period of an emergency, the Permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards or other requirements in this permit;
  - (4) For each emergency lasting one (1) hour or more, the Permittee notified IDEM, OAQ, within four (4) daytime business hours after the beginning of the emergency, or after the emergency was discovered or reasonably should have been discovered;

Telephone Number: 1-800-451-6027 (ask for Office of Air Quality,  
Compliance and Enforcement Branch), or  
Telephone Number: 317-233-0178 (ask for Office of Air Quality,  
Compliance and Enforcement Branch)  
Facsimile Number: 317-233-6865

- (5) For each emergency lasting one (1) hour or more, the Permittee submitted the attached Emergency Occurrence Report Form or its equivalent, either by mail or facsimile to:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

within two (2) working days of the time when emission limitations were exceeded due to the emergency.

The notice fulfills the requirement of 326 IAC 2-7-5(3)(C)(ii) and must contain the following:

- (A) A description of the emergency;
- (B) Any steps taken to mitigate the emissions; and
- (C) Corrective actions taken.

The notification which shall be submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

- (6) The Permittee immediately took all reasonable steps to correct the emergency.
- (c) In any enforcement proceeding, the Permittee seeking to establish the occurrence of an emergency has the burden of proof.
- (d) This emergency provision supersedes 326 IAC 1-6 (Malfunctions). This permit condition is in addition to any emergency or upset provision contained in any applicable requirement.
- (e) The Permittee seeking to establish the occurrence of an emergency shall make records available upon request to ensure that failure to implement a PMP did not cause or contribute to an exceedance of any limitations on emissions. However, IDEM, OAQ may require that the Preventive Maintenance Plans required under 326 IAC 2-7-4(c)(9) be revised in response to an emergency.
- (f) Failure to notify IDEM, OAQ by telephone or facsimile of an emergency lasting more than one (1) hour in accordance with (b)(4) and (5) of this condition shall constitute a violation of 326 IAC 2-7 and any other applicable rules.
- (g) If the emergency situation causes a deviation from a technology-based limit, the Permittee may continue to operate the affected emitting facilities during the emergency provided the Permittee immediately takes all reasonable steps to correct the emergency and minimize emissions.

**B.12 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]**

---

- (a) Pursuant to 326 IAC 2-7-15, the Permittee has been granted a permit shield. The permit shield provides that compliance with the conditions of this permit shall be deemed compliance with any applicable requirements as of the date of permit issuance, provided that either the applicable requirements are included and specifically identified in this permit or the permit contains an explicit determination or concise summary of a determination that other specifically identified requirements are not applicable. The Indiana statutes from IC 13 and rules from 326 IAC, referenced in conditions in this permit, are those applicable at the time the permit was issued. The issuance or possession of this permit shall not alone constitute a defense against an alleged violation of any law, regulation or standard, except for the requirement to obtain a Part 70 permit under 326 IAC 2-7 or for applicable requirements for which a permit shield has been granted.

This permit shield does not extend to applicable requirements which are promulgated after the date of issuance of this permit unless this permit has been modified to reflect such new requirements.

- (b) If, after issuance of this permit, it is determined that the permit is in nonconformance with an applicable requirement that applied to the source on the date of permit issuance, IDEM, OAQ, shall immediately take steps to reopen and revise this permit and issue a compliance order to the Permittee to ensure expeditious compliance with the applicable requirement until the permit is reissued. The permit shield shall continue in effect so long as the Permittee is in compliance with the compliance order.
- (c) No permit shield shall apply to any permit term or condition that is determined after issuance of this permit to have been based on erroneous information supplied in the permit application. Erroneous information means information that the Permittee knew to be false, or in the exercise of reasonable care should have been known to be false, at the time the information was submitted.
- (d) Nothing in 326 IAC 2-7-15 or in this permit shall alter or affect the following:
  - (1) The provisions of Section 303 of the Clean Air Act (emergency orders), including the authority of the U.S. EPA under Section 303 of the Clean Air Act;
  - (2) The liability of the Permittee for any violation of applicable requirements prior to or at the time of this permit's issuance;
  - (3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act; and
  - (4) The ability of U.S. EPA to obtain information from the Permittee under Section 114 of the Clean Air Act.
- (e) This permit shield is not applicable to any change made under 326 IAC 2-7-20(b)(2) (Sections 502(b)(10) of the Clean Air Act changes) and 326 IAC 2-7-20(c)(2) (trading based on State Implementation Plan (SIP) provisions).
- (f) This permit shield is not applicable to modifications eligible for group processing until after IDEM, OAQ, has issued the modifications. [326 IAC 2-7-12(c)(7)]
- (g) This permit shield is not applicable to minor Part 70 permit modifications until after IDEM, OAQ, has issued the modification. [326 IAC 2-7-12(b)(8)]

**B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]**

---

- (a) All terms and conditions of permits established prior to T 003-30376-00257 and issued pursuant to permitting programs approved into the state implementation plan have been either:
  - (1) incorporated as originally stated,
  - (2) revised under 326 IAC 2-7-10.5, or
  - (3) deleted under 326 IAC 2-7-10.5.
- (b) Provided that all terms and conditions are accurately reflected in this permit, all previous registrations and permits are superseded by this Part 70 operating permit.

**B.14 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]**

---

The Permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least nine (9) months prior to the date of expiration of the source's existing permit, consistent with 326 IAC 2-7-3 and 326 IAC 2-7-4(a).

B.15 Permit Modification, Reopening, Revocation and Reissuance, or Termination  
[326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]

---

- (a) This permit may be modified, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for a Part 70 Operating Permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any condition of this permit. [326 IAC 2-7-5(6)(C)] The notification by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).
- (b) This permit shall be reopened and revised under any of the circumstances listed in IC 13-15-7-2 or if IDEM, OAQ determines any of the following:
- (1) That this permit contains a material mistake.
  - (2) That inaccurate statements were made in establishing the emissions standards or other terms or conditions.
  - (3) That this permit must be revised or revoked to assure compliance with an applicable requirement. [326 IAC 2-7-9(a)(3)]
- (c) Proceedings by IDEM, OAQ to reopen and revise this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening and revision shall be made as expeditiously as practicable. [326 IAC 2-7-9(b)]
- (d) The reopening and revision of this permit, under 326 IAC 2-7-9(a), shall not be initiated before notice of such intent is provided to the Permittee by IDEM, OAQ at least thirty (30) days in advance of the date this permit is to be reopened, except that IDEM, OAQ may provide a shorter time period in the case of an emergency. [326 IAC 2-7-9(c)]

B.16 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]

---

- (a) The application for renewal shall be submitted using the application form or forms prescribed by IDEM, OAQ and shall include the information specified in 326 IAC 2-7-4. Such information shall be included in the application for each emission unit at this source, except those emission units included on the trivial or insignificant activities list contained in 326 IAC 2-7-1(21) and 326 IAC 2-7-1(40). The renewal application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Request for renewal shall be submitted to:

Indiana Department of Environmental Management  
Permit Administration and Support Section, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

- (b) A timely renewal application is one that is:
- (1) Submitted at least nine (9) months prior to the date of the expiration of this permit; and

- (2) If the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (c) If the Permittee submits a timely and complete application for renewal of this permit, the source's failure to have a permit is not a violation of 326 IAC 2-7 until IDEM, OAQ takes final action on the renewal application, except that this protection shall cease to apply if, subsequent to the completeness determination, the Permittee fails to submit by the deadline specified, pursuant to 326 IAC 2-7-4(a)(2)(D), in writing by IDEM, OAQ any additional information identified as being needed to process the application.

**B.17 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]**

---

- (a) Permit amendments and modifications are governed by the requirements of 326 IAC 2-7-11 or 326 IAC 2-7-12 whenever the Permittee seeks to amend or modify this permit.

- (b) Any application requesting an amendment or modification of this permit shall be submitted to:

Indiana Department of Environmental Management  
Permit Administration and Support Section, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

- (c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

**B.18 Permit Revision Under Economic Incentives and Other Programs  
[326 IAC 2-7-5(8)][326 IAC 2-7-12(b)(2)]**

---

- (a) No Part 70 permit revision or notice shall be required under any approved economic incentives, marketable Part 70 permits, emissions trading, and other similar programs or processes for changes that are provided for in a Part 70 permit.
- (b) Notwithstanding 326 IAC 2-7-12(b)(1) and 326 IAC 2-7-12(c)(1), minor Part 70 permit modification procedures may be used for Part 70 modifications involving the use of economic incentives, marketable Part 70 permits, emissions trading, and other similar approaches to the extent that such minor Part 70 permit modification procedures are explicitly provided for in the applicable State Implementation Plan (SIP) or in applicable requirements promulgated or approved by the U.S. EPA.

**B.19 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]**

---

- (a) The Permittee may make any change or changes at the source that are described in 326 IAC 2-7-20(b),(c), or (e) without a prior permit revision, if each of the following conditions is met:
  - (1) The changes are not modifications under any provision of Title I of the Clean Air Act;
  - (2) Any preconstruction approval required by 326 IAC 2-7-10.5 has been obtained;

(3) The changes do not result in emissions which exceed the limitations provided in this permit (whether expressed herein as a rate of emissions or in terms of total emissions);

(4) The Permittee notifies the:

Indiana Department of Environmental Management  
Permit Administration and Support Section, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region V  
Air and Radiation Division, Regulation Development Branch - Indiana (AR-18J)  
77 West Jackson Boulevard  
Chicago, Illinois 60604-3590

in advance of the change by written notification at least ten (10) days in advance of the proposed change. The Permittee shall attach every such notice to the Permittee's copy of this permit; and

(5) The Permittee maintains records on-site, on a rolling five (5) year basis, which document all such changes and emission trades that are subject to 326 IAC 2-7-20(b),(c), or (e). The Permittee shall make such records available, upon reasonable request, for public review.

Such records shall consist of all information required to be submitted to IDEM, OAQ in the notices specified in 326 IAC 2-7-20(b)(1), (c)(1), and (e)(2).

(b) The Permittee may make Section 502(b)(10) of the Clean Air Act changes (this term is defined at 326 IAC 2-7-1(36)) without a permit revision, subject to the constraint of 326 IAC 2-7-20(a). For each such Section 502(b)(10) of the Clean Air Act change, the required written notification shall include the following:

- (1) A brief description of the change within the source;
- (2) The date on which the change will occur;
- (3) Any change in emissions; and
- (4) Any permit term or condition that is no longer applicable as a result of the change.

The notification which shall be submitted is not considered an application form, report or compliance certification. Therefore, the notification by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

(c) Emission Trades [326 IAC 2-7-20(c)]  
The Permittee may trade emissions increases and decreases at the source, where the applicable SIP provides for such emission trades without requiring a permit revision, subject to the constraints of Section (a) of this condition and those in 326 IAC 2-7-20(c).

- (d) Alternative Operating Scenarios [326 IAC 2-7-20(d)]  
The Permittee may make changes at the source within the range of alternative operating scenarios that are described in the terms and conditions of this permit in accordance with 326 IAC 2-7-5(9). No prior notification of IDEM, OAQ, or U.S. EPA is required.
- (e) Backup fuel switches specifically addressed in, and limited under, Section D of this permit shall not be considered alternative operating scenarios. Therefore, the notification requirements of part (a) of this condition do not apply.

**B.20 Source Modification Requirement [326 IAC 2-7-10.5]**

---

A modification, construction, or reconstruction is governed by the requirements of 326 IAC 2.

**B.21 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]**

---

Upon presentation of proper identification cards, credentials, and other documents as may be required by law, and subject to the Permittee's right under all applicable laws and regulations to assert that the information collected by the agency is confidential and entitled to be treated as such, the Permittee shall allow IDEM, OAQ, U.S. EPA, or an authorized representative to perform the following:

- (a) Enter upon the Permittee's premises where a Part 70 source is located, or emissions related activity is conducted, or where records must be kept under the conditions of this permit;
- (b) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, have access to and copy any records that must be kept under the conditions of this permit;
- (c) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, inspect any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit;
- (d) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, sample or monitor substances or parameters for the purpose of assuring compliance with this permit or applicable requirements; and
- (e) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, utilize any photographic, recording, testing, monitoring, or other equipment for the purpose of assuring compliance with this permit or applicable requirements.

**B.22 Transfer of Ownership or Operational Control [326 IAC 2-7-11]**

---

- (a) The Permittee must comply with the requirements of 326 IAC 2-7-11 whenever the Permittee seeks to change the ownership or operational control of the source and no other change in the permit is necessary.
- (b) Any application requesting a change in the ownership or operational control of the source shall contain a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new Permittee. The application shall be submitted to:

Indiana Department of Environmental Management  
Permit Administration and Support Section, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

- (c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]

- (a) The Permittee shall pay annual fees to IDEM, OAQ within thirty (30) calendar days of receipt of a billing. Pursuant to 326 IAC 2-7-19(b), if the Permittee does not receive a bill from IDEM, OAQ the applicable fee is due April 1 of each year.
- (b) Except as provided in 326 IAC 2-7-19(e), failure to pay may result in administrative enforcement action or revocation of this permit.
- (c) The Permittee may call the following telephone numbers: 1-800-451-6027 or 317-233-4230 (ask for OAQ, Billing, Licensing, and Training Section), to determine the appropriate permit fee.

B.24 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

For the purpose of submitting compliance certifications or establishing whether or not the Permittee has violated or is in violation of any condition of this permit, nothing in this permit shall preclude the use, including the exclusive use, of any credible evidence or information relevant to whether the Permittee would have been in compliance with the condition of this permit if the appropriate performance or compliance test or procedure had been performed.

## SECTION C SOURCE OPERATION CONDITIONS

Entire Source

### Emission Limitations and Standards [326 IAC 2-7-5(1)]

#### C.1 Particulate Emission Limitations For Processes with Process Weight Rates Less Than One Hundred (100) Pounds per Hour [326 IAC 6-3-2]

Pursuant to 326 IAC 6-3-2(e)(2), particulate emissions from any process not exempt under 326 IAC 6-3-1(b) or (c) which has a maximum process weight rate less than 100 pounds per hour and the methods in 326 IAC 6-3-2(b) through (d) do not apply shall not exceed 0.551 pounds per hour.

#### C.2 Opacity [326 IAC 5-1]

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-1 (Applicability) and 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

- (a) Opacity shall not exceed an average of forty percent (40%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.
- (b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

#### C.3 Open Burning [326 IAC 4-1] [IC 13-17-9]

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

#### C.4 Incineration [326 IAC 4-2] [326 IAC 9-1-2]

The Permittee shall not operate an incinerator except as provided in 326 IAC 4-2 or in this permit. The Permittee shall not operate a refuse incinerator or refuse burning equipment except as provided in 326 IAC 9-1-2 or in this permit.

#### C.5 Fugitive Dust Emissions [326 IAC 6-4]

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions). 326 IAC 6-4-2(4) is not federally enforceable.

#### C.6 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

- (a) Notification requirements apply to each owner or operator. If the combined amount of regulated asbestos containing material (RACM) to be stripped, removed or disturbed is at least 260 linear feet on pipes or 160 square feet on other facility components, or at least thirty-five (35) cubic feet on all facility components, then the notification requirements of 326 IAC 14-10-3 are mandatory. All demolition projects require notification whether or not asbestos is present.
- (b) The Permittee shall ensure that a written notification is sent on a form provided by the Commissioner at least ten (10) working days before asbestos stripping or removal work or before demolition begins, per 326 IAC 14-10-3, and shall update such notice as necessary, including, but not limited to the following:

- (1) When the amount of affected asbestos containing material increases or decreases by at least twenty percent (20%); or
- (2) If there is a change in the following:
  - (A) Asbestos removal or demolition start date;
  - (B) Removal or demolition contractor; or
  - (C) Waste disposal site.
- (c) The Permittee shall ensure that the notice is postmarked or delivered according to the guidelines set forth in 326 IAC 14-10-3(2).
- (d) The notice to be submitted shall include the information enumerated in 326 IAC 14-10-3(3).

All required notifications shall be submitted to:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

The notice shall include a signed certification from the owner or operator that the information provided in this notification is correct and that only Indiana licensed workers and project supervisors will be used to implement the asbestos removal project. The notifications do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

- (e) **Procedures for Asbestos Emission Control**  
The Permittee shall comply with the applicable emission control procedures in 326 IAC 14-10-4 and 40 CFR 61.145(c). Per 326 IAC 14-10-1, emission control requirements are applicable for any removal or disturbance of RACM greater than three (3) linear feet on pipes or three (3) square feet on any other facility components or a total of at least 0.75 cubic feet on all facility components.
- (f) **Demolition and Renovation**  
The Permittee shall thoroughly inspect the affected facility or part of the facility where the demolition or renovation will occur for the presence of asbestos pursuant to 40 CFR 61.145(a).
- (g) **Indiana Licensed Asbestos Inspector**  
The Permittee shall comply with 326 IAC 14-10-1(a) that requires the owner or operator, prior to a renovation/demolition, to use an Indiana Licensed Asbestos Inspector to thoroughly inspect the affected portion of the facility for the presence of asbestos. The requirement to use an Indiana Licensed Asbestos inspector is not federally enforceable.

### Testing Requirements [326 IAC 2-7-6(1)]

#### C.7 Performance Testing [326 IAC 3-6]

---

- (a) For performance testing required by this permit, a test protocol, except as provided elsewhere in this permit, shall be submitted to:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

no later than thirty-five (35) days prior to the intended test date. The protocol submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

- (b) The Permittee shall notify IDEM, OAQ of the actual test date at least fourteen (14) days prior to the actual test date. The notification submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).
- (c) Pursuant to 326 IAC 3-6-4(b), all test reports must be received by IDEM, OAQ not later than forty-five (45) days after the completion of the testing. An extension may be granted by IDEM, OAQ if the Permittee submits to IDEM, OAQ a reasonable written explanation not later than five (5) days prior to the end of the initial forty-five (45) day period.

### Compliance Requirements [326 IAC 2-1.1-11]

#### C.8 Compliance Requirements [326 IAC 2-1.1-11]

---

The commissioner may require stack testing, monitoring, or reporting at any time to assure compliance with all applicable requirements by issuing an order under 326 IAC 2-1.1-11. Any monitoring or testing shall be performed in accordance with 326 IAC 3 or other methods approved by the commissioner or the U. S. EPA.

### Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

#### C.9 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]

---

Unless otherwise specified in this permit, for all monitoring requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or of initial start-up, whichever is later, to begin such monitoring. If due to circumstances beyond the Permittee's control, any monitoring equipment required by this permit cannot be installed and operated no later than ninety (90) days after permit issuance or the date of initial startup, whichever is later, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification which shall be submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

Unless otherwise specified in the approval for the new emission unit(s), compliance monitoring for new emission units or emission units added through a source modification shall be implemented when operation begins.

C.10 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

---

- (a) When required by any condition of this permit, an analog instrument used to measure a parameter related to the operation of an air pollution control device shall have a scale such that the expected maximum reading for the normal range shall be no less than twenty percent (20%) of full scale.
- (b) The Permittee may request that the IDEM, OAQ approve the use of an instrument that does not meet the above specifications provided the Permittee can demonstrate that an alternative instrument specification will adequately ensure compliance with permit conditions requiring the measurement of the parameters.

**Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]**

C.11 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]

---

Pursuant to 326 IAC 1-5-2 (Emergency Reduction Plans; Submission):

- (a) The Permittee shall maintain the most recently submitted written emergency reduction plans (ERPs) consistent with safe operating procedures.
- (b) Upon direct notification by IDEM, OAQ that a specific air pollution episode level is in effect, the Permittee shall immediately put into effect the actions stipulated in the approved ERP for the appropriate episode level. [326 IAC 1-5-3]

C.12 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]

---

If a regulated substance, as defined in 40 CFR 68, is present at a source in more than a threshold quantity, the Permittee must comply with the applicable requirements of 40 CFR 68.

C.13 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]

---

Upon detecting an excursion where a response step is required by the D Section or an exceedance of a limitation in this permit:

- (a) The Permittee shall take reasonable response steps to restore operation of the emissions unit (including any control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing excess emissions.
- (b) The response shall include minimizing the period of any startup, shutdown or malfunction. The response may include, but is not limited to, the following:
  - (1) initial inspection and evaluation;
  - (2) recording that operations returned or are returning to normal without operator action (such as through response by a computerized distribution control system);  
or
  - (3) any necessary follow-up actions to return operation to normal or usual manner of operation.

- (c) A determination of whether the Permittee has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include, but is not limited to, the following:
  - (1) monitoring results;
  - (2) review of operation and maintenance procedures and records; and/or
  - (3) inspection of the control device, associated capture system, and the process.
- (d) Failure to take reasonable response steps shall be considered a deviation from the permit.
- (e) The Permittee shall record the reasonable response steps taken.

**C.14 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]**

- (a) When the results of a stack test performed in conformance with Section C - Performance Testing, of this permit exceed the level specified in any condition of this permit, the Permittee shall submit a description of its response actions to IDEM, OAQ, no later than seventy-five (75) days after the date of the test.
- (b) A retest to demonstrate compliance shall be performed no later than one hundred eighty (180) days after the date of the test. Should the Permittee demonstrate to IDEM, OAQ that retesting in one hundred eighty (180) days is not practicable, IDEM, OAQ may extend the retesting deadline
- (c) IDEM, OAQ reserves the authority to take any actions allowed under law in response to noncompliant stack tests.

The response action documents submitted pursuant to this condition do require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

**Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]**

**C.15 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]**  
In accordance with the compliance schedule specified in 326 IAC 2-6-3(b)(1), starting in 2004 and every three (3) years thereafter, the Permittee shall submit by July 1 an emission statement covering the previous calendar year. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4(c) and shall meet the following requirements:

- (1) Indicate estimated actual emissions of all pollutants listed in 326 IAC 2-6-4(a);
- (2) Indicate estimated actual emissions of regulated pollutants as defined by 326 IAC 2-7-1(32) ("Regulated pollutant, which is used only for purposes of Section 19 of this rule") from the source, for purpose of fee assessment.

The statement must be submitted to:

Indiana Department of Environmental Management  
Technical Support and Modeling Section, Office of Air Quality  
100 North Senate Avenue  
MC 61-50 IGCN 1003  
Indianapolis, Indiana 46204-2251

The emission statement does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34).

**C.16 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]**

---

- (a) Records of all required monitoring data, reports and support information required by this permit shall be retained for a period of at least five (5) years from the date of monitoring sample, measurement, report, or application. These records shall be physically present or electronically accessible at the source location for a minimum of three (3) years. The records may be stored elsewhere for the remaining two (2) years as long as they are available upon request. If the Commissioner makes a request for records to the Permittee, the Permittee shall furnish the records to the Commissioner within a reasonable time.
- (b) Unless otherwise specified in this permit, for all record keeping requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or the date of initial start-up, whichever is later, to begin such record keeping.

**C.17 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11]**

---

- (a) The Permittee shall submit the attached Quarterly Deviation and Compliance Monitoring Report or its equivalent. Any deviation from permit requirements, the date(s) of each deviation, the cause of the deviation, and the response steps taken must be reported except that a deviation required to be reported pursuant to an applicable requirement that exists independent of this permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. This report shall be submitted not later than thirty (30) days after the end of the reporting period. The Quarterly Deviation and Compliance Monitoring Report shall include a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(34). A deviation is an exceedance of a permit limitation or a failure to comply with a requirement of the permit.
- (b) The address for report submittal is:  
  
Indiana Department of Environmental Management  
Compliance and Enforcement Branch, Office of Air Quality  
100 North Senate Avenue  
MC 61-53 IGCN 1003  
Indianapolis, Indiana 46204-2251
- (c) Unless otherwise specified in this permit, any notice, report, or other submission required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (d) Reporting periods are based on calendar years, unless otherwise specified in this permit. For the purpose of this permit "calendar year" means the twelve (12) month period from January 1 to December 31 inclusive.

**Stratospheric Ozone Protection**

**C.18 Compliance with 40 CFR 82 and 326 IAC 22-1**

---

Pursuant to 40 CFR 82 (Protection of Stratospheric Ozone), Subpart F, except as provided for motor vehicle air conditioners in Subpart B, the Permittee shall comply with applicable standards for recycling and emissions reduction.

## SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS

### Emissions Unit Description:

- (a) Three (3) crystal clean parts washers with a solvent consumption of 240 gallons per year, constructed after 1990. [326 IAC 8-3-2][326 IAC 8-3-5]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

### Emission Limitations and Standards [326 IAC 2-7-5(1)]

#### D.1.1 Cold Cleaner Operation [326 IAC 8-3-2]

Pursuant to 326 IAC 8-3-2 (Cold Cleaner Operations), the owner or operator of the cold cleaning facility shall:

- (a) equip the cleaner with a cover;
- (b) equip the cleaner with a facility for draining cleaned parts;
- (c) close the degreaser cover whenever parts are not being handled in the cleaner;
- (d) drain cleaned parts for at least fifteen (15) seconds or until dripping ceases;
- (e) provide a permanent, conspicuous label summarizing the operation requirements;
- (f) store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.

#### D.1.2 Cold Cleaner Degreaser Operation and Control [326 IAC 8-3-5]

- (a) Pursuant to 326 IAC 8-3-5(a) (Cold Cleaner Degreaser Operation and Control), for cold cleaner degreaser operations without remote solvent reservoirs constructed after July 1, 1990, the Permittee shall ensure that the following control equipment requirements are met:
  - (1) Equip the degreaser with a cover. The cover must be designed so that it can be easily operated with one (1) hand if:
    - (A) The solvent volatility is greater than two (2) kiloPascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F));
    - (B) The solvent is agitated; or
    - (C) The solvent is heated.

- (2) Equip the degreaser with a facility for draining cleaned articles. If the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F)), then the drainage facility must be internal such that articles are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.
  - (3) Provide a permanent, conspicuous label which lists the operating requirements outlined in subsection (b).
  - (4) The solvent spray, if used, must be a solid, fluid stream and shall be applied at a pressure which does not cause excessive splashing.
  - (5) Equip the degreaser with one (1) of the following control devices if the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F)), or if the solvent is heated to a temperature greater than forty-eight and nine-tenths degrees Celsius (48.9°C) (one hundred twenty degrees Fahrenheit (120°F)):
    - (A) A freeboard that attains a freeboard ratio of seventy-five hundredths (0.75) or greater.
    - (B) A water cover when solvent is used is insoluble in, and heavier than, water.
    - (C) Other systems of demonstrated equivalent control such as a refrigerated chiller or carbon adsorption. Such systems shall be submitted to the U.S. EPA as a SIP revision.
- (b) Pursuant to 326 IAC 8-3-5(b) (Cold Cleaner Degreaser Operation and Control), the owner or operator of a cold cleaning facility construction of which commenced after July 1, 1990, shall ensure that the following operating requirements are met:
- (1) Close the cover whenever articles are not being handled in the degreaser.
  - (2) Drain cleaned articles for at least fifteen (15) seconds or until dripping ceases.
  - (3) Store waste solvent only in covered containers and prohibit the disposal or transfer of waste solvent in any manner in which greater than twenty percent (20%) of the waste solvent by weight could evaporate.

## SECTION E.1 FACILITY OPERATION CONDITIONS

### Emissions Unit Description:

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M]  
[40 CFR 63, Subpart AAAA]
- (b) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW]  
[40 CFR 63, Subpart AAAA]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

### New Source Performance Standards

#### E.1.1 General Provisions Relating to NSPS WWW [326 IAC 12][40 CFR Part 60, Subpart A]

The provisions of 40 CFR Part 60, Subpart A – General Provisions, which are incorporated by reference in 326 IAC 12-1, apply to the municipal solid waste landfill and flare described in this section except when otherwise specified in 40 CFR Part 60, Subpart WWW.

#### E.1.2 Standards of Performance for Municipal Solid Waste Landfills [326 IAC 12][326 IAC 8.1] [40 CFR Part 60, Subpart WWW]

The Permittee who operates a municipal solid waste landfill that commenced construction, reconstruction or modification on or after May 30, 1991 shall comply with the following provisions of 40 CFR Part 60, Subpart WWW, included as Attachment A of this permit, except for approved variances incorporated into the Collection and Control Design Plan in accordance with 40 CFR 60, Subpart WWW. The source is subject to the following portions of Subpart WWW:

- 1) 40 CFR 60.752(b)
- 2) 40 CFR 60.753
- 3) 40 CFR 60.754
- 4) 40 CFR 60.755
- 5) 40 CFR 60.756
- 6) 40 CFR 60.757
- 7) 40 CFR 60.758
- 8) 40 CFR 60.759

#### E.1.3 Operational Standards for Collection and Control Systems [40 CFR 60.753] [326 IAC 12][326 IAC 8.1]

- (a) Operate each interior wellhead in the collection system with a landfill gas temperature less than 55 °C and with either a nitrogen level less than 20 percent or an oxygen level less than 5 percent, except as indicated in (3) below (except for the landfill gas well, LFGASB16, which can have an oxygen level less than 16.9 percent). The Permittee may establish a higher operating temperature, nitrogen, or oxygen value at a particular well. A higher operating value demonstration shall show supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.
  - (1) The nitrogen level shall be determined using Method 3C, unless an alternative method is established as allowed by 40CFR 60.752 (b)(2)(i).

- (2) Unless an alternative test method is established as allowed by 40 CFR 60.752 (b)(2)(i), the oxygen shall be determined by an oxygen meter using Method 3A except that; the span shall be set so that the regulatory limit is between 20 and 50 percent of the span; a data recorder is not required; only two calibration gases are required, a zero and span, and ambient air may be used as the span; a calibration error check is not required; the allowable sample bias, zero drift, and calibration drift are  $\pm 10$  percent.
- (3) Pursuant to Administrative Amendment 003-27018-00257, the Permittee has established a higher operating temperature at wells C25R, C30, C38, C39R, C40R, C41R, C43R, C44R, C46R, C47R, C52, C53, C56, C57, and C59. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.
- (4) Pursuant to Administrative Amendment 003-27719-00257, the Permittee has established a higher operating temperature at wells C24R, C42R, C45R, and C48R. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.

## SECTION E.2 FACILITY OPERATION CONDITIONS

### Emissions Unit Description:

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M]  
[40 CFR 63, Subpart AAAA]
- (b) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW]  
[40 CFR 63, Subpart AAAA]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

### National Emission Standards for Hazardous Air Pollutants

#### E.2.1 General Provisions Relating to NESHAP AAAA [326 IAC 20-67][40 CFR Part 63, Subpart AAAA]

The provisions of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated by reference in 326 IAC 20-1, apply to the municipal solid waste landfill and flare described in this section except when otherwise specified in 40 CFR Part 63, Subpart AAAA.

#### E.2.2 National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills [326 IAC 20-67][40 CFR Part 63, Subpart AAAA]

The Permittee who operates a stationary municipal solid waste landfill that has accepted waste since November 8, 1987 and has a design capacity equal to or greater than 2.5 million megagrams shall comply with the following provisions of 40 CFR Part 63, Subpart AAAA, included as Attachment B of this permit. The source is subject to the following portions of Subpart AAAA:

- 1) 40 CFR 63.1955
- 2) 40 CFR 63.1960 to 40 CFR 63.1985

### SECTION E.3

### FACILITY OPERATION CONDITIONS

#### **Emissions Unit Description:**

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M]  
[40 CFR 63, Subpart AAAA]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

#### **National Emission Standards for Asbestos**

- E.3.1 General Provisions Relating to National Emission Standards for Asbestos [326 IAC 14-1][40 CFR Part 61, Subpart M]

---

The provisions of 40 CFR Part 61, Subpart A – General Provisions, which are incorporated by reference in 326 IAC 14-1, apply to the municipal solid waste landfill described in this section except when otherwise specified in 40 CFR Part 61, Subpart M.

- E.3.2 National Emission Standards for Asbestos [326 IAC 14-2][40 CFR Part 61, Subpart M]

---

The Permittee who operates a municipal solid waste landfill that receives asbestos-containing waste material from a source listed in 40 CFR 61.149, 40 CFR 61.150 or 40 CFR 61.155 shall comply with the following provisions of 40 CFR Part 61, Subpart M, included as Attachment C of this permit. The source is subject to the following portions of Subpart M:

- 1) 40 CFR 61.154

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
OFFICE OF AIR QUALITY  
COMPLIANCE AND ENFORCEMENT BRANCH  
PART 70 OPERATING PERMIT  
CERTIFICATION**

Source Name: Republic Services of Indiana, LP d/b/a National Serv-all Landfill  
Source Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Part 70 Permit No.: T 003-30376-00257

**This certification shall be included when submitting monitoring, testing reports/results or other documents as required by this permit.**

Please check what document is being certified:

- Annual Compliance Certification Letter
- Test Result (specify)
- Report (specify)
- Notification (specify)
- Affidavit (specify)
- Other (specify)

I certify that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

Signature:

Printed Name:

Title/Position:

Phone:

Date:

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT**  
**OFFICE OF AIR QUALITY**  
**COMPLIANCE AND ENFORCEMENT BRANCH**  
**100 North Senate Avenue**  
**MC 61-53 IGCN 1003**  
**Indianapolis, Indiana 46204-2251**  
**Phone: (317) 233-0178**  
**Fax: (317) 233-6865**

**PART 70 OPERATING PERMIT**  
**EMERGENCY OCCURRENCE REPORT**

Source Name: Republic Services of Indiana, LP d/b/a National Serv-all Landfill  
Source Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Part 70 Permit No.: T 003-30376-00257

**This form consists of 2 pages**

**Page 1 of 2**

- This is an emergency as defined in 326 IAC 2-7-1(12)
- The Permittee must notify the Office of Air Quality (OAQ), within four (4) business hours (1-800-451-6027 or 317-233-0178, ask for Compliance Section); and
  - The Permittee must submit notice in writing or by facsimile within two (2) working days (Facsimile Number: 317-233-6865), and follow the other requirements of 326 IAC 2-7-16.

If any of the following are not applicable, mark N/A

Facility/Equipment/Operation:
Control Equipment:
Permit Condition or Operation Limitation in Permit:
Description of the Emergency:
Describe the cause of the Emergency:

If any of the following are not applicable, mark N/A

Page 2 of 2

Date/Time Emergency started:
Date/Time Emergency was corrected:
Was the facility being properly operated at the time of the emergency?    Y    N
Type of Pollutants Emitted: TSP, PM-10, SO <sub>2</sub> , VOC, NO <sub>x</sub> , CO, Pb, other:
Estimated amount of pollutant(s) emitted during emergency:
Describe the steps taken to mitigate the problem:
Describe the corrective actions/response steps taken:
Describe the measures taken to minimize emissions:
If applicable, describe the reasons why continued operation of the facilities are necessary to prevent imminent injury to persons, severe damage to equipment, substantial loss of capital investment, or loss of product or raw materials of substantial economic value:

Form Completed by: \_\_\_\_\_

Title / Position: \_\_\_\_\_

Date: \_\_\_\_\_

Phone: \_\_\_\_\_

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
 OFFICE OF AIR QUALITY  
 COMPLIANCE AND ENFORCEMENT BRANCH  
 PART 70 OPERATING PERMIT  
 QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT**

Source Name: Republic Services of Indiana, LP d/b/a National Serv-all Landfill  
 Source Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
 Part 70 Permit No.: T 003-30376-00257

**Months:** \_\_\_\_\_ **to** \_\_\_\_\_ **Year:** \_\_\_\_\_

<p>This report shall be submitted quarterly based on a calendar year. Any deviation from the requirements of this permit, the date(s) of each deviation, the probable cause of the deviation, and the response steps taken must be reported. A deviation required to be reported pursuant to an applicable requirement that exists independent of the permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. Additional pages may be attached if necessary. If no deviations occurred, please specify in the box marked "No deviations occurred this reporting period".</p>	
<input type="checkbox"/> NO DEVIATIONS OCCURRED THIS REPORTING PERIOD.	
<input type="checkbox"/> THE FOLLOWING DEVIATIONS OCCURRED THIS REPORTING PERIOD	
<b>Permit Requirement</b> (specify permit condition #)	
<b>Date of Deviation:</b>	<b>Duration of Deviation:</b>
<b>Number of Deviations:</b>	
<b>Probable Cause of Deviation:</b>	
<b>Response Steps Taken:</b>	
<b>Permit Requirement</b> (specify permit condition #)	
<b>Date of Deviation:</b>	<b>Duration of Deviation:</b>
<b>Number of Deviations:</b>	
<b>Probable Cause of Deviation:</b>	
<b>Response Steps Taken:</b>	

<b>Permit Requirement (specify permit condition #)</b>	
<b>Date of Deviation:</b>	<b>Duration of Deviation:</b>
<b>Number of Deviations:</b>	
<b>Probable Cause of Deviation:</b>	
<b>Response Steps Taken:</b>	
<b>Permit Requirement (specify permit condition #)</b>	
<b>Date of Deviation:</b>	<b>Duration of Deviation:</b>
<b>Number of Deviations:</b>	
<b>Probable Cause of Deviation:</b>	
<b>Response Steps Taken:</b>	
<b>Permit Requirement (specify permit condition #)</b>	
<b>Date of Deviation:</b>	<b>Duration of Deviation:</b>
<b>Number of Deviations:</b>	
<b>Probable Cause of Deviation:</b>	
<b>Response Steps Taken:</b>	

Form Completed by: \_\_\_\_\_

Title / Position: \_\_\_\_\_

Date: \_\_\_\_\_

Phone: \_\_\_\_\_

**Indiana Department of Environmental Management  
Office of Air Quality**

**Attachment A**

**40 CFR 60, Subpart WWW — Standards of Performance for Municipal Solid Waste Landfills**

**Source Description and Location**

Source Name:	Republic Services of Indiana, LP d/b/a National Serv-All Landfill
Source Location:	6231 McBeth Road, Fort Wayne, Indiana 46809-9719
County:	Allen County
SIC Code:	4953
Operation Permit No.:	T003-30376-00257
Permit Reviewer:	David J. Matousek

**Complete Text of 40 CFR 60, Subpart WWW**

**40 CFR 60, Subpart WWW — Standards of Performance for Municipal Solid Waste Landfills**

Source: 61 FR 9919, Mar. 12, 1996, unless otherwise noted.

**§ 60.750 Applicability, designation of affected facility, and delegation of authority.**

(a) The provisions of this subpart apply to each municipal solid waste landfill that commenced construction, reconstruction or modification on or after May 30, 1991. Physical or operational changes made to an existing MSW landfill solely to comply with subpart Cc of this part are not considered construction, reconstruction, or modification for the purposes of this section.

(b) The following authorities shall be retained by the Administrator and not transferred to the State: §60.754(a)(5).

(c) Activities required by or conducted pursuant to a CERCLA, RCRA, or State remedial action are not considered construction, reconstruction, or modification for purposes of this subpart.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32750, June 16, 1998]

**§ 60.751 Definitions.**

As used in this subpart, all terms not defined herein shall have the meaning given them in the Act or in subpart A of this part.

*Active collection system* means a gas collection system that uses gas mover equipment.

*Active landfill* means a landfill in which solid waste is being placed or a landfill that is planned to accept waste in the future.

*Closed landfill* means a landfill in which solid waste is no longer being placed, and in which no additional solid wastes will be placed without first filing a notification of modification as prescribed under §60.7(a)(4). Once a notification of modification has been filed, and additional solid waste is placed in the landfill, the landfill is no longer closed.

*Closure* means that point in time when a landfill becomes a closed landfill.

*Commercial solid waste* means all types of solid waste generated by stores, offices, restaurants, warehouses, and other nonmanufacturing activities, excluding residential and industrial wastes.

*Controlled landfill* means any landfill at which collection and control systems are required under this subpart as a result of the nonmethane organic compounds emission rate. The landfill is considered controlled at the time a collection and control system design plan is submitted in compliance with §60.752(b)(2)(i).

*Design capacity* means the maximum amount of solid waste a landfill can accept, as indicated in terms of volume or mass in the most recent permit issued by the State, local, or Tribal agency responsible for regulating the landfill, plus any in-place waste not accounted for in the most recent permit. If the owner or operator chooses to convert the design capacity from volume to mass or from mass to volume to demonstrate its design capacity is less than 2.5 million megagrams or 2.5 million cubic meters, the calculation must include a site specific density, which must be recalculated annually.

*Disposal facility* means all contiguous land and structures, other appurtenances, and improvements on the land used for the disposal of solid waste.

*Emission rate cutoff* means the threshold annual emission rate to which a landfill compares its estimated emission rate to determine if control under the regulation is required.

*Enclosed combustor* means an enclosed firebox which maintains a relatively constant limited peak temperature generally using a limited supply of combustion air. An enclosed flare is considered an enclosed combustor.

*Flare* means an open combustor without enclosure or shroud.

*Gas mover equipment* means the equipment (i.e., fan, blower, compressor) used to transport landfill gas through the header system.

*Household waste* means any solid waste (including garbage, trash, and sanitary waste in septic tanks) derived from households (including, but not limited to, single and multiple residences, hotels and motels, bunkhouses, ranger stations, crew quarters, campgrounds, picnic grounds, and day-use recreation areas).

*Industrial solid waste* means solid waste generated by manufacturing or industrial processes that is not a hazardous waste regulated under Subtitle C of the Resource Conservation and Recovery Act, parts 264 and 265 of this title. Such waste may include, but is not limited to, waste resulting from the following manufacturing processes: electric power generation; fertilizer/agricultural chemicals; food and related products/by-products; inorganic chemicals; iron and steel manufacturing; leather and leather products; nonferrous metals manufacturing/foundries; organic chemicals; plastics and resins manufacturing; pulp and paper industry; rubber and miscellaneous plastic products; stone, glass, clay, and concrete products; textile manufacturing; transportation equipment; and water treatment. This term does not include mining waste or oil and gas waste.

*Interior well* means any well or similar collection component located inside the perimeter of the landfill waste. A perimeter well located outside the landfilled waste is not an interior well.

*Landfill* means an area of land or an excavation in which wastes are placed for permanent disposal, and that is not a land application unit, surface impoundment, injection well, or waste pile as those terms are defined under §257.2 of this title.

*Lateral expansion* means a horizontal expansion of the waste boundaries of an existing MSW landfill. A lateral expansion is not a modification unless it results in an increase in the design capacity of the landfill.

*Modification* means an increase in the permitted volume design capacity of the landfill by either horizontal or vertical expansion based on its permitted design capacity as of May 30, 1991. Modification does not occur until the owner or operator commences construction on the horizontal or vertical expansion.

*Municipal solid waste landfill* or *MSW landfill* means an entire disposal facility in a contiguous geographical space where household waste is placed in or on land. An MSW landfill may also receive other types of RCRA Subtitle D wastes (§257.2 of this title) such as commercial solid waste, nonhazardous sludge, conditionally exempt small quantity generator waste, and industrial solid waste. Portions of an MSW landfill may be separated by access roads. An MSW landfill may be publicly or privately owned. An MSW landfill may be a new MSW landfill, an existing MSW landfill, or a lateral expansion.

*Municipal solid waste landfill emissions* or *MSW landfill emissions* means gas generated by the decomposition of organic waste deposited in an MSW landfill or derived from the evolution of organic compounds in the waste.

*NMOC* means nonmethane organic compounds, as measured according to the provisions of §60.754.

*Nondegradable waste* means any waste that does not decompose through chemical breakdown or microbiological activity. Examples are, but are not limited to, concrete, municipal waste combustor ash, and metals.

*Passive collection system* means a gas collection system that solely uses positive pressure within the landfill to move the gas rather than using gas mover equipment.

*Sludge* means any solid, semisolid, or liquid waste generated from a municipal, commercial, or industrial wastewater treatment plant, water supply treatment plant, or air pollution control facility, exclusive of the treated effluent from a wastewater treatment plant.

*Solid waste* means any garbage, sludge from a wastewater treatment plant, water supply treatment plant, or air pollution control facility and other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities, but does not include solid or dissolved material in domestic sewage, or solid or dissolved materials in irrigation return flows or industrial discharges that are point sources subject to permits under 33 U.S.C. 1342, or source, special nuclear, or by-product material as defined by the Atomic Energy Act of 1954, as amended (42 U.S.C 2011 et seq.).

*Sufficient density* means any number, spacing, and combination of collection system components, including vertical wells, horizontal collectors, and surface collectors, necessary to maintain emission and migration control as determined by measures of performance set forth in this part.

*Sufficient extraction rate* means a rate sufficient to maintain a negative pressure at all wellheads in the collection system without causing air infiltration, including any wellheads connected to the system as a result of expansion or excess surface emissions, for the life of the blower.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32750, June 16, 1998; 64 FR 9262, Feb. 24, 1999]

#### **§ 60.752 Standards for air emissions from municipal solid waste landfills.**

(a) Each owner or operator of an MSW landfill having a design capacity less than 2.5 million megagrams by mass or 2.5 million cubic meters by volume shall submit an initial design capacity report to the Administrator as provided in §60.757(a). The landfill may calculate design capacity in either megagrams or cubic meters for comparison with the exemption values. Any density conversions shall be documented and submitted with the report. Submittal of the initial design capacity report shall fulfill the requirements of this subpart except as provided for in paragraphs (a)(1) and (a)(2) of this section.

(1) The owner or operator shall submit to the Administrator an amended design capacity report, as provided for in §60.757(a)(3).

(2) When an increase in the maximum design capacity of a landfill exempted from the provisions of §60.752(b) through §60.759 of this subpart on the basis of the design capacity exemption in paragraph (a) of this section results in a revised maximum design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters, the owner or operator shall comply with the provision of paragraph (b) of this section.

(b) Each owner or operator of an MSW landfill having a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters, shall either comply with paragraph (b)(2) of this section or calculate an NMOC emission rate for the landfill using the procedures specified in §60.754. The NMOC emission rate shall be recalculated annually, except as provided in §60.757(b)(1)(ii) of this subpart. The owner or operator of an MSW landfill subject to this subpart with a design capacity greater than or equal to 2.5 million megagrams and 2.5 million cubic meters is subject to part 70 or 71 permitting requirements.

(1) If the calculated NMOC emission rate is less than 50 megagrams per year, the owner or operator shall:

(i) Submit an annual emission report to the Administrator, except as provided for in §60.757(b)(1)(ii); and

(ii) Recalculate the NMOC emission rate annually using the procedures specified in §60.754(a)(1) until such time as the calculated NMOC emission rate is equal to or greater than 50 megagrams per year, or the landfill is closed.

(A) If the NMOC emission rate, upon recalculation required in paragraph (b)(1)(ii) of this section, is equal to or greater than 50 megagrams per year, the owner or operator shall install a collection and control system in compliance with paragraph (b)(2) of this section.

(B) If the landfill is permanently closed, a closure notification shall be submitted to the Administrator as provided for in §60.757(d).

(2) If the calculated NMOC emission rate is equal to or greater than 50 megagrams per year, the owner or operator shall:

(i) Submit a collection and control system design plan prepared by a professional engineer to the Administrator within 1 year:

(A) The collection and control system as described in the plan shall meet the design requirements of paragraph (b)(2)(ii) of this section.

(B) The collection and control system design plan shall include any alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, recordkeeping or reporting provisions of §§60.753 through 60.758 proposed by the owner or operator.

(C) The collection and control system design plan shall either conform with specifications for active collection systems in §60.759 or include a demonstration to the Administrator's satisfaction of the sufficiency of the alternative provisions to §60.759.

(D) The Administrator shall review the information submitted under paragraphs (b)(2)(i) (A),(B) and (C) of this section and either approve it, disapprove it, or request that additional information be submitted. Because of the many site-specific factors involved with landfill gas system design, alternative systems may be necessary. A wide variety of system designs are possible, such as vertical wells, combination horizontal and vertical collection systems, or horizontal trenches only, leachate collection components, and passive systems.

(ii) Install a collection and control system that captures the gas generated within the landfill as required by paragraphs (b)(2)(ii)(A) or (B) and (b)(2)(iii) of this section within 30 months after the first annual report in which the emission rate equals or exceeds 50 megagrams per year, unless Tier 2 or Tier 3 sampling demonstrates that the emission rate is less than 50 megagrams per year, as specified in §60.757(c)(1) or (2).

(A) An active collection system shall:

( 1 ) Be designed to handle the maximum expected gas flow rate from the entire area of the landfill that warrants control over the intended use period of the gas control or treatment system equipment;

( 2 ) Collect gas from each area, cell, or group of cells in the landfill in which the initial solid waste has been placed for a period of:

( i ) 5 years or more if active; or

( ii ) 2 years or more if closed or at final grade.

( 3 ) Collect gas at a sufficient extraction rate;

( 4 ) Be designed to minimize off-site migration of subsurface gas.

(B) A passive collection system shall:

( 1 ) Comply with the provisions specified in paragraphs (b)(2)(ii)(A)( 1 ), ( 2 ), and (2)(ii)(A)( 4 ) of this section.

( 2 ) Be installed with liners on the bottom and all sides in all areas in which gas is to be collected. The liners shall be installed as required under §258.40.

(iii) Route all the collected gas to a control system that complies with the requirements in either paragraph (b)(2)(iii) (A), (B) or (C) of this section.

(A) An open flare designed and operated in accordance with §60.18 except as noted in §60.754(e);

(B) A control system designed and operated to reduce NMOC by 98 weight-percent, or, when an enclosed combustion device is used for control, to either reduce NMOC by 98 weight percent or reduce the outlet NMOC concentration to less than 20 parts per million by volume, dry basis as hexane at 3 percent oxygen. The reduction efficiency or parts per million by volume shall be established by an initial performance test to be completed no later than 180 days after the initial startup of the approved control system using the test methods specified in §60.754(d).

( 1 ) If a boiler or process heater is used as the control device, the landfill gas stream shall be introduced into the flame zone.

( 2 ) The control device shall be operated within the parameter ranges established during the initial or most recent performance test. The operating parameters to be monitored are specified in §60.756;

(C) Route the collected gas to a treatment system that processes the collected gas for subsequent sale or use. All emissions from any atmospheric vent from the gas treatment system shall be subject to the requirements of paragraph (b)(2)(iii) (A) or (B) of this section.

(iv) Operate the collection and control device installed to comply with this subpart in accordance with the provisions of §§60.753, 60.755 and 60.756.

(v) The collection and control system may be capped or removed provided that all the conditions of paragraphs (b)(2)(v) (A), (B), and (C) of this section are met:

(A) The landfill shall be a closed landfill as defined in §60.751 of this subpart. A closure report shall be submitted to the Administrator as provided in §60.757(d);

(B) The collection and control system shall have been in operation a minimum of 15 years; and

(C) Following the procedures specified in §60.754(b) of this subpart, the calculated NMOC gas produced by the landfill shall be less than 50 megagrams per year on three successive test dates. The test dates shall be no less than 90 days apart, and no more than 180 days apart.

(c) For purposes of obtaining an operating permit under title V of the Act, the owner or operator of a MSW landfill subject to this subpart with a design capacity less than 2.5 million megagrams or 2.5 million cubic meters is not subject to the requirement to obtain an operating permit for the landfill under part 70 or 71 of this chapter, unless the landfill is otherwise subject to either part 70 or 71. For purposes of submitting a timely application for an operating permit under part 70 or 71, the owner or operator of a MSW landfill subject to this subpart with a design capacity greater than or equal to 2.5 million megagrams and 2.5 million cubic meters, and not otherwise subject to either part 70 or 71, becomes subject to the requirements of §§70.5(a)(1)(i) or 71.5(a)(1)(i) of this chapter, regardless of when the design capacity report is actually submitted, no later than:

(1) June 10, 1996 for MSW landfills that commenced construction, modification, or reconstruction on or after May 30, 1991 but before March 12, 1996;

(2) Ninety days after the date of commenced construction, modification, or reconstruction for MSW landfills that commence construction, modification, or reconstruction on or after March 12, 1996.

(d) When a MSW landfill subject to this subpart is closed, the owner or operator is no longer subject to the requirement to maintain an operating permit under part 70 or 71 of this chapter for the landfill if the landfill is not otherwise subject to the requirements of either part 70 or 71 and if either of the following conditions are met:

(1) The landfill was never subject to the requirement for a control system under paragraph (b)(2) of this section; or

(2) The owner or operator meets the conditions for control system removal specified in paragraph (b)(2)(v) of this section.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32751, June 16, 1998; 65 FR 18908, Apr. 10, 2000; 71 FR 55127, Sept. 21, 2006]

### **§ 60.753 Operational standards for collection and control systems.**

Each owner or operator of an MSW landfill with a gas collection and control system used to comply with the provisions of §60.752(b)(2)(ii) of this subpart shall:

(a) Operate the collection system such that gas is collected from each area, cell, or group of cells in the MSW landfill in which solid waste has been in place for:

(1) 5 years or more if active; or

(2) 2 years or more if closed or at final grade;

(b) Operate the collection system with negative pressure at each wellhead except under the following conditions:

(1) A fire or increased well temperature. The owner or operator shall record instances when positive pressure occurs in efforts to avoid a fire. These records shall be submitted with the annual reports as provided in §60.757(f)(1);

(2) Use of a geomembrane or synthetic cover. The owner or operator shall develop acceptable pressure limits in the design plan;

(3) A decommissioned well. A well may experience a static positive pressure after shut down to accommodate for declining flows. All design changes shall be approved by the Administrator;

(c) Operate each interior wellhead in the collection system with a landfill gas temperature less than 55 °C and with either a nitrogen level less than 20 percent or an oxygen level less than 5 percent. The owner or operator may establish a higher operating temperature, nitrogen, or oxygen value at a particular well. A higher operating value demonstration shall show supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.

(1) The nitrogen level shall be determined using Method 3C, unless an alternative test method is established as allowed by §60.752(b)(2)(i) of this subpart.

(2) Unless an alternative test method is established as allowed by §60.752(b)(2)(i) of this subpart, the oxygen shall be determined by an oxygen meter using Method 3A or 3C except that:

(i) The span shall be set so that the regulatory limit is between 20 and 50 percent of the span;

(ii) A data recorder is not required;

(iii) Only two calibration gases are required, a zero and span, and ambient air may be used as the span;

(iv) A calibration error check is not required;

(v) The allowable sample bias, zero drift, and calibration drift are  $\pm 10$  percent.

(d) Operate the collection system so that the methane concentration is less than 500 parts per million above background at the surface of the landfill. To determine if this level is exceeded, the owner or operator shall conduct surface testing around the perimeter of the collection area and along a pattern that traverses the landfill at 30 meter intervals and where visual observations indicate elevated concentrations of landfill gas, such as distressed vegetation and cracks or seeps in the cover. The owner or operator may establish an alternative traversing pattern that ensures equivalent coverage. A surface monitoring design plan shall be developed that includes a topographical map with the monitoring route and the rationale for any site-specific deviations from the 30 meter intervals. Areas with steep slopes or other dangerous areas may be excluded from the surface testing.

(e) Operate the system such that all collected gases are vented to a control system designed and operated in compliance with §60.752(b)(2)(iii). In the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control system contributing to venting of the gas to the atmosphere shall be closed within 1 hour; and

(f) Operate the control or treatment system at all times when the collected gas is routed to the system.

(g) If monitoring demonstrates that the operational requirements in paragraphs (b), (c), or (d) of this section are not met, corrective action shall be taken as specified in §60.755(a)(3) through (5) or §60.755(c) of this subpart. If corrective actions are taken as specified in §60.755, the monitored exceedance is not a violation of the operational requirements in this section.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32751, June 16, 1998; 65 FR 61778, Oct. 17, 2000]

#### § 60.754 Test methods and procedures.

(a)(1) The landfill owner or operator shall calculate the NMOC emission rate using either the equation provided in paragraph (a)(1)(i) of this section or the equation provided in paragraph (a)(1)(ii) of this section. Both equations may be used if the actual year-to-year solid waste acceptance rate is known, as specified in paragraph (a)(1)(i), for part of the life of the landfill and the actual year-to-year solid waste acceptance rate is unknown, as specified in paragraph (a)(1)(ii), for part of the life of the landfill. The values to be used in both equations are 0.05 per year for  $k$ , 170 cubic meters per megagram for  $L_o$ , and 4,000 parts per million by volume as hexane for the  $C_{NMOC}$ . For landfills located in geographical areas with a thirty year annual average precipitation of less than 25 inches, as measured at the nearest representative official meteorologic site, the  $k$  value to be used is 0.02 per year.

(i) The following equation shall be used if the actual year-to-year solid waste acceptance rate is known.

$$M_{NMOC} = \sum_{i=1}^n 2 k L_o M_i (e^{-k t_i}) (C_{NMOC}) (3.6 \times 10^{-9})$$

where,

$M_{NMOC}$ =Total NMOC emission rate from the landfill, megagrams per year

$k$ =methane generation rate constant, year<sup>-1</sup>

$L_o$ =methane generation potential, cubic meters per megagram solid waste

$M_i$ =mass of solid waste in the  $i^{\text{th}}$  section, megagrams

$t_i$ =age of the  $i^{\text{th}}$  section, years

$C_{NMOC}$ =concentration of NMOC, parts per million by volume as hexane

$3.6 \times 10^{-9}$ =conversion factor

The mass of nondegradable solid waste may be subtracted from the total mass of solid waste in a particular section of the landfill when calculating the value for  $M_i$  if documentation of the nature and amount of such wastes is maintained

(ii) The following equation shall be used if the actual year-to-year solid waste acceptance rate is unknown.

$$M_{NMOC} = 2L_o R (e^{-k c} - e^{-k t}) C_{NMOC} (3.6 \times 10^{-9})$$

Where:

$M_{NMOC}$ =mass emission rate of NMOC, megagrams per year

$L_0$ =methane generation potential, cubic meters per megagram solid waste

R=average annual acceptance rate, megagrams per year

k=methane generation rate constant, year<sup>-1</sup>

t = age of landfill, years

$C_{NMOC}$ =concentration of NMOC, parts per million by volume as hexane

c=time since closure, years; for active landfill c=0 and  $e^{-kc}$

$3.6 \times 10^{-9}$ =conversion factor

The mass of nondegradable solid waste may be subtracted from the total mass of solid waste in a particular section of the landfill when calculating the value of R, if documentation of the nature and amount of such wastes is maintained.

(2) *Tier 1.* The owner or operator shall compare the calculated NMOC mass emission rate to the standard of 50 megagrams per year.

(i) If the NMOC emission rate calculated in paragraph (a)(1) of this section is less than 50 megagrams per year, then the landfill owner shall submit an emission rate report as provided in §60.757(b)(1), and shall recalculate the NMOC mass emission rate annually as required under §60.752(b)(1).

(ii) If the calculated NMOC emission rate is equal to or greater than 50 megagrams per year, then the landfill owner shall either comply with §60.752(b)(2), or determine a site-specific NMOC concentration and recalculate the NMOC emission rate using the procedures provided in paragraph (a)(3) of this section.

(3) *Tier 2.* The landfill owner or operator shall determine the NMOC concentration using the following sampling procedure. The landfill owner or operator shall install at least two sample probes per hectare of landfill surface that has retained waste for at least 2 years. If the landfill is larger than 25 hectares in area, only 50 samples are required. The sample probes should be located to avoid known areas of nondegradable solid waste. The owner or operator shall collect and analyze one sample of landfill gas from each probe to determine the NMOC concentration using Method 25 or 25C of appendix A of this part. Method 18 of appendix A of this part may be used to analyze the samples collected by the Method 25 or 25C sampling procedure. Taking composite samples from different probes into a single cylinder is allowed; however, equal sample volumes must be taken from each probe. For each composite, the sampling rate, collection times, beginning and ending cylinder vacuums, or alternative volume measurements must be recorded to verify that composite volumes are equal. Composite sample volumes should not be less than one liter unless evidence can be provided to substantiate the accuracy of smaller volumes. Terminate compositing before the cylinder approaches ambient pressure where measurement accuracy diminishes. If using Method 18, the owner or operator must identify all compounds in the sample and, as a minimum, test for those compounds published in the most recent Compilation of Air Pollutant Emission Factors (AP-42), minus carbon monoxide, hydrogen sulfide, and mercury. As a minimum, the instrument must be calibrated for each of the compounds on the list. Convert the concentration of each Method 18 compound to  $C_{NMOC}$  as hexane by multiplying by the ratio of its carbon atoms divided by six. If more than the required number of samples are taken, all samples must be used in the analysis. The landfill owner or operator must divide the NMOC concentration from Method 25 or 25C of appendix A of this part by six to convert from  $C_{NMOC}$  as carbon to  $C_{NMOC}$  as hexane. If the landfill has an active or passive gas removal system in place, Method 25 or 25C samples may be collected from these systems instead of surface probes provided the removal system can be shown to provide sampling as representative as the two sampling probe per hectare requirement. For active collection systems, samples may be collected from the common header pipe before the gas moving or condensate removal equipment. For these systems, a minimum of three samples must be collected from the header pipe.

(i) The landfill owner or operator shall recalculate the NMOC mass emission rate using the equations provided in paragraph (a)(1)(i) or (a)(1)(ii) of this section and using the average NMOC concentration from the collected samples instead of the default value in the equation provided in paragraph (a)(1) of this section.

(ii) If the resulting mass emission rate calculated using the site-specific NMOC concentration is equal to or greater than 50 megagrams per year, then the landfill owner or operator shall either comply with §60.752(b)(2), or determine the site-specific methane generation rate constant and recalculate the NMOC emission rate using the site-specific methane generation rate using the procedure specified in paragraph (a)(4) of this section.

(iii) If the resulting NMOC mass emission rate is less than 50 megagrams per year, the owner or operator shall submit a periodic estimate of the emission rate report as provided in §60.757(b)(1) and retest the site-specific NMOC concentration every 5 years using the methods specified in this section.

(4) *Tier 3.* The site-specific methane generation rate constant shall be determined using the procedures provided in Method 2E of appendix A of this part. The landfill owner or operator shall estimate the NMOC mass emission rate using equations in paragraph (a)(1)(i) or (a)(1)(ii) of this section and using a site-specific methane generation rate constant  $k$ , and the site-specific NMOC concentration as determined in paragraph (a)(3) of this section instead of the default values provided in paragraph (a)(1) of this section. The landfill owner or operator shall compare the resulting NMOC mass emission rate to the standard of 50 megagrams per year.

(i) If the NMOC mass emission rate as calculated using the site-specific methane generation rate and concentration of NMOC is equal to or greater than 50 megagrams per year, the owner or operator shall comply with §60.752(b)(2).

(ii) If the NMOC mass emission rate is less than 50 megagrams per year, then the owner or operator shall submit a periodic emission rate report as provided in §60.757(b)(1) and shall recalculate the NMOC mass emission rate annually, as provided in §60.757(b)(1) using the equations in paragraph (a)(1) of this section and using the site-specific methane generation rate constant and NMOC concentration obtained in paragraph (a)(3) of this section. The calculation of the methane generation rate constant is performed only once, and the value obtained from this test shall be used in all subsequent annual NMOC emission rate calculations.

(5) The owner or operator may use other methods to determine the NMOC concentration or a site-specific  $k$  as an alternative to the methods required in paragraphs (a)(3) and (a)(4) of this section if the method has been approved by the Administrator.

(b) After the installation of a collection and control system in compliance with §60.755, the owner or operator shall calculate the NMOC emission rate for purposes of determining when the system can be removed as provided in §60.752(b)(2)(v), using the following equation:

$$M_{\text{NMOC}} = 1.89 \times 10^{-3} Q_{\text{LFG}} C_{\text{NMOC}}$$

where,

$M_{\text{NMOC}}$  = mass emission rate of NMOC, megagrams per year

$Q_{\text{LFG}}$  = flow rate of landfill gas, cubic meters per minute

$C_{\text{NMOC}}$  = NMOC concentration, parts per million by volume as hexane

(1) The flow rate of landfill gas,  $Q_{LFG}$ , shall be determined by measuring the total landfill gas flow rate at the common header pipe that leads to the control device using a gas flow measuring device calibrated according to the provisions of section 4 of Method 2E of appendix A of this part.

(2) The average NMOC concentration,  $C_{NMOC}$ , shall be determined by collecting and analyzing landfill gas sampled from the common header pipe before the gas moving or condensate removal equipment using the procedures in Method 25C or Method 18 of appendix A of this part. If using Method 18 of appendix A of this part, the minimum list of compounds to be tested shall be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42). The sample location on the common header pipe shall be before any condensate removal or other gas refining units. The landfill owner or operator shall divide the NMOC concentration from Method 25C of appendix A of this part by six to convert from  $C_{NMOC}$  as carbon to  $C_{NMOC}$  as hexane.

(3) The owner or operator may use another method to determine landfill gas flow rate and NMOC concentration if the method has been approved by the Administrator.

(c) When calculating emissions for PSD purposes, the owner or operator of each MSW landfill subject to the provisions of this subpart shall estimate the NMOC emission rate for comparison to the PSD major source and significance levels in §§51.166 or 52.21 of this chapter using AP-42 or other approved measurement procedures.

(d) For the performance test required in §60.752(b)(2)(iii)(B), Method 25, 25C, or Method 18 of appendix A of this part must be used to determine compliance with the 98 weight-percent efficiency or the 20 ppmv outlet concentration level, unless another method to demonstrate compliance has been approved by the Administrator as provided by §60.752(b)(2)(i)(B). Method 3 or 3A shall be used to determine oxygen for correcting the NMOC concentration as hexane to 3 percent. In cases where the outlet concentration is less than 50 ppm NMOC as carbon (8 ppm NMOC as hexane), Method 25A should be used in place of Method 25. If using Method 18 of appendix A of this part, the minimum list of compounds to be tested shall be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42). The following equation shall be used to calculate efficiency:

$$\text{Control Efficiency} = (\text{NMOC}_{\text{in}} - \text{NMOC}_{\text{out}}) / (\text{NMOC}_{\text{in}})$$

where,

$\text{NMOC}_{\text{in}}$  = mass of NMOC entering control device

$\text{NMOC}_{\text{out}}$  = mass of NMOC exiting control device

(e) For the performance test required in §60.752(b)(2)(iii)(A), the net heating value of the combusted landfill gas as determined in §60.18(f)(3) is calculated from the concentration of methane in the landfill gas as measured by Method 3C. A minimum of three 30-minute Method 3C samples are determined. The measurement of other organic components, hydrogen, and carbon monoxide is not applicable. Method 3C may be used to determine the landfill gas molecular weight for calculating the flare gas exit velocity under §60.18(f)(4).

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32751, June 16, 1998; 65 FR 18908, Apr. 10, 2000; 65 FR 61778, Oct. 17, 2000; 71 FR 55127, Sept. 21, 2006]

### § 60.755 Compliance provisions.

(a) Except as provided in §60.752(b)(2)(i)(B), the specified methods in paragraphs (a)(1) through (a)(6) of this section shall be used to determine whether the gas collection system is in compliance with §60.752(b)(2)(ii).

(1) For the purposes of calculating the maximum expected gas generation flow rate from the landfill to determine compliance with §60.752(b)(2)(ii)(A)( 1 ), one of the following equations shall be used. The  $k$  and  $L_o$  kinetic factors should be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42) or other site specific values demonstrated to be appropriate and approved by the Administrator. If  $k$  has been determined as specified in §60.754(a)(4), the value of  $k$  determined from the test shall be used. A value of no more than 15 years shall be used for the intended use period of the gas mover equipment. The active life of the landfill is the age of the landfill plus the estimated number of years until closure.

(i) For sites with unknown year-to-year solid waste acceptance rate:

$$Q_m = 2L_o R (e^{-kc} - e^{-kt})$$

where,

$Q_m$  = maximum expected gas generation flow rate, cubic meters per year

$L_o$  = methane generation potential, cubic meters per megagram solid waste

$R$  = average annual acceptance rate, megagrams per year

$k$  = methane generation rate constant, year<sup>-1</sup>

$t$  = age of the landfill at equipment installation plus the time the owner or operator intends to use the gas mover equipment or active life of the landfill, whichever is less. If the equipment is installed after closure,  $t$  is the age of the landfill at installation, years

$c$  = time since closure, years (for an active landfill  $c = 0$  and  $e^{-kc} = 1$ )

(ii) For sites with known year-to-year solid waste acceptance rate:

$$Q_M = \sum_{i=1}^n 2 k L_o M_i (e^{-kt_i})$$

where,

$Q_M$  = maximum expected gas generation flow rate, cubic meters per year

$k$  = methane generation rate constant, year<sup>-1</sup>

$L_o$  = methane generation potential, cubic meters per megagram solid waste

$M_i$  = mass of solid waste in the  $i^{\text{th}}$  section, megagrams

$t_i$  = age of the  $i^{\text{th}}$  section, years

(iii) If a collection and control system has been installed, actual flow data may be used to project the maximum expected gas generation flow rate instead of, or in conjunction with, the equations in paragraphs (a)(1) (i) and (ii) of this section. If the landfill is still accepting waste, the actual measured flow data will not equal the maximum expected gas generation rate, so calculations using the equations in paragraphs (a)(1) (i) or (ii) or other methods shall be used to predict the maximum expected gas generation rate over the intended period of use of the gas control system equipment.

(2) For the purposes of determining sufficient density of gas collectors for compliance with §60.752(b)(2)(ii)(A)( 2 ), the owner or operator shall design a system of vertical wells, horizontal collectors, or other collection devices, satisfactory to the Administrator, capable of controlling and extracting gas from all portions of the landfill sufficient to meet all operational and performance standards.

(3) For the purpose of demonstrating whether the gas collection system flow rate is sufficient to determine compliance with §60.752(b)(2)(ii)(A)( 3 ), the owner or operator shall measure gauge pressure in the gas collection header at each individual well, monthly. If a positive pressure exists, action shall be initiated to correct the exceedance within 5 calendar days, except for the three conditions allowed under §60.753(b). If negative pressure cannot be achieved without excess air infiltration within 15 calendar days of the first measurement, the gas collection system shall be expanded to correct the exceedance within 120 days of the initial measurement of positive pressure. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. An alternative timeline for correcting the exceedance may be submitted to the Administrator for approval.

(4) Owners or operators are not required to expand the system as required in paragraph (a)(3) of this section during the first 180 days after gas collection system startup.

(5) For the purpose of identifying whether excess air infiltration into the landfill is occurring, the owner or operator shall monitor each well monthly for temperature and nitrogen or oxygen as provided in §60.753(c). If a well exceeds one of these operating parameters, action shall be initiated to correct the exceedance within 5 calendar days. If correction of the exceedance cannot be achieved within 15 calendar days of the first measurement, the gas collection system shall be expanded to correct the exceedance within 120 days of the initial exceedance. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. An alternative timeline for correcting the exceedance may be submitted to the Administrator for approval.

(6) An owner or operator seeking to demonstrate compliance with §60.752(b)(2)(ii)(A)( 4 ) through the use of a collection system not conforming to the specifications provided in §60.759 shall provide information satisfactory to the Administrator as specified in §60.752(b)(2)(i)(C) demonstrating that off-site migration is being controlled.

(b) For purposes of compliance with §60.753(a), each owner or operator of a controlled landfill shall place each well or design component as specified in the approved design plan as provided in §60.752(b)(2)(i). Each well shall be installed no later than 60 days after the date on which the initial solid waste has been in place for a period of:

(1) 5 years or more if active; or

(2) 2 years or more if closed or at final grade.

(c) The following procedures shall be used for compliance with the surface methane operational standard as provided in §60.753(d).

(1) After installation of the collection system, the owner or operator shall monitor surface concentrations of methane along the entire perimeter of the collection area and along a pattern that traverses the landfill at 30 meter intervals (or a site-specific established spacing) for each collection area on a quarterly basis using an organic vapor analyzer, flame ionization detector, or other portable monitor meeting the specifications provided in paragraph (d) of this section.

(2) The background concentration shall be determined by moving the probe inlet upwind and downwind outside the boundary of the landfill at a distance of at least 30 meters from the perimeter wells.

(3) Surface emission monitoring shall be performed in accordance with section 4.3.1 of Method 21 of appendix A of this part, except that the probe inlet shall be placed within 5 to 10 centimeters of the ground. Monitoring shall be performed during typical meteorological conditions.

(4) Any reading of 500 parts per million or more above background at any location shall be recorded as a monitored exceedance and the actions specified in paragraphs (c)(4) (i) through (v) of this section shall be taken. As long as the specified actions are taken, the exceedance is not a violation of the operational requirements of §60.753(d).

(i) The location of each monitored exceedance shall be marked and the location recorded.

(ii) Cover maintenance or adjustments to the vacuum of the adjacent wells to increase the gas collection in the vicinity of each exceedance shall be made and the location shall be re-monitored within 10 calendar days of detecting the exceedance.

(iii) If the re-monitoring of the location shows a second exceedance, additional corrective action shall be taken and the location shall be monitored again within 10 days of the second exceedance. If the re-monitoring shows a third exceedance for the same location, the action specified in paragraph (c)(4)(v) of this section shall be taken, and no further monitoring of that location is required until the action specified in paragraph (c)(4)(v) has been taken.

(iv) Any location that initially showed an exceedance but has a methane concentration less than 500 ppm methane above background at the 10-day re-monitoring specified in paragraph (c)(4) (ii) or (iii) of this section shall be re-monitored 1 month from the initial exceedance. If the 1-month re-monitoring shows a concentration less than 500 parts per million above background, no further monitoring of that location is required until the next quarterly monitoring period. If the 1-month re-monitoring shows an exceedance, the actions specified in paragraph (c)(4) (iii) or (v) shall be taken.

(v) For any location where monitored methane concentration equals or exceeds 500 parts per million above background three times within a quarterly period, a new well or other collection device shall be installed within 120 calendar days of the initial exceedance. An alternative remedy to the exceedance, such as upgrading the blower, header pipes or control device, and a corresponding timeline for installation may be submitted to the Administrator for approval.

(5) The owner or operator shall implement a program to monitor for cover integrity and implement cover repairs as necessary on a monthly basis.

(d) Each owner or operator seeking to comply with the provisions in paragraph (c) of this section shall comply with the following instrumentation specifications and procedures for surface emission monitoring devices:

(1) The portable analyzer shall meet the instrument specifications provided in section 3 of Method 21 of appendix A of this part, except that "methane" shall replace all references to VOC.

(2) The calibration gas shall be methane, diluted to a nominal concentration of 500 parts per million in air.

(3) To meet the performance evaluation requirements in section 3.1.3 of Method 21 of appendix A of this part, the instrument evaluation procedures of section 4.4 of Method 21 of appendix A of this part shall be used.

(4) The calibration procedures provided in section 4.2 of Method 21 of appendix A of this part shall be followed immediately before commencing a surface monitoring survey.

(e) The provisions of this subpart apply at all times, except during periods of start-up, shutdown, or malfunction, provided that the duration of start-up, shutdown, or malfunction shall not exceed 5 days for collection systems and shall not exceed 1 hour for treatment or control devices.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32752, June 16, 1998]

**§ 60.756 Monitoring of operations.**

Except as provided in §60.752(b)(2)(i)(B),

(a) Each owner or operator seeking to comply with §60.752(b)(2)(ii)(A) for an active gas collection system shall install a sampling port and a thermometer, other temperature measuring device, or an access port for temperature measurements at each wellhead and:

(1) Measure the gauge pressure in the gas collection header on a monthly basis as provided in §60.755(a)(3); and

(2) Monitor nitrogen or oxygen concentration in the landfill gas on a monthly basis as provided in §60.755(a)(5); and

(3) Monitor temperature of the landfill gas on a monthly basis as provided in §60.755(a)(5).

(b) Each owner or operator seeking to comply with §60.752(b)(2)(iii) using an enclosed combustor shall calibrate, maintain, and operate according to the manufacturer's specifications, the following equipment.

(1) A temperature monitoring device equipped with a continuous recorder and having a minimum accuracy of  $\pm 1$  percent of the temperature being measured expressed in degrees Celsius or  $\pm 0.5$  degrees Celsius, whichever is greater. A temperature monitoring device is not required for boilers or process heaters with design heat input capacity equal to or greater than 44 megawatts.

(2) A device that records flow to or bypass of the control device. The owner or operator shall either:

(i) Install, calibrate, and maintain a gas flow rate measuring device that shall record the flow to the control device at least every 15 minutes; or

(ii) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism shall be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.

(c) Each owner or operator seeking to comply with §60.752(b)(2)(iii) using an open flare shall install, calibrate, maintain, and operate according to the manufacturer's specifications the following equipment:

(1) A heat sensing device, such as an ultraviolet beam sensor or thermocouple, at the pilot light or the flame itself to indicate the continuous presence of a flame.

(2) A device that records flow to or bypass of the flare. The owner or operator shall either:

(i) Install, calibrate, and maintain a gas flow rate measuring device that shall record the flow to the control device at least every 15 minutes; or

(ii) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism shall be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.

(d) Each owner or operator seeking to demonstrate compliance with §60.752(b)(2)(iii) using a device other than an open flare or an enclosed combustor shall provide information satisfactory to the Administrator as provided in §60.752(b)(2)(i)(B) describing the operation of the control device, the operating parameters that would indicate proper performance, and appropriate monitoring procedures. The Administrator shall review the information and either approve it, or request that additional information be submitted. The Administrator may specify additional appropriate monitoring procedures.

(e) Each owner or operator seeking to install a collection system that does not meet the specifications in §60.759 or seeking to monitor alternative parameters to those required by §60.753 through §60.756 shall provide information satisfactory to the Administrator as provided in §60.752(b)(2)(i) (B) and (C) describing the design and operation of the collection system, the operating parameters that would indicate proper performance, and appropriate monitoring procedures. The Administrator may specify additional appropriate monitoring procedures.

(f) Each owner or operator seeking to demonstrate compliance with §60.755(c), shall monitor surface concentrations of methane according to the instrument specifications and procedures provided in §60.755(d). Any closed landfill that has no monitored exceedances of the operational standard in three consecutive quarterly monitoring periods may skip to annual monitoring. Any methane reading of 500 ppm or more above background detected during the annual monitoring returns the frequency for that landfill to quarterly monitoring.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32752, June 16, 1998; 65 FR 18909, Apr. 10, 2000]

#### **§ 60.757 Reporting requirements.**

Except as provided in §60.752(b)(2)(i)(B),

(a) Each owner or operator subject to the requirements of this subpart shall submit an initial design capacity report to the Administrator.

(1) The initial design capacity report shall fulfill the requirements of the notification of the date construction is commenced as required by §60.7(a)(1) and shall be submitted no later than:

(i) June 10, 1996, for landfills that commenced construction, modification, or reconstruction on or after May 30, 1991 but before March 12, 1996 or

(ii) Ninety days after the date of commenced construction, modification, or reconstruction for landfills that commence construction, modification, or reconstruction on or after March 12, 1996.

(2) The initial design capacity report shall contain the following information:

(i) A map or plot of the landfill, providing the size and location of the landfill, and identifying all areas where solid waste may be landfilled according to the permit issued by the State, local, or tribal agency responsible for regulating the landfill.

(ii) The maximum design capacity of the landfill. Where the maximum design capacity is specified in the permit issued by the State, local, or tribal agency responsible for regulating the landfill, a copy of the permit specifying the maximum design capacity may be submitted as part of the report. If the maximum design capacity of the landfill is not specified in the permit, the maximum design capacity shall be calculated using

good engineering practices. The calculations shall be provided, along with the relevant parameters as part of the report. The State, Tribal, local agency or Administrator may request other reasonable information as may be necessary to verify the maximum design capacity of the landfill.

(3) An amended design capacity report shall be submitted to the Administrator providing notification of an increase in the design capacity of the landfill, within 90 days of an increase in the maximum design capacity of the landfill to or above 2.5 million megagrams and 2.5 million cubic meters. This increase in design capacity may result from an increase in the permitted volume of the landfill or an increase in the density as documented in the annual recalculation required in §60.758(f).

(b) Each owner or operator subject to the requirements of this subpart shall submit an NMOC emission rate report to the Administrator initially and annually thereafter, except as provided for in paragraphs (b)(1)(ii) or (b)(3) of this section. The Administrator may request such additional information as may be necessary to verify the reported NMOC emission rate.

(1) The NMOC emission rate report shall contain an annual or 5-year estimate of the NMOC emission rate calculated using the formula and procedures provided in §60.754(a) or (b), as applicable.

(i) The initial NMOC emission rate report may be combined with the initial design capacity report required in paragraph (a) of this section and shall be submitted no later than indicated in paragraphs (b)(1)(i)(A) and (B) of this section. Subsequent NMOC emission rate reports shall be submitted annually thereafter, except as provided for in paragraphs (b)(1)(ii) and (b)(3) of this section.

(A) June 10, 1996, for landfills that commenced construction, modification, or reconstruction on or after May 30, 1991, but before March 12, 1996, or

(B) Ninety days after the date of commenced construction, modification, or reconstruction for landfills that commence construction, modification, or reconstruction on or after March 12, 1996.

(ii) If the estimated NMOC emission rate as reported in the annual report to the Administrator is less than 50 megagrams per year in each of the next 5 consecutive years, the owner or operator may elect to submit an estimate of the NMOC emission rate for the next 5-year period in lieu of the annual report. This estimate shall include the current amount of solid waste-in-place and the estimated waste acceptance rate for each year of the 5 years for which an NMOC emission rate is estimated. All data and calculations upon which this estimate is based shall be provided to the Administrator. This estimate shall be revised at least once every 5 years. If the actual waste acceptance rate exceeds the estimated waste acceptance rate in any year reported in the 5-year estimate, a revised 5-year estimate shall be submitted to the Administrator. The revised estimate shall cover the 5-year period beginning with the year in which the actual waste acceptance rate exceeded the estimated waste acceptance rate.

(2) The NMOC emission rate report shall include all the data, calculations, sample reports and measurements used to estimate the annual or 5-year emissions.

(3) Each owner or operator subject to the requirements of this subpart is exempted from the requirements of paragraphs (b)(1) and (2) of this section, after the installation of a collection and control system in compliance with §60.752(b)(2), during such time as the collection and control system is in operation and in compliance with §§60.753 and 60.755.

(c) Each owner or operator subject to the provisions of §60.752(b)(2)(i) shall submit a collection and control system design plan to the Administrator within 1 year of the first report required under paragraph (b) of this section in which the emission rate equals or exceeds 50 megagrams per year, except as follows:

(1) If the owner or operator elects to recalculate the NMOC emission rate after Tier 2 NMOC sampling and analysis as provided in §60.754(a)(3) and the resulting rate is less than 50 megagrams per year, annual periodic reporting shall be resumed, using the Tier 2 determined site-specific NMOC concentration, until the calculated emission rate is equal to or greater than 50 megagrams per year or the landfill is closed. The revised NMOC emission rate report, with the recalculated emission rate based on NMOC sampling and analysis, shall be submitted within 180 days of the first calculated exceedance of 50 megagrams per year.

(2) If the owner or operator elects to recalculate the NMOC emission rate after determining a site-specific methane generation rate constant (k), as provided in Tier 3 in §60.754(a)(4), and the resulting NMOC emission rate is less than 50 Mg/yr, annual periodic reporting shall be resumed. The resulting site-specific methane generation rate constant (k) shall be used in the emission rate calculation until such time as the emissions rate calculation results in an exceedance. The revised NMOC emission rate report based on the provisions of §60.754(a)(4) and the resulting site-specific methane generation rate constant (k) shall be submitted to the Administrator within 1 year of the first calculated emission rate exceeding 50 megagrams per year.

(d) Each owner or operator of a controlled landfill shall submit a closure report to the Administrator within 30 days of waste acceptance cessation. The Administrator may request additional information as may be necessary to verify that permanent closure has taken place in accordance with the requirements of 40 CFR 258.60. If a closure report has been submitted to the Administrator, no additional wastes may be placed into the landfill without filing a notification of modification as described under §60.7(a)(4).

(e) Each owner or operator of a controlled landfill shall submit an equipment removal report to the Administrator 30 days prior to removal or cessation of operation of the control equipment.

(1) The equipment removal report shall contain all of the following items:

(i) A copy of the closure report submitted in accordance with paragraph (d) of this section;

(ii) A copy of the initial performance test report demonstrating that the 15 year minimum control period has expired; and

(iii) Dated copies of three successive NMOC emission rate reports demonstrating that the landfill is no longer producing 50 megagrams or greater of NMOC per year.

(2) The Administrator may request such additional information as may be necessary to verify that all of the conditions for removal in §60.752(b)(2)(v) have been met.

(f) Each owner or operator of a landfill seeking to comply with §60.752(b)(2) using an active collection system designed in accordance with §60.752(b)(2)(ii) shall submit to the Administrator annual reports of the recorded information in (f)(1) through (f)(6) of this paragraph. The initial annual report shall be submitted within 180 days of installation and start-up of the collection and control system, and shall include the initial performance test report required under §60.8. For enclosed combustion devices and flares, reportable exceedances are defined under §60.758(c).

(1) Value and length of time for exceedance of applicable parameters monitored under §60.756(a), (b), (c), and (d).

(2) Description and duration of all periods when the gas stream is diverted from the control device through a bypass line or the indication of bypass flow as specified under §60.756.

(3) Description and duration of all periods when the control device was not operating for a period exceeding 1 hour and length of time the control device was not operating.

- (4) All periods when the collection system was not operating in excess of 5 days.
- (5) The location of each exceedance of the 500 parts per million methane concentration as provided in §60.753(d) and the concentration recorded at each location for which an exceedance was recorded in the previous month.
- (6) The date of installation and the location of each well or collection system expansion added pursuant to paragraphs (a)(3), (b), and (c)(4) of §60.755.
- (g) Each owner or operator seeking to comply with §60.752(b)(2)(iii) shall include the following information with the initial performance test report required under §60.8:
- (1) A diagram of the collection system showing collection system positioning including all wells, horizontal collectors, surface collectors, or other gas extraction devices, including the locations of any areas excluded from collection and the proposed sites for the future collection system expansion;
- (2) The data upon which the sufficient density of wells, horizontal collectors, surface collectors, or other gas extraction devices and the gas mover equipment sizing are based;
- (3) The documentation of the presence of asbestos or nondegradable material for each area from which collection wells have been excluded based on the presence of asbestos or nondegradable material;
- (4) The sum of the gas generation flow rates for all areas from which collection wells have been excluded based on nonproductivity and the calculations of gas generation flow rate for each excluded area; and
- (5) The provisions for increasing gas mover equipment capacity with increased gas generation flow rate, if the present gas mover equipment is inadequate to move the maximum flow rate expected over the life of the landfill; and
- (6) The provisions for the control of off-site migration.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32752, June 16, 1998; 65 FR 18909, Apr. 10, 2000]

**§ 60.758 Recordkeeping requirements.**

- (a) Except as provided in §60.752(b)(2)(i)(B), each owner or operator of an MSW landfill subject to the provisions of §60.752(b) shall keep for at least 5 years up-to-date, readily accessible, on-site records of the design capacity report which triggered §60.752(b), the current amount of solid waste in-place, and the year-by-year waste acceptance rate. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.
- (b) Except as provided in §60.752(b)(2)(i)(B), each owner or operator of a controlled landfill shall keep up-to-date, readily accessible records for the life of the control equipment of the data listed in paragraphs (b)(1) through (b)(4) of this section as measured during the initial performance test or compliance determination. Records of subsequent tests or monitoring shall be maintained for a minimum of 5 years. Records of the control device vendor specifications shall be maintained until removal.
- (1) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §60.752(b)(2)(ii):
- (i) The maximum expected gas generation flow rate as calculated in §60.755(a)(1). The owner or operator may use another method to determine the maximum gas generation flow rate, if the method has been approved by the Administrator.

(ii) The density of wells, horizontal collectors, surface collectors, or other gas extraction devices determined using the procedures specified in §60.759(a)(1).

(2) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §60.752(b)(2)(iii) through use of an enclosed combustion device other than a boiler or process heater with a design heat input capacity equal to or greater than 44 megawatts:

(i) The average combustion temperature measured at least every 15 minutes and averaged over the same time period of the performance test.

(ii) The percent reduction of NMOC determined as specified in §60.752(b)(2)(iii)(B) achieved by the control device.

(3) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §60.752(b)(2)(iii)(B)( 1 ) through use of a boiler or process heater of any size: a description of the location at which the collected gas vent stream is introduced into the boiler or process heater over the same time period of the performance testing.

(4) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §60.752(b)(2)(iii)(A) through use of an open flare, the flare type (i.e., steam-assisted, air-assisted, or nonassisted), all visible emission readings, heat content determination, flow rate or bypass flow rate measurements, and exit velocity determinations made during the performance test as specified in §60.18; continuous records of the flare pilot flame or flare flame monitoring and records of all periods of operations during which the pilot flame of the flare flame is absent.

(c) Except as provided in §60.752(b)(2)(i)(B), each owner or operator of a controlled landfill subject to the provisions of this subpart shall keep for 5 years up-to-date, readily accessible continuous records of the equipment operating parameters specified to be monitored in §60.756 as well as up-to-date, readily accessible records for periods of operation during which the parameter boundaries established during the most recent performance test are exceeded.

(1) The following constitute exceedances that shall be recorded and reported under §60.757(f):

(i) For enclosed combustors except for boilers and process heaters with design heat input capacity of 44 megawatts (150 million British thermal unit per hour) or greater, all 3-hour periods of operation during which the average combustion temperature was more than 28 °C below the average combustion temperature during the most recent performance test at which compliance with §60.752(b)(2)(iii) was determined.

(ii) For boilers or process heaters, whenever there is a change in the location at which the vent stream is introduced into the flame zone as required under paragraph (b)(3) of this section.

(2) Each owner or operator subject to the provisions of this subpart shall keep up-to-date, readily accessible continuous records of the indication of flow to the control device or the indication of bypass flow or records of monthly inspections of car-seals or lock-and-key configurations used to seal bypass lines, specified under §60.756.

(3) Each owner or operator subject to the provisions of this subpart who uses a boiler or process heater with a design heat input capacity of 44 megawatts or greater to comply with §60.752(b)(2)(iii) shall keep an up-to-date, readily accessible record of all periods of operation of the boiler or process heater. (Examples of such records could include records of steam use, fuel use, or monitoring data collected pursuant to other State, local, Tribal, or Federal regulatory requirements.)

(4) Each owner or operator seeking to comply with the provisions of this subpart by use of an open flare shall keep up-to-date, readily accessible continuous records of the flame or flare pilot flame monitoring specified under §60.756(c), and up-to-date, readily accessible records of all periods of operation in which the flame or flare pilot flame is absent.

(d) Except as provided in §60.752(b)(2)(i)(B), each owner or operator subject to the provisions of this subpart shall keep for the life of the collection system an up-to-date, readily accessible plot map showing each existing and planned collector in the system and providing a unique identification location label for each collector.

(1) Each owner or operator subject to the provisions of this subpart shall keep up-to-date, readily accessible records of the installation date and location of all newly installed collectors as specified under §60.755(b).

(2) Each owner or operator subject to the provisions of this subpart shall keep readily accessible documentation of the nature, date of deposition, amount, and location of asbestos-containing or nondegradable waste excluded from collection as provided in §60.759(a)(3)(i) as well as any nonproductive areas excluded from collection as provided in §60.759(a)(3)(ii).

(e) Except as provided in §60.752(b)(2)(i)(B), each owner or operator subject to the provisions of this subpart shall keep for at least 5 years up-to-date, readily accessible records of all collection and control system exceedances of the operational standards in §60.753, the reading in the subsequent month whether or not the second reading is an exceedance, and the location of each exceedance.

(f) Landfill owners or operators who convert design capacity from volume to mass or mass to volume to demonstrate that landfill design capacity is less than 2.5 million megagrams or 2.5 million cubic meters, as provided in the definition of "design capacity", shall keep readily accessible, on-site records of the annual recalculation of site-specific density, design capacity, and the supporting documentation. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32752, June 16, 1998; 65 FR 18909, Apr. 10, 2000]

#### **§ 60.759 Specifications for active collection systems.**

(a) Each owner or operator seeking to comply with §60.752(b)(2)(i) shall site active collection wells, horizontal collectors, surface collectors, or other extraction devices at a sufficient density throughout all gas producing areas using the following procedures unless alternative procedures have been approved by the Administrator as provided in §60.752(b)(2)(i)(C) and (D):

(1) The collection devices within the interior and along the perimeter areas shall be certified to achieve comprehensive control of surface gas emissions by a professional engineer. The following issues shall be addressed in the design: depths of refuse, refuse gas generation rates and flow characteristics, cover properties, gas system expandibility, leachate and condensate management, accessibility, compatibility with filling operations, integration with closure end use, air intrusion control, corrosion resistance, fill settlement, and resistance to the refuse decomposition heat.

(2) The sufficient density of gas collection devices determined in paragraph (a)(1) of this section shall address landfill gas migration issues and augmentation of the collection system through the use of active or passive systems at the landfill perimeter or exterior.

(3) The placement of gas collection devices determined in paragraph (a)(1) of this section shall control all gas producing areas, except as provided by paragraphs (a)(3)(i) and (a)(3)(ii) of this section.

(i) Any segregated area of asbestos or nondegradable material may be excluded from collection if documented as provided under §60.758(d). The documentation shall provide the nature, date of deposition, location and amount of asbestos or nondegradable material deposited in the area, and shall be provided to the Administrator upon request.

(ii) Any nonproductive area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than 1 percent of the total amount of NMOC emissions from the landfill. The amount, location, and age of the material shall be documented and provided to the Administrator upon request. A separate NMOC emissions estimate shall be made for each section proposed for exclusion, and the sum of all such sections shall be compared to the NMOC emissions estimate for the entire landfill. Emissions from each section shall be computed using the following equation:

$$Q_i = 2 k L_o M_i (e^{-kt_i}) (C_{NMOC}) (3.6 \times 10^{-9})$$

where,

$Q_i$  = NMOC emission rate from the  $i^{\text{th}}$  section, megagrams per year

$k$  = methane generation rate constant,  $\text{year}^{-1}$

$L_o$  = methane generation potential, cubic meters per megagram solid waste

$M_i$  = mass of the degradable solid waste in the  $i^{\text{th}}$  section, megagram

$t_i$  = age of the solid waste in the  $i^{\text{th}}$  section, years

$C_{NMOC}$  = concentration of nonmethane organic compounds, parts per million by volume

$3.6 \times 10^{-9}$  = conversion factor

(iii) The values for  $k$  and  $C_{NMOC}$  determined in field testing shall be used if field testing has been performed in determining the NMOC emission rate or the radii of influence (this distance from the well center to a point in the landfill where the pressure gradient applied by the blower or compressor approaches zero). If field testing has not been performed, the default values for  $k$ ,  $L_o$  and  $C_{NMOC}$  provided in §60.754(a)(1) or the alternative values from §60.754(a)(5) shall be used. The mass of nondegradable solid waste contained within the given section may be subtracted from the total mass of the section when estimating emissions provided the nature, location, age, and amount of the nondegradable material is documented as provided in paragraph (a)(3)(i) of this section.

(b) Each owner or operator seeking to comply with §60.752(b)(2)(i)(A) shall construct the gas collection devices using the following equipment or procedures:

(1) The landfill gas extraction components shall be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system shall extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors shall be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations shall be situated with regard to the need to prevent excessive air infiltration.

(2) Vertical wells shall be placed so as not to endanger underlying liners and shall address the occurrence of water within the landfill. Holes and trenches constructed for piped wells and horizontal collectors shall be of sufficient cross-section so as to allow for their proper construction and completion including, for example, centering of pipes and placement of gravel backfill. Collection devices shall be designed so as not to allow indirect short circuiting of air into the cover or refuse into the collection system or gas into the air. Any gravel used around pipe perforations should be of a dimension so as not to penetrate or block perforations.

(3) Collection devices may be connected to the collection header pipes below or above the landfill surface. The connector assembly shall include a positive closing throttle valve, any necessary seals and couplings, access couplings and at least one sampling port. The collection devices shall be constructed of PVC, HDPE, fiberglass, stainless steel, or other nonporous material of suitable thickness.

(c) Each owner or operator seeking to comply with §60.752(b)(2)(i)(A) shall convey the landfill gas to a control system in compliance with §60.752(b)(2)(iii) through the collection header pipe(s). The gas mover equipment shall be sized to handle the maximum gas generation flow rate expected over the intended use period of the gas moving equipment using the following procedures:

(1) For existing collection systems, the flow data shall be used to project the maximum flow rate. If no flow data exists, the procedures in paragraph (c)(2) of this section shall be used.

(2) For new collection systems, the maximum flow rate shall be in accordance with §60.755(a)(1).

[61 FR 9919, Mar. 12, 1996, as amended at 63 FR 32753, June 16, 1998; 64 FR 9262, Feb. 24, 1999; 65 FR 18909, Apr. 10, 2000]

**Indiana Department of Environmental Management  
Office of Air Quality**

**Attachment B**

**40 CFR 63, Subpart AAAA — National Emission Standards for Hazardous Air Pollutants:  
Municipal Solid Waste Landfills**

**Source Description and Location**

Source Name:	Republic Services of Indiana, LP d/b/a National Serv-All Landfill
Source Location:	6231 McBeth Road, Fort Wayne, Indiana 46809-9719
County:	Allen County
SIC Code:	4953
Operation Permit No.:	T 003-30376-00257
Permit Reviewer:	David J. Matousek

**Complete Text of 40 CFR 63, Subpart AAAA**

**40 CFR 63, Subpart AAAA — National Emission Standards for Hazardous Air Pollutants:  
Municipal Solid Waste Landfills**

**Source:** 68 FR 2238, Jan. 16, 2003, unless otherwise noted.

**What This Subpart Covers**

**§ 63.1930 What is the purpose of this subpart?**

This subpart establishes national emission standards for hazardous air pollutants for existing and new municipal solid waste (MSW) landfills. This subpart requires all landfills described in §63.1935 to meet the requirements of 40 CFR part 60, subpart Cc or WWW and requires timely control of bioreactors. This subpart also requires such landfills to meet the startup, shutdown, and malfunction (SSM) requirements of the general provisions of this part and provides that compliance with the operating conditions shall be demonstrated by parameter monitoring results that are within the specified ranges. It also includes additional reporting requirements.

**§ 63.1935 Am I subject to this subpart?**

You are subject to this subpart if you meet the criteria in paragraph (a) or (b) of this section.

(a) You are subject to this subpart if you own or operate a MSW landfill that has accepted waste since November 8, 1987 or has additional capacity for waste deposition and meets any one of the three criteria in paragraphs (a)(1) through (3) of this section:

(1) Your MSW landfill is a major source as defined in 40 CFR 63.2 of subpart A.

(2) Your MSW landfill is collocated with a major source as defined in 40 CFR 63.2 of subpart A.

(3) Your MSW landfill is an area source landfill that has a design capacity equal to or greater than 2.5 million megagrams (Mg) and 2.5 million cubic meters (m<sup>3</sup>) and has estimated uncontrolled emissions equal to or greater than 50 megagrams per year (Mg/yr) NMOC as calculated according to §60.754(a) of the MSW landfills new source performance standards in 40 CFR part 60, subpart WWW, the Federal plan, or an EPA approved and effective State or tribal plan that applies to your landfill.

(b) You are subject to this subpart if you own or operate a MSW landfill that has accepted waste since November 8, 1987 or has additional capacity for waste deposition, that includes a bioreactor, as defined in §63.1990, and that meets any one of the criteria in paragraphs (b)(1) through (3) of this section:

(1) Your MSW landfill is a major source as defined in 40 CFR 63.2 of subpart A.

(2) Your MSW landfill is collocated with a major source as defined in 40 CFR 63.2 of subpart A.

(3) Your MSW landfill is an area source landfill that has a design capacity equal to or greater than 2.5 million Mg and 2.5 million m<sup>3</sup> and that is not permanently closed as of January 16, 2003.

#### **§ 63.1940 What is the affected source of this subpart?**

(a) An affected source of this subpart is a MSW landfill, as defined in §63.1990, that meets the criteria in §63.1935(a) or (b). The affected source includes the entire disposal facility in a contiguous geographic space where household waste is placed in or on land, including any portion of the MSW landfill operated as a bioreactor.

(b) A new affected source of this subpart is an affected source that commenced construction or reconstruction after November 7, 2000. An affected source is reconstructed if it meets the definition of reconstruction in 40 CFR 63.2 of subpart A.

(c) An affected source of this subpart is existing if it is not new.

#### **§ 63.1945 When do I have to comply with this subpart?**

(a) If your landfill is a new affected source, you must comply with this subpart by January 16, 2003 or at the time you begin operating, whichever is last.

(b) If your landfill is an existing affected source, you must comply with this subpart by January 16, 2004.

(c) If your landfill is a new affected source and is a major source or is collocated with a major source, you must comply with the requirements in §§63.1955(b) and 63.1960 through 63.1980 by the date your landfill is required to install a collection and control system by 40 CFR 60.752(b)(2) of subpart WWW.

(d) If your landfill is an existing affected source and is a major source or is collocated with a major source, you must comply with the requirements in §§63.1955(b) and 63.1960 through 63.1980 by the date your landfill is required to install a collection and control system by 40 CFR 60.752(b)(2) of subpart WWW, the Federal plan, or EPA approved and effective State or tribal plan that applies to your landfill or by January 13, 2004, whichever occurs later.

(e) If your landfill is a new affected source and is an area source meeting the criteria in §63.1935(a)(3), you must comply with the requirements of §§63.1955(b) and 63.1960 through 63.1980 by the date your landfill is required to install a collection and control system by 40 CFR 60.752(b)(2) of subpart WWW.

(f) If your landfill is an existing affected source and is an area source meeting the criteria in §63.1935(a)(3), you must comply with the requirements in §§63.1955(b) and 63.1960 through 63.1980 by the date your landfill is required to install a collection and control system by 40 CFR 60.752(b)(2) of subpart WWW, the Federal plan, or EPA approved and effective State or tribal plan that applies to your landfill or by January 16, 2004, whichever occurs later.

### **§ 63.1947 When do I have to comply with this subpart if I own or operate a bioreactor?**

You must comply with this subpart by the dates specified in §63.1945(a) or (b) of this subpart. If you own or operate a bioreactor located at a landfill that is not permanently closed as of January 16, 2003 and has a design capacity equal to or greater than 2.5 million Mg and 2.5 million m<sup>3</sup>, then you must install and operate a collection and control system that meets the criteria in 40 CFR 60.752(b)(2)(v) of part 60, subpart WWW, the Federal plan, or EPA approved and effective State plan according to the schedule specified in paragraph (a), (b), or (c) of this section.

(a) If your bioreactor is at a new affected source, then you must meet the requirements in paragraphs (a)(1) and (2) of this section:

(1) Install the gas collection and control system for the bioreactor before initiating liquids addition.

(2) Begin operating the gas collection and control system within 180 days after initiating liquids addition or within 180 days after achieving a moisture content of 40 percent by weight, whichever is later. If you choose to begin gas collection and control system operation 180 days after achieving a 40 percent moisture content instead of 180 days after liquids addition, use the procedures in §63.1980(g) and (h) to determine when the bioreactor moisture content reaches 40 percent.

(b) If your bioreactor is at an existing affected source, then you must install and begin operating the gas collection and control system for the bioreactor by January 17, 2006 or by the date your bioreactor is required to install a gas collection and control system under 40 CFR part 60, subpart WWW, the Federal plan, or EPA approved and effective State plan or tribal plan that applies to your landfill, whichever is earlier.

(c) If your bioreactor is at an existing affected source and you do not initiate liquids addition to your bioreactor until later than January 17, 2006, then you must meet the requirements in paragraphs (c)(1) and (2) of this section:

(1) Install the gas collection and control system for the bioreactor before initiating liquids addition.

(2) Begin operating the gas collection and control system within 180 days after initiating liquids addition or within 180 days after achieving a moisture content of 40 percent by weight, whichever is later. If you choose to begin gas collection and control system operation 180 days after achieving a 40 percent moisture content instead of 180 days after liquids addition, use the procedures in §63.1980(g) and (h) to determine when the bioreactor moisture content reaches 40 percent.

### **§ 63.1950 When am I no longer required to comply with this subpart?**

You are no longer required to comply with the requirements of this subpart when you are no longer required to apply controls as specified in 40 CFR 60.752(b)(2)(v) of subpart WWW, or the Federal plan or EPA approved and effective State plan or tribal plan that implements 40 CFR part 60, subpart Cc, whichever applies to your landfill.

### **§ 63.1952 When am I no longer required to comply with the requirements of this subpart if I own or operate a bioreactor?**

If you own or operate a landfill that includes a bioreactor, you are no longer required to comply with the requirements of this subpart for the bioreactor provided you meet the conditions of either paragraphs (a) or (b).

(a) Your affected source meets the control system removal criteria in 40 CFR 60.752(b)(2)(v) of part 60, subpart WWW or the bioreactor meets the criteria for a nonproductive area of the landfill in 40 CFR 60.759(a)(3)(ii) of part 60, subpart WWW.

(b) The bioreactor portion of the landfill is a closed landfill as defined in 40 CFR 60.751, subpart WWW, you have permanently ceased adding liquids to the bioreactor, and you have not added liquids to the bioreactor for at least 1 year. A closure report for the bioreactor must be submitted to the Administrator as provided in 40 CFR 60.757(d) of subpart WWW.

(c) Compliance with the bioreactor control removal provisions in this section constitutes compliance with 40 CFR part 60, subpart WWW or the Federal plan, whichever applies to your bioreactor.

## Standards

### § 63.1955 What requirements must I meet?

(a) You must fulfill one of the requirements in paragraph (a)(1) or (2) of this section, whichever is applicable:

(1) Comply with the requirements of 40 CFR part 60, subpart WWW.

(2) Comply with the requirements of the Federal plan or EPA approved and effective State plan or tribal plan that implements 40 CFR part 60, subpart Cc.

(b) If you are required by 40 CFR 60.752(b)(2) of subpart WWW, the Federal plan, or an EPA approved and effective State or tribal plan to install a collection and control system, you must comply with the requirements in §§63.1960 through 63.1985 and with the general provisions of this part specified in table 1 of this subpart.

(c) For approval of collection and control systems that include any alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, recordkeeping or reporting provisions, you must follow the procedures in 40 CFR 60.752(b)(2). If alternatives have already been approved under 40 CFR part 60 subpart WWW or the Federal plan, or EPA approved and effective State or tribal plan, these alternatives can be used to comply with this subpart, except that all affected sources must comply with the SSM requirements in Subpart A of this part as specified in Table 1 of this subpart and all affected sources must submit compliance reports every 6 months as specified in §63.1980(a) and (b), including information on all deviations that occurred during the 6-month reporting period. Deviations for continuous emission monitors or numerical continuous parameter monitors must be determined using a 3 hour monitoring block average.

(d) If you own or operate a bioreactor that is located at a MSW landfill that is not permanently closed and has a design capacity equal to or greater than 2.5 million Mg and 2.5 million m<sup>3</sup>, then you must meet the requirements of paragraph (a) and the additional requirements in paragraphs (d)(1) and (2) of this section.

(1) You must comply with the general provisions specified in Table 1 of this subpart and §§63.1960 through 63.1985 starting on the date you are required to install the gas collection and control system.

(2) You must extend the collection and control system into each new cell or area of the bioreactor prior to initiating liquids addition in that area, instead of the schedule in 40 CFR 60.752(b)(2)(ii)(A)(2).

## **General and Continuing Compliance Requirements**

### **§ 63.1960 How is compliance determined?**

Compliance is determined in the same way it is determined for 40 CFR part 60, subpart WWW, including performance testing, monitoring of the collection system, continuous parameter monitoring, and other credible evidence. In addition, continuous parameter monitoring data, collected under 40 CFR 60.756(b)(1), (c)(1), and (d) of subpart WWW, are used to demonstrate compliance with the operating conditions for control systems. If a deviation occurs, you have failed to meet the control device operating conditions described in this subpart and have deviated from the requirements of this subpart. Finally, you must develop a written SSM plan according to the provisions in 40 CFR 63.6(e)(3). A copy of the SSM plan must be maintained on site. Failure to write or maintain a copy of the SSM plan is a deviation from the requirements of this subpart.

[68 FR 2238, Jan. 16, 2003, as amended at 71 FR 20462, Apr. 20, 2006]

### **§ 63.1965 What is a deviation?**

A deviation is defined in §63.1990. For the purposes of the landfill monitoring and SSM plan requirements, deviations include the items in paragraphs (a) through (c) of this section.

(a) A deviation occurs when the control device operating parameter boundaries described in 40 CFR 60.758(c)(1) of subpart WWW are exceeded.

(b) A deviation occurs when 1 hour or more of the hours during the 3-hour block averaging period does not constitute a valid hour of data. A valid hour of data must have measured values for at least three 15-minute monitoring periods within the hour.

(c) A deviation occurs when a SSM plan is not developed or maintained on site.

[68 FR 2238, Jan. 16, 2003, as amended at 71 FR 20462, Apr. 20, 2006]

### **§ 63.1975 How do I calculate the 3-hour block average used to demonstrate compliance?**

Averages are calculated in the same way as they are calculated in 40 CFR part 60, subpart WWW, except that the data collected during the events listed in paragraphs (a), (b), (c), and (d) of this section are not to be included in any average computed under this subpart:

(a) Monitoring system breakdowns, repairs, calibration checks, and zero (low-level) and high-level adjustments.

(b) Startups.

(c) Shutdowns.

(d) Malfunctions.

## Notifications, Records, and Reports

### § 63.1980 What records and reports must I keep and submit?

(a) Keep records and reports as specified in 40 CFR part 60, subpart WWW, or in the Federal plan, EPA approved State plan or tribal plan that implements 40 CFR part 60, subpart Cc, whichever applies to your landfill, with one exception: You must submit the annual report described in 40 CFR 60.757(f) every 6 months.

(b) You must also keep records and reports as specified in the general provisions of 40 CFR part 60 and this part as shown in Table 1 of this subpart. Applicable records in the general provisions include items such as SSM plans and the SSM plan reports.

(c) For bioreactors at new affected sources you must submit the initial semiannual compliance report and performance test results described in 40 CFR 60.757(f) within 180 days after the date you are required to begin operating the gas collection and control system by §63.1947(a)(2) of this subpart.

(d) For bioreactors at existing affected sources, you must submit the initial semiannual compliance report and performance test results described in 40 CFR 60.757(f) within 180 days after the compliance date specified in §63.1947(b) of this subpart, unless you have previously submitted a compliance report for the bioreactor required by 40 CFR part 60, subpart WWW, the Federal plan, or an EPA approved and effective State plan or tribal plan.

(e) For bioreactors that are located at existing affected sources, but do not initiate liquids addition until later than the compliance date in §63.1947(b) of this subpart, you must submit the initial semiannual compliance report and performance tests results described in 40 CFR 60.757(f) within 180 days after the date you are required to begin operating the gas collection and control system by §63.1947(c) of this subpart.

(f) If you must submit a semiannual compliance report for a bioreactor as well as a semiannual compliance report for a conventional portion of the same landfill, you may delay submittal of a subsequent semiannual compliance report for the bioreactor according to paragraphs (f)(1) through (3) of this section so that the reports may be submitted on the same schedule.

(1) After submittal of your initial semiannual compliance report and performance test results for the bioreactor, you may delay submittal of the subsequent semiannual compliance report for the bioreactor until the date the initial or subsequent semiannual compliance report is due for the conventional portion of your landfill.

(2) You may delay submittal of your subsequent semiannual compliance report by no more than 12 months after the due date for submitting the initial semiannual compliance report and performance test results described in 40 CFR 60.757(f) for the bioreactor. The report shall cover the time period since the previous semiannual report for the bioreactor, which would be a period of at least 6 months and no more than 12 months.

(3) After the delayed semiannual report, all subsequent semiannual reports for the bioreactor must be submitted every 6 months on the same date the semiannual report for the conventional portion of the landfill is due.

(g) If you add any liquids other than leachate in a controlled fashion to the waste mass and do not comply with the bioreactor requirements in §§63.1947, 63.1955(c) and 63.1980(c) through (f) of this subpart, you must keep a record of calculations showing that the percent moisture by weight expected in the waste mass to which liquid is added is less than 40 percent. The calculation must consider the waste mass, moisture content of the incoming waste, mass of water added to the waste including leachate recirculation and other

liquids addition and precipitation, and the mass of water removed through leachate or other water losses. Moisture level sampling or mass balances calculations can be used. You must document the calculations and the basis of any assumptions. Keep the record of the calculations until you cease liquids addition.

(h) If you calculate moisture content to establish the date your bioreactor is required to begin operating the collection and control system under §63.1947(a)(2) or (c)(2), keep a record of the calculations including the information specified in paragraph (g) of this section for 5 years. Within 90 days after the bioreactor achieves 40 percent moisture content, report the results of the calculation, the date the bioreactor achieved 40 percent moisture content by weight, and the date you plan to begin collection and control system operation.

## **Other Requirements and Information**

### **§ 63.1985 Who enforces this subpart?**

(a) This subpart can be implemented and enforced by the U.S. EPA, or a delegated authority such as the applicable State, local, or tribal agency. If the EPA Administrator has delegated authority to a State, local, or tribal agency, then that agency as well as the U.S. EPA has the authority to implement and enforce this subpart. Contact the applicable EPA Regional Office to find out if this subpart is delegated to a State, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the EPA Administrator and are not transferred to the State, local, or tribal agency.

(c) The authorities that will not be delegated to State, local, or tribal agencies are as follows. Approval of alternatives to the standards in §63.1955. Where these standards reference another subpart, the cited provisions will be delegated according to the delegation provisions of the referenced subpart.

### **§ 63.1990 What definitions apply to this subpart?**

Terms used in this subpart are defined in the Clean Air Act, 40 CFR part 60, subparts A, Cc, and WWW; 40 CFR part 62, subpart GGG, and subpart A of this part, and this section that follows:

*Bioreactor* means a MSW landfill or portion of a MSW landfill where any liquid other than leachate (leachate includes landfill gas condensate) is added in a controlled fashion into the waste mass (often in combination with recirculating leachate) to reach a minimum average moisture content of at least 40 percent by weight to accelerate or enhance the anaerobic (without oxygen) biodegradation of the waste.

*Deviation* means any instance in which an affected source subject to this subpart, or an owner or operator of such a source:

- (1) Fails to meet any requirement or obligation established by this subpart, including, but not limited to, any emissions limitation (including any operating limit) or work practice standard;
- (2) Fails to meet any term or condition that is adopted to implement an applicable requirement in this subpart and that is included in the operating permit for any affected source required to obtain such a permit; or
- (3) Fails to meet any emission limitation, (including any operating limit), or work practice standard in this subpart during SSM, regardless of whether or not such failure is permitted by this subpart.

*Emissions limitation* means any emission limit, opacity limit, operating limit, or visible emissions limit.

*EPA approved State plan* means a State plan that EPA has approved based on the requirements in 40 CFR part 60, subpart B to implement and enforce 40 CFR part 60, subpart Cc. An approved State plan becomes effective on the date specified in the notice published in the Federal Register announcing EPA's approval.

*Federal plan* means the EPA plan to implement 40 CFR part 60, subpart Cc for existing MSW landfills located in States and Indian country where State plans or tribal plans are not currently in effect. On the effective date of an EPA approved State or tribal plan, the Federal plan no longer applies. The Federal plan is found at 40 CFR part 62, subpart GGG.

*Municipal solid waste landfill or MSW landfill* means an entire disposal facility in a contiguous geographical space where household waste is placed in or on land. A municipal solid waste landfill may also receive other types of RCRA Subtitle D wastes (see §257.2 of this chapter) such as commercial solid waste, nonhazardous sludge, conditionally exempt small quantity generator waste, and industrial solid waste. Portions of a municipal solid waste landfill may be separated by access roads. A municipal solid waste landfill may be publicly or privately owned. A municipal solid waste landfill may be a new municipal solid waste landfill, an existing municipal solid waste landfill, or a lateral expansion.

*Tribal plan* means a plan submitted by a tribal authority pursuant to 40 CFR parts 9, 35, 49, 50, and 81 to implement and enforce 40 CFR part 60, subpart Cc.

*Work practice standard* means any design, equipment, work practice, or operational standard, or combination thereof, that is promulgated pursuant to section 112(h) of the Clean Air Act.

As stated in §§63.1955 and 63.1980, you must meet each requirement in the following table that applies to you.

**Table 1 to Subpart AAAA of Part 63—Applicability of NESHAP General Provisions to Subpart AAAA**

<b>Part 63 Citation</b>	<b>Description</b>	<b>Explanation</b>
63.1(a)	Applicability: general applicability of NESHAP in this part	Affected sources are already subject to the provisions of paragraphs (a)(10)–(12) through the same provisions under 40 CFR, part 60 subpart A.
63.1(b)	Applicability determination for stationary sources	
63.1(e)	Title V permitting	
63.2	Definitions	
63.4	Prohibited activities and circumvention	Affected sources are already subject to the provisions of paragraph (b) through the same provisions under 40 CFR, part 60 subpart A.
63.5(b)	Requirements for existing, newly constructed, and reconstructed sources	
63.6(e)	Operation and maintenance requirements, startup, shutdown and malfunction plan provisions	

63.6(f)	Compliance with nonopacity emission standards	Affected sources are already subject to the provisions of paragraphs (f)(1) and (2)(i) through the same provisions under 40 CFR, part 60 subpart A.
63.10(b)(2)(i)–(b)(2)(v)	General recordkeeping requirements	
63.10(d)(5)	If actions taken during a startup, shutdown and malfunction plan are consistent with the procedures in the startup, shutdown and malfunction plan, this information shall be included in a semi-annual startup, shutdown and malfunction plan report. Any time an action taken during a startup, shutdown and malfunction plan is not consistent with the startup, shutdown and malfunction plan, the source shall report actions taken within 2 working days after commencing such actions, followed by a letter 7 days after the event	
63.12(a)	These provisions do not preclude the State from adopting and enforcing any standard, limitation, etc., requiring permits, or requiring emissions reductions in excess of those specified	
63.15	Availability of information and confidentiality	

**Indiana Department of Environmental Management  
Office of Air Quality**

**Attachment C**

**40 CFR 61, Subpart M — National Emission Standards for Asbestos**

**Source Description and Location**

Source Name:	Republic Services of Indiana, LP d/b/a National Serv-All Landfill
Source Location:	6231 McBeth Road, Fort Wayne, Indiana 46809-9719
County:	Allen County
SIC Code:	4953
Operation Permit No.:	T 003-30376-00257
Permit Reviewer:	David J. Matousek

**Complete Text of 40 CFR 61, Subpart M**

**40 CFR 61, Subpart M — National Emission Standards for Asbestos**

**Source:** 49 FR 13661, Apr. 5, 1984, unless otherwise noted.

**§ 61.140 Applicability.**

The provisions of this subpart are applicable to those sources specified in §§61.142 through 61.151, 61.154, and 61.155.

[55 FR 48414, Nov. 20, 1990]

**§ 61.141 Definitions.**

All terms that are used in this subpart and are not defined below are given the same meaning as in the Act and in subpart A of this part.

*Active waste disposal site* means any disposal site other than an inactive site.

*Adequately wet* means sufficiently mix or penetrate with liquid to prevent the release of particulates. If visible emissions are observed coming from asbestos-containing material, then that material has not been adequately wetted. However, the absence of visible emissions is not sufficient evidence of being adequately wet.

*Asbestos* means the asbestiform varieties of serpentinite (chrysotile), riebeckite (crocidolite), cummingtonite-grunerite, anthophyllite, and actinolite-tremolite.

*Asbestos-containing waste materials* means mill tailings or any waste that contains commercial asbestos and is generated by a source subject to the provisions of this subpart. This term includes filters from control devices, friable asbestos waste material, and bags or other similar packaging contaminated with commercial asbestos. As applied to demolition and renovation operations, this term also includes regulated asbestos-containing material waste and materials contaminated with asbestos including disposable equipment and clothing.

*Asbestos mill* means any facility engaged in converting, or in any intermediate step in converting, asbestos ore into commercial asbestos. Outside storage of asbestos material is not considered a part of the asbestos mill.

*Asbestos tailings* means any solid waste that contains asbestos and is a product of asbestos mining or milling operations.

*Asbestos waste from control devices* means any waste material that contains asbestos and is collected by a pollution control device.

*Category I nonfriable asbestos-containing material (ACM)* means asbestos-containing packings, gaskets, resilient floor covering, and asphalt roofing products containing more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy.

*Category II nonfriable ACM* means any material, excluding Category I nonfriable ACM, containing more than 1 percent asbestos as determined using the methods specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.

*Commercial asbestos* means any material containing asbestos that is extracted from ore and has value because of its asbestos content.

*Cutting* means to penetrate with a sharp-edged instrument and includes sawing, but does not include shearing, slicing, or punching.

*Demolition* means the wrecking or taking out of any load-supporting structural member of a facility together with any related handling operations or the intentional burning of any facility.

*Emergency renovation operation* means a renovation operation that was not planned but results from a sudden, unexpected event that, if not immediately attended to, presents a safety or public health hazard, is necessary to protect equipment from damage, or is necessary to avoid imposing an unreasonable financial burden. This term includes operations necessitated by nonroutine failures of equipment.

*Fabricating* means any processing ( e.g., cutting, sawing, drilling) of a manufactured product that contains commercial asbestos, with the exception of processing at temporary sites (field fabricating) for the construction or restoration of facilities. In the case of friction products, fabricating includes bonding, debonding, grinding, sawing, drilling, or other similar operations performed as part of fabricating.

*Facility* means any institutional, commercial, public, industrial, or residential structure, installation, or building (including any structure, installation, or building containing condominiums or individual dwelling units operated as a residential cooperative, but excluding residential buildings having four or fewer dwelling units); any ship; and any active or inactive waste disposal site. For purposes of this definition, any building, structure, or installation that contains a loft used as a dwelling is not considered a residential structure, installation, or building. Any structure, installation or building that was previously subject to this subpart is not excluded, regardless of its current use or function.

*Facility component* means any part of a facility including equipment.

*Friable asbestos material* means any material containing more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure. If the asbestos content is less than 10 percent as determined by a method other than point counting by polarized light microscopy (PLM), verify the asbestos content by point counting using PLM.

*Fugitive source* means any source of emissions not controlled by an air pollution control device.

*Glove bag* means a sealed compartment with attached inner gloves used for the handling of asbestos-containing materials. Properly installed and used, glove bags provide a small work area enclosure typically used for small-scale asbestos stripping operations. Information on glove-bag installation, equipment and supplies, and work practices is contained in the Occupational Safety and Health Administration's (OSHA's) final rule on occupational exposure to asbestos (appendix G to 29 CFR 1926.58).

*Grinding* means to reduce to powder or small fragments and includes mechanical chipping or drilling.

*In poor condition* means the binding of the material is losing its integrity as indicated by peeling, cracking, or crumbling of the material.

*Inactive waste disposal site* means any disposal site or portion of it where additional asbestos-containing waste material has not been deposited within the past year.

*Installation* means any building or structure or any group of buildings or structures at a single demolition or renovation site that are under the control of the same owner or operator (or owner or operator under common control).

*Leak-tight* means that solids or liquids cannot escape or spill out. It also means dust-tight.

*Malfunction* means any sudden and unavoidable failure of air pollution control equipment or process equipment or of a process to operate in a normal or usual manner so that emissions of asbestos are increased. Failures of equipment shall not be considered malfunctions if they are caused in any way by poor maintenance, careless operation, or any other preventable upset conditions, equipment breakdown, or process failure.

*Manufacturing* means the combining of commercial asbestos-or, in the case of woven friction products, the combining of textiles containing commercial asbestos-with any other material(s), including commercial asbestos, and the processing of this combination into a product. Chlorine production is considered a part of manufacturing.

*Natural barrier* means a natural object that effectively precludes or deters access. Natural barriers include physical obstacles such as cliffs, lakes or other large bodies of water, deep and wide ravines, and mountains. Remoteness by itself is not a natural barrier.

*Nonfriable asbestos-containing material* means any material containing more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy, that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.

*Nonscheduled renovation operation* means a renovation operation necessitated by the routine failure of equipment, which is expected to occur within a given period based on past operating experience, but for which an exact date cannot be predicted.

*Outside air* means the air outside buildings and structures, including, but not limited to, the air under a bridge or in an open air ferry dock.

*Owner or operator of a demolition or renovation activity* means any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

*Particulate asbestos material* means finely divided particles of asbestos or material containing asbestos.

*Planned renovation operations* means a renovation operation, or a number of such operations, in which some RACM will be removed or stripped within a given period of time and that can be predicted. Individual nonscheduled operations are included if a number of such operations can be predicted to occur during a given period of time based on operating experience.

*Regulated asbestos-containing material (RACM)* means (a) Friable asbestos material, (b) Category I nonfriable ACM that has become friable, (c) Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading, or (d) Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations regulated by this subpart.

*Remove* means to take out RACM or facility components that contain or are covered with RACM from any facility.

*Renovation* means altering a facility or one or more facility components in any way, including the stripping or removal of RACM from a facility component. Operations in which load-supporting structural members are wrecked or taken out are demolitions.

*Resilient floor covering* means asbestos-containing floor tile, including asphalt and vinyl floor tile, and sheet vinyl floor covering containing more than 1 percent asbestos as determined using polarized light microscopy according to the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy.

*Roadways* means surfaces on which vehicles travel. This term includes public and private highways, roads, streets, parking areas, and driveways.

*Strip* means to take off RACM from any part of a facility or facility components.

*Structural member* means any load-supporting member of a facility, such as beams and load supporting walls; or any nonload-supporting member, such as ceilings and nonload-supporting walls.

*Visible emissions* means any emissions, which are visually detectable without the aid of instruments, coming from RACM or asbestos-containing waste material, or from any asbestos milling, manufacturing, or fabricating operation. This does not include condensed, uncombined water vapor.

*Waste generator* means any owner or operator of a source covered by this subpart whose act or process produces asbestos-containing waste material.

*Waste shipment record* means the shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

*Working day* means Monday through Friday and includes holidays that fall on any of the days Monday through Friday.

[49 FR 13661, Apr. 5, 1984; 49 FR 25453, June 21, 1984, as amended by 55 FR 48414, Nov. 20, 1990; 56 FR 1669, Jan. 16, 1991; 60 FR 31920, June 19, 1995]

#### **§ 61.142 Standard for asbestos mills.**

(a) Each owner or operator of an asbestos mill shall either discharge no visible emissions to the outside air from that asbestos mill, including fugitive sources, or use the methods specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air.

(b) Each owner or operator of an asbestos mill shall meet the following requirements:

(1) Monitor each potential source of asbestos emissions from any part of the mill facility, including air cleaning devices, process equipment, and buildings that house equipment for material processing and handling, at least once each day, during daylight hours, for visible emissions to the outside air during periods of operation. The monitoring shall be by visual observation of at least 15 seconds duration per source of emissions.

(2) Inspect each air cleaning device at least once each week for proper operation and for changes that signal the potential for malfunction, including, to the maximum extent possible without dismantling other than opening the device, the presence of tears, holes, and abrasions in filter bags and for dust deposits on the clean side of bags. For air cleaning devices that cannot be inspected on a weekly basis according to this paragraph, submit to the Administrator, and revise as necessary, a written maintenance plan to include, at a minimum, the following:

(i) Maintenance schedule.

(ii) Recordkeeping plan.

(3) Maintain records of the results of visible emissions monitoring and air cleaning device inspections using a format similar to that shown in Figures 1 and 2 and include the following:

(i) Date and time of each inspection.

(ii) Presence or absence of visible emissions.

(iii) Condition of fabric filters, including presence of any tears, holes, and abrasions.

(iv) Presence of dust deposits on clean side of fabric filters.

(v) Brief description of corrective actions taken, including date and time.

(vi) Daily hours of operation for each air cleaning device.

(4) Furnish upon request, and make available at the affected facility during normal business hours for inspection by the Administrator, all records required under this section.

(5) Retain a copy of all monitoring and inspection records for at least 2 years.

(6) Submit semiannually a copy of visible emission monitoring records to the Administrator if visible emissions occurred during the report period. Semiannual reports shall be postmarked by the 30th day following the end of the six-month period.

Date of inspection (mo/day/yr)	Time of inspection (a.m./p.m.)	Air cleaning device or fugitive source designation or number	Visible emissions observed (yes/no), corrective action taken	Daily operating hours	Inspector's initials

Figure 1. Record of Visible Emission Monitoring

1. Air cleaning device designation or number \_\_\_\_\_

2. Date of inspection \_\_\_\_\_

3. Time of inspection \_\_\_\_\_

4. Is air cleaning device operating properly (yes/no) \_\_\_\_\_

5. Tears, holes, or abrasions in fabric filter (yes/no) \_\_\_\_\_

6. Dust on clean side of fabric filters (yes/no) \_\_\_\_\_

7. Other signs of malfunctions or potential malfunctions (yes/no) \_\_\_\_\_

8. Describe other malfunctions or signs of potential malfunctions. \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

9. Describe corrective action(s) taken. \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

10. Date and time corrective action taken \_\_\_\_\_

11. Inspected by

\_\_\_\_\_  
 (Print/type Name)      (Title)      (Signature)      (Date)

\_\_\_\_\_  
 (Print/type Name)      (Title)      (Signature)      (Date)

Figure 2. Air Cleaning Device Inspection Checklist

[55 FR 48416, Nov. 20, 1990, as amended at 64 FR 7467, Feb. 12, 1999]

**§ 61.143 Standard for roadways.**

No person may construct or maintain a roadway with asbestos tailings or asbestos-containing waste material on that roadway, unless, for asbestos tailings.

(a) It is a temporary roadway on an area of asbestos ore deposits (asbestos mine): or

(b) It is a temporary roadway at an active asbestos mill site and is encapsulated with a resinous or bituminous binder. The encapsulated road surface must be maintained at a minimum frequency of once per year to prevent dust emissions; or

(c) It is encapsulated in asphalt concrete meeting the specifications contained in section 401 of Standard Specifications for Construction of Roads and Bridges on Federal Highway Projects, FP-85, 1985, or their equivalent.

[55 FR 48419, Nov. 20, 1990; 56 FR 1669, Jan. 16, 1991]

**§ 61.144 Standard for manufacturing.**

(a) *Applicability.* This section applies to the following manufacturing operations using commercial asbestos.

(1) The manufacture of cloth, cord, wicks, tubing, tape, twine, rope, thread, yarn, roving, lap, or other textile materials.

(2) The manufacture of cement products.

(3) The manufacture of fireproofing and insulating materials.

(4) The manufacture of friction products.

(5) The manufacture of paper, millboard, and felt.

(6) The manufacture of floor tile.

(7) The manufacture of paints, coatings, caulks, adhesives, and sealants.

(8) The manufacture of plastics and rubber materials.

(9) The manufacture of chlorine utilizing asbestos diaphragm technology.

(10) The manufacture of shotgun shell wads.

(11) The manufacture of asphalt concrete.

(b) *Standard.* Each owner or operator of any of the manufacturing operations to which this section applies shall either:

(1) Discharge no visible emissions to the outside air from these operations or from any building or structure in which they are conducted or from any other fugitive sources; or

(2) Use the methods specified by §61.152 to clean emissions from these operations containing particulate asbestos material before they escape to, or are vented to, the outside air.

(3) Monitor each potential source of asbestos emissions from any part of the manufacturing facility, including air cleaning devices, process equipment, and buildings housing material processing and handling equipment, at least once each day during daylight hours for visible emissions to the outside air during periods of operation. The monitoring shall be by visual observation of at least 15 seconds duration per source of emissions.

(4) Inspect each air cleaning device at least once each week for proper operation and for changes that signal the potential for malfunctions, including, to the maximum extent possible without dismantling other than opening the device, the presence of tears, holes, and abrasions in filter bags and for dust deposits on the clean side of bags. For air cleaning devices that cannot be inspected on a weekly basis according to this paragraph, submit to the Administrator, and revise as necessary, a written maintenance plan to include, at a minimum, the following:

(i) Maintenance schedule.

(ii) Recordkeeping plan.

(5) Maintain records of the results of visible emission monitoring and air cleaning device inspections using a format similar to that shown in Figures 1 and 2 and include the following.

(i) Date and time of each inspection.

(ii) Presence or absence of visible emissions.

(iii) Condition of fabric filters, including presence of any tears, holes and abrasions.

(iv) Presence of dust deposits on clean side of fabric filters.

(v) Brief description of corrective actions taken, including date and time.

(vi) Daily hours of operation for each air cleaning device.

(6) Furnish upon request, and make available at the affected facility during normal business hours for inspection by the Administrator, all records required under this section.

(7) Retain a copy of all monitoring and inspection records for at least 2 years.

(8) Submit semiannually a copy of the visible emission monitoring records to the Administrator if visible emission occurred during the report period. Semiannual reports shall be postmarked by the 30th day following the end of the six-month period.

[49 FR 13661, Apr. 5, 1984, as amended at 55 FR 48419, Nov. 20, 1990; 56 FR 1669, Jan. 16, 1991; 64 FR 7467, Feb. 12, 1999]

#### **§ 61.145 Standard for demolition and renovation.**

(a) *Applicability.* To determine which requirements of paragraphs (a), (b), and (c) of this section apply to the owner or operator of a demolition or renovation activity and prior to the commencement of the demolition or renovation, thoroughly inspect the affected facility or part of the facility where the demolition or renovation

operation will occur for the presence of asbestos, including Category I and Category II nonfriable ACM. The requirements of paragraphs (b) and (c) of this section apply to each owner or operator of a demolition or renovation activity, including the removal of RACM as follows:

(1) In a facility being demolished, all the requirements of paragraphs (b) and (c) of this section apply, except as provided in paragraph (a)(3) of this section, if the combined amount of RACM is

(i) At least 80 linear meters (260 linear feet) on pipes or at least 15 square meters (160 square feet) on other facility components, or

(ii) At least 1 cubic meter (35 cubic feet) off facility components where the length or area could not be measured previously.

(2) In a facility being demolished, only the notification requirements of paragraphs (b)(1), (2), (3)(i) and (iv), and (4)(i) through (vii) and (4)(ix) and (xvi) of this section apply, if the combined amount of RACM is

(i) Less than 80 linear meters (260 linear feet) on pipes and less than 15 square meters (160 square feet) on other facility components, and

(ii) Less than one cubic meter (35 cubic feet) off facility components where the length or area could not be measured previously or there is no asbestos.

(3) If the facility is being demolished under an order of a State or local government agency, issued because the facility is structurally unsound and in danger of imminent collapse, only the requirements of paragraphs (b)(1), (b)(2), (b)(3)(iii), (b)(4) (except (b)(4)(viii)), (b)(5), and (c)(4) through (c)(9) of this section apply.

(4) In a facility being renovated, including any individual nonscheduled renovation operation, all the requirements of paragraphs (b) and (c) of this section apply if the combined amount of RACM to be stripped, removed, dislodged, cut, drilled, or similarly disturbed is

(i) At least 80 linear meters (260 linear feet) on pipes or at least 15 square meters (160 square feet) on other facility components, or

(ii) At least 1 cubic meter (35 cubic feet) off facility components where the length or area could not be measured previously.

(iii) To determine whether paragraph (a)(4) of this section applies to planned renovation operations involving individual nonscheduled operations, predict the combined additive amount of RACM to be removed or stripped during a calendar year of January 1 through December 31.

(iv) To determine whether paragraph (a)(4) of this section applies to emergency renovation operations, estimate the combined amount of RACM to be removed or stripped as a result of the sudden, unexpected event that necessitated the renovation.

(5) Owners or operators of demolition and renovation operations are exempt from the requirements of §§61.05(a), 61.07, and 61.09.

(b) *Notification requirements.* Each owner or operator of a demolition or renovation activity to which this section applies shall:

(1) Provide the Administrator with written notice of intention to demolish or renovate. Delivery of the notice by U.S. Postal Service, commercial delivery service, or hand delivery is acceptable.

(2) Update notice, as necessary, including when the amount of asbestos affected changes by at least 20 percent.

(3) Postmark or deliver the notice as follows:

(i) At least 10 working days before asbestos stripping or removal work or any other activity begins (such as site preparation that would break up, dislodge or similarly disturb asbestos material), if the operation is described in paragraphs (a) (1) and (4) (except (a)(4)(iii) and (a)(4)(iv)) of this section. If the operation is as described in paragraph (a)(2) of this section, notification is required 10 working days before demolition begins.

(ii) At least 10 working days before the end of the calendar year preceding the year for which notice is being given for renovations described in paragraph (a)(4)(iii) of this section.

(iii) As early as possible before, but not later than, the following working day if the operation is a demolition ordered according to paragraph (a)(3) of this section or, if the operation is a renovation described in paragraph (a)(4)(iv) of this section.

(iv) For asbestos stripping or removal work in a demolition or renovation operation, described in paragraphs (a) (1) and (4) (except (a)(4)(iii) and (a)(4)(iv)) of this section, and for a demolition described in paragraph (a)(2) of this section, that will begin on a date other than the one contained in the original notice, notice of the new start date must be provided to the Administrator as follows:

(A) When the asbestos stripping or removal operation or demolition operation covered by this paragraph will begin after the date contained in the notice,

( 1 ) Notify the Administrator of the new start date by telephone as soon as possible before the original start date, and

( 2 ) Provide the Administrator with a written notice of the new start date as soon as possible before, and no later than, the original start date. Delivery of the updated notice by the U.S. Postal Service, commercial delivery service, or hand delivery is acceptable.

(B) When the asbestos stripping or removal operation or demolition operation covered by this paragraph will begin on a date earlier than the original start date,

( 1 ) Provide the Administrator with a written notice of the new start date at least 10 working days before asbestos stripping or removal work begins.

( 2 ) For demolitions covered by paragraph (a)(2) of this section, provide the Administrator written notice of a new start date at least 10 working days before commencement of demolition. Delivery of updated notice by U.S. Postal Service, commercial delivery service, or hand delivery is acceptable.

(C) In no event shall an operation covered by this paragraph begin on a date other than the date contained in the written notice of the new start date.

(4) Include the following in the notice:

(i) An indication of whether the notice is the original or a revised notification.

(ii) Name, address, and telephone number of both the facility owner and operator and the asbestos removal contractor owner or operator.

(iii) Type of operation: demolition or renovation.

(iv) Description of the facility or affected part of the facility including the size (square meters [square feet] and number of floors), age, and present and prior use of the facility.

(v) Procedure, including analytical methods, employed to detect the presence of RACM and Category I and Category II nonfriable ACM.

(vi) Estimate of the approximate amount of RACM to be removed from the facility in terms of length of pipe in linear meters (linear feet), surface area in square meters (square feet) on other facility components, or volume in cubic meters (cubic feet) if off the facility components. Also, estimate the approximate amount of Category I and Category II nonfriable ACM in the affected part of the facility that will not be removed before demolition.

(vii) Location and street address (including building number or name and floor or room number, if appropriate), city, county, and state, of the facility being demolished or renovated.

(viii) Scheduled starting and completion dates of asbestos removal work (or any other activity, such as site preparation that would break up, dislodge, or similarly disturb asbestos material) in a demolition or renovation; planned renovation operations involving individual nonscheduled operations shall only include the beginning and ending dates of the report period as described in paragraph (a)(4)(iii) of this section.

(ix) Scheduled starting and completion dates of demolition or renovation.

(x) Description of planned demolition or renovation work to be performed and method(s) to be employed, including demolition or renovation techniques to be used and description of affected facility components.

(xi) Description of work practices and engineering controls to be used to comply with the requirements of this subpart, including asbestos removal and waste-handling emission control procedures.

(xii) Name and location of the waste disposal site where the asbestos-containing waste material will be deposited.

(xiii) A certification that at least one person trained as required by paragraph (c)(8) of this section will supervise the stripping and removal described by this notification. This requirement shall become effective 1 year after promulgation of this regulation.

(xiv) For facilities described in paragraph (a)(3) of this section, the name, title, and authority of the State or local government representative who has ordered the demolition, the date that the order was issued, and the date on which the demolition was ordered to begin. A copy of the order shall be attached to the notification.

(xv) For emergency renovations described in paragraph (a)(4)(iv) of this section, the date and hour that the emergency occurred, a description of the sudden, unexpected event, and an explanation of how the event caused an unsafe condition, or would cause equipment damage or an unreasonable financial burden.

(xvi) Description of procedures to be followed in the event that unexpected RACM is found or Category II nonfriable ACM becomes crumbled, pulverized, or reduced to powder.

(xvii) Name, address, and telephone number of the waste transporter.

(5) The information required in paragraph (b)(4) of this section must be reported using a form similar to that shown in Figure 3.

(c) *Procedures for asbestos emission control.* Each owner or operator of a demolition or renovation activity to whom this paragraph applies, according to paragraph (a) of this section, shall comply with the following procedures:

(1) Remove all RACM from a facility being demolished or renovated before any activity begins that would break up, dislodge, or similarly disturb the material or preclude access to the material for subsequent removal. RACM need not be removed before demolition if:

(i) It is Category I nonfriable ACM that is not in poor condition and is not friable.

(ii) It is on a facility component that is encased in concrete or other similarly hard material and is adequately wet whenever exposed during demolition; or

(iii) It was not accessible for testing and was, therefore, not discovered until after demolition began and, as a result of the demolition, the material cannot be safely removed. If not removed for safety reasons, the exposed RACM and any asbestos-contaminated debris must be treated as asbestos-containing waste material and adequately wet at all times until disposed of.

(iv) They are Category II nonfriable ACM and the probability is low that the materials will become crumbled, pulverized, or reduced to powder during demolition.

(2) When a facility component that contains, is covered with, or is coated with RACM is being taken out of the facility as a unit or in sections:

(i) Adequately wet all RACM exposed during cutting or disjoining operations; and

(ii) Carefully lower each unit or section to the floor and to ground level, not dropping, throwing, sliding, or otherwise damaging or disturbing the RACM.

(3) When RACM is stripped from a facility component while it remains in place in the facility, adequately wet the RACM during the stripping operation.

(i) In renovation operations, wetting is not required if:

(A) The owner or operator has obtained prior written approval from the Administrator based on a written application that wetting to comply with this paragraph would unavoidably damage equipment or present a safety hazard; and

(B) The owner or operator uses one of the following emission control methods:

( 1 ) A local exhaust ventilation and collection system designed and operated to capture the particulate asbestos material produced by the stripping and removal of the asbestos materials. The system must exhibit no visible emissions to the outside air or be designed and operated in accordance with the requirements in §61.152.

( 2 ) A glove-bag system designed and operated to contain the particulate asbestos material produced by the stripping of the asbestos materials.

( 3 ) Leak-tight wrapping to contain all RACM prior to dismantlement.

(ii) In renovation operations where wetting would result in equipment damage or a safety hazard, and the methods allowed in paragraph (c)(3)(i) of this section cannot be used, another method may be used after

obtaining written approval from the Administrator based upon a determination that it is equivalent to wetting in controlling emissions or to the methods allowed in paragraph (c)(3)(i) of this section.

(iii) A copy of the Administrator's written approval shall be kept at the worksite and made available for inspection.

(4) After a facility component covered with, coated with, or containing RACM has been taken out of the facility as a unit or in sections pursuant to paragraph (c)(2) of this section, it shall be stripped or contained in leak-tight wrapping, except as described in paragraph (c)(5) of this section. If stripped, either:

(i) Adequately wet the RACM during stripping; or

(ii) Use a local exhaust ventilation and collection system designed and operated to capture the particulate asbestos material produced by the stripping. The system must exhibit no visible emissions to the outside air or be designed and operated in accordance with the requirements in §61.152.

(5) For large facility components such as reactor vessels, large tanks, and steam generators, but not beams (which must be handled in accordance with paragraphs (c)(2), (3), and (4) of this section), the RACM is not required to be stripped if the following requirements are met:

(i) The component is removed, transported, stored, disposed of, or reused without disturbing or damaging the RACM.

(ii) The component is encased in a leak-tight wrapping.

(iii) The leak-tight wrapping is labeled according to §61.149(d)(1)(i), (ii), and (iii) during all loading and unloading operations and during storage.

(6) For all RACM, including material that has been removed or stripped:

(i) Adequately wet the material and ensure that it remains wet until collected and contained or treated in preparation for disposal in accordance with §61.150; and

(ii) Carefully lower the material to the ground and floor, not dropping, throwing, sliding, or otherwise damaging or disturbing the material.

(iii) Transport the material to the ground via leak-tight chutes or containers if it has been removed or stripped more than 50 feet above ground level and was not removed as units or in sections.

(iv) RACM contained in leak-tight wrapping that has been removed in accordance with paragraphs (c)(4) and (c)(3)(i)(B)( 3 ) of this section need not be wetted.

(7) When the temperature at the point of wetting is below 0 °C (32 °F):

(i) The owner or operator need not comply with paragraph (c)(2)(i) and the wetting provisions of paragraph (c)(3) of this section.

(ii) The owner or operator shall remove facility components containing, coated with, or covered with RACM as units or in sections to the maximum extent possible.

(iii) During periods when wetting operations are suspended due to freezing temperatures, the owner or operator must record the temperature in the area containing the facility components at the beginning, middle,

and end of each workday and keep daily temperature records available for inspection by the Administrator during normal business hours at the demolition or renovation site. The owner or operator shall retain the temperature records for at least 2 years.

(8) Effective 1 year after promulgation of this regulation, no RACM shall be stripped, removed, or otherwise handled or disturbed at a facility regulated by this section unless at least one on-site representative, such as a foreman or management-level person or other authorized representative, trained in the provisions of this regulation and the means of complying with them, is present. Every 2 years, the trained on-site individual shall receive refresher training in the provisions of this regulation. The required training shall include as a minimum: applicability; notifications; material identification; control procedures for removals including, at least, wetting, local exhaust ventilation, negative pressure enclosures, glove-bag procedures, and High Efficiency Particulate Air (HEPA) filters; waste disposal work practices; reporting and recordkeeping; and asbestos hazards and worker protection. Evidence that the required training has been completed shall be posted and made available for inspection by the Administrator at the demolition or renovation site.

(9) For facilities described in paragraph (a)(3) of this section, adequately wet the portion of the facility that contains RACM during the wrecking operation.

(10) If a facility is demolished by intentional burning, all RACM including Category I and Category II nonfriable ACM must be removed in accordance with the NESHAP before burning.

NOTIFICATION OF DEMOLITION AND RENOVATION					
Operator Project #	Postmark	Date Received	Notification #		
<b>I. TYPE OF NOTIFICATION</b> ( C=Original Subvised C=Canceled )					
<b>II. FACILITY INFORMATION</b> ( Identify owner, removal contractor, and other operator )					
OWNER NAME:					
ADDRESS:					
City:		State:	Zip:		
Contact:		Tel:			
REMOVAL CONTRACTOR:					
ADDRESS:					
City:		State:	Zip:		
Contact:		Tel:			
OTHER OPERATOR:					
ADDRESS:					
City:		State:	Zip:		
Contact:		Tel:			
<b>III. TYPE OF OPERATION</b> ( D=Demo D=Demolished Dem R=Renovation R=Rear-Renovation )					
<b>IV. IS ASBESTOS PRESENT?</b> ( Yes/No )					
<b>V. FACILITY DESCRIPTION</b> ( Include building name, number and floor or room number )					
Bldg Name:					
ADDRESS:					
City:		State:	County:		
Site Location:					
Building Size:		# of Floors:	Age in Years:		
Present Year:			Prior Year:		
<b>VI. PROCEDURE, INCLUDING ANALYTICAL METHOD, IF APPROPRIATE, USED TO DETECT THE PRESENCE OF ASBESTOS MATERIAL:</b>					
<b>VII. APPROXIMATE AMOUNT OF ASBESTOS, INCLUDING:</b>					
1. Regulated ACM to be removed		RACM TO BE REMOVED	Nonfriable Asbestos Material NOT to be removed		Indicate Unit of Measurement Below
2. Category I ACM Not Removed			Cat I	Cat II	UNIT
Pipes				SqFt	Lb Wt
Surface Area				SqFt	Lb Wt
Do RACM Off Facility Component					
City:					
<b>VIII. SCHEDULED DATE ASBESTOS REMOVAL (MM/DD/YY)</b> Starts: Complete:					
<b>IX. SCHEDULED DATE DEMO/RENOVATION (MM/DD/YY)</b> Starts: Complete:					

Continued on page two

Figure 3. Notification of Demolition and Renovation

NOTIFICATION OF DEMOLITION AND RENOVATION (cont'd)		
X. DESCRIPTION OF PLANNED DEMOLITION OR RENOVATION WORK, AND METHOD(S) TO BE USED:		
XI. DESCRIPTION OF WORK PRACTICES AND ENGINEERING CONTROLS TO BE USED TO PREVENT EMISSIONS OF ASBESTOS AT THE DEMOLITION AND RENOVATION SITE:		
XII. WASTE TRANSPORTER #1		
Name:		
Address:		
City:	State:	Zip:
Contact Person:	Telephone:	
WASTE TRANSPORTER #2		
Name:		
Address:		
City:	State:	Zip:
Contact Person:	Telephone:	
XIII. WASTE DISPOSAL SITE		
Name:		
Location:		
City:	State:	Zip:
Telephone:		
XIV. IF DEMOLITION ORDERED BY A GOVERNMENT AGENCY, PLEASE IDENTIFY THE AGENCY BELOW:		
Name:		Title:
Authority:		
Date of Order (MM/DD/YY):	Date Ordered to Begin (MM/DD/YY):	
XV. FOR EMERGENCY RENOVATIONS		
Date and Hour of Emergency (MM/DD/YY):		
Description of the sudden, unexpected event:		
Explanation of how the event created unsafe conditions or would cause equipment damage or an unreasonable financial burden:		
XVI. DESCRIPTION OF PROCEDURES TO BE FOLLOWED IN THE EVENT THAT UNEXPECTED ASBESTOS IS FOUND OR PREVIOUSLY NONFRIABLE ASBESTOS MATERIAL BECOMES CRUMLED, FULVERIZED, OR REDUCED TO POWDER.		
XVI. I CERTIFY THAT AN INDIVIDUAL TRAINED IN THE PROVISIONS OF THIS REGULATION (40 CFR PART 61, SUBPART M) WILL BE ON-SITE DURING THE DEMOLITION OR RENOVATION AND EVIDENCE THAT THE REQUIRED TRAINING HAS BEEN ACCOMPLISHED BY THIS PERSON WILL BE AVAILABLE FOR INSPECTION DURING NORMAL BUSINESS HOURS. (Required 1 year after commencement)		
(Signature of Owner/Operator)		(Date)
XVII. I CERTIFY THAT THE ABOVE INFORMATION IS CORRECT.		
(Signature of Owner/Operator)		(Date)

Figure 3. Notification of Demolition and Renovation

[55 FR 48419, Nov. 20, 1990; 56 FR 1669, Jan. 16, 1991]

**§ 61.146 Standard for spraying.**

The owner or operator of an operation in which asbestos-containing materials are spray applied shall comply with the following requirements:

(a) For spray-on application on buildings, structures, pipes, and conduits, do not use material containing more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy, except as provided in paragraph (c) of this section.

(b) For spray-on application of materials that contain more than 1 percent asbestos as determined using the method specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy, on equipment and machinery, except as provided in paragraph (c) of this section:

(1) Notify the Administrator at least 20 days before beginning the spraying operation. Include the following information in the notice:

(i) Name and address of owner or operator.

(ii) Location of spraying operation.

(iii) Procedures to be followed to meet the requirements of this paragraph.

(2) Discharge no visible emissions to the outside air from spray-on application of the asbestos-containing material or use the methods specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air.

(c) The requirements of paragraphs (a) and (b) of this section do not apply to the spray-on application of materials where the asbestos fibers in the materials are encapsulated with a bituminous or resinous binder during spraying and the materials are not friable after drying.

(d) Owners or operators of sources subject to this paragraph are exempt from the requirements of §§61.05(a), 61.07 and 61.09.

[49 FR 13661, Apr. 5, 1984. Redesignated and amended at 55 FR 48424, Nov. 20, 1990; 60 FR 31920, June 19, 1995]

### **§ 61.147 Standard for fabricating.**

(a) *Applicability.* This section applies to the following fabricating operations using commercial asbestos:

(1) The fabrication of cement building products.

(2) The fabrication of friction products, except those operations that primarily install asbestos friction materials on motor vehicles.

(3) The fabrication of cement or silicate board for ventilation hoods; ovens; electrical panels; laboratory furniture, bulkheads, partitions, and ceilings for marine construction; and flow control devices for the molten metal industry.

(b) *Standard.* Each owner or operator of any of the fabricating operations to which this section applies shall either:

(1) Discharge no visible emissions to the outside air from any of the operations or from any building or structure in which they are conducted or from any other fugitive sources; or

(2) Use the methods specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air.

(3) Monitor each potential source of asbestos emissions from any part of the fabricating facility, including air cleaning devices, process equipment, and buildings that house equipment for material processing and handling, at least once each day, during daylight hours, for visible emissions to the outside air during periods of operation. The monitoring shall be by visual observation of at least 15 seconds duration per source of emissions.

(4) Inspect each air cleaning device at least once each week for proper operation and for changes that signal the potential for malfunctions, including, to the maximum extent possible without dismantling other than opening the device, the presence of tears, holes, and abrasions in filter bags and for dust deposits on the clean side of bags. For air cleaning devices that cannot be inspected on a weekly basis according to this paragraph, submit to the Administrator, and revise as necessary, a written maintenance plan to include, at a minimum, the following:

(i) Maintenance schedule.

(ii) Recordkeeping plan.

(5) Maintain records of the results of visible emission monitoring and air cleaning device inspections using a format similar to that shown in Figures 1 and 2 and include the following:

- (i) Date and time of each inspection.
- (ii) Presence or absence of visible emissions.
- (iii) Condition of fabric filters, including presence of any tears, holes, and abrasions.
- (iv) Presence of dust deposits on clean side of fabric filters.
- (v) Brief description of corrective actions taken, including date and time.
- (vi) Daily hours of operation for each air cleaning device.

(6) Furnish upon request and make available at the affected facility during normal business hours for inspection by the Administrator, all records required under this section.

(7) Retain a copy of all monitoring and inspection records for at least 2 years.

(8) Submit semiannually a copy of the visible emission monitoring records to the Administrator if visible emission occurred during the report period. Semiannual reports shall be postmarked by the 30th day following the end of the six-month period.

[49 FR 13661, Apr. 5, 1984. Redesignated and amended at 55 FR 48424, Nov. 20, 1991; 64 FR 7467, Feb. 12, 1999]

#### **§ 61.148 Standard for insulating materials.**

No owner or operator of a facility may install or reinstall on a facility component any insulating materials that contain commercial asbestos if the materials are either molded and friable or wet-applied and friable after drying. The provisions of this section do not apply to spray-applied insulating materials regulated under §61.146.

[55 FR 48424, Nov. 20, 1990]

#### **§ 61.149 Standard for waste disposal for asbestos mills.**

Each owner or operator of any source covered under the provisions of §61.142 shall:

- (a) Deposit all asbestos-containing waste material at a waste disposal site operated in accordance with the provisions of §61.154; and
- (b) Discharge no visible emissions to the outside air from the transfer of control device asbestos waste to the tailings conveyor, or use the methods specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air. Dispose of the asbestos waste from control devices in accordance with §61.150(a) or paragraph (c) of this section; and
- (c) Discharge no visible emissions to the outside air during the collection, processing, packaging, or on-site transporting of any asbestos-containing waste material, or use one of the disposal methods specified in paragraphs (c) (1) or (2) of this section, as follows:

(1) Use a wetting agent as follows:

(i) Adequately mix all asbestos-containing waste material with a wetting agent recommended by the manufacturer of the agent to effectively wet dust and tailings, before depositing the material at a waste disposal site. Use the agent as recommended for the particular dust by the manufacturer of the agent.

(ii) Discharge no visible emissions to the outside air from the wetting operation or use the methods specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air.

(iii) Wetting may be suspended when the ambient temperature at the waste disposal site is less than  $-9.5^{\circ}\text{C}$  ( $15^{\circ}\text{F}$ ), as determined by an appropriate measurement method with an accuracy of  $\pm 1^{\circ}\text{C}$  ( $\pm 2^{\circ}\text{F}$ ). During periods when wetting operations are suspended, the temperature must be recorded at least at hourly intervals, and records must be retained for at least 2 years in a form suitable for inspection.

(2) Use an alternative emission control and waste treatment method that has received prior written approval by the Administrator. To obtain approval for an alternative method, a written application must be submitted to the Administrator demonstrating that the following criteria are met:

(i) The alternative method will control asbestos emissions equivalent to currently required methods.

(ii) The suitability of the alternative method for the intended application.

(iii) The alternative method will not violate other regulations.

(iv) The alternative method will not result in increased water pollution, land pollution, or occupational hazards.

(d) When waste is transported by vehicle to a disposal site:

(1) Mark vehicles used to transport asbestos-containing waste material during the loading and unloading of the waste so that the signs are visible. The markings must:

(i) Be displayed in such a manner and location that a person can easily read the legend.

(ii) Conform to the requirements for 51 cm x 36 cm (20 in x 14 in) upright format signs specified in 29 CFR 1910.145(d)(4) and this paragraph; and

(iii) Display the following legend in the lower panel with letter sizes and styles of a visibility at least equal to those specified in this paragraph.

<b>Legend</b>	<b>Notation</b>
Asbestos Waste Disposal Site	2.5 cm (1 inch) Sans Serif, Gothic or Block.
Do Not Create Dust	1.9 cm (3/4 inch) Sans Serif, Gothic or Block.
Breathing Asbestos is Hazardous to Your Health	14 Point Gothic

Spacing between any two lines must be a least equal to the height of the upper of the two lines.

(2) For off-site disposal, provide a copy of the waste shipment record, described in paragraph (e)(1) of this section, to the disposal site owner or operator at the same time as the asbestos-containing waste material is delivered to the disposal site.

(e) For all asbestos-containing waste material transported off the facility site:

(1) Maintain asbestos waste shipment records, using a form similar to that shown in Figure 4, and include the following information:

(i) The name, address, and telephone number of the waste generator.

(ii) The name and address of the local, State, or EPA Regional agency responsible for administering the asbestos NESHAP program.

(iii) The quantity of the asbestos-containing waste material in cubic meters (cubic yards).

(iv) The name and telephone number of the disposal site operator.

(v) The name and physical site location of the disposal site.

(vi) The date transported.

(vii) The name, address, and telephone number of the transporter(s).

(viii) A certification that the contents of this consignment are fully and accurately described by proper shipping name and are classified, packed, marked, and labeled, and are in all respects in proper condition for transport by highway according to applicable international and government regulations.

(2) For waste shipments where a copy of the waste shipment record, signed by the owner or operator of the designated disposal site, is not received by the waste generator within 35 days of the date the waste was accepted by the initial transporter, contact the transporter and/or the owner or operator of the designated disposal site to determine the status of the waste shipment.

(3) Report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator if a copy of the waste shipment record, signed by the owner or operator of the designated waste disposal site, is not received by the waste generator within 45 days of the date the waste was accepted by the initial transporter. Include in the report the following information:

(i) A copy of the waste shipment record for which a confirmation of delivery was not received, and

(ii) A cover letter signed by the waste generator explaining the efforts taken to locate the asbestos waste shipment and the results of those efforts.

(4) Retain a copy of all waste shipment records, including a copy of the waste shipment record signed by the owner or operator of the designated waste disposal site, for at least 2 years.

(f) Furnish upon request, and make available for inspection by the Administrator, all records required under this section.

Generator	1. Work site name and mailing address		Owner's name	Owner's telephone no.
	2. Operator's name and address			Operator's telephone no.
	3. Waste disposal site (WDS) name, mailing address, and physical site location			WDS phone no.
	4. Name, and address of responsible agency			
	5. Description of materials		6. Containers No. Type	7. Total quantity m <sup>3</sup> (yd <sup>3</sup> )
	8. Special handling instructions and additional information			
	9. OPERATOR'S CERTIFICATION: I hereby declare that the contents of this consignment are fully and accurately described above by proper shipping name and are classified, packed, marked, and labeled, and are in all respects in proper condition for transport by highway according to applicable international and government regulations.			
	Printed/typed name & title		Signature	Month Day Year
	10. Transporter 1 (Acknowledgment of receipt of materials)			
Transporter	Printed/typed name & title		Signature	Month Day Year
	Address and telephone no.			
11. Transporter 2 (Acknowledgment of receipt of materials)				
Printed/typed name & title		Signature	Month Day Year	
Address and telephone no.				
Disposal Site	12. Discrepancy indication space			
	13. Waste disposal site owner or operator: Certification of receipt of asbestos materials covered by this manifest except as noted in item 12.			
	Printed/typed name & title		Signature	Month Day Year

(Continued)

Figure 4. Waste Shipment Record

INSTRUCTIONS

Waste Generator Section (Items 1-9)

1. Enter the name of the facility at which asbestos waste is generated and the address where the facility is located. In the appropriate spaces, also enter the name of the owner of the facility and the owner's phone number.
2. If a demolition or renovation, enter the name and address of the company and authorized agent responsible for performing the asbestos removal. In the appropriate spaces, also enter the phone number of the operator.
3. Enter the name, address, and physical site location of the waste disposal site (WDS) that will be receiving the asbestos materials. In the appropriate spaces, also enter the phone number of the WDS. Enter "on-site" if the waste will be disposed of on the generator's property.
4. Provide the name and address of the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program.
5. Indicate the types of asbestos waste materials generated. If from a demolition or renovation, indicate the amount of asbestos that is
  - Friable asbestos material
  - Nonfriable asbestos material
6. Enter the number of containers used to transport the asbestos materials listed in item 5. Also enter one of the following container codes used in transporting each type of asbestos material (specify any other type of container used if not listed below):
  - DM - Metal drums, barrels
  - DP - Plastic drums, barrels
  - BA - 6 mil plastic bags or wrapping
7. Enter the quantities of each type of asbestos material removed in units of cubic meters (cubic yards).
8. Use this space to indicate special transportation, treatment, storage or disposal or Bill of Lading information. If an alternate waste disposal site is designated, note it here. Emergency response telephone numbers or similar information may be included here.
9. The authorized agent of the waste generator must read and then sign and date this certification. The date is the date of receipt by transporter.

NOTE: The waste generator must retain a copy of this form.

(continued)

Figure 4. Waste Shipment Record

Transporter Section (Items 10 & 11)

10. & 11. Enter name, address, and telephone number of each transporter used, if applicable. Print or type the full name and title of person accepting responsibility and acknowledging receipt of materials as listed on this waste shipment record for transport. Enter date of receipt and signature.

NOTE: The transporter must retain a copy of this form.

Disposal Site Section (Items 12 & 13)

12. The authorized representative of the WDS must note in this space any discrepancy between waste described on this manifest and waste actually received as well as any improperly enclosed or contained waste. Any rejected materials should be listed and destination of those materials provided. A site that converts asbestos-containing waste material to nonasbestos material is considered a WDS.

13. The signature (by hand) of the authorized WDS agent indicates acceptance and agreement with statements on this manifest except as noted in item 12. The date is the date of signature and receipt of shipment.

NOTE: The WDS must retain a completed copy of this form. The WDS must also send a completed copy to the operator listed in item 2.

Figure 4. Waste Shipment Record

**§ 61.150 Standard for waste disposal for manufacturing, fabricating, demolition, renovation, and spraying operations.**

Each owner or operator of any source covered under the provisions of §§61.144, 61.145, 61.146, and 61.147 shall comply with the following provisions:

(a) Discharge no visible emissions to the outside air during the collection, processing (including incineration), packaging, or transporting of any asbestos-containing waste material generated by the source, or use one of the emission control and waste treatment methods specified in paragraphs (a) (1) through (4) of this section.

(1) Adequately wet asbestos-containing waste material as follows:

(i) Mix control device asbestos waste to form a slurry; adequately wet other asbestos-containing waste material; and

(ii) Discharge no visible emissions to the outside air from collection, mixing, wetting, and handling operations, or use the methods specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air; and

(iii) After wetting, seal all asbestos-containing waste material in leak-tight containers while wet; or, for materials that will not fit into containers without additional breaking, put materials into leak-tight wrapping; and

(iv) Label the containers or wrapped materials specified in paragraph (a)(1)(iii) of this section using warning labels specified by Occupational Safety and Health Standards of the Department of Labor, Occupational Safety and Health Administration (OSHA) under 29 CFR 1910.1001(j)(4) or 1926.1101(k)(8). The labels shall be printed in letters of sufficient size and contrast so as to be readily visible and legible.

(v) For asbestos-containing waste material to be transported off the facility site, label containers or wrapped materials with the name of the waste generator and the location at which the waste was generated.

(2) Process asbestos-containing waste material into nonfriable forms as follows:

(i) Form all asbestos-containing waste material into nonfriable pellets or other shapes;

(ii) Discharge no visible emissions to the outside air from collection and processing operations, including incineration, or use the method specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air.

(3) For facilities demolished where the RACM is not removed prior to demolition according to §§61.145(c)(1) (i), (ii), (iii), and (iv) or for facilities demolished according to §61.145(c)(9), adequately wet asbestos-containing waste material at all times after demolition and keep wet during handling and loading for transport to a disposal site. Asbestos-containing waste materials covered by this paragraph do not have to be sealed in leak-tight containers or wrapping but may be transported and disposed of in bulk.

(4) Use an alternative emission control and waste treatment method that has received prior approval by the Administrator according to the procedure described in §61.149(c)(2).

(5) As applied to demolition and renovation, the requirements of paragraph (a) of this section do not apply to Category I nonfriable ACM waste and Category II nonfriable ACM waste that did not become crumbled, pulverized, or reduced to powder.

(b) All asbestos-containing waste material shall be deposited as soon as is practical by the waste generator at:

(1) A waste disposal site operated in accordance with the provisions of §61.154, or

(2) An EPA-approved site that converts RACM and asbestos-containing waste material into nonasbestos (asbestos-free) material according to the provisions of §61.155.

(3) The requirements of paragraph (b) of this section do not apply to Category I nonfriable ACM that is not RACM.

(c) Mark vehicles used to transport asbestos-containing waste material during the loading and unloading of waste so that the signs are visible. The markings must conform to the requirements of §§61.149(d)(1) (i), (ii), and (iii).

(d) For all asbestos-containing waste material transported off the facility site:

(1) Maintain waste shipment records, using a form similar to that shown in Figure 4, and include the following information:

(i) The name, address, and telephone number of the waste generator.

(ii) The name and address of the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program.

(iii) The approximate quantity in cubic meters (cubic yards).

(iv) The name and telephone number of the disposal site operator.

(v) The name and physical site location of the disposal site.

(vi) The date transported.

(vii) The name, address, and telephone number of the transporter(s).

(viii) A certification that the contents of this consignment are fully and accurately described by proper shipping name and are classified, packed, marked, and labeled, and are in all respects in proper condition for transport by highway according to applicable international and government regulations.

(2) Provide a copy of the waste shipment record, described in paragraph (d)(1) of this section, to the disposal site owners or operators at the same time as the asbestos-containing waste material is delivered to the disposal site.

(3) For waste shipments where a copy of the waste shipment record, signed by the owner or operator of the designated disposal site, is not received by the waste generator within 35 days of the date the waste was accepted by the initial transporter, contact the transporter and/or the owner or operator of the designated disposal site to determine the status of the waste shipment.

(4) Report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator if a copy of the waste shipment record, signed by the owner or operator of the designated waste disposal site, is not received by the waste generator within 45 days of the date the waste was accepted by the initial transporter. Include in the report the following information:

- (i) A copy of the waste shipment record for which a confirmation of delivery was not received, and
  - (ii) A cover letter signed by the waste generator explaining the efforts taken to locate the asbestos waste shipment and the results of those efforts.
- (5) Retain a copy of all waste shipment records, including a copy of the waste shipment record signed by the owner or operator of the designated waste disposal site, for at least 2 years.
- (e) Furnish upon request, and make available for inspection by the Administrator, all records required under this section.

[55 FR 48429, Nov. 20, 1990; 56 FR 1669, Jan. 16, 1991, as amended at 68 FR 54793, Sept. 18, 2003]

**§ 61.151 Standard for inactive waste disposal sites for asbestos mills and manufacturing and fabricating operations.**

Each owner or operator of any inactive waste disposal site that was operated by sources covered under §61.142, 61.144, or 61.147 and received deposits of asbestos-containing waste material generated by the sources, shall:

(a) Comply with one of the following:

(1) Either discharge no visible emissions to the outside air from an inactive waste disposal site subject to this paragraph; or

(2) Cover the asbestos-containing waste material with at least 15 centimeters (6 inches) of compacted nonasbestos-containing material, and grow and maintain a cover of vegetation on the area adequate to prevent exposure of the asbestos-containing waste material. In desert areas where vegetation would be difficult to maintain, at least 8 additional centimeters (3 inches) of well-graded, nonasbestos crushed rock may be placed on top of the final cover instead of vegetation and maintained to prevent emissions; or

(3) Cover the asbestos-containing waste material with at least 60 centimeters (2 feet) of compacted nonasbestos-containing material, and maintain it to prevent exposure of the asbestos-containing waste; or

(4) For inactive waste disposal sites for asbestos tailings, a resinous or petroleum-based dust suppression agent that effectively binds dust to control surface air emissions may be used instead of the methods in paragraphs (a) (1), (2), and (3) of this section. Use the agent in the manner and frequency recommended for the particular asbestos tailings by the manufacturer of the dust suppression agent to achieve and maintain dust control. Obtain prior written approval of the Administrator to use other equally effective dust suppression agents. For purposes of this paragraph, any used, spent, or other waste oil is not considered a dust suppression agent.

(b) Unless a natural barrier adequately deters access by the general public, install and maintain warning signs and fencing as follows, or comply with paragraph (a)(2) or (a)(3) of this section.

(1) Display warning signs at all entrances and at intervals of 100 m (328 ft) or less along the property line of the site or along the perimeter of the sections of the site where asbestos-containing waste material was deposited. The warning signs must:

(i) Be posted in such a manner and location that a person can easily read the legend; and

(ii) Conform to the requirements for 51 cm×36 cm (20-inch×14-inch) upright format signs specified in 29 CFR 1910.145(d)(4) and this paragraph; and

(iii) Display the following legend in the lower panel with letter sizes and styles of a visibility at least equal to those specified in this paragraph.

<b>Legend</b>	<b>Notation</b>
Asbestos Waste Disposal Site	2.5 cm (1 inch) Sans Serif, Gothic or Block
Do Not Create Dust	1.9 cm ( 3/4 inch) Sans Serif, Gothic or Block
Breathing Asbestos is Hazardous to Your Health	14 Point Gothic.

Spacing between any two lines must be at least equal to the height of the upper of the two lines.

(2) Fence the perimeter of the site in a manner adequate to deter access by the general public.

(3) When requesting a determination on whether a natural barrier adequately deters public access, supply information enabling the Administrator to determine whether a fence or a natural barrier adequately deters access by the general public.

(c) The owner or operator may use an alternative control method that has received prior approval of the Administrator rather than comply with the requirements of paragraph (a) or (b) of this section.

(d) Notify the Administrator in writing at least 45 days prior to excavating or otherwise disturbing any asbestos-containing waste material that has been deposited at a waste disposal site under this section, and follow the procedures specified in the notification. If the excavation will begin on a date other than the one contained in the original notice, notice of the new start date must be provided to the Administrator at least 10 working days before excavation begins and in no event shall excavation begin earlier than the date specified in the original notification. Include the following information in the notice:

(1) Scheduled starting and completion dates.

(2) Reason for disturbing the waste.

(3) Procedures to be used to control emissions during the excavation, storage, transport, and ultimate disposal of the excavated asbestos-containing waste material. If deemed necessary, the Administrator may require changes in the emission control procedures to be used.

(4) Location of any temporary storage site and the final disposal site.

(e) Within 60 days of a site becoming inactive and after the effective date of this subpart, record, in accordance with State law, a notation on the deed to the facility property and on any other instrument that would normally be examined during a title search; this notation will in perpetuity notify any potential purchaser of the property that:

(1) The land has been used for the disposal of asbestos-containing waste material;

(2) The survey plot and record of the location and quantity of asbestos-containing waste disposed of within the disposal site required in §61.154(f) have been filed with the Administrator; and

(3) The site is subject to 40 CFR part 61, subpart M.

### § 61.152 Air-cleaning.

(a) The owner or operator who uses air cleaning, as specified in §§61.142(a), 61.144(b)(2), 61.145(c)(3)(i)(B)( 1), 61.145(c)(4)(ii), 61.145(c)(11)(i), 61.146(b)(2), 61.147(b)(2), 61.149(b), 61.149(c)(1)(ii), 61.150(a)(1)(ii), 61.150(a)(2)(ii), and 61.155(e) shall:

(1) Use fabric filter collection devices, except as noted in paragraph (b) of this section, doing all of the following:

(i) Ensuring that the airflow permeability, as determined by ASTM Method D737–75, does not exceed  $9 \text{ m}^3/\text{min}/\text{m}^2$  ( $30 \text{ ft}^3/\text{min}/\text{ft}^2$ ) for woven fabrics or  $11 \text{ m}^3/\text{min}/\text{m}^2$  ( $35 \text{ ft}^3/\text{min}/\text{ft}^2$ ) for felted fabrics, except that  $12 \text{ m}^3/\text{min}/\text{m}^2$  ( $40 \text{ ft}^3/\text{min}/\text{ft}^2$ ) for woven and  $14 \text{ m}^3/\text{min}/\text{m}^2$  ( $45 \text{ ft}^3/\text{min}/\text{ft}^2$ ) for felted fabrics is allowed for filtering air from asbestos ore dryers; and

(ii) Ensuring that felted fabric weighs at least 475 grams per square meter (14 ounces per square yard) and is at least 1.6 millimeters (one-sixteenth inch) thick throughout; and

(iii) Avoiding the use of synthetic fabrics that contain fill yarn other than that which is spun.

(2) Properly install, use, operate, and maintain all air-cleaning equipment authorized by this section. Bypass devices may be used only during upset or emergency conditions and then only for so long as it takes to shut down the operation generating the particulate asbestos material.

(3) For fabric filter collection devices installed after January 10, 1989, provide for easy inspection for faulty bags.

(b) There are the following exceptions to paragraph (a)(1):

(1) After January 10, 1989, if the use of fabric creates a fire or explosion hazard, or the Administrator determines that a fabric filter is not feasible, the Administrator may authorize as a substitute the use of wet collectors designed to operate with a unit contacting energy of at least 9.95 kilopascals (40 inches water gage pressure).

(2) Use a HEPA filter that is certified to be at least 99.97 percent efficient for 0.3 micron particles.

(3) The Administrator may authorize the use of filtering equipment other than described in paragraphs (a)(1) and (b)(1) and (2) of this section if the owner or operator demonstrates to the Administrator's satisfaction that it is equivalent to the described equipment in filtering particulate asbestos material.

[49 FR 13661, Apr. 5, 1984; 49 FR 25453, June 21, 1984, as amended at 51 FR 8199, Mar. 10, 1986. Redesignated and amended at 55 FR 48430, Nov. 20, 1990]

### § 61.153 Reporting.

(a) Any new source to which this subpart applies (with the exception of sources subject to §§61.143, 61.145, 61.146, and 61.148), which has an initial startup date preceding the effective date of this revision, shall provide the following information to the Administrator postmarked or delivered within 90 days of the effective date. In the case of a new source that does not have an initial startup date preceding the effective date, the information shall be provided, postmarked or delivered, within 90 days of the initial startup date. Any owner or operator of an existing source shall provide the following information to the Administrator within 90 days of the effective date of this subpart unless the owner or operator of the existing source has previously provided this information to the Administrator. Any changes in the information provided by any existing source shall be provided to the Administrator, postmarked or delivered, within 30 days after the change.

(1) A description of the emission control equipment used for each process; and

(i) If the fabric device uses a woven fabric, the airflow permeability in  $\text{m}^3/\text{min}/\text{m}^2$  and; if the fabric is synthetic, whether the fill yarn is spun or not spun; and

(ii) If the fabric filter device uses a felted fabric, the density in  $\text{g}/\text{m}^2$ , the minimum thickness in inches, and the airflow permeability in  $\text{m}^3/\text{min}/\text{m}^2$ .

(2) If a fabric filter device is used to control emissions,

(i) The airflow permeability in  $\text{m}^3/\text{min}/\text{m}^2$  ( $\text{ft}^3/\text{min}/\text{ft}^2$ ) if the fabric filter device uses a woven fabric, and, if the fabric is synthetic, whether the fill yarn is spun or not spun; and

(ii) If the fabric filter device uses a felted fabric, the density in  $\text{g}/\text{m}^2$  ( $\text{oz}/\text{yd}^2$ ), the minimum thickness in millimeters (inches), and the airflow permeability in  $\text{m}^3/\text{min}/\text{m}^2$  ( $\text{ft}^3/\text{min}/\text{ft}^2$ ).

(3) If a HEPA filter is used to control emissions, the certified efficiency.

(4) For sources subject to §§61.149 and 61.150:

(i) A brief description of each process that generates asbestos-containing waste material; and

(ii) The average volume of asbestos-containing waste material disposed of, measured in  $\text{m}^3/\text{day}$  ( $\text{yd}^3/\text{day}$ ); and

(iii) The emission control methods used in all stages of waste disposal; and

(iv) The type of disposal site or incineration site used for ultimate disposal, the name of the site operator, and the name and location of the disposal site.

(5) For sources subject to §§61.151 and 61.154:

(i) A brief description of the site; and

(ii) The method or methods used to comply with the standard, or alternative procedures to be used.

(b) The information required by paragraph (a) of this section must accompany the information required by §61.10. Active waste disposal sites subject to §61.154 shall also comply with this provision. Roadways, demolition and renovation, spraying, and insulating materials are exempted from the requirements of §61.10(a). The information described in this section must be reported using the format of appendix A of this part as a guide.

(Sec. 114. Clean Air Act as amended (42 U.S.C. 7414))

[49 FR 13661, Apr. 5, 1984. Redesignated and amended at 55 FR 48430, Nov. 20, 1990; 56 FR 1669, Jan. 16, 1991]

**§ 61.154 Standard for active waste disposal sites.**

Each owner or operator of an active waste disposal site that receives asbestos-containing waste material from a source covered under §61.149, 61.150, or 61.155 shall meet the requirements of this section:

(a) Either there must be no visible emissions to the outside air from any active waste disposal site where asbestos-containing waste material has been deposited, or the requirements of paragraph (c) or (d) of this section must be met.

(b) Unless a natural barrier adequately deters access by the general public, either warning signs and fencing must be installed and maintained as follows, or the requirements of paragraph (c)(1) of this section must be met.

(1) Warning signs must be displayed at all entrances and at intervals of 100 m (330 ft) or less along the property line of the site or along the perimeter of the sections of the site where asbestos-containing waste material is deposited. The warning signs must:

(i) Be posted in such a manner and location that a person can easily read the legend; and

(ii) Conform to the requirements of 51 cm x 36 cm (20-inchx14-inch) upright format signs specified in 29 CFR 1910.145(d)(4) and this paragraph; and

(iii) Display the following legend in the lower panel with letter sizes and styles of a visibility at least equal to those specified in this paragraph.

<b>Legend</b>	<b>Notation</b>
Asbestos Waste Disposal Site	2.5 cm (1 inch) Sans Serif, Gothic or Block.
Do Not Create Dust	1.9 cm ( 3/4 inch) Sans Serif, Gothic or Block.
Breathing Asbestos is Hazardous to Your Health	14 Point Gothic.

Spacing between any two lines must be at least equal to the height of the upper of the two lines.

(2) The perimeter of the disposal site must be fenced in a manner adequate to deter access by the general public.

(3) Upon request and supply of appropriate information, the Administrator will determine whether a fence or a natural barrier adequately deters access by the general public.

(c) Rather than meet the no visible emission requirement of paragraph (a) of this section, at the end of each operating day, or at least once every 24-hour period while the site is in continuous operation, the asbestos-containing waste material that has been deposited at the site during the operating day or previous 24-hour period shall:

(1) Be covered with at least 15 centimeters (6 inches) of compacted nonasbestos-containing material, or

(2) Be covered with a resinous or petroleum-based dust suppression agent that effectively binds dust and controls wind erosion. Such an agent shall be used in the manner and frequency recommended for the particular dust by the dust suppression agent manufacturer to achieve and maintain dust control. Other equally effective dust suppression agents may be used upon prior approval by the Administrator. For purposes of this paragraph, any used, spent, or other waste oil is not considered a dust suppression agent.

(d) Rather than meet the no visible emission requirement of paragraph (a) of this section, use an alternative emissions control method that has received prior written approval by the Administrator according to the procedures described in §61.149(c)(2).

(e) For all asbestos-containing waste material received, the owner or operator of the active waste disposal site shall:

(1) Maintain waste shipment records, using a form similar to that shown in Figure 4, and include the following information:

(i) The name, address, and telephone number of the waste generator.

(ii) The name, address, and telephone number of the transporter(s).

(iii) The quantity of the asbestos-containing waste material in cubic meters (cubic yards).

(iv) The presence of improperly enclosed or uncovered waste, or any asbestos-containing waste material not sealed in leak-tight containers. Report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site, by the following working day, the presence of a significant amount of improperly enclosed or uncovered waste. Submit a copy of the waste shipment record along with the report.

(v) The date of the receipt.

(2) As soon as possible and no longer than 30 days after receipt of the waste, send a copy of the signed waste shipment record to the waste generator.

(3) Upon discovering a discrepancy between the quantity of waste designated on the waste shipment records and the quantity actually received, attempt to reconcile the discrepancy with the waste generator. If the discrepancy is not resolved within 15 days after receiving the waste, immediately report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site. Describe the discrepancy and attempts to reconcile it, and submit a copy of the waste shipment record along with the report.

(4) Retain a copy of all records and reports required by this paragraph for at least 2 years.

(f) Maintain, until closure, records of the location, depth and area, and quantity in cubic meters (cubic yards) of asbestos-containing waste material within the disposal site on a map or diagram of the disposal area.

(g) Upon closure, comply with all the provisions of §61.151.

(h) Submit to the Administrator, upon closure of the facility, a copy of records of asbestos waste disposal locations and quantities.

(i) Furnish upon request, and make available during normal business hours for inspection by the Administrator, all records required under this section.

(j) Notify the Administrator in writing at least 45 days prior to excavating or otherwise disturbing any asbestos-containing waste material that has been deposited at a waste disposal site and is covered. If the excavation will begin on a date other than the one contained in the original notice, notice of the new start

date must be provided to the Administrator at least 10 working days before excavation begins and in no event shall excavation begin earlier than the date specified in the original notification. Include the following information in the notice:

- (1) Scheduled starting and completion dates.
- (2) Reason for disturbing the waste.
- (3) Procedures to be used to control emissions during the excavation, storage, transport, and ultimate disposal of the excavated asbestos-containing waste material. If deemed necessary, the Administrator may require changes in the emission control procedures to be used.
- (4) Location of any temporary storage site and the final disposal site.

(Secs. 112 and 301(a) of the Clean Air Act as amended (42 U.S.C. 7412, 7601(a))

[49 FR 13661, Apr. 5, 1990. Redesignated and amended at 55 FR 48431, Nov. 20, 1990; 56 FR 1669, Jan. 16, 1991]

**§ 61.155 Standard for operations that convert asbestos-containing waste material into nonasbestos (asbestos-free) material.**

Each owner or operator of an operation that converts RACM and asbestos-containing waste material into nonasbestos (asbestos-free) material shall:

(a) Obtain the prior written approval of the Administrator to construct the facility. To obtain approval, the owner or operator shall provide the Administrator with the following information:

- (1) Application to construct pursuant to §61.07.
  - (2) In addition to the information requirements of §61.07(b)(3), a
    - (i) Description of waste feed handling and temporary storage.
    - (ii) Description of process operating conditions.
    - (iii) Description of the handling and temporary storage of the end product.
    - (iv) Description of the protocol to be followed when analyzing output materials by transmission electron microscopy.
  - (3) Performance test protocol, including provisions for obtaining information required under paragraph (b) of this section.
  - (4) The Administrator may require that a demonstration of the process be performed prior to approval of the application to construct.
- (b) Conduct a start-up performance test. Test results shall include:

- (1) A detailed description of the types and quantities of nonasbestos material, RACM, and asbestos-containing waste material processed, e.g., asbestos cement products, friable asbestos insulation, plaster,

wood, plastic, wire, etc. Test feed is to include the full range of materials that will be encountered in actual operation of the process.

(2) Results of analyses, using polarized light microscopy, that document the asbestos content of the wastes processed.

(3) Results of analyses, using transmission electron microscopy, that document that the output materials are free of asbestos. Samples for analysis are to be collected as 8-hour composite samples (one 200-gram (7-ounce) sample per hour), beginning with the initial introduction of RACM or asbestos-containing waste material and continuing until the end of the performance test.

(4) A description of operating parameters, such as temperature and residence time, defining the full range over which the process is expected to operate to produce nonasbestos (asbestos-free) materials. Specify the limits for each operating parameter within which the process will produce nonasbestos (asbestos-free) materials.

(5) The length of the test.

(c) During the initial 90 days of operation,

(1) Continuously monitor and log the operating parameters identified during start-up performance tests that are intended to ensure the production of nonasbestos (asbestos-free) output material.

(2) Monitor input materials to ensure that they are consistent with the test feed materials described during start-up performance tests in paragraph (b)(1) of this section.

(3) Collect and analyze samples, taken as 10-day composite samples (one 200-gram (7-ounce) sample collected every 8 hours of operation) of all output material for the presence of asbestos. Composite samples may be for fewer than 10 days. Transmission electron microscopy (TEM) shall be used to analyze the output material for the presence of asbestos. During the initial 90-day period, all output materials must be stored on-site until analysis shows the material to be asbestos-free or disposed of as asbestos-containing waste material according to §61.150.

(d) After the initial 90 days of operation,

(1) Continuously monitor and record the operating parameters identified during start-up performance testing and any subsequent performance testing. Any output produced during a period of deviation from the range of operating conditions established to ensure the production of nonasbestos (asbestos-free) output materials shall be:

(i) Disposed of as asbestos-containing waste material according to §61.150, or

(ii) Recycled as waste feed during process operation within the established range of operating conditions, or

(iii) Stored temporarily on-site in a leak-tight container until analyzed for asbestos content. Any product material that is not asbestos-free shall be either disposed of as asbestos-containing waste material or recycled as waste feed to the process.

(2) Collect and analyze monthly composite samples (one 200-gram (7-ounce) sample collected every 8 hours of operation) of the output material. Transmission electron microscopy shall be used to analyze the output material for the presence of asbestos.

(e) Discharge no visible emissions to the outside air from any part of the operation, or use the methods specified by §61.152 to clean emissions containing particulate asbestos material before they escape to, or are vented to, the outside air.

(f) Maintain records on-site and include the following information:

(1) Results of start-up performance testing and all subsequent performance testing, including operating parameters, feed characteristic, and analyses of output materials.

(2) Results of the composite analyses required during the initial 90 days of operation under §61.155(c).

(3) Results of the monthly composite analyses required under §61.155(d).

(4) Results of continuous monitoring and logs of process operating parameters required under §61.155 (c) and (d).

(5) The information on waste shipments received as required in §61.154(e).

(6) For output materials where no analyses were performed to determine the presence of asbestos, record the name and location of the purchaser or disposal site to which the output materials were sold or deposited, and the date of sale or disposal.

(7) Retain records required by paragraph (f) of this section for at least 2 years.

(g) Submit the following reports to the Administrator:

(1) A report for each analysis of product composite samples performed during the initial 90 days of operation.

(2) A quarterly report, including the following information concerning activities during each consecutive 3-month period:

(i) Results of analyses of monthly product composite samples.

(ii) A description of any deviation from the operating parameters established during performance testing, the duration of the deviation, and steps taken to correct the deviation.

(iii) Disposition of any product produced during a period of deviation, including whether it was recycled, disposed of as asbestos-containing waste material, or stored temporarily on-site until analyzed for asbestos content.

(iv) The information on waste disposal activities as required in §61.154(f).

(h) Nonasbestos (asbestos-free) output material is not subject to any of the provisions of this subpart. Output materials in which asbestos is detected, or output materials produced when the operating parameters deviated from those established during the start-up performance testing, unless shown by TEM analysis to be asbestos-free, shall be considered to be asbestos-containing waste and shall be handled and disposed of according to §§61.150 and 61.154 or reprocessed while all of the established operating parameters are being met.

**§ 61.156 Cross-reference to other asbestos regulations.**

In addition to this subpart, the regulations referenced in Table 1 also apply to asbestos and may be applicable to those sources specified in §§61.142 through 61.151, 61.154, and 61.155 of this subpart. These cross-references are presented for the reader's information and to promote compliance with the cited regulations.

**Table 1-Cross-Reference to Other Asbestos Regulations**

<b>Agency</b>	<b>CFR citation</b>	<b>Comment</b>
EPA	40 CFR part 763, subpart E	Requires schools to inspect for asbestos and implement response actions and submit asbestos management plans to States. Specifies use of accredited inspectors, air sampling methods, and waste disposal procedures.
	40 CFR part 427	Effluent standards for asbestos manufacturing source categories.
	40 CFR part 763, subpart G	Protects public employees performing asbestos abatement work in States not covered by OSHA asbestos standard.
OSHA	29 CFR 1910.1001	Worker protection measures-engineering controls, worker training, labeling, respiratory protection, bagging of waste, permissible exposure level.
	29 CFR 1926.1101	Worker protection measures for all construction work involving asbestos, including demolition and renovation-work practices, worker training, bagging of waste, permissible exposure level.
MSHA	30 CFR part 56, subpart D	Specifies exposure limits, engineering controls, and respiratory protection measures for workers in surface mines.
	30 CFR part 57, subpart D	Specifies exposure limits, engineering controls, and respiratory protection measures for workers in underground mines.
DOT	49 CFR parts 171 and 172	Regulates the transportation of asbestos-containing waste material. Requires waste containment and shipping papers.

[55 FR 48432, Nov. 20, 1990, as amended at 60 FR 31920, June 19, 1995; 68 FR 54793, Sept. 18, 2003; 69 FR 43324, July 20, 2004]

**§ 61.157 Delegation of authority.**

(a) In delegating implementation and enforcement authority to a State under section 112(d) of the Act, the authorities contained in paragraph (b) of this section shall be retained by the Administrator and not transferred to a State.

(b) Authorities that will not be delegated to States:

(1) Section 61.149(c)(2)

(2) Section 61.150(a)(4)

(3) Section 61.151(c)

(4) Section 61.152(b)(3)

(5) Section 61.154(d)

(6) Section 61.155(a).

[55 FR 48433, Nov. 20, 1990]

## **Appendix A to Subpart M of Part 61- Interpretive Rule Governing Roof Removal Operations**

### *I. Applicability of the Asbestos NESHAP*

1.1. Asbestos-containing material (ACM) is material containing more than one percent asbestos as determined using the methods specified in appendix E, subpart E, 40 CFR part 763, section 1, Polarized Light Microscopy. The NESHAP classifies ACM as either -friable- or -nonfriable-. Friable ACM is ACM that, when dry, can be crumbled, pulverized or reduced to powder by hand pressure. Nonfriable ACM is ACM that, when dry, cannot be crumbled, pulverized or reduced to powder by hand pressure.

1.2. Nonfriable ACM is further classified as either Category I ACM or Category II ACM. Category I ACM and Category II ACM are distinguished from each other by their potential to release fibers when damaged. Category I ACM includes asbestos-containing gaskets, packings, resilient floor coverings, resilient floor covering mastic, and asphalt roofing products containing more than one percent asbestos. Asphalt roofing products which may contain asbestos include built-up roofing; asphalt-containing single ply membrane systems; asphalt shingles; asphalt-containing underlayment felts; asphalt-containing roof coatings and mastics; and asphalt-containing base flashings. ACM roofing products that use other bituminous or resinous binders (such as coal tars or pitches) are also considered to be Category I ACM. Category II ACM includes all other nonfriable ACM, for example, asbestos-cement (A/C) shingles, A/C tiles, and transite boards or panels containing more than one percent asbestos. Generally speaking, Category II ACM is more likely to become friable when damaged than is Category I ACM. The applicability of the NESHAP to Category I and II ACM depends on: (1) the condition of the material at the time of demolition or renovation, (2) the nature of the operation to which the material will be subjected, (3) the amount of ACM involved.

1.3. Asbestos-containing material regulated under the NESHAP is referred to as "regulated asbestos-containing material" (RACM). RACM is defined in §61.141 of the NESHAP and includes: (1) friable asbestos-containing material; (2) Category I nonfriable ACM that has become friable; (3) Category I nonfriable ACM that has been or will be sanded, ground, cut, or abraded; or (4) Category II nonfriable ACM that has already been or is likely to become crumbled, pulverized, or reduced to powder. If the coverage threshold for RACM is met or exceeded in a renovation or demolition operation, then all friable ACM in the operation, and in certain situations, nonfriable ACM in the operation, are subject to the NESHAP.

### **A. Threshold Amounts of Asbestos-Containing Roofing Material**

1.A.1. The NESHAP does not cover roofing projects on single family homes or on residential buildings containing four or fewer dwelling units. 40 CFR 61.141. For other roofing renovation projects, if the total asbestos-containing roof area undergoing renovation is less than 160 ft<sup>2</sup>, the NESHAP does not apply, regardless of the removal method to be used, the type of material (Category I or II), or its condition (friable versus nonfriable). 40 CFR 61.145(a)(4). However, EPA would recommend the use of methods that damage asbestos-containing roofing material as little as possible. EPA has determined that where a rotating blade (RB) roof cutter or equipment that similarly damages the roofing material is used to remove Category I nonfriable asbestos-containing roofing material, the removal of 5580 ft<sup>2</sup> of that material will create 160 ft<sup>2</sup> of RACM. For the purposes of this interpretive rule, "RB roof cutter" means an engine-powered roof cutting machine with one or more rotating cutting blades the edges of which are blunt. (Equipment with blades having sharp or tapered edges, and/or which does not use a rotating blade, is used for "slicing" rather than "cutting" the roofing material; such equipment is not included in the term "RB roof cutter".) Therefore, it is EPA's interpretation that when an RB roof cutter or equipment that similarly damages the roofing material is used to remove Category I nonfriable asbestos-containing roofing material, any project that is 5580 ft<sup>2</sup> or

greater is subject to the NESHAP; conversely, it is EPA's interpretation that when an RB roof cutter or equipment that similarly damages the roofing material is used to remove Category I nonfriable asbestos-containing roofing material in a roof removal project that is less than 5580 ft<sup>2</sup>, the project is not subject to the NESHAP, except that notification is always required for demolitions. EPA further construes the NESHAP to mean that if slicing or other methods that do not sand, grind, cut or abrade will be used on Category I nonfriable ACM, the NESHAP does not apply, regardless of the area of roof to be removed.

1.A.2. For asbestos cement (A/C) shingles (or other Category II roofing material), if the area of the roofing material to be removed is at least 160 ft<sup>2</sup> and the removal methods will crumble, pulverize, reduce to powder, or contaminate with RACM (from other ACM that has been crumbled, pulverized or reduced to powder) 160 ft<sup>2</sup> or more of such roofing material, the removal is subject to the NESHAP. Conversely, if the area of the A/C shingles (or other Category II roofing materials) to be removed is less than 160 ft<sup>2</sup>, the removal is not subject to the NESHAP regardless of the removal method used, except that notification is always required for demolitions. 40 CFR 61.145(a). However, EPA would recommend the use of methods that damage asbestos-containing roofing material as little as possible. If A/C shingles (or other Category II roofing materials) are removed without 160 ft<sup>2</sup> or more of such roofing material being crumbled, pulverized, reduced to powder, or contaminated with RACM (from other ACM that has been crumbled, pulverized or reduced to powder), the operation is not subject to the NESHAP, even where the total area of the roofing material to be removed exceeds 160 ft<sup>2</sup>; provided, however, that if the renovation includes other operations involving RACM, the roof removal operation is covered if the total area of RACM from all renovation activities exceeds 160 ft<sup>2</sup>. See the definition of regulated asbestos-containing material (RACM), 40 CFR 61.141.

1.A.3. Only roofing material that meets the definition of ACM can qualify as RACM subject to the NESHAP. Therefore, to determine if a removal operation that meets or exceeds the coverage threshold is subject to the NESHAP, any suspect roofing material ( *i.e.* roofing material that may be ACM) should be tested for asbestos. If any such roofing material contains more than one percent asbestos and if the removal operation is covered by the NESHAP, then EPA must be notified and the work practices in §61.145(c) must be followed. In EPA's view, if a removal operation involves at least the threshold level of suspect material, a roofing contractor may choose not to test for asbestos if the contractor follows the notification and work practice requirements of the NESHAP.

## B. A/C Shingle Removal (Category II ACM Removal)

1.B.1. A/C shingles, which are Category II nonfriable ACM, become regulated ACM if the material has a high probability of becoming or has become crumbled, pulverized or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations. 40 CFR 61.141. However, merely breaking an A/C shingle (or any other category II ACM) that is not friable may not necessarily cause the material to become RACM. A/C shingles are typically nailed to buildings on which they are attached. EPA believes that the extent of breakage that will normally result from carefully removing A/C shingles and lowering the shingles to the ground will not result in crumbling, pulverizing or reducing the shingles to powder. Conversely, the extent of breakage that will normally occur if the A/C shingles are dropped from a building or scraped off of a building with heavy machinery would cause the shingles to become RACM. EPA therefore construes the NESHAP to mean that the removal of A/C shingles that are not friable, using methods that do not crumble, pulverize, or reduce the A/C shingles to powder (such as pry bars, spud bars and shovels to carefully pry the material), is not subject to the NESHAP provided that the A/C shingles are properly handled during and after removal, as discussed in this paragraph and the asbestos NESHAP. This interpretation also applies to other Category II nonfriable asbestos-containing roofing materials.

## C. Cutting vs. Slicing and Manual Methods for Removal of Category I ACM

1.C.1. Because of damage to the roofing material, and the potential for fiber release, roof removal operations using rotating blade (RB) roof cutters or other equipment that sand, grind, cut or abrade the roof material are subject to the NESHAP. As EPA interprets the NESHAP, the use of certain manual methods (using equipment such as axes, hatchets, or knives, spud bars, pry bars, and shovels, but not saws) or methods that slice, shear, or punch (using equipment such as a power slicer or power plow) does not constitute

“cutting, sanding, grinding or abrading.” This is because these methods do not destroy the structural matrix or integrity of the material such that the material is crumbled, pulverized or reduced to powder. Hence, it is EPA's interpretation that when such methods are used, assuming the roof material is not friable, the removal operation is not subject to the regulation.

1.C.2. Power removers or power tear-off machines are typically used to pry the roofing material up from the deck after the roof membrane has been cut. It is EPA's interpretation that when these machines are used to pry roofing material up, their use is not regulated by the NESHAP.

1.C.3. As noted previously, the NESHAP only applies to the removal of asbestos-containing roofing materials. Thus, the NESHAP does not apply to the use of RB cutters to remove non-asbestos built up roofing (BUR). On roofs containing some asbestos-containing and some non-asbestos-containing materials, coverage under the NESHAP depends on the methods used to remove each type of material in addition to other coverage thresholds specified above. For example, it is not uncommon for existing roofs to be made of non-asbestos BUR and base flashings that do contain asbestos. In that situation, EPA construes the NESHAP to be inapplicable to the removal of the non-asbestos BUR using an RB cutter so long as the RB cutter is not used to cut 5580 ft<sup>2</sup> or more of the asbestos-containing base flashing or other asbestos-containing material into sections. In addition, the use of methods that slice, shear, punch or pry could then be used to remove the asbestos flashings and not trigger coverage under the NESHAP.

## *II. Notification*

2.1. Notification for a demolition is always required under the NESHAP. However, EPA believes that few roof removal jobs constitute “demolitions” as defined in the NESHAP (§61.141). In particular, it is EPA's view that the removal of roofing systems (i.e., the roof membrane, insulation, surfacing, coatings, flashings, mastic, shingles, and felt underlayment), when such removal is not a part of a demolition project, constitutes a “renovation” under the NESHAP. If the operation is a renovation, and Category I roofing material is being removed using either manual methods or slicing, notification is not required by the NESHAP. If Category II material is not friable and will be removed without crumbling, pulverizing, or reducing it to powder, no notification is required. Also, if the renovation involves less than the threshold area for applicability as discussed above, then no notification is required. However, if a roof removal meets the applicability and threshold requirements under the NESHAP, then EPA (or the delegated agency) must be notified in advance of the removal in accordance with the requirements of §61.145(b), as follows:

- Notification must be given in writing at least 10 working days in advance and must include the information in §61.145(b)(4), except for emergency renovations as discussed below.
- The notice must be updated as necessary, including, for example, when the amount of asbestos-containing roofing material reported changes by 20 percent or more.
- EPA must be notified if the start date of the roof removal changes. If the start date of a roof removal project is changed to an earlier date, EPA must be provided with a written notice of the new start date at least 10 working days in advance. If the start date changes to a later date, EPA must be notified by telephone as soon as possible before the original start date and a written notice must be sent as soon as possible.
- For emergency renovations (as defined in §61.141), where work must begin immediately to avoid safety or public health hazards, equipment damage, or unreasonable financial burden, the notification must be postmarked or delivered to EPA as soon as possible, but no later than the following work day.

## *III. Emission Control Practices*

### *A. Requirements To Adequately Wet and Discharge No Visible Emission*

3.A.1. The principal controls contained in the NESHAP for removal operations include requirements that the affected material be adequately wetted, and that asbestos waste be handled, collected, and disposed of properly. The requirements for disposal of waste materials are discussed separately in section IV below. The emission control requirements discussed in this section III apply only to roof removal operations that are covered by the NESHAP as set forth in Section I above.

3.A.2. For any operation subject to the NESHAP, the regulation (§§61.145(c)(2)(i), (3), (6)(i)) requires that RACM be adequately wet (as defined in §61.141) during the operation that damages or disturbs the asbestos material until collected for disposal.

3.A.3. When using an RB roof cutter (or any other method that sands, grinds, cuts or abrades the roofing material) to remove Category I asbestos-containing roofing material, the emission control requirements of §61.145(c) apply as discussed in Section I above. EPA will consider a roof removal project to be in compliance with the “adequately wet” and “discharge no visible emission” requirements of the NESHAP if the RB roof cutter is equipped and operated with the following: (1) a blade guard that completely encloses the blade and extends down close to the roof surface; and (2) a device for spraying a fine mist of water inside the blade guard, and which device is in operation during the cutting of the roof.

## B. Exemptions From Wetting Requirements

3.B.1. The NESHAP provides that, in certain instances, wetting may not be required during the cutting of Category I asbestos roofing material with an RB roof cutter. If EPA determines in accordance with §61.145(c)(3)(i), that wetting will unavoidably damage the building, equipment inside the building, or will present a safety hazard while stripping the ACM from a facility component that remains in place, the roof removal operation will be exempted from the requirement to wet during cutting. EPA must have sufficient written information on which to base such a decision. Before proceeding with a dry removal, the contractor must have received EPA's written approval. Such exemptions will be made on a case-by-case basis.

3.B.2. It is EPA's view that, in most instances, exemptions from the wetting requirements are not necessary. Where EPA grants an exemption from wetting because of the potential for damage to the building, damage to equipment within the building or a safety hazard, the NESHAP specifies alternative control methods (§61.145(c)(3)(i)(B)). Alternative control methods include (a) the use of local exhaust ventilation systems that capture the dust, and do not produce visible emissions, or (b) methods that are designed and operated in accordance with the requirements of §61.152, or (c) other methods that have received the written approval of EPA. EPA will consider an alternative emission control method in compliance with the NESHAP if the method has received written approval from EPA and the method is being implemented consistent with the approved procedures (§61.145(c)(3)(ii) or §61.152(b)(3)).

3.B.3. An exemption from wetting is also allowed when the air or roof surface temperature at the point of wetting is below freezing, as specified in §61.145(c)(7). If freezing temperatures are indicated as the reason for not wetting, records must be kept of the temperature at the beginning, middle and end of the day on which wetting is not performed and the records of temperature must be retained for at least 2 years. 42 CFR §61.145(c)(7)(iii). It is EPA's interpretation that in such cases, no written application to, or written approval by the Administrator is needed for using emission control methods listed in §61.145(c)(3)(i)(B), or alternative emission control methods that have been previously approved by the Administrator. However, such written application or approval is required for alternative emission control methods that have not been previously approved. Any dust and debris collected from cutting must still be kept wet and placed in containers. All of the other requirements for notification and waste disposal would continue to apply as described elsewhere in this notice and the Asbestos NESHAP.

### C. Waste Collection and Handling

3.C.1. It is EPA's interpretation that waste resulting from slicing and other methods that do not cut, grind, sand or abrade Category I nonfriable asbestos-containing roofing material is not subject to the NESHAP and can be disposed of as nonasbestos waste. EPA further construes the NESHAP to provide that if Category II roofing material (such as A/C shingles) is removed and disposed of without crumbling, pulverizing, or reducing it to powder, the waste from the removal is not subject to the NESHAP waste disposal requirements. EPA also interprets the NESHAP to be inapplicable to waste resulting from roof removal operations that do not meet or exceed the coverage thresholds described in section I above. Of course, other State, local, or Federal regulations may apply.

3.C.2. It is EPA's interpretation that when an RB roof cutter, or other method that similarly damages the roofing material, is used to cut Category I asbestos containing roofing material, the damaged material from the cut (the sawdust or debris) is considered asbestos containing waste subject to §61.150 of the NESHAP, provided the coverage thresholds discussed above in section 1 are met or exceeded. This sawdust or debris must be disposed of at a disposal site operated in accordance with the NESHAP. It is also EPA's interpretation of the NESHAP that if the remainder of the roof is free of the sawdust and debris generated by the cutting, or if such sawdust or debris is collected as discussed below in paragraphs 3.C.3, 3.C.4, 3.C.5 and 3.C.6, the remainder of the roof can be disposed of as nonasbestos waste because it is considered to be Category I nonfriable material (as long as the remainder of the roof is in fact nonasbestos material or if it is Category I asbestos material and the removal methods do not further sand, grind, cut or abrade the roof material). EPA further believes that if the roof is not cleaned of such sawdust or debris, *i.e.*, it is contaminated, then it must be treated as asbestos-containing waste material and be handled in accordance with §61.150.

3.C.3. In order to be in compliance with the NESHAP while using an RB roof cutter (or device that similarly damages the roofing material) to cut Category I asbestos containing roofing material, the dust and debris resulting from the cutting of the roof should be collected as soon as possible after the cutting operation, and kept wet until collected and placed in leak-tight containers. EPA believes that where the blade guard completely encloses the blade and extends down close to the roof surface and is equipped with a device for spraying a fine mist of water inside the blade guard, and the spraying device is in operation during the cutting, most of the dust and debris from cutting will be confined along the cut. The most efficient methods to collect the dust and debris from cutting are to immediately collect or vacuum up the damaged material where it lies along the cut using a filtered vacuum cleaner or debris collector that meets the requirements of 40 CFR 61.152 to clean up as much of the debris as possible, or to gently sweep up the bulk of the debris, and then use a filtered vacuum cleaner that meets the requirements of 40 CFR 61.152 to clean up as much of the remainder of the debris as possible. On smooth surfaced roofs (nonaggregate roofs), sweeping up the debris and then wet wiping the surface may be done in place of using a filtered vacuum cleaner. It is EPA's view that if these decontamination procedures are followed, the remaining roofing material does not have to be collected and disposed of as asbestos waste. Additionally, it is EPA's view that where such decontamination procedures are followed, if the remaining portions of the roof are non-asbestos or Category I nonfriable asbestos material, and if the remaining portions are removed using removal methods that slice, shear, punch or pry, as discussed in section 1.C above, then the remaining portions do not have to be collected and disposed of as asbestos waste and the NESHAP's no visible emissions and adequately wet requirements are not applicable to the removal of the remaining portions. In EPA's interpretation, the failure of a filtered vacuum cleaner or debris collector to collect larger chunks or pieces of damaged roofing material created by the RB roof cutter does not require the remaining roofing material to be handled and disposed of as asbestos waste, provided that such visible chunks or pieces of roofing material are collected (e.g. by gentle sweeping) and disposed of as asbestos waste. Other methods of decontamination may not be adequate, and should be approved by the local delegated agency.

3.C.4. In EPA's interpretation, if the debris from the cutting is not collected immediately, it will be necessary to lightly mist the dust or debris, until it is collected, as discussed above, and placed in containers. The dust or debris should be lightly misted frequently enough to prevent the material from drying, and to prevent airborne emissions, prior to collection as described above. It is EPA's interpretation of the NESHAP that if

these procedures are followed, the remaining roofing material does not have to be collected and disposed of as asbestos waste, as long as the remaining roof material is in fact nonasbestos material or if it is Category I asbestos material and the removal methods do not further sand, grind, cut or abrade the roof material.

3.C.5. It is EPA's interpretation that, provided the roofing material is not friable prior to the cutting operation, and provided the roofing material has not been made friable by the cutting operation, the appearance of rough, jagged or damaged edges on the remaining roofing material, due to the use of an RB roof cutter, does not require that such remaining roofing material be handled and disposed of as asbestos waste. In addition, it is also EPA's interpretation that if the sawdust or debris generated by the use of an RB roof cutter has been collected as discussed in paragraphs 3.C.3, 3.C.4 and 3.C.6, the presence of dust along the edge of the remaining roof material does not render such material "friable" for purposes of this interpretive rule or the NESHAP, provided the roofing material is not friable prior to the cutting operation, and provided that the remaining roofing material near the cutline has not been made friable by the cutting operation. Where roofing material near the cutline has been made friable by the use of the RB cutter ( *i.e.* where such remaining roofing material near the cutline can be crumbled, pulverized or reduced to powder using hand pressure), it is EPA's interpretation that the use of an encapsulant will ensure that such friable material need not be treated or disposed of as asbestos containing waste material. The encapsulant may be applied to the friable material after the roofing material has been collected into stacks for subsequent disposal as nonasbestos waste. It is EPA's view that if the encapsulation procedure set forth in this paragraph is followed in operations where roofing material near the cutline has been rendered friable by the use of an RB roof cutter, and if the decontamination procedures set forth in paragraph 3.C.3 have been followed, the NESHAP's no visible emissions and adequately wet requirements would be met for the removal, handling and disposal of the remaining roofing material.

3.C.6. As one way to comply with the NESHAP, the dust and debris from cutting can be placed in leak-tight containers, such as plastic bags, and the containers labeled using warning labels required by OSHA (29 CFR 1926.58). In addition, the containers must have labels that identify the waste generator (such as the name of the roofing contractor, abatement contractor, and/or building owner or operator) and the location of the site at which the waste was generated.

#### *IV. Waste Disposal*

##### A. Disposal Requirements

4.A.1. Section 61.150(b) requires that, as soon as is practical, all collected dust and debris from cutting as well as any contaminated roofing squares, must be taken to a landfill that is operated in accordance with §61.154 or to an EPA-approved site that converts asbestos waste to nonasbestos material in accordance with §61.155. During the loading and unloading of affected waste, asbestos warning signs must be affixed to the vehicles.

##### B. Waste Shipment Record

4.B.1. For each load of asbestos waste that is regulated under the NESHAP, a waste shipment record (WSR) must be maintained in accordance with §61.150(d). Information that must be maintained for each waste load includes the following:

- Name, address, and telephone number of the waste generator
- Name and address of the local, State, or EPA regional office responsible for administering the asbestos NESHAP program
- Quantity of waste in cubic meters (or cubic yards)

- Name and telephone number of the disposal site operator
- Name and physical site location of the disposal site
- Date transported
- Name, address, and telephone number of the transporter(s)
- Certification that the contents meet all government regulations for transport by highways.

4.B.2. The waste generator is responsible for ensuring that a copy of the WSR is delivered to the disposal site along with the waste shipment. If a copy of the WSR signed by the disposal site operator is not returned to the waste generator within 35 days, the waste generator must contact the transporter and/or the disposal site to determine the status of the waste shipment. 40 CFR 61.150(d)(3). If the signed WSR is not received within 45 days, the waste generator must report, in writing, to the responsible NESHAP program agency and send along a copy of the WSR. 40 CFR 61.150(d)(4). Copies of WSRs, including those signed by the disposal site operator, must be retained for at least 2 years. 40 CFR 61.150(d)(5).

#### *V. Training*

5.1. For those roof removals that are subject to the NESHAP, at least one on-site supervisor trained in the provisions of the NESHAP must be present during the removal of the asbestos roofing material. 40 CFR 61.145(c)(8). In EPA's view, this person can be a job foreman, a hired consultant, or someone who can represent the building owner or contractor responsible for the removal. In addition to the initial training requirement, a refresher training course is required every 2 years. The NESHAP training requirements became effective on November 20, 1991.

5.2. Asbestos training courses developed specifically to address compliance with the NESHAP in roofing work, as well as courses developed for other purposes can satisfy this requirement of the NESHAP, as long as the course covers the areas specified in the regulation. EPA believes that Asbestos Hazard Emergency Response Act (AHERA) training courses will, for example, satisfy the NESHAP training requirements. However, nothing in this interpretive rule or in the NESHAP shall be deemed to require that roofing contractors or roofing workers performing operations covered by the NESHAP must be trained or accredited under AHERA, as amended by the Asbestos School Hazard Abatement Reauthorization Act (ASHARA). Likewise, state or local authorities may independently impose additional training, licensing, or accreditation requirements on roofing contractors performing operations covered by the NESHAP, but such additional training, licensing or accreditation is not called for by this interpretive rule or the federal NESHAP.

5.3. For removal of Category I asbestos containing roofing material where RB roof cutters or equipment that similarly damages the asbestos-containing roofing material are used, the NESHAP training requirements (§61.145(c)(8)) apply as discussed in Section I above. It is EPA's intention that removal of Category I asbestos-containing roofing material using hatchets, axes, knives, and/or the use of spud bars, pry bars and shovels to lift the roofing material, or similar removal methods that slice, punch, or shear the roof membrane are not subject to the training requirements, since these methods do not cause the roof removal to be subject to the NESHAP. Likewise, it is EPA's intention that roof removal operations involving Category II nonfriable ACM are not subject to the training requirements where such operations are not subject to the NESHAP as discussed in section I above.

[59 FR 31158, June 17, 1994, as amended at 60 FR 31920, June 19, 1995]

**Indiana Department of Environmental Management  
Office of Air Quality**

**Addendum to the Technical Support Document (ATSD)  
for a Part 70 Operating Permit Renewal**

**Source Description and Location**

Source Name:	Republic Services of Indiana, LP d/b/a National Serv-all Landfill
Source Location:	6231 McBeth Road, Fort Wayne, Indiana 46809
County:	Allen
SIC Code:	4953
Permit Renewal No.:	T 003-30376-00257
Permit Reviewer:	David Matousek

The Office of Air Quality (OAQ) has reviewed the operating permit renewal application from Republic Services of Indiana, LP d/b/a National Serv-all Landfill relating to the operation of a stationary municipal solid waste landfill. On March 25, 2011, Republic Services of Indiana, LP d/b/a National Serv-all Landfill submitted an application to the OAQ requesting to renew its operating permit. Republic Services of Indiana, LP d/b/a National Serv-all Landfill was issued its first Part 70 Operating Permit Renewal T003-18142-00257 on December 27, 2006.

**Public Notice Information**

On October 8, 2011, the Office of Air Quality (OAQ) had a notice published in the Fort Wayne Journal Gazette in Fort Wayne, Indiana stating that Republic Services of Indiana, LP d/b/a National Serv-all Landfill had applied for a renewal of their Part 70 Operating Permit issued on December 27, 2006. The notice also stated that the OAQ proposed to issue a Part 70 Operating Permit Renewal for this operation and provided information on how the public could review the proposed permit and other documentation. Finally, the notice informed interested parties that there was a period of thirty (30) days to provide comments on whether or not this permit should be issued as proposed.

**Additional IDEM Changes**

IDEM did not receive any comments during the public notice period. However, IDEM is preparing this Addendum to the Technical Support Document to clarify the source status shown in the Technical Support Document placed on public notice. IDEM failed to indicate Republic Services of Indiana, LP d/b/a National Serv-all Landfill (Plant Id 003-00257) located at 6231 McBeth Road, Fort Wayne, Indiana 46809; and Republic Services of Indiana, LP d/b/a United Refuse Landfill (Plant Id 003-00291) located at 5000 Smith Road, Fort Wayne, Indiana 46809 are considered one source with two administratively separate Part 70 Operating Permits. Attached to this ATSD are emission calculations for the United Refuse Landfill showing the combined source is a major source under PSD because carbon monoxide emissions are in excess of 250 TPY.

The following revisions to the draft permit are required as a result of this change:

A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(15)][326 IAC 2-7-1(22)]

---

The Permittee owns and operates a stationary municipal solid waste landfill.


Source Address:	6231 McBeth Road, Fort Wayne, Indiana 46809
General Source Phone Number:	(260) 478-0300
SIC Code:	4953
County Location:	Allen
Source Location Status:	Attainment for all criteria pollutants
Source Status:	Part 70 Operating Permit Program <del>Major</del> Minor Source, under PSD Minor Source, Section 112 of the Clean Air Act Not 1 of 28 Source Categories

<b>IDEM Contact</b>
---------------------

Questions regarding this proposed permit can be directed to:

David J. Matousek  
Indiana Department Environmental Management  
Office of Air Quality  
100 North Senate Avenue  
MC 61-53, Room 1003  
Indianapolis, Indiana 46204-2251  
Toll free (within Indiana): 1-800-451-6027 extension (2-8253)  
Or dial directly: (317) 232-8253  
Fax: (317) 232-6749 attn: David Matousek  
E-mail: [dmatouse@idem.in.gov](mailto:dmatouse@idem.in.gov)

Please reference permit number T003-30376-00257 in all correspondence.

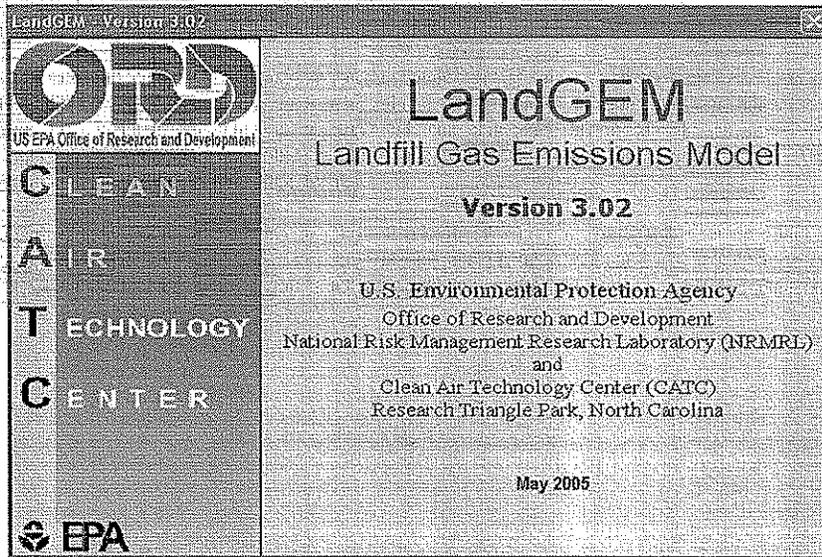

## Summary Report

**Landfill Name or Identifier:** Republic Services of Indiana - United Refuse

**Date:** Wednesday, November 16, 2011

### Description/Comments:

#### About LandGEM:

First-Order Decomposition Rate Equation:

$$Q_{CH_4} = \sum_{i=1}^n \sum_{j=0.1}^1 kL_o \left( \frac{M_i}{10} \right) e^{-kt_{ij}}$$

Where,

$Q_{CH_4}$  = annual methane generation in the year of the calculation ( $m^3/year$ )

$i$  = 1-year time increment

$n$  = (year of the calculation) - (initial year of waste acceptance)

$j$  = 0.1-year time increment

$k$  = methane generation rate ( $year^{-1}$ )

$L_o$  = potential methane generation capacity ( $m^3/Ma$ )

$M_i$  = mass of waste accepted in the  $i^{th}$  year ( $Ma$ )

$t_{ij}$  = age of the  $j^{th}$  section of waste mass  $M_i$  accepted in the  $i^{th}$  year (decimal years, e.g., 3.2 years)

LandGEM is based on a first-order decomposition rate equation for quantifying emissions from the decomposition of landfilled waste in municipal solid waste (MSW) landfills. The software provides a relatively simple approach to estimating landfill gas emissions. Model defaults are based on empirical data from U.S. landfills. Field test data can also be used in place of model defaults when available. Further guidance on EPA test methods, Clean Air Act (CAA) regulations, and other guidance regarding landfill gas emissions and control technology requirements can be found at <http://www.epa.gov/ttnatw01/landfill/landfpg.html>.

LandGEM is considered a screening tool — the better the input data, the better the estimates. Often, there are limitations with the available data regarding waste quantity and composition, variation in design and operating practices over time, and changes occurring over time that impact the emissions potential. Changes to landfill operation, such as operating under wet conditions through leachate recirculation or other liquid additions, will result in generating more gas at a faster rate. Defaults for estimating emissions for this type of operation are being developed to include in LandGEM along with defaults for conventional landfills (no leachate or liquid additions) for developing emission inventories and determining CAA applicability. Refer to the Web site identified above for future updates.

**Input Review**

LANDFILL CHARACTERISTICS

Landfill Open Year **1976**  
 Landfill Closure Year (with 80-year limit) **2000**  
 Actual Closure Year (without limit) **2000**  
 Have Model Calculate Closure Year? **No**  
 Waste Design Capacity **3,009,050** megagrams

MODEL PARAMETERS

Methane Generation Rate, k **0.040** year<sup>-1</sup>  
 Potential Methane Generation Capacity, L<sub>0</sub> **100** m<sup>3</sup>/Mg  
 NMOC Concentration **595** ppmv as hexane  
 Methane Content **50** % by volume

GASES / POLLUTANTS SELECTED

Gas / Pollutant #1: **Total landfill gas**  
 Gas / Pollutant #2: **Methane**  
 Gas / Pollutant #3: **Carbon dioxide**  
 Gas / Pollutant #4: **NMOC**

WASTE ACCEPTANCE RATES

Year	Waste Accepted		Waste-in-Place	
	(Mg/year)	(short tons/year)	(Mg)	(short tons)
1976	45,470	50,017	0	0
1977	45,470	50,017	45,470	50,017
1978	45,460	50,006	90,940	100,034
1979	45,500	50,050	136,400	150,040
1980	45,400	49,940	181,900	200,090
1981	45,500	50,050	227,300	250,030
1982	45,500	50,050	272,800	300,080
1983	45,400	49,940	318,300	350,130
1984	45,500	50,050	363,700	400,070
1985	45,500	50,050	409,200	450,120
1986	45,400	49,940	454,700	500,170
1987	45,500	50,050	500,100	550,110
1988	45,500	50,050	545,600	600,160
1989	45,500	50,050	591,100	650,210
1990	45,400	49,940	636,600	700,260
1991	147,700	162,470	682,000	750,200
1992	230,300	253,330	829,700	912,670
1993	239,000	262,900	1,060,000	1,166,000
1994	300,000	330,000	1,299,000	1,428,900
1995	267,000	293,700	1,599,000	1,758,900
1996	266,000	292,600	1,866,000	2,052,600
1997	289,000	317,900	2,132,000	2,345,200
1998	289,000	317,900	2,421,000	2,663,100
1999	289,000	317,900	2,710,000	2,981,000
2000	10,050	11,055	2,999,000	3,298,900
2001	0	0	3,009,050	3,309,955
2002	0	0	3,009,050	3,309,955
2003	0	0	3,009,050	3,309,955
2004	0	0	3,009,050	3,309,955
2005	0	0	3,009,050	3,309,955
2006	0	0	3,009,050	3,309,955
2007	0	0	3,009,050	3,309,955
2008	0	0	3,009,050	3,309,955
2009	0	0	3,009,050	3,309,955
2010	0	0	3,009,050	3,309,955
2011	0	0	3,009,050	3,309,955
2012	0	0	3,009,050	3,309,955
2013	0	0	3,009,050	3,309,955
2014	0	0	3,009,050	3,309,955
2015	0	0	3,009,050	3,309,955

WASTE ACCEPTANCE RATES (Continued)




Year	Waste Accepted		Waste-In-Place	
	(Mg/year)	(short tons/year)	(Mg)	(short tons)
2016	0	0	3,009,050	3,309,955
2017	0	0	3,009,050	3,309,955
2018	0	0	3,009,050	3,309,955
2019	0	0	3,009,050	3,309,955
2020	0	0	3,009,050	3,309,955
2021	0	0	3,009,050	3,309,955
2022	0	0	3,009,050	3,309,955
2023	0	0	3,009,050	3,309,955
2024	0	0	3,009,050	3,309,955
2025	0	0	3,009,050	3,309,955
2026	0	0	3,009,050	3,309,955
2027	0	0	3,009,050	3,309,955
2028	0	0	3,009,050	3,309,955
2029	0	0	3,009,050	3,309,955
2030	0	0	3,009,050	3,309,955
2031	0	0	3,009,050	3,309,955
2032	0	0	3,009,050	3,309,955
2033	0	0	3,009,050	3,309,955
2034	0	0	3,009,050	3,309,955
2035	0	0	3,009,050	3,309,955
2036	0	0	3,009,050	3,309,955
2037	0	0	3,009,050	3,309,955
2038	0	0	3,009,050	3,309,955
2039	0	0	3,009,050	3,309,955
2040	0	0	3,009,050	3,309,955
2041	0	0	3,009,050	3,309,955
2042	0	0	3,009,050	3,309,955
2043	0	0	3,009,050	3,309,955
2044	0	0	3,009,050	3,309,955
2045	0	0	3,009,050	3,309,955
2046	0	0	3,009,050	3,309,955
2047	0	0	3,009,050	3,309,955
2048	0	0	3,009,050	3,309,955
2049	0	0	3,009,050	3,309,955
2050	0	0	3,009,050	3,309,955
2051	0	0	3,009,050	3,309,955
2052	0	0	3,009,050	3,309,955
2053	0	0	3,009,050	3,309,955
2054	0	0	3,009,050	3,309,955
2055	0	0	3,009,050	3,309,955

**Pollutant Parameters****Gas / Pollutant Default Parameters:****User-specified Pollutant Parameters:**

	Compound	Concentration (ppmv)	Molecular Weight	Concentration (ppmv)	Molecular Weight
<b>Gases</b>	Total landfill gas		0.00		
	Methane		16.04		
	Carbon dioxide		44.01		
	NMOC	4,000	86.18		
<b>Pollutants</b>	1,1,1-Trichloroethane (methyl chloroform) - HAP	0.48	133.41		
	1,1,2,2- Tetrachloroethane - HAP/VOC	1.1	167.85		
	1,1-Dichloroethane (ethylidene dichloride) - HAP/VOC	2.4	98.97		
	1,1-Dichloroethene (vinylidene chloride) - HAP/VOC	0.20	96.94		
	1,2-Dichloroethane (ethylene dichloride) - HAP/VOC	0.41	98.96		
	1,2-Dichloropropane (propylene dichloride) - HAP/VOC	0.18	112.99		
	2-Propanol (isopropyl alcohol) - VOC	50	60.11		
	Acetone	7.0	58.08		
	Acrylonitrile - HAP/VOC	6.3	53.06		
	Benzene - No or Unknown Co-disposal - HAP/VOC	1.9	78.11		
	Benzene - Co-disposal - HAP/VOC	11	78.11		
	Bromodichloromethane - VOC	3.1	163.83		
	Butane - VOC	5.0	58.12		
	Carbon disulfide - HAP/VOC	0.58	76.13		
	Carbon monoxide	140	28.01		
	Carbon tetrachloride - HAP/VOC	4.0E-03	153.84		
	Carbonyl sulfide - HAP/VOC	0.49	60.07		
	Chlorobenzene - HAP/VOC	0.25	112.56		
	Chlorodifluoromethane	1.3	86.47		
	Chloroethane (ethyl chloride) - HAP/VOC	1.3	64.52		
	Chloroform - HAP/VOC	0.03	119.39		
	Chloromethane - VOC	1.2	50.49		
	Dichlorobenzene - (HAP for para isomer/VOC)	0.21	147		
	Dichlorodifluoromethane	16	120.91		
	Dichlorofluoromethane - VOC	2.6	102.92		
	Dichloromethane (methylene chloride) - HAP	14	84.94		
	Dimethyl sulfide (methyl sulfide) - VOC	7.8	62.13		
	Ethane	890	30.07		
	Ethanol - VOC	27	46.08		



**Graphs**

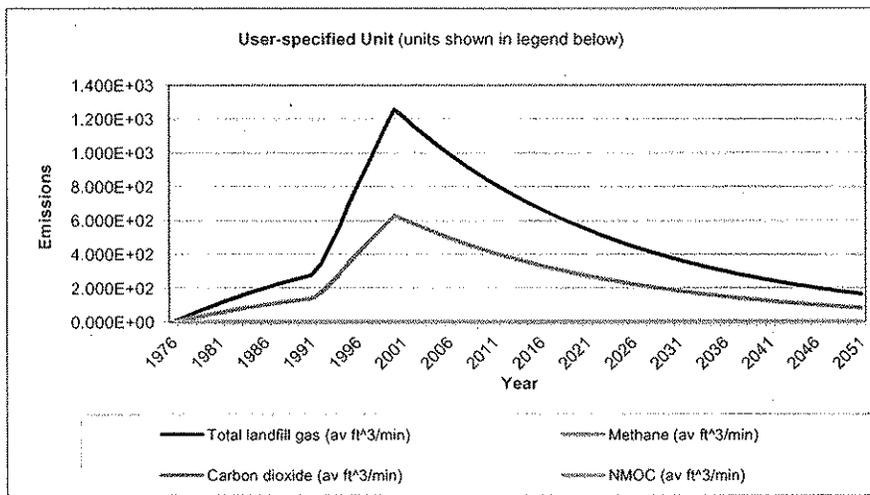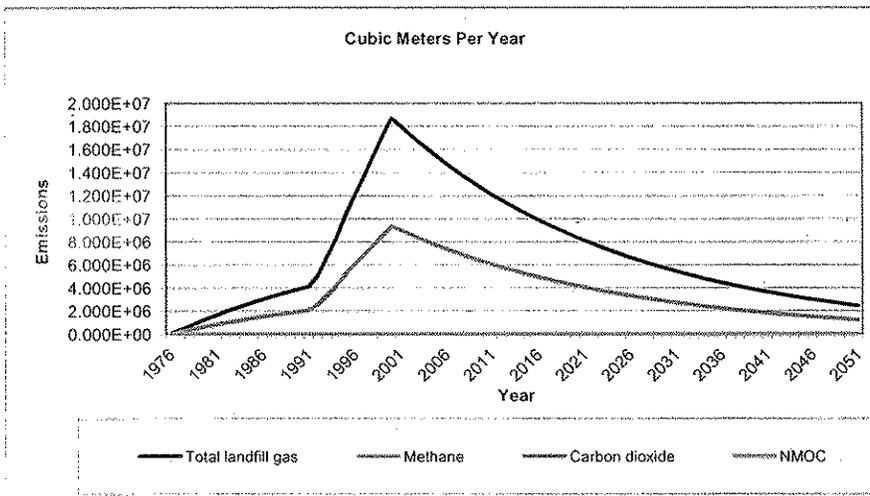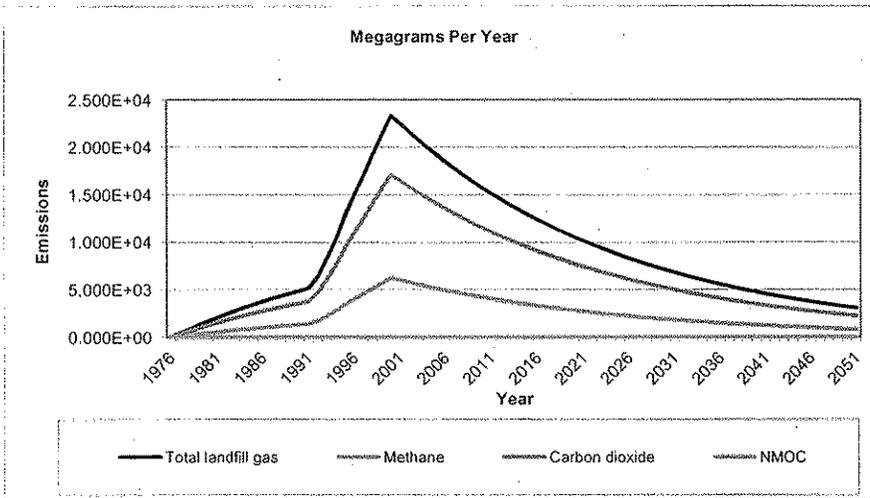

## Results

Year	Total landfill gas			Methane		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
1976	0	0	0	0	0	0
1977	4.462E+02	3.573E+05	2.401E+01	1.192E+02	1.786E+05	1.200E+01
1978	8.749E+02	7.006E+05	4.707E+01	2.337E+02	3.503E+05	2.354E+01
1979	1.287E+03	1.030E+06	6.923E+01	3.437E+02	5.152E+05	3.461E+01
1980	1.683E+03	1.347E+06	9.054E+01	4.495E+02	6.737E+05	4.527E+01
1981	2.062E+03	1.651E+06	1.110E+02	5.509E+02	8.257E+05	5.548E+01
1982	2.428E+03	1.944E+06	1.306E+02	6.485E+02	9.721E+05	6.531E+01
1983	2.779E+03	2.225E+06	1.495E+02	7.424E+02	1.113E+06	7.476E+01
1984	3.116E+03	2.495E+06	1.676E+02	8.322E+02	1.247E+06	8.382E+01
1985	3.440E+03	2.755E+06	1.851E+02	9.189E+02	1.377E+06	9.254E+01
1986	3.752E+03	3.004E+06	2.018E+02	1.002E+03	1.502E+06	1.009E+02
1987	4.050E+03	3.243E+06	2.179E+02	1.082E+03	1.622E+06	1.090E+02
1988	4.338E+03	3.473E+06	2.334E+02	1.159E+03	1.737E+06	1.167E+02
1989	4.614E+03	3.695E+06	2.483E+02	1.232E+03	1.847E+06	1.241E+02
1990	4.880E+03	3.907E+06	2.625E+02	1.303E+03	1.954E+06	1.313E+02
1991	5.134E+03	4.111E+06	2.762E+02	1.371E+03	2.055E+06	1.381E+02
1992	6.382E+03	5.110E+06	3.434E+02	1.705E+03	2.555E+06	1.717E+02
1993	8.392E+03	6.720E+06	4.515E+02	2.242E+03	3.360E+06	2.257E+02
1994	1.041E+04	8.334E+06	5.600E+02	2.780E+03	4.167E+06	2.800E+02
1995	1.294E+04	1.036E+07	6.964E+02	3.457E+03	5.182E+06	3.482E+02
1996	1.506E+04	1.206E+07	8.101E+02	4.022E+03	6.028E+06	4.050E+02
1997	1.708E+04	1.367E+07	9.187E+02	4.561E+03	6.837E+06	4.594E+02
1998	1.924E+04	1.541E+07	1.035E+03	5.140E+03	7.704E+06	5.176E+02
1999	2.132E+04	1.708E+07	1.147E+03	5.696E+03	8.538E+06	5.736E+02
2000	2.332E+04	1.868E+07	1.255E+03	6.230E+03	9.338E+06	6.274E+02
2001	2.251E+04	1.802E+07	1.211E+03	6.012E+03	9.012E+06	6.055E+02
2002	2.163E+04	1.732E+07	1.164E+03	5.776E+03	8.658E+06	5.818E+02
2003	2.078E+04	1.664E+07	1.118E+03	5.550E+03	8.319E+06	5.589E+02
2004	1.996E+04	1.599E+07	1.074E+03	5.332E+03	7.993E+06	5.370E+02
2005	1.918E+04	1.536E+07	1.032E+03	5.123E+03	7.679E+06	5.160E+02
2006	1.843E+04	1.476E+07	9.915E+02	4.922E+03	7.378E+06	4.957E+02
2007	1.771E+04	1.418E+07	9.526E+02	4.729E+03	7.089E+06	4.763E+02
2008	1.701E+04	1.362E+07	9.152E+02	4.544E+03	6.811E+06	4.576E+02
2009	1.634E+04	1.309E+07	8.794E+02	4.366E+03	6.544E+06	4.397E+02
2010	1.570E+04	1.257E+07	8.449E+02	4.195E+03	6.287E+06	4.224E+02
2011	1.509E+04	1.208E+07	8.117E+02	4.030E+03	6.041E+06	4.059E+02
2012	1.450E+04	1.161E+07	7.799E+02	3.872E+03	5.804E+06	3.900E+02
2013	1.393E+04	1.115E+07	7.493E+02	3.720E+03	5.576E+06	3.747E+02
2014	1.338E+04	1.072E+07	7.200E+02	3.574E+03	5.358E+06	3.600E+02
2015	1.286E+04	1.030E+07	6.917E+02	3.434E+03	5.148E+06	3.459E+02
2016	1.235E+04	9.891E+06	6.646E+02	3.300E+03	4.946E+06	3.323E+02
2017	1.187E+04	9.504E+06	6.385E+02	3.170E+03	4.752E+06	3.193E+02
2018	1.140E+04	9.131E+06	6.135E+02	3.046E+03	4.565E+06	3.068E+02
2019	1.096E+04	8.773E+06	5.894E+02	2.926E+03	4.386E+06	2.947E+02
2020	1.053E+04	8.429E+06	5.663E+02	2.812E+03	4.214E+06	2.832E+02
2021	1.011E+04	8.098E+06	5.441E+02	2.701E+03	4.049E+06	2.721E+02
2022	9.717E+03	7.781E+06	5.228E+02	2.595E+03	3.890E+06	2.614E+02
2023	9.336E+03	7.476E+06	5.023E+02	2.494E+03	3.738E+06	2.511E+02
2024	8.970E+03	7.183E+06	4.826E+02	2.396E+03	3.591E+06	2.413E+02
2025	8.618E+03	6.901E+06	4.637E+02	2.302E+03	3.450E+06	2.318E+02

**Results (Continued)**

Year	Total landfill gas			Methane		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
2026	8.280E+03	6.630E+06	4.455E+02	2.212E+03	3.315E+06	2.227E+02
2027	7.956E+03	6.370E+06	4.280E+02	2.125E+03	3.185E+06	2.140E+02
2028	7.644E+03	6.121E+06	4.112E+02	2.042E+03	3.060E+06	2.056E+02
2029	7.344E+03	5.881E+06	3.951E+02	1.962E+03	2.940E+06	1.976E+02
2030	7.056E+03	5.650E+06	3.796E+02	1.885E+03	2.825E+06	1.898E+02
2031	6.779E+03	5.429E+06	3.647E+02	1.811E+03	2.714E+06	1.824E+02
2032	6.513E+03	5.216E+06	3.504E+02	1.740E+03	2.608E+06	1.752E+02
2033	6.258E+03	5.011E+06	3.367E+02	1.672E+03	2.506E+06	1.683E+02
2034	6.013E+03	4.815E+06	3.235E+02	1.606E+03	2.407E+06	1.617E+02
2035	5.777E+03	4.626E+06	3.108E+02	1.543E+03	2.313E+06	1.554E+02
2036	5.550E+03	4.444E+06	2.986E+02	1.483E+03	2.222E+06	1.493E+02
2037	5.333E+03	4.270E+06	2.869E+02	1.424E+03	2.135E+06	1.435E+02
2038	5.124E+03	4.103E+06	2.757E+02	1.369E+03	2.051E+06	1.378E+02
2039	4.923E+03	3.942E+06	2.649E+02	1.315E+03	1.971E+06	1.324E+02
2040	4.730E+03	3.787E+06	2.545E+02	1.263E+03	1.894E+06	1.272E+02
2041	4.544E+03	3.639E+06	2.445E+02	1.214E+03	1.819E+06	1.222E+02
2042	4.366E+03	3.496E+06	2.349E+02	1.166E+03	1.748E+06	1.175E+02
2043	4.195E+03	3.359E+06	2.257E+02	1.121E+03	1.680E+06	1.128E+02
2044	4.030E+03	3.227E+06	2.168E+02	1.077E+03	1.614E+06	1.084E+02
2045	3.872E+03	3.101E+06	2.083E+02	1.034E+03	1.550E+06	1.042E+02
2046	3.721E+03	2.979E+06	2.002E+02	9.938E+02	1.490E+06	1.001E+02
2047	3.575E+03	2.862E+06	1.923E+02	9.548E+02	1.431E+06	9.616E+01
2048	3.434E+03	2.750E+06	1.848E+02	9.174E+02	1.375E+06	9.239E+01
2049	3.300E+03	2.642E+06	1.775E+02	8.814E+02	1.321E+06	8.877E+01
2050	3.170E+03	2.539E+06	1.706E+02	8.469E+02	1.269E+06	8.529E+01
2051	3.046E+03	2.439E+06	1.639E+02	8.137E+02	1.220E+06	8.194E+01
2052	2.927E+03	2.344E+06	1.575E+02	7.817E+02	1.172E+06	7.873E+01
2053	2.812E+03	2.252E+06	1.513E+02	7.511E+02	1.126E+06	7.564E+01
2054	2.702E+03	2.163E+06	1.454E+02	7.216E+02	1.082E+06	7.268E+01
2055	2.596E+03	2.079E+06	1.397E+02	6.933E+02	1.039E+06	6.983E+01
2056	2.494E+03	1.997E+06	1.342E+02	6.662E+02	9.985E+05	6.709E+01
2057	2.396E+03	1.919E+06	1.289E+02	6.400E+02	9.594E+05	6.446E+01
2058	2.302E+03	1.844E+06	1.239E+02	6.149E+02	9.218E+05	6.193E+01
2059	2.212E+03	1.771E+06	1.190E+02	5.908E+02	8.856E+05	5.950E+01
2060	2.125E+03	1.702E+06	1.143E+02	5.677E+02	8.509E+05	5.717E+01
2061	2.042E+03	1.635E+06	1.099E+02	5.454E+02	8.175E+05	5.493E+01
2062	1.962E+03	1.571E+06	1.056E+02	5.240E+02	7.855E+05	5.278E+01
2063	1.885E+03	1.509E+06	1.014E+02	5.035E+02	7.547E+05	5.071E+01
2064	1.811E+03	1.450E+06	9.744E+01	4.837E+02	7.251E+05	4.872E+01
2065	1.740E+03	1.393E+06	9.361E+01	4.648E+02	6.966E+05	4.681E+01
2066	1.672E+03	1.339E+06	8.994E+01	4.465E+02	6.693E+05	4.497E+01
2067	1.606E+03	1.286E+06	8.642E+01	4.290E+02	6.431E+05	4.321E+01
2068	1.543E+03	1.236E+06	8.303E+01	4.122E+02	6.179E+05	4.151E+01
2069	1.483E+03	1.187E+06	7.977E+01	3.960E+02	5.936E+05	3.989E+01
2070	1.425E+03	1.141E+06	7.665E+01	3.805E+02	5.704E+05	3.832E+01
2071	1.369E+03	1.096E+06	7.364E+01	3.656E+02	5.480E+05	3.682E+01
2072	1.315E+03	1.053E+06	7.075E+01	3.513E+02	5.265E+05	3.538E+01
2073	1.263E+03	1.012E+06	6.798E+01	3.375E+02	5.059E+05	3.399E+01
2074	1.214E+03	9.721E+05	6.531E+01	3.243E+02	4.860E+05	3.266E+01
2075	1.166E+03	9.339E+05	6.275E+01	3.115E+02	4.670E+05	3.138E+01
2076	1.121E+03	8.973E+05	6.029E+01	2.993E+02	4.487E+05	3.015E+01

**Results (Continued)**

Year	Total landfill gas			Methane		
	(Mg/year)	(m <sup>3</sup> /year)	(av. ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av. ft <sup>3</sup> /min)
2077	1.077E+03	8.621E+05	5.793E+01	2.876E+02	4.311E+05	2.896E+01
2078	1.034E+03	8.283E+05	5.566E+01	2.763E+02	4.142E+05	2.783E+01
2079	9.939E+02	7.959E+05	5.347E+01	2.655E+02	3.979E+05	2.674E+01
2080	9.549E+02	7.647E+05	5.138E+01	2.551E+02	3.823E+05	2.569E+01
2081	9.175E+02	7.347E+05	4.936E+01	2.451E+02	3.673E+05	2.468E+01
2082	8.815E+02	7.059E+05	4.743E+01	2.355E+02	3.529E+05	2.371E+01
2083	8.469E+02	6.782E+05	4.557E+01	2.262E+02	3.391E+05	2.278E+01
2084	8.137E+02	6.516E+05	4.378E+01	2.174E+02	3.258E+05	2.189E+01
2085	7.818E+02	6.260E+05	4.206E+01	2.088E+02	3.130E+05	2.103E+01
2086	7.512E+02	6.015E+05	4.041E+01	2.006E+02	3.007E+05	2.021E+01
2087	7.217E+02	5.779E+05	3.883E+01	1.928E+02	2.890E+05	1.941E+01
2088	6.934E+02	5.553E+05	3.731E+01	1.852E+02	2.776E+05	1.865E+01
2089	6.662E+02	5.335E+05	3.584E+01	1.780E+02	2.667E+05	1.792E+01
2090	6.401E+02	5.126E+05	3.444E+01	1.710E+02	2.563E+05	1.722E+01
2091	6.150E+02	4.925E+05	3.309E+01	1.643E+02	2.462E+05	1.654E+01
2092	5.909E+02	4.732E+05	3.179E+01	1.578E+02	2.366E+05	1.590E+01
2093	5.677E+02	4.546E+05	3.054E+01	1.516E+02	2.273E+05	1.527E+01
2094	5.455E+02	4.368E+05	2.935E+01	1.457E+02	2.184E+05	1.467E+01
2095	5.241E+02	4.197E+05	2.820E+01	1.400E+02	2.098E+05	1.410E+01
2096	5.035E+02	4.032E+05	2.709E+01	1.345E+02	2.016E+05	1.355E+01
2097	4.838E+02	3.874E+05	2.603E+01	1.292E+02	1.937E+05	1.301E+01
2098	4.648E+02	3.722E+05	2.501E+01	1.242E+02	1.861E+05	1.250E+01
2099	4.466E+02	3.576E+05	2.403E+01	1.193E+02	1.788E+05	1.201E+01
2100	4.291E+02	3.436E+05	2.309E+01	1.146E+02	1.718E+05	1.154E+01
2101	4.122E+02	3.301E+05	2.218E+01	1.101E+02	1.651E+05	1.109E+01
2102	3.961E+02	3.172E+05	2.131E+01	1.058E+02	1.586E+05	1.066E+01
2103	3.806E+02	3.047E+05	2.047E+01	1.016E+02	1.524E+05	1.024E+01
2104	3.656E+02	2.928E+05	1.967E+01	9.766E+01	1.464E+05	9.836E+00
2105	3.513E+02	2.813E+05	1.890E+01	9.383E+01	1.406E+05	9.450E+00
2106	3.375E+02	2.703E+05	1.816E+01	9.016E+01	1.351E+05	9.080E+00
2107	3.243E+02	2.597E+05	1.745E+01	8.662E+01	1.298E+05	8.724E+00
2108	3.116E+02	2.495E+05	1.676E+01	8.322E+01	1.247E+05	8.382E+00
2109	2.994E+02	2.397E+05	1.611E+01	7.996E+01	1.199E+05	8.053E+00
2110	2.876E+02	2.303E+05	1.547E+01	7.683E+01	1.152E+05	7.737E+00
2111	2.763E+02	2.213E+05	1.487E+01	7.381E+01	1.106E+05	7.434E+00
2112	2.655E+02	2.126E+05	1.428E+01	7.092E+01	1.063E+05	7.142E+00
2113	2.551E+02	2.043E+05	1.372E+01	6.814E+01	1.021E+05	6.862E+00
2114	2.451E+02	1.963E+05	1.319E+01	6.547E+01	9.813E+04	6.593E+00
2115	2.355E+02	1.886E+05	1.267E+01	6.290E+01	9.428E+04	6.335E+00
2116	2.262E+02	1.812E+05	1.217E+01	6.043E+01	9.058E+04	6.086E+00

**Results (Continued)**

Year	Carbon dioxide			NMOC		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
1976	0	0	0	0	0	0
1977	3.270E+02	1.786E+05	1.200E+01	7.620E-01	2.126E+02	1.428E-02
1978	6.412E+02	3.503E+05	2.354E+01	1.494E+00	4.168E+02	2.801E-02
1979	9.430E+02	5.152E+05	3.461E+01	2.197E+00	6.130E+02	4.119E-02
1980	1.233E+03	6.737E+05	4.527E+01	2.874E+00	8.017E+02	5.387E-02
1981	1.511E+03	8.257E+05	5.548E+01	3.522E+00	9.826E+02	6.602E-02
1982	1.779E+03	9.721E+05	6.531E+01	4.146E+00	1.157E+03	7.772E-02
1983	2.037E+03	1.113E+06	7.476E+01	4.746E+00	1.324E+03	8.897E-02
1984	2.283E+03	1.247E+06	8.382E+01	5.321E+00	1.484E+03	9.974E-02
1985	2.521E+03	1.377E+06	9.254E+01	5.875E+00	1.639E+03	1.101E-01
1986	2.750E+03	1.502E+06	1.009E+02	6.407E+00	1.787E+03	1.201E-01
1987	2.968E+03	1.622E+06	1.090E+02	6.917E+00	1.930E+03	1.297E-01
1988	3.179E+03	1.737E+06	1.167E+02	7.408E+00	2.067E+03	1.389E-01
1989	3.382E+03	1.847E+06	1.241E+02	7.880E+00	2.198E+03	1.477E-01
1990	3.576E+03	1.954E+06	1.313E+02	8.334E+00	2.325E+03	1.562E-01
1991	3.763E+03	2.055E+06	1.381E+02	8.768E+00	2.446E+03	1.643E-01
1992	4.677E+03	2.555E+06	1.717E+02	1.090E+01	3.041E+03	2.043E-01
1993	6.150E+03	3.360E+06	2.257E+02	1.433E+01	3.998E+03	2.686E-01
1994	7.628E+03	4.167E+06	2.800E+02	1.777E+01	4.959E+03	3.332E-01
1995	9.486E+03	5.182E+06	3.482E+02	2.211E+01	6.167E+03	4.144E-01
1996	1.103E+04	6.028E+06	4.050E+02	2.571E+01	7.174E+03	4.820E-01
1997	1.251E+04	6.837E+06	4.594E+02	2.916E+01	8.136E+03	5.467E-01
1998	1.410E+04	7.704E+06	5.176E+02	3.286E+01	9.168E+03	6.160E-01
1999	1.563E+04	8.538E+06	5.736E+02	3.642E+01	1.016E+04	6.826E-01
2000	1.709E+04	9.338E+06	6.274E+02	3.983E+01	1.111E+04	7.467E-01
2001	1.650E+04	9.012E+06	6.055E+02	3.844E+01	1.072E+04	7.205E-01
2002	1.585E+04	8.658E+06	5.818E+02	3.693E+01	1.030E+04	6.923E-01
2003	1.523E+04	8.319E+06	5.589E+02	3.548E+01	9.899E+03	6.651E-01
2004	1.463E+04	7.993E+06	5.370E+02	3.409E+01	9.511E+03	6.391E-01
2005	1.406E+04	7.679E+06	5.160E+02	3.276E+01	9.138E+03	6.140E-01
2006	1.351E+04	7.378E+06	4.957E+02	3.147E+01	8.780E+03	5.899E-01
2007	1.298E+04	7.089E+06	4.763E+02	3.024E+01	8.438E+03	5.668E-01
2008	1.247E+04	6.811E+06	4.576E+02	2.905E+01	8.105E+03	5.446E-01
2009	1.198E+04	6.544E+06	4.397E+02	2.791E+01	7.787E+03	5.232E-01
2010	1.151E+04	6.287E+06	4.224E+02	2.682E+01	7.482E+03	5.027E-01
2011	1.106E+04	6.041E+06	4.059E+02	2.577E+01	7.188E+03	4.830E-01
2012	1.062E+04	5.804E+06	3.900E+02	2.476E+01	6.907E+03	4.641E-01
2013	1.021E+04	5.576E+06	3.747E+02	2.379E+01	6.636E+03	4.459E-01
2014	9.807E+03	5.358E+06	3.600E+02	2.285E+01	6.376E+03	4.284E-01
2015	9.423E+03	5.148E+06	3.459E+02	2.196E+01	6.126E+03	4.116E-01
2016	9.053E+03	4.946E+06	3.323E+02	2.110E+01	5.885E+03	3.954E-01
2017	8.698E+03	4.752E+06	3.193E+02	2.027E+01	5.655E+03	3.799E-01
2018	8.357E+03	4.565E+06	3.068E+02	1.947E+01	5.433E+03	3.650E-01
2019	8.029E+03	4.386E+06	2.947E+02	1.871E+01	5.220E+03	3.507E-01
2020	7.715E+03	4.214E+06	2.832E+02	1.798E+01	5.015E+03	3.370E-01
2021	7.412E+03	4.049E+06	2.721E+02	1.727E+01	4.819E+03	3.238E-01
2022	7.121E+03	3.890E+06	2.614E+02	1.659E+01	4.630E+03	3.111E-01
2023	6.842E+03	3.738E+06	2.511E+02	1.594E+01	4.448E+03	2.989E-01
2024	6.574E+03	3.591E+06	2.413E+02	1.532E+01	4.274E+03	2.871E-01
2025	6.316E+03	3.450E+06	2.318E+02	1.472E+01	4.106E+03	2.759E-01

**Results (Continued)**

Year	Carbon dioxide			NMOC		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
2026	6.068E+03	3.315E+06	2.227E+02	1.414E+01	3.945E+03	2.651E-01
2027	5.831E+03	3.185E+06	2.140E+02	1.359E+01	3.790E+03	2.547E-01
2028	5.602E+03	3.060E+06	2.056E+02	1.305E+01	3.642E+03	2.447E-01
2029	5.382E+03	2.940E+06	1.976E+02	1.254E+01	3.499E+03	2.351E-01
2030	5.171E+03	2.825E+06	1.898E+02	1.205E+01	3.362E+03	2.259E-01
2031	4.968E+03	2.714E+06	1.824E+02	1.158E+01	3.230E+03	2.170E-01
2032	4.774E+03	2.608E+06	1.752E+02	1.112E+01	3.103E+03	2.085E-01
2033	4.586E+03	2.506E+06	1.683E+02	1.069E+01	2.982E+03	2.003E-01
2034	4.407E+03	2.407E+06	1.617E+02	1.027E+01	2.865E+03	1.925E-01
2035	4.234E+03	2.313E+06	1.554E+02	9.866E+00	2.752E+03	1.849E-01
2036	4.068E+03	2.222E+06	1.493E+02	9.479E+00	2.644E+03	1.777E-01
2037	3.908E+03	2.135E+06	1.435E+02	9.107E+00	2.541E+03	1.707E-01
2038	3.755E+03	2.051E+06	1.378E+02	8.750E+00	2.441E+03	1.640E-01
2039	3.608E+03	1.971E+06	1.324E+02	8.407E+00	2.345E+03	1.576E-01
2040	3.466E+03	1.894E+06	1.272E+02	8.077E+00	2.253E+03	1.514E-01
2041	3.330E+03	1.819E+06	1.222E+02	7.761E+00	2.165E+03	1.455E-01
2042	3.200E+03	1.748E+06	1.175E+02	7.456E+00	2.080E+03	1.398E-01
2043	3.074E+03	1.680E+06	1.128E+02	7.164E+00	1.999E+03	1.343E-01
2044	2.954E+03	1.614E+06	1.084E+02	6.883E+00	1.920E+03	1.290E-01
2045	2.838E+03	1.550E+06	1.042E+02	6.613E+00	1.845E+03	1.240E-01
2046	2.727E+03	1.490E+06	1.001E+02	6.354E+00	1.773E+03	1.191E-01
2047	2.620E+03	1.431E+06	9.616E+01	6.105E+00	1.703E+03	1.144E-01
2048	2.517E+03	1.375E+06	9.239E+01	5.865E+00	1.636E+03	1.099E-01
2049	2.418E+03	1.321E+06	8.877E+01	5.635E+00	1.572E+03	1.056E-01
2050	2.324E+03	1.269E+06	8.529E+01	5.415E+00	1.511E+03	1.015E-01
2051	2.232E+03	1.220E+06	8.194E+01	5.202E+00	1.451E+03	9.751E-02
2052	2.145E+03	1.172E+06	7.873E+01	4.998E+00	1.394E+03	9.369E-02
2053	2.061E+03	1.126E+06	7.564E+01	4.802E+00	1.340E+03	9.002E-02
2054	1.980E+03	1.082E+06	7.268E+01	4.614E+00	1.287E+03	8.649E-02
2055	1.902E+03	1.039E+06	6.983E+01	4.433E+00	1.237E+03	8.310E-02
2056	1.828E+03	9.985E+05	6.709E+01	4.259E+00	1.188E+03	7.984E-02
2057	1.756E+03	9.594E+05	6.446E+01	4.092E+00	1.142E+03	7.671E-02
2058	1.687E+03	9.218E+05	6.193E+01	3.932E+00	1.097E+03	7.370E-02
2059	1.621E+03	8.856E+05	5.950E+01	3.778E+00	1.054E+03	7.081E-02
2060	1.558E+03	8.509E+05	5.717E+01	3.629E+00	1.013E+03	6.803E-02
2061	1.496E+03	8.175E+05	5.493E+01	3.487E+00	9.728E+02	6.537E-02
2062	1.438E+03	7.855E+05	5.278E+01	3.350E+00	9.347E+02	6.280E-02
2063	1.381E+03	7.547E+05	5.071E+01	3.219E+00	8.981E+02	6.034E-02
2064	1.327E+03	7.251E+05	4.872E+01	3.093E+00	8.628E+02	5.797E-02
2065	1.275E+03	6.966E+05	4.681E+01	2.972E+00	8.290E+02	5.570E-02
2066	1.225E+03	6.693E+05	4.497E+01	2.855E+00	7.965E+02	5.352E-02
2067	1.177E+03	6.431E+05	4.321E+01	2.743E+00	7.653E+02	5.142E-02
2068	1.131E+03	6.179E+05	4.151E+01	2.636E+00	7.353E+02	4.940E-02
2069	1.087E+03	5.936E+05	3.989E+01	2.532E+00	7.064E+02	4.747E-02
2070	1.044E+03	5.704E+05	3.832E+01	2.433E+00	6.787E+02	4.560E-02
2071	1.003E+03	5.480E+05	3.682E+01	2.338E+00	6.521E+02	4.382E-02
2072	9.638E+02	5.265E+05	3.538E+01	2.246E+00	6.265E+02	4.210E-02
2073	9.260E+02	5.059E+05	3.399E+01	2.158E+00	6.020E+02	4.045E-02
2074	8.897E+02	4.860E+05	3.266E+01	2.073E+00	5.784E+02	3.886E-02
2075	8.548E+02	4.670E+05	3.138E+01	1.992E+00	5.557E+02	3.734E-02
2076	8.213E+02	4.487E+05	3.015E+01	1.914E+00	5.339E+02	3.587E-02

## Results (Continued)

Year	Carbon dioxide			NMOC		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
2077	7.891E+02	4.311E+05	2.896E+01	1.839E+00	5.130E+02	3.447E-02
2078	7.581E+02	4.142E+05	2.783E+01	1.767E+00	4.929E+02	3.312E-02
2079	7.284E+02	3.979E+05	2.674E+01	1.697E+00	4.735E+02	3.182E-02
2080	6.998E+02	3.823E+05	2.569E+01	1.631E+00	4.550E+02	3.057E-02
2081	6.724E+02	3.673E+05	2.468E+01	1.567E+00	4.371E+02	2.937E-02
2082	6.460E+02	3.529E+05	2.371E+01	1.505E+00	4.200E+02	2.822E-02
2083	6.207E+02	3.391E+05	2.278E+01	1.446E+00	4.035E+02	2.711E-02
2084	5.964E+02	3.258E+05	2.189E+01	1.390E+00	3.877E+02	2.605E-02
2085	5.730E+02	3.130E+05	2.103E+01	1.335E+00	3.725E+02	2.503E-02
2086	5.505E+02	3.007E+05	2.021E+01	1.283E+00	3.579E+02	2.405E-02
2087	5.289E+02	2.890E+05	1.941E+01	1.233E+00	3.439E+02	2.310E-02
2088	5.082E+02	2.776E+05	1.865E+01	1.184E+00	3.304E+02	2.220E-02
2089	4.883E+02	2.667E+05	1.792E+01	1.138E+00	3.174E+02	2.133E-02
2090	4.691E+02	2.563E+05	1.722E+01	1.093E+00	3.050E+02	2.049E-02
2091	4.507E+02	2.462E+05	1.654E+01	1.050E+00	2.930E+02	1.969E-02
2092	4.331E+02	2.366E+05	1.590E+01	1.009E+00	2.815E+02	1.892E-02
2093	4.161E+02	2.273E+05	1.527E+01	9.696E-01	2.705E+02	1.817E-02
2094	3.998E+02	2.184E+05	1.467E+01	9.315E-01	2.599E+02	1.746E-02
2095	3.841E+02	2.098E+05	1.410E+01	8.950E-01	2.497E+02	1.678E-02
2096	3.690E+02	2.016E+05	1.355E+01	8.599E-01	2.399E+02	1.612E-02
2097	3.546E+02	1.937E+05	1.301E+01	8.262E-01	2.305E+02	1.549E-02
2098	3.407E+02	1.861E+05	1.250E+01	7.938E-01	2.215E+02	1.488E-02
2099	3.273E+02	1.788E+05	1.201E+01	7.627E-01	2.128E+02	1.430E-02
2100	3.145E+02	1.718E+05	1.154E+01	7.328E-01	2.044E+02	1.374E-02
2101	3.021E+02	1.651E+05	1.109E+01	7.040E-01	1.964E+02	1.320E-02
2102	2.903E+02	1.586E+05	1.066E+01	6.764E-01	1.887E+02	1.268E-02
2103	2.789E+02	1.524E+05	1.024E+01	6.499E-01	1.813E+02	1.218E-02
2104	2.680E+02	1.464E+05	9.836E+00	6.244E-01	1.742E+02	1.170E-02
2105	2.575E+02	1.406E+05	9.450E+00	5.999E-01	1.674E+02	1.125E-02
2106	2.474E+02	1.351E+05	9.080E+00	5.764E-01	1.608E+02	1.080E-02
2107	2.377E+02	1.298E+05	8.724E+00	5.538E-01	1.545E+02	1.038E-02
2108	2.283E+02	1.247E+05	8.382E+00	5.321E-01	1.484E+02	9.974E-03
2109	2.194E+02	1.199E+05	8.053E+00	5.112E-01	1.426E+02	9.583E-03
2110	2.108E+02	1.152E+05	7.737E+00	4.912E-01	1.370E+02	9.207E-03
2111	2.025E+02	1.106E+05	7.434E+00	4.719E-01	1.317E+02	8.846E-03
2112	1.946E+02	1.063E+05	7.142E+00	4.534E-01	1.265E+02	8.499E-03
2113	1.870E+02	1.021E+05	6.862E+00	4.356E-01	1.215E+02	8.166E-03
2114	1.796E+02	9.813E+04	6.593E+00	4.186E-01	1.168E+02	7.846E-03
2115	1.726E+02	9.428E+04	6.335E+00	4.022E-01	1.122E+02	7.538E-03
2116	1.658E+02	9.058E+04	6.086E+00	3.864E-01	1.078E+02	7.243E-03

## INVENTORY

Landfill Name or Identifier: Republic Services of Indiana - United Refuse

Enter year of emissions inventory:

2000

Gas / Pollutant	Emission Rate				
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(ft <sup>3</sup> /year)	(short tons/year)
Total landfill gas	2.332E+04	1.868E+07	1.255E+03	6.596E+08	2.566E+04
Methane	6.230E+03	9.338E+06	6.274E+02	3.298E+08	6.853E+03
Carbon dioxide	1.709E+04	9.338E+06	6.274E+02	3.298E+08	1.880E+04
NMOC	3.983E+01	1.111E+04	7.467E-01	3.924E+05	4.382E+01
1,1,1-Trichloroethane (methyl chloroform) - HAP	4.974E-02	8.965E+00	6.023E-04	3.166E+02	5.472E-02
1,1,2,2-Tetrachloroethane - HAP/VOC	1.434E-01	2.054E+01	1.380E-03	7.255E+02	1.578E-01
1,1-Dichloroethane (ethylidene dichloride) - HAP/VOC	1.845E-01	4.482E+01	3.012E-03	1.583E+03	2.030E-01
1,1-Dichloroethene (vinylidene chloride) - HAP/VOC	1.506E-02	3.735E+00	2.510E-04	1.319E+02	1.657E-02
1,2-Dichloroethane (ethylene dichloride) - HAP/VOC	3.152E-02	7.657E+00	5.145E-04	2.704E+02	3.467E-02
1,2-Dichloropropane (propylene dichloride) - HAP/VOC	1.580E-02	3.362E+00	2.259E-04	1.187E+02	1.738E-02
2-Propanol (isopropyl alcohol) - VOC	2.335E+00	9.338E+02	6.274E-02	3.298E+04	2.568E+00
Acetone	3.158E-01	1.307E+02	8.784E-03	4.617E+03	3.474E-01
Acrylonitrile - HAP/VOC	2.597E-01	1.177E+02	7.906E-03	4.155E+03	2.856E-01
Benzene - No or Unknown Co-disposal - HAP/VOC	1.153E-01	3.549E+01	2.384E-03	1.253E+03	1.268E-01
Benzene - Co-disposal - HAP/VOC	6.674E-01	2.054E+02	1.380E-02	7.255E+03	7.342E-01
Bromodichloromethane - VOC	3.945E-01	5.790E+01	3.890E-03	2.045E+03	4.340E-01
Butane - VOC	2.257E-01	9.338E+01	6.274E-03	3.298E+03	2.483E-01
Carbon disulfide - HAP/VOC	3.430E-02	1.083E+01	7.278E-04	3.825E+02	3.773E-02
Carbon monoxide	3.046E+00	2.615E+03	1.757E-01	9.234E+04	3.351E+00
Carbon tetrachloride - HAP/VOC	4.780E-04	7.471E-02	5.020E-06	2.638E+00	5.258E-04
Carbonyl sulfide - HAP/VOC	2.286E-02	9.152E+00	6.149E-04	3.232E+02	2.515E-02
Chlorobenzene - HAP/VOC	2.186E-02	4.669E+00	3.137E-04	1.649E+02	2.405E-02
Chlorodifluoromethane	8.732E-02	2.428E+01	1.631E-03	8.574E+02	9.605E-02
Chloroethane (ethyl chloride) - HAP/VOC	6.516E-02	2.428E+01	1.631E-03	8.574E+02	7.167E-02
Chloroform - HAP/VOC	2.782E-03	5.603E-01	3.765E-05	1.979E+01	3.061E-03
Chloromethane - VOC	4.707E-02	2.241E+01	1.506E-03	7.915E+02	5.177E-02
Dichlorobenzene - (HAP for para isomer/VOC)	2.398E-02	3.922E+00	2.635E-04	1.385E+02	2.638E-02
Dichlorodifluoromethane	1.503E+00	2.988E+02	2.008E-02	1.055E+04	1.653E+00
Dichlorofluoromethane - VOC	2.079E-01	4.856E+01	3.263E-03	1.715E+03	2.287E-01
Dichloromethane (methylene chloride) - HAP	9.238E-01	2.615E+02	1.757E-02	9.234E+03	1.016E+00
Dimethyl sulfide (methyl sulfide) - VOC	3.765E-01	1.457E+02	9.788E-03	5.145E+03	4.141E-01
Ethane	2.079E+01	1.662E+04	1.117E+00	5.870E+05	2.287E+01
Ethanol - VOC	9.665E-01	5.043E+02	3.388E-02	1.781E+04	1.063E+00
Ethyl mercaptan (ethanethiol) - VOC	1.110E-01	4.296E+01	2.886E-03	1.517E+03	1.221E-01
Ethylbenzene - HAP/VOC	3.793E-01	8.591E+01	5.772E-03	3.034E+03	4.173E-01
Ethylene dibromide - HAP/VOC	1.459E-04	1.868E-02	1.255E-06	6.596E-01	1.605E-04
Fluorotrichloromethane - VOC	8.111E-02	1.419E+01	9.537E-04	5.013E+02	8.922E-02
Hexane - HAP/VOC	4.418E-01	1.233E+02	8.282E-03	4.353E+03	4.860E-01
Hydrogen sulfide	9.531E-01	6.724E+02	4.518E-02	2.374E+04	1.048E+00
Mercury (total) - HAP	4.519E-05	5.416E-03	3.639E-07	1.913E-01	4.971E-05
Methyl ethyl ketone - HAP/VOC	3.977E-01	1.326E+02	8.910E-03	4.683E+03	4.375E-01
Methyl isobutyl ketone - HAP/VOC	1.478E-01	3.549E+01	2.384E-03	1.253E+03	1.626E-01
Methyl mercaptan - VOC	9.343E-02	4.669E+01	3.137E-03	1.649E+03	1.028E-01
Pentane - VOC	1.850E-01	6.163E+01	4.141E-03	2.177E+03	2.035E-01
Perchloroethylene (tetrachloroethylene) - HAP	4.766E-01	6.910E+01	4.643E-03	2.440E+03	5.243E-01
Propane - VOC	3.767E-01	2.054E+02	1.380E-02	7.255E+03	4.144E-01
t-1,2-Dichloroethene - VOC	2.109E-01	5.229E+01	3.514E-03	1.847E+03	2.319E-01
Toluene - No or Unknown Co-disposal - HAP/VOC	2.791E+00	7.284E+02	4.894E-02	2.572E+04	3.070E+00
Toluene - Co-disposal - HAP/VOC	1.217E+01	3.175E+03	2.133E-01	1.121E+05	1.338E+01
Trichloroethylene (trichloroethene) - HAP/VOC	2.858E-01	5.229E+01	3.514E-03	1.847E+03	3.144E-01
Vinyl chloride - HAP/VOC	3.544E-01	1.363E+02	9.161E-03	4.815E+03	3.899E-01
Xylenes - HAP/VOC	9.896E-01	2.241E+02	1.506E-02	7.915E+03	1.089E+00

### Addendum to the Technical Support Document - Appendix A - Emission Summary Sheet

Company Name: Republic Services of Indiana, LP d/b/a United Refuse  
 Address: 500 Smith Road, Fort Wayne, Indiana 46241  
 Permit Number: T 003-31121-00291  
 Reviewer: David J. Matousek  
 Date: November 17, 2011

Limited Potential to Emit (ton/yr)											
Emission Unit	PM	PM10	PM2.5	SO <sub>2</sub>	VOC	CO	NOx	Biogenic CO <sub>2</sub> as CO <sub>2</sub> e	Non-CO <sub>2</sub> GHG as CO <sub>2</sub> e	Single HAP	Total HAPs
Landfill	0.00	0.00	0.00	0.00	11.34	3.41	0.00	18,800	35,978	0.84 Toluene	2.37
Flare	2.47	2.47	2.47	2.55	0.00	58.56	10.77	20,874	34	1.27 HCL	1.27
Paved Roads - Fugitive	0.93	0.19	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Unpaved Roads - Fugitive	21.60	5.83	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total / United Refuse T003-31121-00291	25.00	8.49	3.13	2.55	11.34	61.97	10.77	39,674	36,012	1.27 HCL	3.64
Total / National Serv-all T003-30376-00257	93.11	31.36	11.60	9.40	45.03	231.39	39.70	73,810	141,225	4.7 HCL	14.03
Total for PSD and Title V	118.11	39.85	14.73	11.95	56.37	293.36	50.47	177,237		< 10	< 25
Title V Major Source Threshold	---	100	100	100	100	100	100	100,000		10	25
PSD Major Source Threshold	250	250	250	250	250	250	250	100,000		---	---

Uncontrolled Potential to Emit (ton/yr)											
Emission Unit	PM	PM10	PM2.5	SO <sub>2</sub>	VOC	CO	NOx	Biogenic CO <sub>2</sub> as CO <sub>2</sub> e	Non-CO <sub>2</sub> GHG as CO <sub>2</sub> e	Single HAP	Total HAPs
Landfill	0.00	0.00	0.00	0.00	42.81	3.41	0.00	18,800	143,913	3.15 Toluene	8.83
Flare	2.47	2.47	2.47	2.55	0.00	58.56	10.77	20,874	34	1.27 HCL	1.27
Paved Roads - Fugitive	1.85	0.37	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Unpaved Roads - Fugitive	43.19	11.65	1.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total / United Refuse T003-31121-00291	47.51	14.49	3.70	2.55	42.81	61.97	10.77	39,674	143,947	3.15 Toluene	10.10
Total / National Serv-all T003-30376-00257	429.11	120.29	21.54	9.40	193.25	231.39	39.70	73,810	564,900	11.12 Toluene	35.83
Total for PSD and Title V	476.62	134.78	25.24	11.95	236.06	293.36	50.47	708,847		> 10	> 25

**Addendum to the Technical Support Document - Appendix A - VOC Emissions from Landfill**

**Company Name: Republic Services of Indiana, LP d/b/a United Refuse**  
**Address: 500 Smith Road, Fort Wayne, Indiana 46241**  
**Permit Number: T 003-31121-00291**  
**Reviewer: David J. Matousek**  
**Date: November 17, 2011**

<b>Potential to Emit</b>
--------------------------

**NMOC Emissions**

IDEM completed a computer simulation of the potential emissions from the landfill using US EPA LandGEM. This model indicated the highest emission rate of landfill gas was reached in the year 2000. LandGEM indicated a total of 39.83 Mg of NMOC (43.82 tons) would be generated in 2000. The potential to emit of the landfill is 43.82 tons per year of NMOC. LandGem emission factors are based on AP-42, Chapter 2.4, November 1998.

**VOC Emissions**

VOC emissions can be estimated from the NMOC emission rate using information provided in AP-42. The estimated emission rate of VOC depends on the classification of the waste in place. AP-42, Chapter 2.4-1, October 2008 indicates a difference between the emissions of landfills with the majority of their waste in place before 1992 and those with the majority of their waste in place after 1992. This difference is related to the applicability of the Resource Conservation and Recovery Act (RCRA) Subtitle D regulations, 40 CFR Part 258. These regulations became effective on October 9, 1993 and applied to landfills accepting waste on or after October 9, 1991. Prior to the RCRA Subtitle D regulations, hazardous waste could be landfilled along with municipal solid waste. This difference in the composition of the waste in place has a significant impact on the potential air emissions from the landfill. Republic Services of Indiana, LP d/b/a National Serv-All Landfill was constructed in 1966 and has accepted industrial waste containing asbestos and municipal waste (Co-Disposal). Only 11.8% of the total capacity of this landfill was in place in 1992. The vast majority of waste will be accepted post 1992. Since the majority of this sites waste will be in place after 1992, VOC emissions from the landfill are estimated to be 97.7% of the NMOC emissions. IDEM choose the 2008 version of AP-42, Chapter 2.4-1 for VOC because it more accurately reflects emissions from landfills. The potential to emit VOC is shown below:

NMOC Emission Rate	43.82	TPY
% VOC	97.70%	
VOC Emission Rate	42.81	TPY

<b>Limited Potential to Emit</b>
----------------------------------

**VOC Emissions Assuming 75% Collection Efficiency**

AP-42, Chapter 2.4-1 indicates approximately 75% of the VOC is captured, 25% is fugitive. Using this assumption, VOC emissions are shown below:

Total VOC Generation in the Landfill from LandGEM		42.81		TPY
Fugitive VOC Emissions (75% Collection)	= 42.81 x 25% =	10.70		TPY
VOC Emissions to Flare (75% Collection)	= 42.81 x 75% =	32.11		TPY
Destruction Efficiency	98%			
VOC Emissions after Flare	= 32.11 x ( 1 - 98% ) =	0.64		TPY
VOC Emissions after Flare		0.64		TPY
+ Fugitive VOC Emissions from Landfill		10.70		TPY
= Limited PTE of VOC		11.34		TPY

**Addendum to the Technical Support Document - Appendix A - Emission Calculation Sheet  
PTE and Fugitive Emissions from the Landfill**

**Company Name: Republic Services of Indiana, LP d/b/a United Refuse  
Address: 500 Smith Road, Fort Wayne, Indiana 46241  
Permit Number: T 003-31121-00291  
Reviewer: David J. Matousek  
Date: November 17, 2011**

Maximum Landfill Gas Flow	1,255 SCFM
Temperature	519.67 °R
Atmospheric Pressure	1.00 atm
Capture Efficiency	75.00%
Fugitive Gas Flow	314 SCFM

Non-HAP Pollutants					
Pollutant	Molecular Weight	Concentration (ppmv)	Average Pollutant Flow (SCFM)	---	Landfill Emission (TPY)
CO at 1,255 SCFM	28.01	140.00	0.18	---	3.41

Hazardous Air Pollutants					
Pollutant	Molecular Weight	Concentration (ppmv)	Average Pollutant Flow (SCFM)	Landfill PTE (TPY)	Landfill Fugitives (TPY)
1,1,1-Trichloroethane	133.41	0.48	0.0006	0.06	0.02
1,1,2,2-Tetrachloroethane	167.85	1.11	0.0014	0.16	0.04
1,1,2-Trichloroethane	133.41	0.10	0.0001	0.01	0.00
1,1-Dichloroethane	98.97	2.35	0.0029	0.20	0.05
1,1-Dichloroethene	96.94	0.20	0.0003	0.02	0.01
1,2-Dichloroethane	98.96	0.41	0.0005	0.04	0.01
1,2-Dichloropropane	112.99	0.18	0.0002	0.02	0.01
Acrylonitrile	53.06	6.33	0.0079	0.29	0.07
Benzene	78.11	1.91	0.0024	0.13	0.03
Carbon Disulfide	76.13	0.58	0.0007	0.04	0.01
Carbon Tetrachloride	153.84	4.00E-03	5.02E-06	5.00E-04	1.00E-04
Carbonyl Sulfide	60.07	0.49	0.0006	0.03	0.01
Chlorobenzene	112.56	0.25	0.0003	0.02	0.01
Chloroethane	64.52	1.25	0.0016	0.07	0.02
Chloroform	119.39	0.03	0.0000	0.00	0.00
Methyl Chloride	50.49	1.21	0.0015	0.05	0.01
p-Dichlorobenzene	147.00	0.21	0.0003	0.03	0.01
Dichloromethane	84.94	14.30	0.0179	1.06	0.27
Ethylbenzene	106.16	4.61	0.0058	0.43	0.11
Ethylene Dibromide	187.88	1.00E-03	1.26E-06	2.00E-04	1.00E-04
Hexane	86.18	6.57	0.0082	0.49	0.12
Mercury (Total)	200.61	2.92E-04	3.66E-07	1.00E-04	3.00E-05
Methyl Isobutyl Ketone	100.16	1.87	0.0023	0.16	0.04
Perchloroethylene	165.83	3.73	0.0047	0.54	0.14
Toluene	92.13	39.30	0.0493	3.15	0.79
Trichloroethylene	131.40	2.82	0.0035	0.32	0.08
Vinyl Chloride	62.50	7.34	0.0092	0.40	0.10
Xylene	106.16	12.00	0.0151	1.11	0.28
Highest HAP - Toluene				3.15	0.79
Total HAP				8.83	2.24

**Notes:**

- Emission factors are the default AP-42 emission factors listed in Chapter 2.4, Tables 2.4-1, and 2.4-2 November 1998 and LandGEM.
- The applicant submitted LandGEM data which is based on 2005 emission factors for HAPs.

**Methodology:**

- Average Flow (SCFM) = [ Maximum Landfill Flow (SCFM) ] x [ ppmv pollutant / 1,000,000 ]
- PTE (tons/yr) =  $\frac{360 \times \text{Average Flow (SCFM)} \times \text{MW (lb/lb mole)} \times \text{P (atm)}}{T(R)}$   
(AP-42, Chapter 2.4, Eq. 4 - converted)
- Fugitive Emissions = PTE x ( 1 - Capture Efficiency )

**Addendum to the Technical Support Document - Appendix A - Emission Calculation Sheet  
Landfill HAP Emissions Controlled by Flare**

**Company Name: Republic Services of Indiana, LP d/b/a United Refuse  
Address: 500 Smith Road, Fort Wayne, Indiana 46241  
Permit Number: T 003-31121-00257  
Reviewer: David J. Matousek  
Date: November 17, 2011**

**Maximum Landfill Gas Flow** 1,255 SCFM  
**Temperature** 519.67 °R  
**Atmospheric Pressure** 1.00 atm  
**Capture Efficiency** 75.00%  
**Maximum Gas Flow to Flare** 941 SCFM

Hazardous Air Pollutants						
Pollutant	Molecular Weight	Concentration (ppmv)	Average Pollutant Flow (SCFM)	Pollutant Flow to Flare (TPY)	Control Efficiency (%)	Controlled Emissions from Landfill (TPY)
1,1,1-Trichloroethane	133.41	0.48	0.0005	0.05	98.00%	0.001
1,1,1,2-Tetrachloroethane	167.85	1.11	0.0010	0.12	98.00%	0.0024
1,1,2-Trichloroethane	133.41	0.10	0.0001	0.01	98.00%	0.0002
1,1-Dichloroethane	98.97	2.35	0.0022	0.15	98.00%	0.003
1,1-Dichloroethene	96.94	0.20	0.0002	0.01	98.00%	0.0002
1,2-Dichloroethane	98.96	0.41	0.0004	0.03	98.00%	0.0006
1,2-Dichloropropane	112.99	0.18	0.0002	0.02	98.00%	0.0004
Acrylonitrile	53.06	6.33	0.0060	0.22	98.00%	0.0044
Benzene	78.11	1.91	0.0018	0.10	98.00%	0.002
Carbon Disulfide	76.13	0.58	0.0005	0.03	98.00%	0.0006
Carbon Tetrachloride	153.84	4.00E-03	4.00E-06	4.26E-04	98.00%	9.00E-06
Carbonyl Sulfide	60.07	0.49	0.0005	0.02	98.00%	0.0004
Chlorobenzene	112.56	0.25	0.0002	0.02	98.00%	0.0004
Chloroethane	64.52	1.25	0.0012	0.05	98.00%	0.0010
Chloroform	119.39	0.03	0.0000	0.00	98.00%	0.0000
Methyl Chloride	50.49	1.21	0.0011	0.04	98.00%	0.0008
p-Dichlorobenzene	147.00	0.21	0.0002	0.02	98.00%	0.0004
Dichloromethane	84.94	14.30	0.0135	0.79	98.00%	0.0158
Ethylbenzene	106.16	4.61	0.0043	0.32	98.00%	0.0064
Ethylene Dibromide	187.88	1.00E-03	1.00E-06	1.30E-04	98.00%	3.00E-06
Hexane	86.18	6.57	0.0062	0.37	98.00%	0.0074
Mercury (Total)	200.61	2.92E-04	0.00E+00	0.00E+00	0.00%	0.00E+00
Methyl Isobutyl Ketone	100.16	1.87	0.0018	0.12	98.00%	0.0024
Perchloroethylene	165.83	3.73	0.0035	0.40	98.00%	0.0080
Toluene	92.13	39.30	0.0370	2.36	98.00%	0.0472
Trichloroethylene	131.40	2.82	0.0027	0.25	98.00%	0.0050
Vinyl Chloride	62.50	7.34	0.0069	0.30	98.00%	0.0060
Xylene	106.16	12.00	0.0113	0.83	98.00%	0.0166
Highest Single HAP - Toluene						0.0472
Total HAP						0.1300

**Notes:**

- Emission factors are the default AP-42 emission factors listed in Chapter 2.4, Tables 2.4-1, and 2.4-2 November 1998 and LandGEM.
- The applicant submitted LandGEM data which is based on 2005 emission factors for HAPs.
- HAP Emissions are overestimated because of two collection efficiencies were used. One for fugitive emissions and one for flare emissions.

**Methodology:**

- Average Flow (SCFM) = [ Total Landfill Flow (SCFM) ] x [ ppmv pollutant / 1,000,000 ]
- PTE (tons/yr) =  $\frac{360 \times Q_p(\text{CFM}) \times MW(\text{lb/lb mole}) \times P(\text{atm})}{T(R)}$  - (AP-42, Chapter 2.4, Eq. 4 - converted)
- Fugitive Emissions = PTE - Captured Emissions

**Addendum to the Technical Support Document - Appendix A - Emission Calculation Sheet  
Landfill Flare - Flare Emissions**

**Company Name: Republic Services of Indiana, LP d/b/a United Refuse  
Address: 500 Smith Road, Fort Wayne, Indiana 46241  
Permit Number: T 003-31121-00291  
Reviewer: David J. Matousek  
Date: November 17, 2011**

<b>Input Data</b>
-------------------

Inlet Gas Temperature	519.67 R
Inlet Gas Pressure	1 atm
Maximum Landfill Gas Flow Rate	1,255 SCFM
Maximum Landfill Gas to Flare	1,200 SCFM
Molecular Weight (S)	32.065 lb/lb mole
Molecular Weight (SO <sub>2</sub> )	64.060 lb/lb mole
Molecular Weight (HCL)	36.458 lb/lb mole
Weight % Water in LFG	8%

Landfill Gas Flow Rate (Wet Basis)	Landfill Gas Flow Rate (Dry Basis)	% Methane	Methane Flow Rate (Dry Basis)	
1,200 SCFM	1,104 DSCFM	50.00%	552 DSCFM	or 291 DMMCF/yr

<b>Potential to Emit Calculations</b>
---------------------------------------

	PTE for Flare Combustion - Emission Factor Method					
	PM	PM10	PM2.5	NO <sub>x</sub>	CO	Dioxin/Furan
Emission Factor in lb/MMCF CH <sub>4</sub> /Dry Basis	17.00	17.00	17.00	74.00	402.50	4.20E-07
<b>Total Emissions from Flare (ton/yr)</b>	2.47	2.47	2.47	10.77	58.56	6.11E-08

PTE for Flare Combustion - AP-42 Default Concentrations					
Pollutant	Pollutant Volume (ppmv)	Pollutant Flow Q (scfm)	PTE (TPY)	Conversions / Notes	PTE (TPY)
S	47.74	0.0573	1.27	---	---
SO <sub>2</sub>	---	---	---	PTE (S) x MW (SO <sub>2</sub> ) / MW (S) =	2.55
HCL	42.00	0.0504	1.27	Emission Factor at Flare Exit	---

**Methodology:**

- 1) Methane Flow Rate = Flare Gas Flow Rate x (% Methane)
- 2) Unlimited PTE = Emission Factor (lb/DMMCF Methane) x Methane Flow Rate (DMMCF/yr) x 1 ton /2,000 lb
- 3) DSCFM = SCFM ( 1 - % Water )
- 4) Captured CO emissions from landfill = 75% of landfill generation.
- 5) PTE (SO<sub>2</sub>) = conversion factor x PTE (S)
- 6) Average Flow (SCFM) = [ Total Landfill Flow (SCFM) ] x [ ppmv pollutant / 1,000,000 ]
- 7)  $PTE (tons/yr) = \frac{360 \times Q_p(CFM) \times MW (lb/lb\ mole) \times P (atm)}{T (R)}$  (AP-42, Chapter 2.4, Eq. 4 - converted)

**Notes:**

- 1) Flare emission factors for PM, PM10, NO<sub>x</sub> and CO were provided by the applicant. They are higher than the emission factors listed in DRAFT AP-42, Chapter 2.4-21, October 2008, Table 2.4-4.
- 2) AP-42 does not include emission factors for PM10 or PM2.5. They are assumed identical to PM.

**Addendum to the Technical Support Document - Appendix A - Emission Calculation Sheet  
Greenhouse Gas Emissions**

**Company Name: Republic Services of Indiana, LP d/b/a United Refuse  
Address: 500 Smith Road, Fort Wayne, Indiana 46241  
Permit Number: T 003-31121-00291  
Reviewer: David J. Matousek  
Date: November 17, 2011**

**Landfill Emissions**

**LandGEM Emission Estimates for the Landfill in 2000**

Pollutant	PTE (TPY)	Global Warming Potential	CO <sub>2</sub> e (TPY)
Biogenic CO <sub>2</sub>	18,800	1	18,800
Non-Biogenic GHG (Methane)	6,853	21	143,913

**Landfill Emissions in 2000 (All CO<sub>2</sub> is Uncontrolled and 75% of Methane is Controlled by Flare)**

Pollutant	PTE CO <sub>2</sub> e (TPY)	Control Efficiency (%)	Landfill Emissions (TPY CO <sub>2</sub> e)
Biogenic CO <sub>2</sub>	18,800	0.00%	18,800
Non-Biogenic (Methane)	143,913	75.00%	35,978

**Flare Emissions**

**Flare Emissions Due to the Combustion of Methane in LFG - 75% Collection**

Landfill Gas Heating Value	500 Btu/scf
Total Landfill Gas Combusted	1,200 scfm
Landfill Gas sent to Flare 75% Collection	900 scfm
%Methane in Landfill Gas	50%
Methane Combusted in Flare	450 scfm
Heat Input to Flare	13.50 MMBtu/hr

**Flare Emissions Due to Methane Combustion**

Pollutant	Emission Factor (Kg/MMBtu)	PTE (TPY)	GWP	Flare Emissions (TPY CO <sub>2</sub> e)
Biogenic CO <sub>2</sub>	52.07	6,774	1	6,774
CH <sub>4</sub>	3.20E-03	0.42	21	9
N <sub>2</sub> O	6.30E-04	0.08	310	25

**Flare Emissions as a Result of the Landfill Gas Collection System**

Pollutant	PTE CO <sub>2</sub> e (TPY)	Capture Efficiency (%)	Flare Emissions (TPY CO <sub>2</sub> e)
Biogenic CO <sub>2</sub>	18,800	75.00%	14,100

**Total Flare Emissions**

Biogenic CO <sub>2</sub>	20,874 TPY as CO <sub>2</sub> e
Non-Biogenic CO <sub>2</sub>	34 TPY as CO <sub>2</sub> e

**Notes:**

On July 20, 2011, the U.S. EPA issued a final rule for the deferral for CO<sub>2</sub> emissions from bioenergy and other biogenic sources under the Prevention of Significant Deterioration (PSD) and Title V programs. According to this rule, the mass calculation of the greenhouse gas carbon dioxide shall not include carbon dioxide emissions resulting from the combustion or decomposition of non-fossilized and biodegradable organic material originating from plants, animals or microorganisms. CO<sub>2</sub> emissions from biogenic sources at the landfill are not included in determining Title V or PSD applicability until July 21, 2014. Fugitive and biogas combustion emissions of CH<sub>4</sub> and N<sub>2</sub>O are considered in Title V or PSD applicability.

**Addendum to the Technical Support Document - Appendix A - Emission Calculation Sheet  
Municipal Landfill - Emissions from Paved Roads**

**Company Name: Republic Services of Indiana, LP d/b/a United Refuse  
Address: 500 Smith Road, Fort Wayne, Indiana 46241  
Permit Number: T 003-31121-00291  
Reviewer: David J. Matousek  
Date: November 17, 2011**

Average Vehicle Weight Calculation							
Vehicle Type	Trucks/Day	Average Weight (tons)	Total Trips per Year	Miles per Trip	Vehicle Miles Traveled (miles per year)	Traffic Component (%)	Component Weight (tons)
Transfer Trailer	3	40	1,095	0.06	66	3.750%	1.50
Roll Off	57	20.5	20,805	0.06	1,248	71.250%	14.61
Dump Truck	20	14	7,300	0.06	438	25.000%	3.50
<b>Total VMT</b>					1,752		
<b>Average Vehicle Weight (tons) - W</b>							19.61

Site Specific Constants				
Value Name	Symbol	Value	Units	Source
Emission Factor	E	---	lb/VMT	Calculated
Particle Size Multiplier	k for PM	0.011	lb/VMT	AP-42 Table 13.2.1-1, January 2011
Particle Size Multiplier	k for PM10	0.0022	lb/VMT	AP-42 Table 13.2.1-1, January 2011
Particle Size Multiplier	k for PM2.5	0.00054	lb/VMT	AP-42 Table 13.2.1-1, January 2011
Silt Loading	sL (Winter)	29.6	g/cubic meter	AP-42, Table 13.2.1-2, January 2011, ADT <500
Silt Loading	sL (Non-Winter)	7.4	g/cubic meter	Previous Determination
Winter Days	Winter Days	90	days	Estimated by IDEM
Non-Winter Days	Non-Winter Days	275	days	Estimated by IDEM
Days >0.01" of rain	P	120	days	AP-42, Figure 13.2.1-2, January 2011
Total Days in Period	N	365	days	Days in the period
Mean Vehicle Weight	W	19.61	tons	Calculated above

Winter Emission Factor Calculations	
$E = [k * (sL \text{ for winter})^{0.91} * (W)^{1.02}] * [1 - P/(4 * N)]$	AP-42, Chapter 13.2.1-5, January 2011, Eq. 2
E for PM (lb/VMT) =	4.59 lb/VMT
E for PM10 (lb/VMT) =	0.92 lb/VMT
E for PM2.5 (lb/VMT) =	0.23 lb/VMT

Non-Winter Emission Factor Calculations	
$E = [k * (sL \text{ for non-winter})^{0.91} * (W)^{1.02}] * [1 - P/(4 * N)]$	AP-42, Chapter 13.2.1-5, January 2011, Eq. 2
E for PM (lb/VMT) =	1.30 lb/VMT
E for PM10 (lb/VMT) =	0.26 lb/VMT
E for PM2.5 (lb/VMT) =	0.06 lb/VMT

Annual Average Emission Factors	
$\text{Annual Average Emission Factor} = [\text{Winter Days} * \text{Winter Factor} + \text{Non-Winter Days} * \text{Non-Winter Factor}] / 365$	
E for PM (lb/VMT) =	2.11 lb/VMT
E for PM10 (lb/VMT) =	0.42 lb/VMT
E for PM2.5 (lb/VMT) =	0.10 lb/VMT

Potential to Emit	
PM Emissions (TPY) = [Annual Average E for PM (lb/VMT) * Total VMT/yr * 1 ton / 2,000 lb]	1.85 TPY
PM10 Emissions (TPY) = [Annual Average E for PM10 (lb/VMT) * Total VMT/yr * 1 ton / 2,000 lb]	0.37 TPY
PM2.5 Emissions (TPY) = [Annual Average E for PM2.5 (lb/VMT) * Total VMT/yr * 1 ton / 2,000 lb]	0.09 TPY

Limited Potential to Emit	
Control Efficiency	50.00%
Limited PM Emissions (TPY) = Potential to Emit PM * (1 - Control Efficiency)	0.93 TPY
Limited PM10 Emissions (TPY) = Potential to Emit PM10 * (1 - Control Efficiency)	0.19 TPY
Limited PM2.5 Emissions (TPY) = Potential to Emit PM2.5 * (1 - Control Efficiency)	0.05 TPY

**Addendum to the Technical Support Document - Appendix A - Emission Calculation Sheet  
Municipal Landfill - Emissions from Unpaved Roads**

**Company Name: Republic Services of Indiana, LP d/b/a United Refuse  
Address: 500 Smith Road, Fort Wayne, Indiana 46241  
Permit Number: T 003-31121-00291  
Reviewer: David J. Matousek  
Date: November 17, 2011**

**Average Vehicle Weight Calculation**

Vehicle Type	Trucks/Day	Average Weight (tons)	Total Trips per Year	Miles per Trip	Vehicle Miles Traveled (miles per year)	Traffic Component (%)	Component Weight (tons)
Transfer Trailer	3	40	1,095	0.6	657	3.750%	1.50
Roll Off	57	20.5	20,805	0.6	12,483	71.250%	14.61
Dump Truck	20	14	7,300	0.6	4,380	25.000%	3.50
<b>Total VMT</b>					17,520		
<b>Average Vehicle Weight (tons) - W</b>							19.61

**Site Specific Constants**

Value Name	Symbol	Value	Units	Source
Emission Factor	E	---	lb/VMT	Calculated
Particle Size Multiplier	k for PM	4.90	lb/VMT	AP-42, Table 13.2.2-2, November 2006
Particle Size Multiplier	k for PM10	1.50	lb/VMT	AP-42, Table 13.2.2-2, November 2006
Particle Size Multiplier	k for PM2.5	0.15	lb/VMT	AP-42, Table 13.2.2-2, November 2006
Silt Content	s	6.40	%	Previous Determination
Days >0.01" of rain	P	120.00	days	AP-42, Figure 13.2.2-1, November 2006
Emperical Constant	a for PM	0.70	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	a for PM10	0.90	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	a for PM2.5	0.90	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	b for PM	0.45	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	b for PM10	0.45	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	b for PM2.5	0.45	Unitless	AP-42, Table 13.2.2-2, November 2006
Mean Vehicle Weight	W	19.61	tons	Calculated above

**Emission Factor Calculations**

$$E = [k * (s/12)^a * (W/3)^b] * [(365 - P) / 365]$$

AP-42, Chapter 13.2.2, November 2006, Eq. 1a and 2

E for PM (lb/VMT) = 4.93 lb/VMT  
E for PM10 (lb/VMT) = 1.33 lb/VMT  
E for PM2.5 (lb/VMT) = 0.13 lb/VMT

**Potential to Emit**

PM Emissions (TPY) = [E for PM (lb/VMT) \* Total VMT/yr \* 1 ton / 2,000 lb] 43.19 TPY  
PM10 Emissions (TPY) = [E for PM10 (lb/VMT) \* Total VMT/yr \* 1 ton / 2,000 lb] 11.65 TPY  
PM2.5 Emissions (TPY) = [E for PM2.5 (lb/VMT) \* Total VMT/yr \* 1 ton / 2,000 lb] 1.14 TPY

**Limited Potential to Emit**

Control Efficiency 50.00%

Limited PM Emissions (TPY) = Potential to Emit PM \* (1 - Control Efficiency) 21.6 TPY  
Limited PM10 Emissions (TPY) = Potential to Emit PM10 \* (1 - Control Efficiency) 5.83 TPY  
Limited PM2.5 Emissions (TPY) = Potential to Emit PM2.5 \* (1 - Control Efficiency) 0.57 TPY

**Indiana Department of Environmental Management  
Office of Air Quality**

**Technical Support Document (TSD) for a Part 70 Operating Permit Renewal**

**Source Background and Description**

Source Name:	Republic Services of Indiana, LP d/b/a National Serv-all Landfill
Source Location:	6231 McBeth Road, Fort Wayne, Indiana 46809
County:	Allen
SIC Code:	4953
Permit Renewal No.:	T 003-30376-00257
Permit Reviewer:	David Matousek

The Office of Air Quality (OAQ) has reviewed the operating permit renewal application from Republic Services of Indiana, LP d/b/a National Serv-all Landfill relating to the operation of a stationary municipal solid waste landfill. On March 25, 2011, Republic Services of Indiana, LP d/b/a National Serv-all Landfill submitted an application to the OAQ requesting to renew its operating permit. Republic Services of Indiana, LP d/b/a National Serv-all Landfill was issued its first Part 70 Operating Permit Renewal T003-18142-00257 on December 27, 2006.

**Permitted Emission Units and Pollution Control Equipment**

The source consists of the following permitted emission units:

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M][40 CFR 63, Subpart AAAA]
- (b) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW][40 CFR 63, Subpart AAAA]

**Insignificant Activities**

The source also consists of the following insignificant activities:

- (a) 10,000-gallon leachate tank and 1,000 gallon propane tank
- (b) Propane or waste oil combustion sources from landfill maintenance garage with heat input equal to or less than six million (6,000,000) Btu per hour
- (c) Five (5) Raznor propane-fired space heaters (80-150,000 Btu per hour)
- (d) Ten (10) Raznor propane-fired radiant gas heaters (150,000 Btu per hour)
- (e) Three (3) crystal clean parts washers with a solvent consumption of 240 gallons per year, constructed after 1990 [326 IAC 8-3-2] [326 IAC 8-3-5]
- (f) Two (2) electric welders from hauling garage maintenance area
- (g) Bryant office propane-fired furnace (150,000 Btu per hour)

- (h) 1,000 gallon propane storage tank from hauling garage maintenance area
- (i) 500-gallon propane storage tank from flare station.
- (j) Two (2) air compressors
- (k) One (1) pressure washer
- (l) Three (3) 10,000 gallon highway diesel fuel underground storage tank (UST)
- (m) One (1) 2,800 gallon diesel fuel above ground storage tank (AST)
- (n) One (1) 180 gallon mobile diesel fuel AST
- (o) One (1) 350 gallon mobile motor oil AST
- (p) Two (2) 500 gallon mobile motor oil AST
- (q) One (1) 180 gallon mobile motor oil AST
- (r) One (1) 250 gallon gear oil AST
- (s) One (1) 180 gallon mobile gear oil AST
- (t) One (1) 350 gallon hydraulic oil AST
- (u) One (1) 250 gallon hydraulic oil AST
- (v) Two (2) 500 gallon hydraulic oil AST
- (w) One (1) 180 gallon mobile hydraulic oil AST
- (x) One (1) 280 gallon used oil AST
- (y) One (1) 500 gallon used oil AST
- (z) One (1) 55 gallon used oil AST
- (aa) One (1) 280 gallon mobile used oil AST
- (bb) One (1) 250 gallon transmission oil AST
- (cc) One (1) 55 gallon coolant AST
- (dd) One (1) 250 gallon coolant AST
- (ee) One (1) 180 gallon mobile coolant AST

### Existing Approvals

Since the issuance of the Part 70 Operating Permit T 003-18142-00257 on December 27, 2006, the source has constructed or has been operating under the following additional approvals:

- (a) Administrative Amendment No. 003-27018-00257, issued on October 10, 2008; and
- (b) Administrative Amendment No. 003-27719-00257, issued on March 15, 2009.

All terms and conditions of previous permits issued pursuant to permitting programs approved into the State Implementation Plan have been either incorporated as originally stated, revised, or deleted by this permit. All previous registrations and permits are superseded by this permit.

### Enforcement Issue

There are no enforcement actions pending.

### Emission Calculations

See Appendix A of this document for detailed emission calculations.

### County Attainment Status

The source is located in Allen County.

Pollutant	Designation
SO <sub>2</sub>	Better than national standards.
CO	Unclassifiable or attainment effective November 15, 1990.
O <sub>3</sub>	Attainment effective February 12, 2007, for the Fort Wayne area, including Allen County, for the 8-hour ozone standard. <sup>1</sup>
PM <sub>10</sub>	Unclassifiable effective November 15, 1990.
NO <sub>2</sub>	Cannot be classified or better than national standards.
Pb	Not designated.

<sup>1</sup>Unclassifiable or attainment effective October 18, 2000, for the 1-hour ozone standard which was revoked effective June 15, 2005.  
Unclassifiable or attainment effective April 5, 2005, for PM<sub>2.5</sub>.

- (a) Ozone Standards  
Volatile organic compounds (VOC) and Nitrogen Oxides (NO<sub>x</sub>) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone. Therefore, VOC and NO<sub>x</sub> emissions are considered when evaluating the rule applicability relating to ozone. Allen County has been designated as attainment or unclassifiable for ozone. Therefore, VOC and NO<sub>x</sub> emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

- (b) **PM<sub>2.5</sub>**  
 Allen County has been classified as attainment for PM<sub>2.5</sub>. On May 8, 2008, U.S. EPA promulgated the requirements for Prevention of Significant Deterioration (PSD) for PM<sub>2.5</sub> emissions. These rules became effective on July 15, 2008. On May 4, 2011 the air pollution control board issued an emergency rule establishing the direct PM<sub>2.5</sub> significant level at ten (10) tons per year. This rule became effective, June 28, 2011. Therefore, direct PM<sub>2.5</sub> and SO<sub>2</sub> emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2. See the State Rule Applicability – Entire Source section.
- (c) **Other Criteria Pollutants**  
 Allen County has been classified as attainment or unclassifiable in Indiana for SO<sub>2</sub>, CO, NO<sub>2</sub> and lead. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

**Fugitive Emissions**

This type of operation is not one of the twenty-eight (28) listed source categories under 326 IAC 2-2, 326 IAC 2-3, or 326 IAC 2-7; however, there is an applicable National Emission Standard for Hazardous Air Pollutants that was in effect on August 7, 1980, therefore fugitive emissions, from the affected facility to which the NESHAP is applicable, are counted toward the determination of PSD, Emission Offset, and Part 70 Permit applicability.

**Unrestricted Potential Emissions**

This table reflects the unrestricted potential emissions of the source.

Unrestricted Potential Emissions	
Pollutant	Tons/year
PM	429.11
PM <sub>10</sub>	120.29
PM <sub>2.5</sub>	21.54
SO <sub>2</sub>	9.40
VOC	193.25
CO	231.39
NO <sub>x</sub>	39.70
GHGs as CO <sub>2</sub> e	141,392
Single HAP - Toluene	14.21
Total HAP	31.13

- (a) The potential to emit (as defined in 326 IAC 2-7-1(29)) of PM10 and VOC is equal to or greater than 100 tons per year. Therefore, the source is subject to the provisions of 326 IAC 2-7 and will be issued a Part 70 Operating Permit Renewal.
- (b) This source has the potential to emit 118,248 tons of biogenic CO<sub>2</sub> per year. On July, 20, 2011 U.S. EPA issued a deferral of biogenic CO<sub>2</sub> emissions from PSD and Title V. Therefore, these emissions were not included in the listed GHG emissions.

**Part 70 Permit Conditions**

This source is subject to the requirements of 326 IAC 2-7, because the source met the following:

- (a) Emission limitations and standards, including those operational requirements and limitations that assure compliance with all applicable requirements at the time of issuance of Part 70 permits.
- (b) Monitoring and related record keeping requirements which assume that all reasonable information is provided to evaluate continuous compliance with the applicable requirements.

**Potential to Emit After Issuance**

The table below summarizes the potential to emit, reflecting all limits, of the emission units. Any new control equipment is considered federally enforceable only after issuance of this Part 70 permit renewal, and only to the extent that the effect of the control equipment is made practically enforceable in the permit.

Process/ Emission Unit	Potential To Emit of the Entire Source After Issuance of Renewal (tons/year)										
	PM	PM <sub>10</sub> *	PM <sub>2.5</sub> **	SO <sub>2</sub>	NO <sub>x</sub>	VOC	CO	CO <sub>2</sub> GHGs	Non CO <sub>2</sub> GHGs	Total HAPs	Worst Single HAP
Landfill	0.00	0.00	0.00	0.00	0.00	42.01	15.39	18,453	141,225	3.09 Toluene	9.33
Flare	9.12	9.12	9.12	9.40	39.70	3.02	216	99,795	167	4.70 HCL	4.70
Paved Roads - Fugitives	6.59	1.32	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Unpaved Roads - Fugitives	77.40	20.92	2.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total PTE of Entire Source	93.11	31.36	11.60	9.40	39.70	45.03	231.39	141,392		< 10	< 25
Title V Major Source Thresholds	NA	100	100	100	100	100	100	100,000 CO <sub>2</sub> e		25	10
PSD Major Source Thresholds	250	250	250	250	250	250	250	100,000 CO <sub>2</sub> e		NA	NA
negl. = negligible *Under the Part 70 Permit program (40 CFR 70), particulate matter with an aerodynamic diameter less than or equal to a nominal 10 micrometers (PM10), not particulate matter (PM), is considered as a "regulated air pollutant". **PM <sub>2.5</sub> listed is direct PM <sub>2.5</sub> .											

- (a) This existing stationary source is not major for PSD because the emissions of each regulated pollutant, excluding GHGs, are less than two hundred fifty (<250) tons per year, emissions of GHGs are greater than one hundred thousand (>100,000) tons of CO<sub>2</sub> equivalent emissions (CO<sub>2</sub>e) per year, however, non-CO<sub>2</sub> greenhouse gases expressed as CO<sub>2</sub>e is the only pollutant subject to PSD and that alone cannot trigger major source status for PSD, and it is not in one of the twenty-eight (28) listed source categories.
- (b) On July, 20, 2011 U.S. EPA issued a deferral of biogenic CO<sub>2</sub> emissions from PSD and Title V. Therefore, these emissions were not included in the listed GHG emissions.

### Federal Rule Applicability

#### **CAM**

- (a) Pursuant to 40 CFR 64.2, Compliance Assurance Monitoring (CAM) is applicable to each existing pollutant-specific emission unit that meets the following criteria:
  - (1) has a potential to emit before controls equal to or greater than the major source threshold for the pollutant involved;
  - (2) is subject to an emission limitation or standard for that pollutant; and
  - (3) uses a control device, as defined in 40 CFR 64.1, to comply with that emission limitation or standard.

The municipal solid waste landfill is not subject to the requirements of 40 CFR 64, CAM for PM, PM<sub>10</sub>, PM<sub>2.5</sub>, SO<sub>2</sub>, VOC, CO, NO<sub>x</sub> or HCL, because, their potential to emit before controls are less than the major source thresholds. The municipal solid waste landfill is not subject to 40 CFR 64, CAM for greenhouse gases, because no control device is used. The landfill has a potential to emit VOC in excess of 100 tons per year, single HAP greater than 10 tons per year and total HAP greater than 25 tons per year; however, the landfill is subject to an emission limitation or standard pursuant to a post November 15, 1990 New Source Performance Standard.

#### **New Source Performance Standards**

- (b) This source is subject to the New Source Performance Standard for Municipal Solid Waste Landfills (40 CFR 60.750, Subpart WWW), which is incorporated by reference as 326 IAC 12 and 326 IAC 8-8.1. This source which operates a municipal solid waste landfill that commenced construction, reconstruction or modification on or after May 30, 1991 shall comply with the provisions of 40 CFR Part 60, Subpart WWW, included as Attachment A of this permit, except for approved variances incorporated into the Collection and Control Design Plan in accordance with 40 CFR 60, Subpart WWW. The emission units subject to Subpart WWW include the following:
  - (1) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW] [40 CFR 61, Subpart M][40 CFR 63, Subpart AAAA]
  - (2) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW][40 CFR 63, Subpart AAAA]

The source is subject to the following portions of Subpart WWW:

- 1) 40 CFR 60.752(b)
- 2) 40 CFR 60.753
- 3) 40 CFR 60.754
- 4) 40 CFR 60.755
- 5) 40 CFR 60.756
- 6) 40 CFR 60.757
- 7) 40 CFR 60.758
- 8) 40 CFR 60.759

#### Operational Standards for Collection and Control Systems

[40 CFR 60.753][326 IAC 12][326 IAC 8.1]

Operate each interior wellhead in the collection system with a landfill gas temperature less than 55 °C and with either a nitrogen level less than 20 percent or an oxygen level less than 5 percent, except as indicated in (3) below (except for the landfill gas well, LFGASB16, which can have an oxygen level less than 16.9 percent). The Permittee may establish a higher operating temperature, nitrogen, or oxygen value at a particular well. A higher operating value demonstration shall show supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.

- (1) The nitrogen level shall be determined using Method 3C, unless an alternative method is established as allowed by 40CFR 60.752 (b)(2)(i).
- (2) Unless an alternative test method is established as allowed by 40 CFR 60.752 (b)(2)(i), the oxygen shall be determined by an oxygen meter using Method 3A except that; the span shall be set so that the regulatory limit is between 20 and 50 percent of the span; a data recorder is not required; only two calibration gases are required, a zero and span, and ambient air may be used as the span; a calibration error check is not required; the allowable sample bias, zero drift, and calibration drift are  $\pm 10$  percent.
- (3) Pursuant to Administrative Amendment 003-27018-00257, the Permittee has established a higher operating temperature at wells C25R, C30, C38, C39R, C40R, C41R, C43R, C44R, C46R, C47R, C52, C53, C56, C57, and C59. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.
- (4) Pursuant to Administrative Amendment 003-27719-00257, the Permittee has established a higher operating temperature at wells C24R, C42R, C45R, and C48R. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.

#### National Emission Standards for Hazardous Air Pollutants

- (c) This source is subject to the National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills (40 CFR 63.1935, Subpart AAAA), which is incorporated by reference as 326 IAC 20-67. This source which operates a stationary municipal solid waste landfill that has accepted waste since November 8, 1987 and has a design capacity equal to or greater than 2.5 million megagrams shall comply with 40 CFR Part 63, Subpart AAAA, included as Attachment B of this permit. The units subject to this rule include the following:

- 1) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M][40 CFR 63, Subpart AAAA]
- 2) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW][40 CFR 63, Subpart AAAA]

The source is subject to the following portions of Subpart AAAA:

- 1) 40 CFR 63.1955
- 2) 40 CFR 63.1960 to 40 CFR 63.1985

The provisions of 40 CFR 63 Subpart A – General Provisions, which are incorporated as 326 IAC 20-1-1, apply to the facility described in this section except when otherwise specified in 40 CFR 63 Subpart AAAA.

- (d) This source is subject to the National Emission Standards for Asbestos (40 CFR 61.140, Subpart M), which is incorporated by reference as 326 IAC 14-2. This source which operates a municipal solid waste landfill that receives asbestos-containing waste material from a source listed in 40 CFR 61.149, 40 CFR 61.150 or 40 CFR 61.155 shall comply with the provisions of 40 CFR Part 61, Subpart M, included as Attachment C of this permit. The units subject to this rule include the following:

- 1) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M][40 CFR 63, Subpart AAAA]

The source is subject to the following portions of Subpart M:

- 1) 40 CFR 61.154

The provisions of 40 CFR 63 Subpart A – General Provisions, which are incorporated as 326 IAC 14-1, apply to the facility described in this section except when otherwise specified in 40 CFR 61 Subpart M.

<b>State Rule Applicability - Entire Source</b>
---

**326 IAC 2-2 (Prevention of Significant Deterioration)**

The potential to emit for PM, PM10, SO2, NOx, CO and VOC from the entire source are all less than 250 tons per year. The potential to emit of non-CO2 greenhouse gases expressed as CO2e is in excess of 100,000 TPY; however, this is the only pollutant subject to PSD and cannot by itself make this a major source for PSD. Therefore, this source is a minor PSD source.

Part 70 Operating Permit Renewal No. T003-18142-00257 contained a limit on the amount of landfill gas combusted in the flare to avoid the applicable requirements of the Prevention of Significant Deterioration (PSD). IDEM estimated potential emissions from this source and has determined that a limit on the amount of landfill gas is not required. Excluding greenhouse gas emissions, all pollutants subject to PSD review are below the major source thresholds. Therefore, the PSD minor limit is not required. The removal of the PSD minor limit is a Title I change to the permit.

**326 IAC 2-6 (Emission Reporting)**

This source, not located in Lake, Porter, or LaPorte County, is subject to 326 IAC 2-6 (Emission Reporting) because it is required to have an operating permit pursuant to 326 IAC 2-7 (Part 70). The potential to emit of VOC and PM10 is less than 250 tons per year; and the potential to emit of CO, NOx, and SO2 is less than 2,500 tons per year. Therefore, pursuant to 326 IAC 2-6-3(a)(2)(b)(1), triennial reporting is required. An emission statement shall be submitted in accordance with the compliance schedule in 326 IAC 2-6-3 by July 1, 2013, and every three (3) years thereafter. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4.

**326 IAC 5-1 (Opacity Limitations)**

This source is subject to the opacity limitations specified in 326 IAC 5-1-2(1)

**326 IAC 6-4 (Fugitive Dust Emissions)**

Pursuant to 326 IAC 6-4, the source shall not generate fugitive dust to the extent that some portion of the material escapes beyond the property line or boundaries of the property, right-of-way or easement on which the source is located. The source currently controls fugitive dust emissions from the roads by applying water on an as-needed basis.

**326 IAC 6-5 (Fugitive Particulate Matter Emission Limitations)**

This rule applies to any source of fugitive particulate matter emissions located in nonattainment areas for particulate matter as designated by the Air Pollution Control Board that has potential fugitive particulate matter emissions of twenty-five tons per year or more. This rule also applies to any new source of fugitive particulate matter emissions located anywhere in the state, requiring a permit in accordance with 326 IAC 2 which did not receive all necessary preconstruction approvals before December 13, 1985. This source is located in an attainment county for particulate matter and received all necessary preconstruction approvals before December 13, 1985; therefore, 326 IAC 6-5 does not apply.

**326 IAC 6.5 PM Limitations Except Lake County**

This source is not subject to 326 IAC 6.5 because it is not located in one of the following counties: Clark, Dearborn, Dubois, Howard, Marion, St. Joseph, Vanderburgh, Vigo or Wayne.

**326 IAC 7-1.1 (Sulfur Dioxide Emission Limitations)**

Each combustion emission unit located at this source does not have a potential to emit twenty-five (25) tons per year or ten (10) pounds per hour of sulfur dioxide; therefore, the requirements of 326 IAC 7-1.1 do not apply.

<b>State Rule Applicability – Municipal Solid Waste Landfill</b>
--

**326 IAC 8-8.1 (Existing Municipal Solid Waste Landfills Not Located in Clark, Floyd, Lake and Porter Counties)**

This source is located in Allen County, has a capacity for future use and was constructed prior to May 30, 1991. It meets the definition of "existing municipal solid waste landfill" as defined in 326 IAC 8-8.1-2(b). Therefore, this landfill is subject to 326 IAC 8-8.1. 326 IAC 8-8.1 incorporates, by reference, all of the provisions of 40 CFR 60, Subpart WWW, Standards of Performance for Municipal Solid Waste Landfills. Therefore, the landfill complies with the requirements of 326 IAC 8-8.1 by following the requirements of 40 CFR 60, Subpart WWW.

**326 IAC 8-1-6 (New facilities; general reduction requirements)**

This rule applies to new facilities as of January 1, 1980 that have potential emissions of twenty-five tons or more per year, are located anywhere in the state, and are not otherwise regulated by other provisions of article 8, 326 IAC 20-48, or 326 IAC 20-56. The municipal solid waste landfill is subject to 326 IAC 8-8.1; therefore, 326 IAC 8-1-6 does not apply to the landfill.

### State Rule Applicability – Crystal Clean Parts Washer

#### **Cold Cleaner Operation [326 IAC 8-3-2]**

This cold cleaner degreasing facility is located in Allen County, was constructed after January 1, 1980 and is used to perform organic solvent degreasing operations. Pursuant to 326 IAC 8-3-2 (Cold Cleaner Operations), the Permittee of a cold cleaning facility shall:

- (a) equip the cleaner with a cover;
- (b) equip the cleaner with a facility for draining cleaned parts;
- (c) close the degreaser cover whenever parts are not being handled in the cleaner;
- (d) drain cleaned parts for at least fifteen (15) seconds or until dripping ceases;
- (e) provide a permanent, conspicuous label summarizing the operation requirements;
- (f) store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.

#### **Cold Cleaner Degreaser Operation and Control [326 IAC 8-3-5]**

This cold cleaner degreaser facility is located in Allen County, was constructed after January 1, 1980 and is used to perform organic solvent degreasing operations.

- (a) Pursuant to 326 IAC 8-3-5(a) (Cold Cleaner Degreaser Operation and Control), the Permittee of a cold cleaner degreaser facility shall ensure that the following control equipment requirements are met:
  - (1) Equip the degreaser with a cover. The cover must be designed so that it can be easily operated with one (1) hand if:
    - (A) the solvent volatility is greater than two (2) kiloPascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pounds per square inch) measured at thirty-eight degrees Celsius (38 °C) (one hundred degrees Fahrenheit (100 °F));
    - (B) the solvent is agitated; or
    - (C) the solvent is heated.
  - (2) Equip the degreaser with a facility for draining cleaned articles. If the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury) or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38 °C) (one hundred degrees Fahrenheit (100 °F)), then the drainage facility must be internal such that articles are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.
  - (3) Provide a permanent, conspicuous label which lists the operating requirements outlined in subsection (b).
  - (4) The solvent spray, if used, must be a solid, fluid stream and shall be applied at a pressure which does not cause excessive splashing.

- (5) Equip the degreaser with one (1) of the following control devices if the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury) or six-tenths (0.6) pounds per square inch measured at thirty-eight degrees Celsius (38 °C) (one hundred degrees Fahrenheit (100 °F)), or if the solvent is heated to a temperature greater than forty-eight and nine-tenths degrees Celsius (48.9 °C) (one hundred twenty degrees Fahrenheit (120 °F)):
  - (A) A freeboard that attains a freeboard ratio of seventy-five hundredths (0.75) or greater.
  - (B) A water cover when solvent is used is insoluble in, and heavier than, water.
  - (C) Other systems of demonstrated equivalent control such as a refrigerated chiller or carbon adsorption. Such systems shall be submitted to the U.S. EPA as a SIP revision.
- (b) Pursuant to 326 IAC 8-3-5(b) (Cold Cleaner Degreaser Operation and Control), the Permittee of a cold cleaning facility shall ensure that the following operating requirements are met:
  - (1) Close the cover whenever articles are not being handled in the degreaser.
  - (2) Drain cleaned articles for at least fifteen (15) seconds or until dripping ceases.
  - (3) Store waste solvent only in covered containers and prohibit the disposal or transfer of waste solvent in any manner in which greater than twenty percent (20%) of the waste solvent by weight could evaporate.

<b>State Rule Applicability – Electric Welders from hauling garage maintenance area</b>
---

**326 IAC 6-3 (Particulate Emission Limitations for Manufacturing Processes)**

In accordance with 326 IAC 6-3-1(9), the welding processes are exempt from this rule because they use less than 625 pounds of rod or wire per day.

<b>Compliance Determination and Monitoring Requirements</b>
---

Permits issued under 326 IAC 2-7 are required to ensure that sources can demonstrate compliance with all applicable state and federal rules on a continuous basis. All state and federal rules contain compliance provisions; however, these provisions do not always fulfill the requirement for a continuous demonstration. When this occurs, IDEM, OAQ, in conjunction with the source, must develop specific conditions to satisfy 326 IAC 2-7-5. As a result, Compliance Determination Requirements are included in the permit. The Compliance Determination Requirements in Section D of the permit are those conditions that are found directly within state and federal rules and the violation of which serves as grounds for enforcement action.

If the Compliance Determination Requirements are not sufficient to demonstrate continuous compliance, they will be supplemented with Compliance Monitoring Requirements, also in Section D of the permit. Unlike Compliance Determination Requirements, failure to meet Compliance Monitoring conditions would serve as a trigger for corrective actions and not grounds for enforcement action. However, a violation in relation to a compliance monitoring condition will arise through a source's failure to take the appropriate corrective actions within a specific time period.

**The compliance determination requirements applicable to this source are as follows:**

There are no additional compliance determination requirements for this source other than the New Source Performance Standards requirements.

**The compliance monitoring requirements applicable to this source are as follows:**

There are no additional compliance monitoring requirements for this source other than the New Source Performance Standards requirements.

**Proposed Changes**

The changes listed below have been made to Part 70 Operating Permit No. T 003-18142-00257. Deleted language appears as ~~strikethroughs~~ and new language appears in **bold**:

**Change #1**

The existing PSD minor limit in original Condition D.1.1 is not needed and has been removed from the permit. The removal of the PSD minor limit is a Title I change to the permit. The potential to emit of all regulated pollutants under PSD are under 250 TPY. Therefore, the PSD minor limit is not needed. This is a naturally minor source under PSD. The remaining D.1 conditions have been incorporated into separate Section E Conditions. The emission unit descriptions have been updated to show applicable NSPS and NESHAPs. Original Section D.2 has been renumbered to Section D.1. This is a title 1 modification. Revisions are shown below:

**Old Sections Deleted**

**SECTION D.1 FACILITY OPERATION CONDITIONS**

**Facility Description [326 IAC 2-7-5(15)]:**

- ~~(a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 Mega grams, constructed in 1966.~~
- ~~(b) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004.~~

~~(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)~~

**Emission Limitations and Standards [326 IAC 2-7-5(1)]**

~~D.1.1 PSD Minor Limit [326 IAC 2-2]~~

~~The input of landfill gas (LFG) into the flare shall be less than 2,365 million standard cubic feet per 12 consecutive month period, with compliance determined at the end of each month.~~

~~The landfill gas (LFG) usage limit is required to limit the potential to emit of CO to less than 241 tons per 12 consecutive month period. Compliance with this limit makes 326 IAC 2-2 (Prevention of Significant Deterioration) not applicable.~~

~~D.1.2 General Provisions Relating to NSPS [326 IAC 12-1][40 CFR Part 60, Subpart A]~~

- ~~(a) The provisions of 40 CFR Part 60, Subpart A - General Provisions, which are incorporated by reference in 326 IAC 12-1, apply to the facility described in this section except when otherwise specified in 40 CFR Part 60, Subpart WWW.~~

- ~~(b) The provisions of 40 CFR Part 61, Subpart A – General Provisions, which are incorporated as 326 IAC 14-1-1, apply to the facility described in this section except when otherwise specified in 40 CFR Part 61, Subpart M.~~
- ~~(c) The provisions of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated by reference in 326 IAC 20-1-1, apply to the facility described in this section except when otherwise specified in 40 CFR Part 63, Subpart AAAA.~~

~~D.1.3 Municipal Solid Waste Landfill NSPS [326 IAC 12] [40CFR 60.752, Subpart WWW]~~

~~The municipal solid waste landfill has a design capacity greater than 2.5 million megagrams (Mg) and shall either comply with 40CFR 60.752 (b)(2) or calculate the non methane organic compound (NMOC) emission rate for the landfill using the procedures specified in 40CFR 60.754(a)(3).~~

~~D.1.4 Operational Standards for Collection and Control Systems [40CFR 60.753]~~

~~In order to comply with 40 CFR 60.752 (b)(2)(ii) the Permittee shall:~~

- ~~(a) Operate the collection system such that gas is collected from each area, cell, or group of cells in the municipal solid waste landfill in which solid waste has been in place for five years if active or 2 years or more if closed or at final grade.~~
- ~~(b) Operate the collection system with negative pressure at each wellhead except under the following conditions:
  - ~~(1) Fire or increased well temperature. The Permittee shall record instances when positive pressure occurs in efforts to avoid a fire. These records shall be submitted with the semi-annual reports as provided in 40 CFR 60.757(f)(1).~~
  - ~~(2) Use of a geomembrane or synthetic cover. The Permittee shall develop acceptable pressure limits in the design plan.~~
  - ~~(3) A decommissioned well. A well may experience a static positive pressure after shut down to accommodate for declining flows. All design changes shall be approved by the Office of Air Quality (OAQ).~~~~
- ~~(c) Operate each interior wellhead in the collection system with a landfill gas temperature less than 55 °C and with either a nitrogen level less than 20 percent or an oxygen level less than 5 percent, except as indicated in (3) below (except for the landfill gas well, LFGASB16, which can have an oxygen level less than 16.9 percent). The Permittee may establish a higher operating temperature, nitrogen, or oxygen value at a particular well. A higher operating value demonstration shall show supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.
  - ~~(1) The nitrogen level shall be determined using Method 3C, unless an alternative method is established as allowed by 40CFR 60.752 (b)(2)(i).~~
  - ~~(2) Unless an alternative test method is established as allowed by 40 CFR 60.752 (b)(2)(i), the oxygen shall be determined by an oxygen meter using Method 3A except that; the span shall be set so that the regulatory limit is between 20 and 50 percent of the span; a data recorder is not required; only two calibration gases are required, a zero and span, and ambient air may be used as the span; a calibration error check is not required; the allowable sample bias, zero drift, and calibration drift are  $\pm$  10 percent.~~~~

- ~~(3) Pursuant to Administrative Amendment 003-27018-00257, the Permittee has established a higher operating temperature at wells C25R, C30, C38, C39R, C40R, C41R, C43R, C44R, C46R, C47R, C52, C53, C56, C57, and C59. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.~~
- ~~(4) Pursuant to Administrative Amendment 003-27719-00257, the Permittee has established a higher operating temperature at wells C24R, C42R, C45R, and C48R. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.~~
- ~~(d) Operate the collection system so that the methane concentration is less than 500 parts per million above background at the surface of the landfill. To determine if this level is exceeded, the Permittee shall conduct surface testing around the perimeter of the collection area and along a pattern that traverses the landfill at 30 meter intervals and where visual observations indicate elevated concentrations of landfill gas, such as distressed vegetation and cracks or seeps in the cover. The Permittee may establish an alternative traversing pattern that ensures equivalent coverage. A surface monitoring design plan shall be developed that includes a topographical map with the monitoring route and the rationale for any site-specific deviations from the 30 meter intervals. Areas with steep slopes or other dangerous areas may be excluded from the surface testing.~~
- ~~(e) Operate the system such that all collected gases are vented to a control system designed and operated in compliance with 40CFR 60.752(b)(2)(iii). In the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control system contributing to venting of the gas to the atmosphere shall be closed within one hour.~~
- ~~(f) Operate the control system at all times when the collected gas is routed to the system.~~
- ~~(g) If monitoring demonstrates that the operational requirements in 40 CFR 60.753(b), (c), or (d) are not met, corrective action shall be taken as specified in 40 CFR 60.755(a)(3) through (5) or 40 CFR 60.755(c). If corrective actions are taken as specified in 40 CFR 60.755, the monitored exceedance is not a violation of the operational requirements in 40 CFR 60.753.~~

~~D.1.5 National Emission Standards for Hazardous Air Pollutants for Active Asbestos Waste Disposal Sites (40 CFR 61.154, Subpart M)~~

~~Pursuant to National Emission Standards for Hazardous Air Pollutants 326 IAC14-2-1, (40 CFR 61.154, Subpart M), any active waste disposal site that receives asbestos-containing waste material must either:~~

- ~~(a) Allow no visible emissions to the outside air from any active waste disposal site where asbestos-containing waste material has been deposited, or comply with (b) or (c) below.~~
- ~~(b) At the end of each operating day or at least once every 24-hour period, asbestos-containing waste material that has been deposited during the previous 24-hour period must:~~
- ~~(1) Be covered with at least 15 centimeters (6 inches) of compacted non asbestos containing material, or~~

- ~~(2) — Be covered with a resinous or petroleum-based dust suppression agent that effectively binds dust and controls wind erosion. Such an agent shall be used in the manner and frequency recommended for the particular dust by the dust suppression agent manufacturer to achieve and maintain dust control. Other equally effective dust suppression agents may be used upon prior approval by the Administrator. Any used, spent, or other waste oil is not considered a dust suppression agent.~~
- ~~(c) — Use an alternate emissions control method that has received prior written approval by the Administrator according to the procedures described in 61.149(c)(2).~~
- ~~(d) — Also, unless a natural barrier deters access by the general public, warning signs and fencing must be installed or the requirements of paragraph (b)(1) above must be met. The perimeter of the disposal site must be fenced in a manner adequate to deter access by the general public. The warning signs must:~~
- ~~(1) — Be posted in such a manner and location that a person can easily read the legend; and~~
- ~~(2) — Conform to the requirements of 51 cm x 36 cm upright format signs specified in 29 CFR 1910.145(d)(4) and this paragraph; and~~
- ~~(3) — Display the information contained in the legend provided in 40 CFR 61.154 (b) (1) (iii).~~

~~D.1.6 — Municipal Solid Waste Landfill NESHAP [326 IAC 20] [40 CFR 63, Subpart AAAAA]~~

~~Pursuant to 40 CFR 63.1955, the Permittee shall:~~

- ~~(a) — Comply with the requirements of 40 CFR 60, Subpart WWW.~~
- ~~(b) — If the source is required by 40 CFR 60.752(b)(2) to install a collection and control system, the source shall comply with the general and continuing compliance requirements in 40 CFR 63.1960 through 40 CFR 63.1985.~~
- ~~(c) — For approval of collection and control systems that include any alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, record keeping or reporting provisions, the Permittee must follow the procedures in 40 CFR 60.752(b)(2). If alternatives have already been approved under 40 CFR part 60 subpart WWW or the Federal plan, or EPA approved and effective State or tribal plan, these alternatives can be used to comply with this subpart, except that all affected sources must comply with the startup, shutdown, and malfunction (SSM) requirements in Subpart A of this part as specified in Table 1 of 40 CFR 63 Subpart AAAAA and all affected sources must submit compliance reports every 6 months as specified in 40 CFR 63.1980(a) and (b), including information on all deviations that occurred during the 6-month reporting period. Deviations (as defined in 40 CFR 63.1965) for continuous emission monitors or numerical continuous parameter monitors must be determined using a 3-hour monitoring block average (as defined in 40 CFR 63.1975).~~

~~D.1.7 — Calculation of Non-Methane Organic Compound (NMOC) Rate [40 CFR 60.754] [326 IAC 8-8.1] [326 IAC 12]~~

~~Pursuant to 40 CFR 60.754, the Permittee shall, when calculating emissions for PSD purposes, estimate the NMOC emission rate for comparison to the PSD major source and significance levels in 40 CFR 51.166 or 40 CFR 52.21 using AP-42 or other approved measurement procedures. If a collection system, which complies with the provisions of 40 CFR 60.752(b)(2) is already installed, the Permittee shall estimate the NMOC emission rate using the procedures provided in 40 CFR 60.754(b).~~

## Compliance Determination Requirements

### ~~D.1.8 Testing Requirements [326 IAC 2-7-6(1),(6)] [40 CFR 60.754(b)]~~

- (a) ~~After installation of a collection and control system in compliance with 40 CFR 60.755, the Permittee shall calculate the non methane organic compound (NMOC) emission rate for purposes of determining when the system can be removed using the following equation:~~

$$M_{\text{NMOC}} = 1.89 \times 10^{-3} \cdot Q_{\text{LFG}} \cdot C_{\text{NMOC}}$$

where,

$M_{\text{NMOC}}$  = mass emission rate of NMOC, megagrams per year  
 $Q_{\text{LFG}}$  = flow rate of landfill gas, cubic meters per minute  
 $C_{\text{NMOC}}$  = NMOC concentration, parts per million by volume as hexane

- (1) ~~The flow rate of landfill gas,  $Q_{\text{LFG}}$ , shall be determined by measuring the total landfill gas flow rate at the common header pipe that leads to the control device using a gas flow measuring device calibrated according to the provisions of section 4 of Method 2E of appendix A of 40 CFR 60.~~
- (2) ~~The average NMOC concentration,  $C_{\text{NMOC}}$ , shall be determined by collecting and analyzing landfill gas sampled from the common header pipe before the gas moving or condensate removal equipment using the procedures in Method 25C or Method 18 of appendix A of 40 CFR 60. If using Method 18 of Appendix A of 40 CFR 60, the minimum list of compounds to be tested shall be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42). The sample location on the common header pipe shall be before any condensate removal or other gas refining units. The Permittee shall divide the NMOC concentration from Method 25C of Appendix A of 40 CFR 60 by six to convert from  $C_{\text{NMOC}}$  as carbon to  $C_{\text{NMOC}}$  as hexane.~~
- (3) ~~The Permittee may use another method to determine landfill gas flow rate and NMOC concentration if the method has been approved by the Office of Air Quality (OAQ).~~

- (b) ~~Testing shall be conducted in accordance with Section C - Performance Testing.~~

### ~~D.1.9 Compliance Determination [40 CFR 63.1960]~~

~~Pursuant to 40 CFR 63.1960, compliance with 40 CFR 63, Subpart AAAA is determined by the following:~~

- (a) ~~The same way it is determined for 40 CFR 60, Subpart WWW, including performance testing, monitoring of the collection system, continuous parameter monitoring, and other credible evidence.~~
- (b) ~~Continuous parameter monitoring data, collected under 40 CFR 60.756(b)(1), (c)(1), and (d) of subpart WWW, are used to demonstrate compliance with the operating conditions for control systems. If a deviation (as defined in 40 CFR 63.1965) occurs, the Permittee has failed to meet the control device operating conditions described in 40 CFR 60, Subpart WWW and has deviated from the requirements of this subpart.~~
- (c) ~~The Permittee must develop and implement a written Startup, Shutdown and Malfunction (SSM) plan according to the provisions in 40 CFR 63.6(e)(3). A copy of the SSM plan must be maintained on site. Failure to write, implement, or maintain a copy of the SSM plan is a deviation from the requirements of this subpart.~~

## **Compliance Monitoring Requirements ~~[326 IAC 2-7-6(1)] [326 IAC 2-7-5(1)]~~**

### **~~D.1.10 Monitoring [40 CFR 60.756]~~**

~~Except as provided in 40 CFR 60.752(b)(2)(i)(B):~~

- ~~(a) The Permittee seeking to comply with 40 CFR 60.752(b)(2)(ii)(A) for an active gas collection shall install a sampling port and a thermometer, other temperature measuring device, or an access port for temperature measurements at each wellhead and:
  - ~~(1) Measure the gauge pressure in the gas collection header on a monthly basis as provided in 40 CFR 60.755(a)(3);~~
  - ~~(2) Monitor nitrogen or oxygen concentration in the landfill gas on a monthly basis as provided in 40 FR 60.755(a)(5); and~~
  - ~~(3) Monitor temperature of the landfill gas on a monthly basis as provided in 40 CFR 60.755(a)(5).~~~~
- ~~(b) The Permittee seeking to comply with 40CFR 60.752(b)(2)(iii) using an open flare shall install, calibrate, maintain, and operate according to the manufacturers specifications the following equipment:
  - ~~(1) Heat sensing device, such as an ultraviolet beam sensor or thermocouple, at the pilot light or the flame itself to indicate the continuous presence of a flame.~~
  - ~~(2) A device that records flow to or bypass of the flare. The Permittee shall either install, calibrate, and maintain a gas flow rate measuring device that shall record the flow to the control device at least every fifteen minutes; or secure the bypass line valve in the closed position with a car seal or a lock-and-key type configuration. A visual inspection of the seal or closure of the seal or closure mechanism shall be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.~~~~
- ~~(c) The Permittee seeking to install a collection system that does not meet the specifications in 40 CFR 60.759 or seeking to monitor alternative parameters to those required by 40 CFR 60.753 through 40 CFR 60.756 shall provide information satisfactory to the Office of Air Quality (OAQ) as provided in 40 CFR 60.752(b)(2)(i)(B) and (C) describing the design and operation of the collection system, the operating parameters that would indicate proper performance, and appropriate monitoring procedures. The Office of Air Quality (OAQ) may specify additional appropriate monitoring procedures.~~
- ~~(d) The Permittee seeking to demonstrate compliance with 40 CFR 60.755(c), shall monitor surface concentrations of methane according to the instrument specifications and procedures provided in 40 CFR 60.755(d). Any closed landfill that has no monitored exceedances of the operational standard in three consecutive quarterly monitoring periods may skip to annual monitoring. Any methane reading of 500 ppm or more above background detected during the annual monitoring returns the frequency for that landfill to quarterly monitoring.~~

### **~~D.1.11 Compliance Provisions [40CFR 60.755]~~**

- ~~(a) Except as provided in 40CFR 60.752(b)(2)(i)(B), the specified methods below shall be used to determine whether the gas collection system is in compliance with 40 CFR 60.752(b)(2)(i).~~

- (1) For the purpose of calculating the maximum expected gas generation flow rate from the landfill to determine compliance with 60.752(b)(2)(ii)(A)(1), one of the following equations shall be used. The  $k$  and  $L_o$  kinetic factors should be those published in the most recent Compilation of Air Pollution Emission Factors (AP42) or other site-specific values demonstrated to be appropriate and approved by the Office of Air Quality (OAQ). If  $k$  has been determined as specified in 40 CFR 60.754(a)(4), the value of  $k$  determined from the test shall be used. A value of no more than 15 years shall be used for the intended use period of the gas mover equipment. The active life of the landfill is the age of the landfill plus the estimated number of years until closure.

For sites with unknown year-to-year solid waste acceptance rate:

$$Q_m = 2L_o R (e^{-kc} - e^{-kt})$$

where,

$Q_m$  = maximum expected gas generation flow rate, cubic meters per year

$L_o$  = methane generation potential, cubic meters per megagram solid waste

$R$  = average annual acceptance rate, megagrams per year

$k$  = methane generation rate constant, year<sup>-1</sup>

$t$  = age of the landfill at equipment installation plus the time the owner or operator intends to use the gas mover equipment or active life of the landfill, whichever is less. If the equipment is installed after closure,  $t$  is the age of the landfill at installation, years.

$c$  = time since closure, years (for an active landfill  $c = 0$  and  $e^{-kc} = 1$ )

For sites with known year-to-year solid waste acceptance rate:

$$Q_M = \sum_{i=1}^n 2kL_o M_i (e^{-kt_i})$$

where,

$Q_M$  = maximum expected gas generation flow rate, cubic meters per year

$k$  = methane generation rate constant, year<sup>-1</sup>

$L_o$  = methane generation potential, cubic meters per megagram solid waste

$M_i$  = mass of solid waste in the  $i^{\text{th}}$  section, megagrams

$t_i$  = age of the  $i^{\text{th}}$  section, years

If a collection and control system has been installed, actual flow data may be used to project the maximum expected gas generation flow rate instead of, or in conjunction with, the equations in 40 CFR 60.755(a)(1)(i) and (ii). If the landfill is still accepting waste, the actual measured flow data will not equal the maximum expected gas generation rate, so calculations using the equations in 40 CFR 60.755(a)(1)(i) or (ii) or other methods shall be used to predict the maximum expected gas generation rate over the intended period of use of the gas control system equipment.

- (2) For the purposes of determining sufficient density of gas collector for compliance with 40 CFR 60.752 (b)(2)(ii)(A)(2), the Permittee shall design a system of vertical wells, horizontal collectors, or other collection devices, satisfactory to the Office of Air Quality (OAQ), capable of controlling and extracting gas from all portions of the landfill sufficient to meet all operational and performance standards.

- ~~(3) — For the purpose of demonstrating whether the gas collection system flow rate is sufficient to determine compliance with 40 CFR 60.752(b)(2)(ii)(A)(3), the Permittee shall measure gauge pressure in the gas collection header at each individual well, monthly. If a positive pressure exists, action shall be initiated to correct the exceedance within five (5) calendar days, except for the three conditions allowed under 40 CFR 60.753(b). If negative pressure cannot be achieved without excess air infiltration within fifteen (15) calendar days of the first measurement, the gas collection system shall be expanded to correct the exceedance within 120 days of the initial measurement of positive pressure. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. An alternative timeline for correcting the exceedance may be submitted to the Administrator for approval.~~
- ~~(4) — The Permittee is not required to expand the system as required in 40 CFR 60.755(a)(3) during the first 180 days after gas collection system start-up.~~
- ~~(5) — For the purpose of identifying whether excess air infiltration into the landfill is occurring, the Permittee shall monitor each well monthly for temperature and nitrogen or oxygen as provided in 40 CFR 60.753(c). If a well exceeds one of these operating parameters, action shall be initiated to correct the exceedance within five (5) calendar days. If correction of the exceedance cannot be achieved within fifteen (15) calendar days of the first measurement, the gas collection system shall be expanded to correct the exceedance within 120 days of the initial exceedance. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. An alternative timeline for correcting the exceedance may be submitted to the Administrator for approval.~~
- ~~(6) — If the Permittee seeks to demonstrate compliance with 40 CFR 60.752(b)(2)(ii)(A)(4) through the use of a collection system not conforming to the specifications provided in 40 CFR 60.759, then the Permittee shall provide information satisfactory to the Office of Air Quality (OAQ) as specified in 40 CFR 60.752 (b)(2)(i)(C) demonstrating that off-site migration is being controlled.~~
- ~~(b) — For purposes of compliance with 40 CFR 60.753(a), the Permittee shall place each well or design component of a controlled landfill as specified in the approved design plan as provided in 40 CFR 60.752(b)(2)(i). Each well shall be installed no later than 60 days after the date on which the initial solid waste has been in place for a period of five (5) years or more if active or two (2) years or more if closed or at final grade.~~
- ~~(c) — The following procedures shall be used for compliance with the surface methane operational standard as provided in 40 CFR 60.753 (d):~~
- ~~(1) — After installation of the collection system, the Permittee shall monitor surface concentrations of methane along the entire perimeter of the collection area and along a pattern that traverses the landfill at 30 meter intervals (or a site-specific established spacing) for each collection area on a quarterly basis using an organic vapor analyzer, flame ionization detector, or other portable monitor meeting the specifications provided in 40 CFR 60.755(d).~~
- ~~(2) — The background concentration shall be determined by moving the probe inlet upwind and downwind outside the boundary of the landfill at a distance of at least 30 meters from perimeter wells.~~

~~(3) — Surface emission monitoring shall be performed in accordance with section 4.3.1 of Method 21 of appendix A of 40 CFR 60, except that the probe inlet shall be placed within five(5) to ten(10) centimeters of the ground. Monitoring shall be performed during typical meteorological conditions.~~

~~(4) — Any reading of 500 parts per million or more above background at any location shall be recorded as a monitored exceedance and the actions specified in 40 CFR 60.755(c)(4)(i) through (v) should be taken. As long as the specified actions are taken, the exceedance is not a violation of the operational requirements of 40 CFR 60.753(d).~~

~~The location of each monitored exceedance shall be marked and the location recorded.~~

~~Cover maintenance or adjustments to the vacuum of the adjacent wells to increase the gas collection in the vicinity of each exceedance shall be made and the location shall be re-monitored within ten (10) calendar days of detecting the exceedance.~~

~~If the re-monitoring of the location shows a second exceedance, additional corrective action shall be taken and the location shall be monitored again within ten (10) days of the second exceedance. If re-monitoring shows a third exceedance for the same location, the action specified in paragraph 40CFR 60.755(c)(4)(v) of this section shall be taken, and no further monitoring of that location is required until the action specified in 40 CFR 60.755(c)(4)(v) has been taken.~~

~~Any location that initially showed an exceedance but has a methane concentration less than 500 ppm methane above background at the 10-day remonitoring specified in 40 CFR 60.755(c)(4)(ii) or (iii) shall be re-monitored one (1) month from the initial exceedance. If the one (1) month re-monitoring shows a concentration less than 500 parts per million above background, no further monitoring of that location is required until the next quarterly monitoring period. If the one (1) month remonitoring shows an exceedance, the actions specified in 40CFR 60.755(c)(4)(iii) or (v) shall be taken.~~

~~For any location where monitored methane concentration equals or exceeds 500 parts per million above background three times within a quarterly period, a new well or other collection device shall be installed within 120 calendar of the initial exceedance. An alternative remedy to the exceedance, such as upgrading the blower, header pipes or control device, and a corresponding timeline for installation may be submitted to the Office of Air Quality (OAQ) for approval.~~

~~(5) — The Permittee shall implement a program to monitor for cover integrity and implement cover repairs as necessary on a monthly basis.~~

~~(d) — The Permittee seeking to comply with the provisions of 40 CFR 60.755(c) shall comply with the following instrumentation specifications and procedures for surface emission monitoring devices:~~

~~(1) — The portable analyzer shall meet the instrument specifications provided in section 3 of Method 21 of appendix A of 40 CFR 60, except the methane shall replace all references to volatile organic compound (VOC).~~

~~(2) — The calibration gas shall be methane, diluted to a nominal concentration of 500 parts per million in air.~~

- ~~(3) — To meet the performance evaluation requirements in section 3.1.3 of Method 21 of appendix A of 40 CFR 60, the instrument evaluation procedures of section 4.4 of Method 21 of appendix A of 40 CFR 60 shall be used.~~
- ~~(4) — The calibration procedures provided in section 4.2 of Method 21 of appendix A of 40 CFR 60 shall be followed immediately before commencing a surface monitoring survey.~~
- ~~(e) — The provisions of 40 CFR 60.755 shall apply at all times, except during periods of startup, shutdown, or malfunction, provided that the duration of start-up, shutdown, or malfunction, shall not exceed five (5) days for collection systems and shall not exceed one (1) hour for treatment or control devices.~~

### **Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]**

#### D.1.12 Reporting Requirements [40CFR 60.757]

Pursuant to 40CFR 60.757, except as provided in 40 CFR 60.752(b)(2)(i)(B), the Permittee shall:

- ~~(a) — Submit an amended design capacity report to the Office of Air Quality (OAQ) providing notification of any increase in the design capacity of the landfill.~~
- ~~(b) — Submit a closure report to the Office of Air Quality (OAQ) within thirty days of waste acceptance cessation. The Office of Air Quality (OAQ) may request additional information as may be necessary to verify that permanent closure has taken place in accordance with the requirements of 40CFR 258.60. If a closure report has been submitted to the Office of Air Quality (OAQ), no additional wastes may be placed into the landfill without filing a notification of modification as described under 40 CFR 60.7(a)(4).~~
- ~~(c) — Submit an equipment removal report to the Office of Air Quality (OAQ) thirty (30) days prior to removal or cessation of operation of the control equipment. The equipment removal report shall contain all of the following items: a copy of the closure report submitted in accordance with 40 CFR 60.757(d), a copy of the initial performance test report demonstrating that the fifteen (15) year minimum control period has expired, and dated copies of three (3) successive NMOC emission rate reports demonstrating that the landfill is no longer producing 50 megagrams or greater of NMOC per year. The Office of Air Quality (OAQ) may request such additional information as may be necessary to verify that all of the conditions for removal in 40 CFR 60.752(b)(2)(v) have been met.~~
- ~~(d) — Submit semi-annual reports of the following recorded information. The initial annual report shall be submitted within 180 days of installation and start-up of the collection and control system, and shall include the initial performance test report required under 40CFR 60.8. For enclosed combustion devices and flares, reportable exceedances are defined under 40 CFR 60.758(c).
  - ~~(1) — Value and length of time for exceedance of applicable parameters monitored under 40CFR 60.756(a), (b), (c), and (d).~~
  - ~~(2) — Description and duration of all periods when the gas stream is diverted from the control device through a bypass line or the indication of bypass flow as specified under 40 CFR 60.756.~~
  - ~~(3) — Description and duration of all periods when the control device was not operating for a period exceeding one (1) hour and length of time the control device was not operating.~~~~

- ~~(4) — All periods when the collection system was not operating in excess of five (5) days.~~
- ~~(5) — Location of each exceedance of the 500 parts per million methane concentration as provided in 40CFR 60.753(d) and the concentration recorded at each location for which an exceedance was recorded in the previous month.~~
- ~~(6) — Date of installation and the location of each well or collection system expansion added pursuant to 40 CFR 60.755(a)(3), (b), and (c)(4).~~
- ~~(e) — The Permittee complying with 40 CFR 40.752(b)(2)(iii) shall include the following information with the initial performance test report required under 40 CFR 60.8:~~
  - ~~(1) — A diagram of the collection system showing collection system positioning including all wells, horizontal collectors, surface collectors, or other gas extraction devices, including the locations of any areas excluded from collection and the proposed sites for the future collection system expansion.~~
  - ~~(2) — The data upon which the sufficient density of wells, horizontal collectors, surface collectors, or other gas extraction devices and the gas mover equipment sizing are based.~~
  - ~~(3) — The documentation of the presence of asbestos or nondegradable material for each area from which collection wells have been excluded based on the presence of asbestos or nondegradable material.~~
  - ~~(4) — The sum of the gas generation flow rates for all areas from which collection wells have been excluded based on nonproductivity and the calculations of gas generation flow rate for each excluded area.~~
  - ~~(5) — The provisions for increasing gas mover equipment capacity with increased gas generation flow rate, if the present gas mover equipment is inadequate to move the maximum flow rate expected over the life of the landfill.~~
  - ~~(6) — The provisions for the control of off-site migration.~~
- ~~(f) — A summary of the above information shall be submitted to the address listed in Section C – General Reporting Requirements, of this permit.~~
- ~~(g) — The reporting period for the semi-annual report required in Condition D.1.12 (d) shall be from January 1 to June 30 and July 1 to December 31. Reports must be submitted every six (6) months to IDEM, OAQ. The reports shall be due within 30 days of the end of the reporting period.~~

~~D.1.13 Record Keeping Requirements [326 IAC 12] [40CFR 60.758]~~

~~Pursuant to 40CFR 60.758~~

- ~~(a) — Except as provided in 40 CFR 60.752(b)(2)(i)(B), the Permittee subject to 40CFR 60.752(b) shall keep for at least 5 years up-to-date, readily accessible, on-site records of the design capacity report which triggered 40 CFR 60.752(b), the current amount of solid waste in-place, and the year-by-year waste acceptance rate. Off-site records may be maintained if they are retrievable within four (4) hours. Either paper copy or electronic formats are acceptable.~~

- ~~(b) Except as provided in 40 CFR 60.752(b)(2)(i)(B), the Permittee of a controlled landfill shall keep up-to-date, readily accessible records for the life of the control equipment listed in (a) through (d) below as measured during the initial performance test or compliance determination. Records of subsequent tests or monitoring shall be maintained for a minimum of five (5) years. Records of control device vendor specifications shall be maintained until removal.~~
- ~~(1) Where the Permittee subject to the provisions of 40 CFR 60.758 seeks to demonstrate compliance with 40CFR 60.752(b)(2)(ii):~~
- ~~(A) The maximum expected gas generation flow rate as calculated in 40 CFR 60.755(a)(1). The Permittee may use another method to determine the maximum gas generation flow rate, if the method has been approved by the Office of Air Quality (OAQ).~~
- ~~(B) The density of wells, horizontal collectors, surface collectors, or other gas extraction devices determined using the procedures specified in 40 CFR 60.759(a)(1).~~
- ~~(2) The Permittee demonstrating compliance with 40 CFR 60.752(b)(2)(iii)(A) through use of an open flare shall keep records of:~~
- ~~(A) The flare type (i.e., steam-assisted, air-assisted, or nonassisted), all visible emission readings, heat content determination, flow rate or bypass flow rate measurements, and exit velocity determinations made during the performance test as specified in 40 CFR 60.18.~~
- ~~(B) Continuous records of the flare pilot flame or flare flame monitoring and records of all periods of operations during which the pilot flame of the flare flame is absent.~~
- ~~(c) Except as provided in 40 CFR 60.752(b)(2)(i)(B), the Permittee of a controlled landfill subject to the provisions of this subpart shall keep for 5 years up-to-date, readily accessible continuous records of the equipment operating parameters specified to be monitored in 40 CFR 60.756 as well as up-to-date, readily accessible records for periods of operation during which the parameter boundaries established during the most recent performance test are exceeded.~~
- ~~(1) The Permittee subject to 40 CFR 60.758 shall keep up-to-date, readily accessible continuous records of the indication of flow to the control device or the indication of bypass flow or records of monthly inspections of car seals or lock-and-key configurations used to seal bypass lines, specified under 40 CFR 60.756.~~
- ~~(2) The Permittee seeking to comply with the provisions of 40 CFR 60.758 by use of an open flare shall keep up-to-date, readily accessible continuous records of the flame or flare pilot flame monitoring specified under 40 CFR 60.756(c), and up-to-date, readily accessible records of all periods of operation in which the flame or flare pilot flame is absent.~~
- ~~(d) Except as provided in 40 CFR 60.752(b)(2)(i)(B), the Permittee subject to the provisions of this subpart shall keep for the life of the collection system an up-to-date, readily accessible plot map showing each existing and planned collector in the system and providing a unique identification location label for each collector.~~

- ~~(1) The Permittee subject to the provisions of 40 CFR 60.758 shall keep up-to-date, readily accessible records of the installation date and location of all newly installed collectors as specified in 40 CFR 60.755 (b).~~
- ~~(2) The Permittee subject to the provisions of 40 CFR 60.758 shall keep readily accessible documentation of the nature, date of deposition, amount, and location of asbestos-containing or nondegradable waste excluded from collection as provided in 40 CFR 60.759 (a)(3)(i) as well as any non-productive areas excluded from collection as provided in 40 CFR 60.759 (a)(3)(ii).~~
- ~~(e) Except as provided in 40 CFR 60.752(b)(2)(i)(B), the Permittee subject to the provisions of this subpart shall keep for at least 5 years up-to-date, readily accessible records of all collection and control system exceedances of the operational standards in 40 CFR 60.753, the reading in the subsequent month whether or not the second reading is an exceedance, and the location of each exceedance.~~
- ~~(f) Landfill owners or operators who convert design capacity from volume to mass or mass to volume to demonstrate that landfill design capacity is less than 2.5 million megagrams or 2.5 million cubic meters, as provided in the definition of design capacity, shall keep readily accessible, on-site records of the annual recalculation of site-specific density, design capacity, and the supporting documentation. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.~~

~~D.1.14 Record keeping for NESHAP for Asbestos Active Waste Disposal Sites [40 CFR 61.154]~~

- ~~(a) For all asbestos containing waste material received, the owner or operator of the active waste disposal site shall:
  - ~~(1) Maintain waste shipment records, using a form similar to that shown in figure 4 of 40 CFR 61, Subpart M, and include the following information
    - ~~(A) The name, address, and telephone number of the waste generator;~~
    - ~~(B) The name, address, and telephone number of the transporter(s);~~
    - ~~(C) The quantity of the asbestos containing waste material in cubic meters (cubic yards).~~
    - ~~(D) The presence of improperly enclosed or uncovered waste, or any asbestos-containing waste material not sealed in leak-tight containers. Report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site, by the following working day, the presence of a significant amount of improperly enclosed or uncovered waste. Submit a copy of the waste shipment record along with the report.~~
    - ~~(E) The date of the receipt.~~~~
  - ~~(2) As soon as possible and no longer than 30 days after receipt of the waste, send a copy of the signed waste shipment record to the waste generator.~~~~

- ~~(3) — Upon discovering a discrepancy between the quantity of waste designated on the waste shipment records and the quantity actually received, attempt to reconcile the discrepancy with the waste generator. If the discrepancy is not resolved within 15 days after receiving the waste, immediately report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site. Describe the discrepancy and attempts to reconcile it, and submit a copy of the waste shipment record along with the report.~~
- ~~(4) — Retain a copy of all records and reports required by this paragraph for at least 2 years.~~
- ~~(b) — Maintain until closure, records of the location, depth and area, and quantity in cubic meters (cubic yards) of asbestos-containing waste material within the disposal site on a map or diagram of the disposal area.~~
- ~~(c) — Upon closure, comply with all the provisions of 40 CFR 61.151.~~
- ~~(d) — Submit to the Administrator, upon closure of the facility, a copy of records of asbestos waste disposal locations and quantities.~~
- ~~(e) — Furnish upon request, and make available during normal business hours for inspection by the Administrator, all records required under this section.~~
- ~~(f) — Notify the Administrator in writing at least 45 days prior to excavating or otherwise disturbing any asbestos-containing waste material that has been deposited at a waste disposal site and is covered. If the excavation will begin on a date other than the one contained in the original notice, notice of the new start date must be provided to the Administrator at least 10 working days before excavation begins and in no event shall excavation begin earlier than the date specified in the original notification. Include the following information in the notice:~~
- ~~(1) — Scheduled starting and completion dates.~~
- ~~(2) — Reason for disturbing the waste.~~
- ~~(3) — Procedures to be used to control emissions during the excavation, storage, transport, and ultimate disposal of the excavated asbestos-containing waste material. If deemed necessary, the Administrator may require changes in the emission control procedures to be used.~~
- ~~(4) — Location of any temporary storage site and the final disposal site.~~

~~D.1.15 Record Keeping and Reporting Requirements for NESHAP for Municipal Solid Waste Landfills [40 CFR 63.1980] [326 IAC 20]~~

~~Pursuant to 40 CFR 63.1980, the Permittee shall:~~

- ~~(a) — Keep records and reports as specified in 40 CFR 60, Subpart WWW, or in the Federal plan, EPA approved State plan or tribal plan that implements 40 CFR 60, Subpart Cc, whichever applies to this landfill, with one exception: The Permittee must submit the annual report described in 40 CFR 60.757(f) every 6 months to IDEM, OAQ.~~

~~(b) — Keep records and reports as specified in the general provisions of 40 CFR 60 and 40 CFR 63 as shown in Table 1 of 40 CFR 63, Subpart AAAA. Applicable records in the general provisions include items such as SSM plans and the SSM plan reports. The SSM Plan report shall be submitted semi-annually IDEM, OAQ.~~

~~(c) — The reporting period for the semi-annual reports required in Conditions D.1.15 (a) and (b) shall be from January 1 to June 30 and July 1 to December 31. Reports must be submitted every six (6) months and the reports shall be due within 30 days of the end of the reporting period.~~

#### ~~D.1.16 Record Keeping Requirements~~

~~(a) — All records shall be maintained in accordance with Section C - General Record Keeping Requirements, of this permit.~~

### **SECTION D.2 FACILITY OPERATION CONDITIONS**

#### **Facility Description [326 IAC 2-7-5(15)]:**

~~(a) — Three (3) crystal clean parts washers with a solvent consumption of 240 gallons per year, constructed after 1990.~~

~~(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)~~

#### **Emission Limitations and Standards [326 IAC 2-7-5(1)]**

##### ~~D.2.1 Cold cleaner operation (VOC) [326 IAC 8-3-2]~~

~~The Crystal Clean Parts washer is subject to this rule because the facilities are constructed after 1980. Pursuant to 326 IAC 8-3-2 (Cold Cleaner Operations), the owner or operator of the cold cleaning facility shall:~~

- ~~(a) — equip the cleaner with a cover;~~
- ~~(b) — equip the cleaner with a facility for draining cleaned parts;~~
- ~~(c) — close the degreaser cover whenever parts are not being handled in the cleaner;~~
- ~~(d) — drain cleaned parts for at least fifteen (15) seconds or until dripping ceases;~~
- ~~(e) — provide a permanent, conspicuous label summarizing the operation requirements;~~
- ~~(f) — store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.~~

##### ~~D.2.2 Cold cleaner degreaser operation and control [326 IAC 8-3-5]~~

~~(a) — Pursuant to 326 IAC 8-3-5(a) (Cold Cleaner Degreaser Operation and Control), for cold cleaner degreaser operations without remote solvent reservoirs constructed after July 1, 1990, the Permittee shall ensure that the following control equipment requirements are met:~~

- ~~(1) — Equip the degreaser with a cover. The cover must be designed so that it can be easily operated with one (1) hand if:~~

- (A) ~~— The solvent volatility is greater than two (2) kiloPascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F));~~
- (B) ~~— The solvent is agitated; or~~
- (C) ~~— The solvent is heated.~~
- (2) ~~— Equip the degreaser with a facility for draining cleaned articles. If the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F)), then the drainage facility must be internal such that articles are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.~~
- (3) ~~— Provide a permanent, conspicuous label which lists the operating requirements outlined in subsection (b).~~
- (4) ~~— The solvent spray, if used, must be a solid, fluid stream and shall be applied at a pressure which does not cause excessive splashing.~~
- (5) ~~— Equip the degreaser with one (1) of the following control devices if the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F)), or if the solvent is heated to a temperature greater than forty-eight and nine-tenths degrees Celsius (48.9°C) (one hundred twenty degrees Fahrenheit (120°F)):~~
- (A) ~~— A freeboard that attains a freeboard ratio of seventy-five hundredths (0.75) or greater.~~
- (B) ~~— A water cover when solvent is used is insoluble in, and heavier than, water.~~
- (C) ~~— Other systems of demonstrated equivalent control such as a refrigerated chiller or carbon adsorption. Such systems shall be submitted to the U.S. EPA as a SIP revision.~~
- (b) ~~— Pursuant to 326 IAC 8-3-5(b) (Cold Cleaner Degreaser Operation and Control), the owner or operator of a cold cleaning facility construction of which commenced after July 1, 1990, shall ensure that the following operating requirements are met:~~
- (1) ~~— Close the cover whenever articles are not being handled in the degreaser.~~
- (2) ~~— Drain cleaned articles for at least fifteen (15) seconds or until dripping ceases.~~
- (3) ~~— Store waste solvent only in covered containers and prohibit the disposal or transfer of waste solvent in any manner in which greater than twenty percent (20%) of the waste solvent by weight could evaporate.~~

## New Sections

### SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS

#### Emissions Unit Description:

- (a) Three (3) crystal clean parts washers with a solvent consumption of 240 gallons per year, constructed after 1990. [326 IAC 8-3-2][326 IAC 8-3-5]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

#### Emission Limitations and Standards [326 IAC 2-7-5(1)]

##### D.1.1 Cold Cleaner Operation [326 IAC 8-3-2]

Pursuant to 326 IAC 8-3-2 (Cold Cleaner Operations), the owner or operator of the cold cleaning facility shall:

- (a) equip the cleaner with a cover;
- (b) equip the cleaner with a facility for draining cleaned parts;
- (c) close the degreaser cover whenever parts are not being handled in the cleaner;
- (d) drain cleaned parts for at least fifteen (15) seconds or until dripping ceases;
- (e) provide a permanent, conspicuous label summarizing the operation requirements;
- (f) store waste solvent only in covered containers and not dispose of waste solvent or transfer it to another party, in such a manner that greater than twenty percent (20%) of the waste solvent (by weight) can evaporate into the atmosphere.

##### D.1.2 Cold Cleaner Degreaser Operation and Control [326 IAC 8-3-5]

- (a) Pursuant to 326 IAC 8-3-5(a) (Cold Cleaner Degreaser Operation and Control), for cold cleaner degreaser operations without remote solvent reservoirs constructed after July 1, 1990, the Permittee shall ensure that the following control equipment requirements are met:
- (1) Equip the degreaser with a cover. The cover must be designed so that it can be easily operated with one (1) hand if:
    - (A) The solvent volatility is greater than two (2) kiloPascals (fifteen (15) millimeters of mercury or three-tenths (0.3) pounds per square inch measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F)));
    - (B) The solvent is agitated; or
    - (C) The solvent is heated.

- (2) Equip the degreaser with a facility for draining cleaned articles. If the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F)), then the drainage facility must be internal such that articles are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.**
  - (3) Provide a permanent, conspicuous label which lists the operating requirements outlined in subsection (b).**
  - (4) The solvent spray, if used, must be a solid, fluid stream and shall be applied at a pressure which does not cause excessive splashing.**
  - (5) Equip the degreaser with one (1) of the following control devices if the solvent volatility is greater than four and three-tenths (4.3) kiloPascals (thirty-two (32) millimeters of mercury or six-tenths (0.6) pounds per square inch) measured at thirty-eight degrees Celsius (38°C) (one hundred degrees Fahrenheit (100°F)), or if the solvent is heated to a temperature greater than forty-eight and nine-tenths degrees Celsius (48.9°C) (one hundred twenty degrees Fahrenheit (120°F)):**

    - (A) A freeboard that attains a freeboard ratio of seventy-five hundredths (0.75) or greater.**
    - (B) A water cover when solvent is used is insoluble in, and heavier than, water.**
    - (C) Other systems of demonstrated equivalent control such as a refrigerated chiller or carbon adsorption. Such systems shall be submitted to the U.S. EPA as a SIP revision.**
- (b) Pursuant to 326 IAC 8-3-5(b) (Cold Cleaner Degreaser Operation and Control), the owner or operator of a cold cleaning facility construction of which commenced after July 1, 1990, shall ensure that the following operating requirements are met:**
- (1) Close the cover whenever articles are not being handled in the degreaser.**
  - (2) Drain cleaned articles for at least fifteen (15) seconds or until dripping ceases.**
  - (3) Store waste solvent only in covered containers and prohibit the disposal or transfer of waste solvent in any manner in which greater than twenty percent (20%) of the waste solvent by weight could evaporate.**

## SECTION E.1 FACILITY OPERATION CONDITIONS

### Emissions Unit Description:

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M] [40 CFR 63, Subpart AAAA]
- (b) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW] [40 CFR 63, Subpart AAAA]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

### New Source Performance Standards

#### E.1.1 General Provisions Relating to NSPS WWW [326 IAC 12][40 CFR Part 60, Subpart A]

The provisions of 40 CFR Part 60, Subpart A – General Provisions, which are incorporated by reference in 326 IAC 12-1, apply to the municipal solid waste landfill and flare described in this section except when otherwise specified in 40 CFR Part 60, Subpart WWW.

#### E.1.2 Standards of Performance for Municipal Solid Waste Landfills [326 IAC 12] [326 IAC 8.1][40 CFR Part 60, Subpart WWW]

The Permittee who operates a municipal solid waste landfill that commenced construction, reconstruction or modification on or after May 30, 1991 shall comply with the following provisions of 40 CFR Part 60, Subpart WWW, included as Attachment A of this permit, except for approved variances incorporated into the Collection and Control Design Plan in accordance with 40 CFR 60, Subpart WWW. The source is subject to the following portions of Subpart WWW:

- 1) 40 CFR 60.752(b)
- 2) 40 CFR 60.753
- 3) 40 CFR 60.754
- 4) 40 CFR 60.755
- 5) 40 CFR 60.756
- 6) 40 CFR 60.757
- 7) 40 CFR 60.758
- 8) 40 CFR 60.759

#### E.1.3 Operational Standards for Collection and Control Systems [40 CFR 60.753] [326 IAC 12][326 IAC 8.1]

- (a) Operate each interior wellhead in the collection system with a landfill gas temperature less than 55 ° C and with either a nitrogen level less than 20 percent or an oxygen level less than 5 percent, except as indicated in (3) below (except for the landfill gas well, LFGASB16, which can have an oxygen level less than 16.9 percent). The Permittee may establish a higher operating temperature, nitrogen, or oxygen value at a particular well. A higher operating value demonstration shall show supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.

- (1) The nitrogen level shall be determined using Method 3C, unless an alternative method is established as allowed by 40CFR 60.752 (b)(2)(i).
- (2) Unless an alternative test method is established as allowed by 40 CFR 60.752 (b)(2)(i), the oxygen shall be determined by an oxygen meter using Method 3A except that; the span shall be set so that the regulatory limit is between 20 and 50 percent of the span; a data recorder is not required; only two calibration gases are required, a zero and span, and ambient air may be used as the span; a calibration error check is not required; the allowable sample bias, zero drift, and calibration drift are  $\pm 10$  percent.
- (3) Pursuant to Administrative Amendment 003-27018-00257, the Permittee has established a higher operating temperature at wells C25R, C30, C38, C39R, C40R, C41R, C43R, C44R, C46R, C47R, C52, C53, C56, C57, and C59. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.
- (4) Pursuant to Administrative Amendment 003-27719-00257, the Permittee has established a higher operating temperature at wells C24R, C42R, C45R, and C48R. This higher operating temperature value demonstration up to 65.6°C (150°F) shows supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.

## SECTION E.2

## FACILITY OPERATION CONDITIONS

### Emissions Unit Description:

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M] [40 CFR 63, Subpart AAAA]
- (b) One (1) 148.5 MMBtu/hr open flare with a maximum capacity of 5,000 scfm of landfill gas usage, identified as EU-3, constructed in 2004. [40 CFR 60, Subpart WWW] [40 CFR 63, Subpart AAAA]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

## National Emission Standards for Hazardous Air Pollutants

### E.2.1 General Provisions Relating to NESHAP AAAA [326 IAC 20-67] [40 CFR Part 63, Subpart AAAA]

The provisions of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated by reference in 326 IAC 20-1, apply to the municipal solid waste landfill and flare described in this section except when otherwise specified in 40 CFR Part 63, Subpart AAAA.

**E.2.2 National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills [326 IAC 20-67][40 CFR Part 63, Subpart AAAAA]**

The Permittee who operates a stationary municipal solid waste landfill that has accepted waste since November 8, 1987 and has a design capacity equal to or greater than 2.5 million megagrams shall comply with the following provisions of 40 CFR Part 63, Subpart AAAAA, included as Attachment B of this permit. The source is subject to the following portions of Subpart AAAAA:

- 1) 40 CFR 63.1955
- 2) 40 CFR 63.1960 to 40 CFR 63.1985

**SECTION E.3 FACILITY OPERATION CONDITIONS**

**Emissions Unit Description:**

- (a) One (1) stationary municipal solid waste landfill with a design capacity of 30,996,952 mega grams, constructed in 1966. [40 CFR 60, Subpart WWW][40 CFR 61, Subpart M] [40 CFR 63, Subpart AAAAA]

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

**National Emission Standards for Asbestos**

**E.3.1 General Provisions Relating to National Emission Standards for Asbestos [326 IAC 14-1] [40 CFR Part 61, Subpart M]**

The provisions of 40 CFR Part 61, Subpart A – General Provisions, which are incorporated by reference in 326 IAC 14-1, apply to the municipal solid waste landfill described in this section except when otherwise specified in 40 CFR Part 61, Subpart M.

**E.3.2 National Emission Standards for Asbestos [326 IAC 14-2][40 CFR Part 61, Subpart M]**

The Permittee who operates a municipal solid waste landfill that receives asbestos-containing waste material from a source listed in 40 CFR 61.149, 40 CFR 61.150 or 40 CFR 61.155 shall comply with the following provisions of 40 CFR Part 61, Subpart M, included as Attachment C of this permit. The source is subject to the following portions of Subpart M:

- 1) 40 CFR 61.154

**Recommendation**

The staff recommends to the Commissioner that the Part 70 Operating Permit Renewal be approved. This recommendation is based on the following facts and conditions:

Unless otherwise stated, information used in this review was derived from the application and additional information submitted by the applicant.

An application for the purposes of this review was received on March 25, 2011.

**Conclusion**

The operation of this stationary municipal solid waste landfill shall be subject to the conditions of the attached Part 70 Operating Permit Renewal No. T 003-30376-00257.

**IDEM Contact**

- (a) Questions regarding this proposed permit can be directed to David J. Matousek at the Indiana Department Environmental Management, Office of Air Quality, Permits Branch, 100 North Senate Avenue, MC 61-53 IGCN 1003, Indianapolis, Indiana 46204-2251 or by telephone at (317) 232-8253 or toll free at 1-800-451-6027 extension (2-8253).
- (b) A copy of the findings is available on the Internet at: <http://www.in.gov/ai/appfiles/idem-caats/>
- (c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM's Guide for Citizen Participation and Permit Guide on the Internet at: [www.idem.in.gov](http://www.idem.in.gov)

### Technical Support Document - Appendix A - Emission Summary Sheet

Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill  
 Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
 Permit Number: T 003-30376-00257  
 Reviewer: David J. Matousek  
 Date: September 1, 2011

Limited Potential to Emit (ton/yr)											
Emission Unit	PM	PM10	PM2.5	SO <sub>2</sub>	VOC	CO	NOx	Biogenic CO <sub>2</sub> as CO <sub>2</sub> e	Non-CO <sub>2</sub> GHG as CO <sub>2</sub> e	Single HAP	Total HAPs
Landfill	0.00	0.00	0.00	0.00	45.03	15.39	0.00	18,453	141,225	3.09 Toluene	9.33
Flare	9.12	9.12	9.12	9.40	0.00	216	39.70	99,795	167	4.70 HCL	4.70
Paved Roads - Fugitive	6.59	1.32	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Unpaved Roads - Fugitive	77.40	20.92	2.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total for PSD and Title V	93.11	31.36	11.60	9.40	45.03	231.39	39.70	141,392		< 10	< 25
Title V Major Source Threshold	100	100	100	100	100	100	100	100,000		10	25
PSD Major Source Threshold	250	250	250	250	250	250	250	100,000		---	---

Uncontrolled Potential to Emit (ton/yr)											
Emission Unit	PM	PM10	PM2.5	SO <sub>2</sub>	VOC	CO	NOx	Biogenic CO <sub>2</sub> as CO <sub>2</sub> e	Non-CO <sub>2</sub> GHG as CO <sub>2</sub> e	Single HAP	Total HAPs
Landfill	0.00	0.00	0.00	0.00	193.25	15.39	0.00	18,453	141,225	11.12 Toluene	31.13
Flare	9.12	9.12	9.12	9.40	0.00	216.00	39.70	99,795	167	4.70 HCL	4.70
Paved Roads - Fugitive	32.97	6.59	1.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Unpaved Roads - Fugitive	387.02	104.58	10.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total for PSD and Title V	429.11	120.29	21.54	9.40	193.25	231.39	39.70	141,392		> 10	> 25

**Technical Support Document - Appendix A - VOC Emissions from Landfill**

**Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill**  
**Address: 6231 McBeth Road, Fort Wayne, Indiana 46809**  
**Permit Number: T 003-30376-00257**  
**Reviewer: David J. Matousek**  
**Date: September 1, 2011**

**Potential to Emit****NMOC Emissions**

Republic Services of Indiana, LP d/b/a National Serv-All Landfill submitted a computer simulation of the potential emissions from the landfill using LandGEM. This model indicated the highest emission rate of landfill gas was reached in the year 2046. LandGEM indicated a total of 156.4 Mg of NMOC (172.0 tons) would be generated in 2046. The potential to emit of the landfill is 172.0 tons per year of NMOC. LandGem emission factors are based on AP-42, Chapter 2.4, November 1998.

**VOC Emissions**

VOC emissions can be estimated from the NMOC emission rate using information provided in AP-42. The estimated emission rate of VOC depends on the classification of the waste in place. AP-42, Chapter 2.4-1, October 2008 indicates a difference between the emissions of landfills with the majority of their waste in place before 1992 and those with the majority of their waste in place after 1992. This difference is related to the applicability of the Resource Conservation and Recovery Act (RCRA) Subtitle D regulations, 40 CFR Part 258. These regulations became effective on October 9, 1993 and applied to landfills accepting waste on or after October 9, 1991. Prior to the RCRA Subtitle D regulations, hazardous waste could be landfilled along with municipal solid waste. This difference in the composition of the waste in place has a significant impact on the potential air emissions from the landfill. Republic Services of Indiana, LP d/b/a National Serv-All Landfill was constructed in 1966 and has accepted industrial waste containing asbestos and municipal waste (Co-Disposal). Only 11.8% of the total capacity of this landfill was in place in 1992. The vast majority of waste will be accepted post 1992. Since the majority of this sites waste will be in place after 1992, VOC emissions from the landfill are estimated to be 97.7% of the NMOC emissions. IDEM choose the 2008 version of AP-42, Chapter 2.4-1 for VOC because it more accurately reflects emissions from landfills. The potential to emit VOC is shown below:

NMOC Emission Rate	172.00	TPY
% VOC	97.70%	
VOC Emission Rate	168.04	TPY

**Limited Potential to Emit****VOC Emissions Assuming 75% and 90% Collection Efficiency**

On September 28, 2011, Republic Services of Indiana, LP d/b/a National Serv-All Landfill requested the landfill gas flow rate to the flare be revised to assume 90% collection efficiency while fugitive emissions from the landfill are calculated with 75% collection efficiency. This methodology is acceptable because it is more conservative than using a 75% collection efficiency alone. VOC emission calculations are shown below:

Total VOC Generation in the Landfill from LandGEM	168.04	TPY
Fugitive VOC Emissions (75% Collection)	= 168.04 x 25%	= 42.01 TPY
VOC Emissions to Flare (90% Collection)	= 168.04 x 90%	= 151.24 TPY
Destruction Efficiency	98%	
VOC Emissions after Flare	= 151.24 x ( 1 - 98% )	= 3.02 TPY
VOC Emissions after Flare		3.02 TPY
+ Fugitive VOC Emissions from Landfill		42.01 TPY
= Limited PTE of VOC		45.03 TPY

**Technical Support Document - Appendix A - Emission Calculation Sheet  
PTE and Fugitive Emissions from the Landfill**

**Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill  
Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Permit Number: T 003-30376-00257  
Reviewer: David J. Matousek  
Date: September 1, 2011**

<b>Maximum Landfill Gas Flow</b>	<b>4,926 SCFM</b>
<b>Temperature</b>	<b>519.67 °R</b>
<b>Atmospheric Pressure</b>	<b>1.00 atm</b>
<b>Capture Efficiency</b>	<b>75.00%</b>
<b>Fugitive Gas Flow</b>	<b>1,232 SCFM</b>

Non-HAP Pollutants					
Pollutant	Molecular Weight	Concentration (ppmv)	Average Pollutant Flow (SCFM)	---	Landfill Emissions (TPY)
CO at 1,232 SCFM	28.01	140.00	0.17	---	3.35

Hazardous Air Pollutants					
Pollutant	Molecular Weight	Concentration (ppmv)	Average Pollutant Flow (SCFM)	PTE (TPY)	Landfill Emissions (TPY)
1,1,1-Trichloroethane	133.41	0.48	0.0024	0.22	0.06
1,1,2,2-Tetrachloroethane	167.85	1.11	0.0055	0.64	0.16
1,1,2-Trichloroethane	133.41	0.10	0.0005	0.05	0.01
1,1-Dichloroethane	98.97	2.35	0.0116	0.79	0.20
1,1-Dichloroethene	96.94	0.20	0.0010	0.07	0.02
1,2-Dichloroethane	98.96	0.41	0.0020	0.14	0.04
1,2-Dichloropropane	112.99	0.18	0.0009	0.07	0.02
Acrylonitrile	53.06	6.33	0.0312	1.15	0.29
Benzene	78.11	1.91	0.0094	0.51	0.13
Carbon Disulfide	76.13	0.58	0.0029	0.15	0.04
Carbon Tetrachloride	153.84	4.00E-03	1.97E-05	2.10E-03	5.00E-04
Carbonyl Sulfide	60.07	0.49	0.0024	0.10	0.03
Chlorobenzene	112.56	0.25	0.0012	0.10	0.03
Chloroethane	64.52	1.25	0.0062	0.28	0.07
Chloroform	119.39	0.03	0.0001	0.01	0.00
Methyl Chloride	50.49	1.21	0.0060	0.21	0.05
p-Dichlorobenzene	147.00	0.21	0.0010	0.11	0.03
Dichloromethane	84.94	14.30	0.0704	4.14	1.04
Ethylbenzene	106.16	4.61	0.0227	1.67	0.42
Ethylene Dibromide	187.88	1.00E-03	4.93E-06	6.00E-04	2.00E-04
Hexane	86.18	6.57	0.0324	1.93	0.48
Mercury (Total)	200.61	2.92E-04	1.44E-06	2.00E-04	5.00E-05
Methyl Isobutyl Ketone	100.16	1.87	0.0092	0.64	0.16
Perchloroethylene	165.83	3.73	0.0184	2.11	0.53
Toluene	92.13	39.30	0.1936	12.36	3.09
Trichloroethylene	131.40	2.82	0.0139	1.26	0.32
Vinyl Chloride	62.50	7.34	0.0362	1.57	0.39
Xylene	106.16	12.00	0.0591	4.35	1.09
Highest HAP - Toluene				12.36	3.09
Total HAP				34.63	8.70

**Notes:**

- Emission factors are the default AP-42 emission factors listed in Chapter 2.4, Tables 2.4-1, and 2.4-2 November 1998 and LandGEM.
- The applicant submitted LandGEM data which is based on 2005 emission factors for HAPs.

**Methodology:**

- Average Flow (SCFM) = [ Maximum Landfill Flow (SCFM) ] x [ ppmv pollutant / 1,000,000 ]
- PTE (tons/yr) =  $\frac{360 \times \text{Average Flow (SCFM)} \times \text{MW (lb/lb mole)} \times \text{P (atm)}}{T(R)}$   
(AP-42, Chapter 2.4, Eq. 4 - converted)
- Fugitive Emissions = PTE x ( 1 - Capture Efficiency )

**Technical Support Document - Appendix A - Emission Calculation Sheet  
Landfill CO and HAP Emissions to the Flare**

Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill  
Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Permit Number: T 003-30376-00257  
Reviewer: David J. Matousek  
Date: September 1, 2011

Maximum Landfill Gas Flow 4,926 SCFM  
Temperature 519.67 °R  
Atmospheric Pressure 1.00 atm  
Capture Efficiency 90.00%  
Maximum Gas Flow to Flare 4,433 SCFM (Higher Flow Rate Requested by Permittee)

Non-HAP Pollutants						
Pollutant	Molecular Weight	Concentration (ppmv)	Average Pollutant Flow (SCFM)	Pollutant Flow to Flare (TPY)	Control Efficiency (%)	Emissions from Flare (TPY)
CO from Landfill to Flare	28.01	140.00	0.62	12.04	0.00%	12.04

Hazardous Air Pollutants						
Pollutant	Molecular Weight	Concentration (ppmv)	Average Pollutant Flow (SCFM)	Pollutant Flow to Flare (TPY)	Control Efficiency (%)	Emissions from Flare (TPY)
1,1,1-Trichloroethane	133.41	0.48	0.0021	0.19	98.00%	0.0038
1,1,2,2-Tetrachloroethane	167.85	1.11	0.0049	0.57	98.00%	0.0114
1,1,2-Trichloroethane	133.41	0.10	0.0004	0.04	98.00%	0.0008
1,1-Dichloroethane	98.97	2.35	0.0104	0.71	98.00%	0.0142
1,1-Dichloroethene	96.94	0.20	0.0009	0.06	98.00%	0.0012
1,2-Dichloroethane	98.96	0.41	0.0018	0.12	98.00%	0.0024
1,2-Dichloropropane	112.99	0.18	0.0008	0.06	98.00%	0.0012
Acrylonitrile	53.06	6.33	0.0281	1.03	98.00%	0.0206
Benzene	78.11	1.91	0.0085	0.46	98.00%	0.0092
Carbon Disulfide	76.13	0.58	0.0026	0.14	98.00%	0.0028
Carbon Tetrachloride	153.84	4.00E-03	1.80E-05	1.92E-03	98.00%	3.80E-05
Carbonyl Sulfide	60.07	0.49	0.0022	0.09	98.00%	0.0018
Chlorobenzene	112.56	0.25	0.0011	0.09	98.00%	0.0018
Chloroethane	64.52	1.25	0.0055	0.25	98.00%	0.0050
Chloroform	119.39	0.03	0.0001	0.01	98.00%	0.0002
Methyl Chloride	50.49	1.21	0.0054	0.19	98.00%	0.0038
p-Dichlorobenzene	147.00	0.21	0.0009	0.09	98.00%	0.0018
Dichloromethane	84.94	14.30	0.0634	3.73	98.00%	0.0746
Ethylbenzene	106.16	4.61	0.0204	1.50	98.00%	0.0300
Ethylene Dibromide	187.88	1.00E-03	4.00E-06	5.21E-04	98.00%	1.00E-05
Hexane	86.18	6.57	0.0291	1.74	98.00%	0.0348
Mercury (Total)	200.61	2.92E-04	1.00E-06	1.39E-04	0.00%	1.39E-04
Methyl Isobutyl Ketone	100.16	1.87	0.0083	0.58	98.00%	0.0116
Perchloroethylene	165.83	3.73	0.0165	1.90	98.00%	0.0380
Toluene	92.13	39.30	0.1742	11.12	98.00%	0.2224
Trichloroethylene	131.40	2.82	0.0125	1.14	98.00%	0.0228
Vinyl Chloride	62.50	7.34	0.0325	1.41	98.00%	0.0282
Xylene	106.16	12.00	0.0532	3.91	98.00%	0.0782
Hydrogen Chloride			See Sheet 5 for Calculation		0.00%	4.7027
			Highest Single HAP Landfill/Flare	11.12 / NA		0.22 / 4.70
			Total HAP Landfill/Flare	31.13 / NA		0.63 / 4.70

**Notes:**

- Emission factors are the default AP-42 emission factors listed in Chapter 2.4, Tables 2.4-1, and 2.4-2 November 1998 and LandGEM.
- The applicant submitted LandGEM data which is based on 2005 emission factors for HAPs.
- HAP Emissions are overestimated because of two collection efficiencies were used. One for fugitive emissions and one for flare emissions.

**Methodology:**

- Average Flow (SCFM) = [ Total Landfill Flow (SCFM) ] x [ ppmv pollutant / 1,000,000 ]
- PTE (tons/yr) =  $\frac{360 \times Q_p(\text{CFM}) \times MW(\text{lb/lb mole}) \times P(\text{atm})}{T(\text{R})}$  - (AP-42, Chapter 2.4, Eq. 4 - converted)
- Fugitive Emissions = PTE - Captured Emissions

**Technical Support Document - Appendix A - Emission Calculation Sheet  
Landfill Flare - Flare Emissions**

**Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill  
Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Permit Number: T 003-30376-00257  
Reviewer: David J. Matousek  
Date: September 1, 2011**

Input Data	
------------	--

Inlet Gas Temperature	519.67 R
Inlet Gas Pressure	1 atm
Maximum Landfill Gas Flow Rate	4,926 SCFM
% Captured	90.0% ( A higher collection efficiency was used to estimate combustion emissions )
Maximum Landfill Gas to Flare	4,433 SCFM
Molecular Weight (S)	32.065 lb/lb mole
Molecular Weight (SO2)	64.060 lb/lb mole
Molecular Weight (HCL)	36.458 lb/lb mole
Weight % Water in LFG	8%

Landfill Gas Flow Rate (Wet Basis)	Landfill Gas Flow Rate (Dry Basis)	%	Methane Flow Rate (Dry Basis)	
		Methane		
4,433 SCFM	4,079 DSCFM	50.00%	2,040 DSCFM	or 1,073 DMMCF/yr

Potential to Emit Calculations	
--------------------------------	--

	PTE for Flare Combustion - Emission Factor Method					
	PM	PM10	PM2.5	NOx	CO	Dioxin/Furan
Emission Factor in lb/MMCF CH4 (Dry Basis)	17.00	17.00	17.00	74.00	402.50	4.20E-07
Total Emissions from Flare (ton/yr)	9.12	9.12	9.12	39.70	215.94	2.25E-07

PTE for Flare Combustion - AP-42 Default Concentrations					
Pollutant	Pollutant Volume (ppmv)	Pollutant Flow Q (scfm)	PTE (TPY)	Conversions / Notes	PTE (TPY)
S	47.74	0.2117	4.70	---	---
SO2	---	---	---	PTE (S) x MW (SO2) / MW (S) =	9.4
HCL	42.00	0.1862	4.70	Emission Factor at Flare Exit	---

**Methodology:**

- 1) Methane Flow Rate = Flare Gas Flow Rate x (% Methane)
- 2) Unlimited PTE = Emission Factor (lb/DMMCF Methane) x Methane Flow Rate (DMMCF/yr) x 1 ton /2,000 lb
- 3) DSCFM = SCFM ( 1 - % Water )
- 4) Captured CO emissions from landfill = 75% of landfill generation.
- 5) PTE (SO2) = conversion factor x PTE (S)
- 6) Average Flow (SCFM) = [ Total Landfill Flow (SCFM) ] x [ ppmv pollutant / 1,000,000 ]
- 7) PTE (tons/yr) =  $\frac{360 \times Q_p(\text{CFM}) \times \text{MW}(\text{lb/lb mole}) \times P(\text{atm})}{T(\text{R})}$  (AP-42, Chapter 2.4, Eq. 4 - converted)

**Notes:**

- 1) Flare emission factors for PM, PM10, NOx and CO were provided by the applicant. They are higher than the emission factors listed in DRAFT AP-42, Chapter 2.4-21, October 2008, Table 2.4-4.
- 2) AP-42 does not include emission factors for PM10 or PM2.5. They are assumed identical to PM.

**Technical Support Document - Appendix A - Emission Calculation Sheet  
Greenhouse Gas Emissions**

**Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill  
Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Permit Number: T 003-30376-00257  
Reviewer: David J. Matousek  
Date: September 1, 2011**

**Landfill Emissions**

**LandGEM Emission Estimates for the Landfill in 2046 based on a LFG Flow Rate of 4,926 SCFM**

Pollutant	PTE (TPY)	Global Warming Potential	CO <sub>2</sub> e (TPY)
Biogenic CO <sub>2</sub>	73,810	1	73,810
Non-Biogenic GHG (Methane)	26,900	21	564,900

**Landfill Emissions in 2046 (Fugitive)**

Pollutant	PTE CO <sub>2</sub> e (TPY)	Capture Efficiency (%)	Landfill Emissions (TPY CO <sub>2</sub> e)
Biogenic CO <sub>2</sub>	73,810	75.00%	18,453
Non-Biogenic (Methane)	564,900	75.00%	141,225

**Flare Emissions**

**Flare Emissions Due to the Combustion of Methane in LFG - 90% Collection**

Landfill Gas Heating Value	500 Btu/scf
Total Landfill Gas Generated in 2046	4,926 scfm
Landfill Gas sent to Flare with 90% Collection Efficiency	4,433 scfm
%Methane in Landfill Gas	50%
Methane Combusted in Flare	2,217 scfm
Heat Input to Flare	66.50 MMBtu/hr

**Flare Emissions Due to Methane Combustion**

Pollutant	Emission Factor (Kg/MMBtu)	PTE (TPY)	GWP	Flare Emissions (TPY CO <sub>2</sub> e)
Biogenic CO <sub>2</sub>	52.07	33,366	1	33,366
CH <sub>4</sub>	3.20E-03	2.05	21	43
N <sub>2</sub> O	6.30E-04	0.40	310	124

**Flare Emissions as a Result of the Landfill Gas Collection System**

Pollutant	PTE CO <sub>2</sub> e (TPY)	Capture Efficiency (%)	Flare Emissions (TPY CO <sub>2</sub> e)
Biogenic CO <sub>2</sub>	73,810	90.00%	66,429

**Total Flare Emissions**

Biogenic CO <sub>2</sub>	99,795 TPY as CO <sub>2</sub> e
Non-Biogenic CO <sub>2</sub>	167 TPY as CO <sub>2</sub> e

**Notes:**

On July 20, 2011, the U.S. EPA issued a final rule for the deferral for CO<sub>2</sub> emissions from bioenergy and other biogenic sources under the Prevention of Significant Deterioration (PSD) and Title V programs. According to this rule, the mass calculation of the greenhouse gas carbon dioxide shall not include carbon dioxide emissions resulting from the combustion or decomposition of non-fossilized and biodegradable organic material originating from plants, animals or microorganisms. CO<sub>2</sub> emissions from biogenic sources at the landfill are not included in determining Title V or PSD applicability until July 21, 2014. Fugitive and biogas combustion emissions of CH<sub>4</sub> and N<sub>2</sub>O are considered in Title V or PSD applicability.

**Technical Support Document - Appendix A - Emission Calculation Sheet  
Municipal Landfill - Emissions from Paved Roads**

**Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill  
Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Permit Number: T 003-30376-00257  
Reviewer: David J. Matousek  
Date: September 1, 2011**

**Average Vehicle Weight Calculation**

Vehicle Type	Trucks/Day	Average Weight (tons)	Total Trips per Year	Miles per Trip	Vehicle Miles Traveled (miles per year)	Traffic Component (%)	Component Weight (tons)
Transfer Trailer	20	28.2	6,240	0.33	2,059	4.684%	1.32
Front End Loader	61	28.2	19,032	0.33	6,281	14.286%	4.03
Rear End Loader	27	28.2	8,424	0.33	2,780	6.323%	1.78
Roll-Off Container	95	28.2	29,640	0.33	9,781	22.248%	6.27
Dump Truck	224	28.2	69,888	0.33	23,063	52.459%	14.79
<b>Total VMT</b>					<b>43,964</b>		
<b>Average Vehicle Weight (tons) - W</b>							<b>28.19</b>

**Site Specific Constants**

Value Name	Symbol	Value	Units	Source
Emission Factor	E	---	lb/VMT	Calculated
Particle Size Multiplier	k for PM	0.011	lb/VMT	AP-42 Table 13.2.1-1, January 2011
Particle Size Multiplier	k for PM10	0.0022	lb/VMT	AP-42 Table 13.2.1-1, January 2011
Particle Size Multiplier	k for PM2.5	0.00054	lb/VMT	AP-42 Table 13.2.1-1, January 2011
Silt Loading	sL (Winter)	29.6	g/cubic meter	AP-42, Table 13.2.1-2, January 2011, ADT <500
Silt Loading	sL (Non-Winter)	7.4	g/cubic meter	Previous Determination
Winter Days	Winter Days	90	days	Estimated by IDEM
Non-Winter Days	Non-Winter Days	275	days	Estimated by IDEM
Days >0.01" of rain	P	120	days	AP-42, Figure 13.2.1-2, January 2011
Total Days in Period	N	365	days	Days in the period
Mean Vehicle Weight	W	14.05	tons	Calculated above

**Winter Emission Factor Calculations**

$$E = [k * (sL \text{ for winter})^{0.91} * (W)^{1.02}] * [1 - P/(4 * N)]$$

AP-42, Chapter 13.2.1-5, January 2011, Eq. 2

E for PM (lb/VMT) =	3.26 lb/VMT
E for PM10 (lb/VMT) =	0.65 lb/VMT
E for PM2.5 (lb/VMT) =	0.16 lb/VMT

**Non-Winter Emission Factor Calculations**

$$E = [k * (sL \text{ for non-winter})^{0.91} * (W)^{1.02}] * [1 - P/(4 * N)]$$

AP-42, Chapter 13.2.1-5, January 2011, Eq. 2

E for PM (lb/VMT) =	0.92 lb/VMT
E for PM10 (lb/VMT) =	0.18 lb/VMT
E for PM2.5 (lb/VMT) =	0.05 lb/VMT

**Annual Average Emission Factors**

$$\text{Annual Average Emission Factor} = [\text{Winter Days} * \text{Winter Factor} + \text{Non-Winter Days} * \text{Non-Winter Factor}] / 365$$

E for PM (lb/VMT) =	1.50 lb/VMT
E for PM10 (lb/VMT) =	0.30 lb/VMT
E for PM2.5 (lb/VMT) =	0.08 lb/VMT

**Potential to Emit**

PM Emissions (TPY) = [Annual Average E for PM (lb/VMT) * Total VMT/yr * 1 ton / 2,000 lb]	32.97 TPY
PM10 Emissions (TPY) = [Annual Average E for PM10 (lb/VMT) * Total VMT/yr * 1 ton / 2,000 lb]	6.59 TPY
PM2.5 Emissions (TPY) = [Annual Average E for PM2.5 (lb/VMT) * Total VMT/yr * 1 ton / 2,000 lb]	1.76 TPY

**Limited Potential to Emit**

Control Efficiency                      80.00% (Previous Determination - T003-18142-00257)

Limited PM Emissions (TPY) = Potential to Emit PM * (1 - Control Efficiency)	6.59 TPY
Limited PM10 Emissions (TPY) = Potential to Emit PM10 * (1 - Control Efficiency)	1.32 TPY
Limited PM2.5 Emissions (TPY) = Potential to Emit PM2.5 * (1 - Control Efficiency)	0.35 TPY

**Technical Support Document - Appendix A - Emission Calculation Sheet  
Municipal Landfill - Emissions from Unpaved Roads**

**Company Name: Republic Services of Indiana, LP d/b/a National Serv-All Landfill  
Address: 6231 McBeth Road, Fort Wayne, Indiana 46809  
Permit Number: T 003-30376-00257  
Reviewer: David J. Matousek  
Date: September 1, 2011**

**Average Vehicle Weight Calculation**

Vehicle Type	Trucks/Day	Average Weight (tons)	Total Trips per Year	Miles per Trip	Vehicle Miles Traveled (miles per year)	Traffic Component (%)	Component Weight (tons)
Transfer Trailer	20	28.2	6,240	1	6,240	4.684%	1.32
Front End Loader	61	28.2	19,032	1	19,032	14.286%	4.03
Rear End Loader	27	28.2	8,424	1	8,424	6.323%	1.78
Roll-Off Container	95	28.2	29,640	1	29,640	22.248%	6.27
Dump Truck	224	28.2	69,888	1	69,888	52.459%	14.79
<b>Total VMT</b>					133,224		
<b>Average Vehicle Weight (tons) - W</b>							28.19

**Site Specific Constants**

Value Name	Symbol	Value	Units	Source
Emission Factor	E	---	lb/VMT	Calculated
Particle Size Multiplier	k for PM	4.90	lb/VMT	AP-42, Table 13.2.2-2, November 2006
Particle Size Multiplier	k for PM10	1.50	lb/VMT	AP-42, Table 13.2.2-2, November 2006
Particle Size Multiplier	k for PM2.5	0.15	lb/VMT	AP-42, Table 13.2.2-2, November 2006
Silt Content	s	6.40	%	Previous Determination
Days >0.01" of rain	P	120.00	days	AP-42, Figure 13.2.2-1, November 2006
Emperical Constant	a for PM	0.70	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	a for PM10	0.90	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	a for PM2.5	0.90	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	b for PM	0.45	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	b for PM10	0.45	Unitless	AP-42, Table 13.2.2-2, November 2006
Emperical Constant	b for PM2.5	0.45	Unitless	AP-42, Table 13.2.2-2, November 2006
Mean Vehicle Weight	W	28.19	tons	Calculated above

**Emission Factor Calculations**

$$E = [k * (s/12)^a * (W/3)^b] * [(365 - P) / 365]$$

AP-42, Chapter 13.2.2, November 2006, Eq. 1a and 2

E for PM (lb/VMT) = 5.81 lb/VMT  
E for PM10 (lb/VMT) = 1.57 lb/VMT  
E for PM2.5 (lb/VMT) = 0.16 lb/VMT

**Potential to Emit**

PM Emissions (TPY) = [E for PM (lb/VMT) \* Total VMT/yr \* 1 ton / 2,000 lb] 387.02 TPY  
PM10 Emissions (TPY) = [E for PM10 (lb/VMT) \* Total VMT/yr \* 1 ton / 2,000 lb] 104.58 TPY  
PM2.5 Emissions (TPY) = [E for PM2.5 (lb/VMT) \* Total VMT/yr \* 1 ton / 2,000 lb] 10.66 TPY

**Limited Potential to Emit**

Control Efficiency 80.00% (Previous Determination - T003-18142-00257)

Limited PM Emissions (TPY) = Potential to Emit PM \* (1 - Control Efficiency) 77.4 TPY  
Limited PM10 Emissions (TPY) = Potential to Emit PM10 \* (1 - Control Efficiency) 20.92 TPY  
Limited PM2.5 Emissions (TPY) = Potential to Emit PM2.5 \* (1 - Control Efficiency) 2.13 TPY

**Indiana Department of Environmental Management  
Office of Air Quality**

**Technical Support Document (TSD) for a Part 70 Operating Permit Renewal**


**Appendix B - LandGEM**

**Source Background and Description**

Source Name:	Republic Services of Indiana, LP d/b/a National Serv-All Landfill
Source Location:	6321 McBeth Road, Fort Wayne, Indiana 46809-9719
County:	Allen County
SIC Code:	4953
Permit Renewal No.:	T 003-30376-00257
Permit Reviewer:	David J. Matousek

**LandGEM Input Data**

The following contains the input and output data from the LandGEM computer program provided by the U.S. EPA.

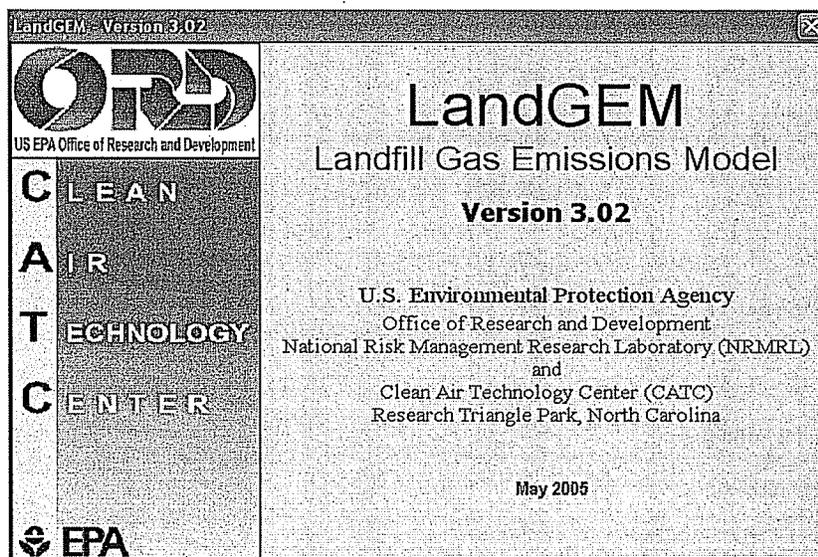

## Summary Report

**Landfill Name or Identifier:** National Serv-All Landfill

**Date:** Thursday, August 04, 2011

**Description/Comments:**

### About LandGEM:

First-Order Decomposition Rate Equation:

$$Q_{CH_4} = \sum_{i=1}^n \sum_{j=0.1}^1 kL_o \left( \frac{M_i}{10} \right) e^{-kt_{ij}}$$

Where,

$Q_{CH_4}$  = annual methane generation in the year of the calculation ( $m^3/year$ )

$i$  = 1-year time increment

$n$  = (year of the calculation) - (initial year of waste acceptance)

$j$  = 0.1-year time increment

$k$  = methane generation rate ( $year^{-1}$ )

$L_o$  = potential methane generation capacity ( $m^3/Ma$ )

$M_i$  = mass of waste accepted in the  $i^{th}$  year ( $Ma$ )

$t_{ij}$  = age of the  $j^{th}$  section of waste mass  $M_i$  accepted in the  $i^{th}$  year (decimal years, e.g., 3.2 years).

LandGEM is based on a first-order decomposition rate equation for quantifying emissions from the decomposition of landfilled waste in municipal solid waste (MSW) landfills. The software provides a relatively simple approach to estimating landfill gas emissions. Model defaults are based on empirical data from U.S. landfills. Field test data can also be used in place of model defaults when available. Further guidance on EPA test methods, Clean Air Act (CAA) regulations, and other guidance regarding landfill gas emissions and control technology requirements can be found at <http://www.epa.gov/ttnatw01/landfill/landflpg.html>.

LandGEM is considered a screening tool — the better the input data, the better the estimates. Often, there are limitations with the available data regarding waste quantity and composition, variation in design and operating practices over time, and changes occurring over time that impact the emissions potential. Changes to landfill operation, such as operating under wet conditions through leachate recirculation or other liquid additions, will result in generating more gas at a faster rate. Defaults for estimating emissions for this type of operation are being developed to include in LandGEM along with defaults for conventional landfills (no leachate or liquid additions) for developing emission inventories and determining CAA applicability. Refer to the Web site identified above for future updates.

**Input Review**

## LANDFILL CHARACTERISTICS

Landfill Open Year	1966	
Landfill Closure Year (with 80-year limit)	2045	
Actual Closure Year (without limit)	2045	
Have Model Calculate Closure Year?	No	
Waste Design Capacity	30,997,167	megagrams

## MODEL PARAMETERS

Methane Generation Rate, k	0.040	year <sup>-1</sup>
Potential Methane Generation Capacity, L <sub>0</sub>	100	m <sup>3</sup> /Mg
NMOC Concentration	595	ppmv as hexane
Methane Content	50	% by volume

## GASES / POLLUTANTS SELECTED

Gas / Pollutant #1:	Total landfill gas
Gas / Pollutant #2:	Methane
Gas / Pollutant #3:	Carbon dioxide
Gas / Pollutant #4:	NMOC

## WASTE ACCEPTANCE RATES

Year	Waste Accepted		Waste-In-Place	
	(Mg/year)	(short tons/year)	(Mg)	(short tons)
1966	19,720	21,692	0	0
1967	20,320	22,352	19,720	21,692
1968	20,930	23,023	40,040	44,044
1969	21,550	23,705	60,970	67,067
1970	22,180	24,398	82,520	90,772
1971	22,900	25,190	104,700	115,170
1972	23,500	25,850	127,600	140,360
1973	24,300	26,730	151,100	166,210
1974	25,000	27,500	175,400	192,940
1975	25,700	28,270	200,400	220,440
1976	26,500	29,150	226,100	248,710
1977	27,300	30,030	252,600	277,860
1978	28,200	31,020	279,900	307,890
1979	32,600	35,860	308,100	338,910
1980	39,000	42,900	340,700	374,770
1981	45,400	49,940	379,700	417,670
1982	68,000	74,800	425,100	467,610
1983	113,400	124,740	493,100	542,410
1984	181,500	199,650	606,500	667,150
1985	249,000	273,900	788,000	866,800
1986	318,000	349,800	1,037,000	1,140,700
1987	317,000	348,700	1,355,000	1,490,500
1988	318,000	349,800	1,672,000	1,839,200
1989	318,000	349,800	1,990,000	2,189,000
1990	317,000	348,700	2,308,000	2,538,800
1991	331,000	364,100	2,625,000	2,887,500
1992	343,000	377,300	2,956,000	3,251,600
1993	306,000	336,600	3,299,000	3,628,900
1994	281,000	309,100	3,605,000	3,965,500
1995	324,000	356,400	3,886,000	4,274,600
1996	118,000	129,800	4,210,000	4,631,000
1997	91,000	100,100	4,328,000	4,760,800
1998	91,000	100,100	4,419,000	4,860,900
1999	705,000	775,500	4,510,000	4,961,000
2000	721,000	793,100	5,215,000	5,736,500
2001	738,000	811,800	5,936,000	6,529,600
2002	798,000	877,800	6,674,000	7,341,400
2003	632,000	695,200	7,472,000	8,219,200
2004	564,327	620,760	8,104,000	8,914,400
2005	709,075	779,983	8,668,327	9,535,160

## WASTE ACCEPTANCE RATES (Continued)




Year	Waste Accepted		Waste-In-Place	
	(Mg/year)	(short tons/year)	(Mg)	(short tons)
2006	821,218	903,340	9,377,402	10,315,142
2007	539,571	593,528	10,198,620	11,218,482
2008	463,695	510,065	10,738,191	11,812,010
2009	528,260	581,086	11,201,886	12,322,075
2010	383,009	421,310	11,730,146	12,903,161
2011	383,009	421,310	12,113,155	13,324,471
2012	383,009	421,310	12,496,164	13,745,780
2013	383,009	421,310	12,879,173	14,167,090
2014	383,009	421,310	13,262,182	14,588,400
2015	383,009	421,310	13,645,191	15,009,710
2016	383,009	421,310	14,028,200	15,431,020
2017	383,009	421,310	14,411,209	15,852,330
2018	383,009	421,310	14,794,218	16,273,640
2019	383,009	421,310	15,177,227	16,694,950
2020	383,009	421,310	15,560,236	17,116,260
2021	383,009	421,310	15,943,245	17,537,570
2022	383,009	421,310	16,326,254	17,958,879
2023	383,009	421,310	16,709,263	18,380,189
2024	383,009	421,310	17,092,272	18,801,499
2025	383,009	421,310	17,475,281	19,222,809
2026	383,009	421,310	17,858,290	19,644,119
2027	383,009	421,310	18,241,299	20,065,429
2028	383,009	421,310	18,624,308	20,486,739
2029	383,009	421,310	19,007,317	20,908,049
2030	383,009	421,310	19,390,326	21,329,359
2031	383,009	421,310	19,773,335	21,750,669
2032	383,009	421,310	20,156,344	22,171,978
2033	383,009	421,310	20,539,353	22,593,288
2034	383,009	421,310	20,922,362	23,014,598
2035	383,009	421,310	21,305,371	23,435,908
2036	383,009	421,310	21,688,380	23,857,218
2037	383,009	421,310	22,071,389	24,278,528
2038	383,009	421,310	22,454,398	24,699,838
2039	383,009	421,310	22,837,407	25,121,148
2040	383,009	421,310	23,220,416	25,542,458
2041	383,009	421,310	23,603,425	25,963,768
2042	383,009	421,310	23,986,434	26,385,077
2043	383,009	421,310	24,369,443	26,806,387
2044	383,009	421,310	24,752,452	27,227,697
2045	383,009	421,310	25,135,461	27,649,007

**Pollutant Parameters**

<i>Gas / Pollutant Default Parameters:</i>				<i>User-specified Pollutant Parameters:</i>	
	Compound	Concentration (ppmv)	Molecular Weight	Concentration (ppmv)	Molecular Weight
<b>Gases</b>	Total landfill gas		0.00		
	Methane		16.04		
	Carbon dioxide		44.01		
	NMOC	4,000	86.18		
<b>Pollutants</b>	1,1,1-Trichloroethane (methyl chloroform) - HAP	0.48	133.41		
	1,1,1,2,2- Tetrachloroethane - HAP/VOC	1.1	167.85		
	1,1-Dichloroethane (ethylidene dichloride) - HAP/VOC	2.4	98.97		
	1,1-Dichloroethene (vinylidene chloride) - HAP/VOC	0.20	96.94		
	1,2-Dichloroethane (ethylene dichloride) - HAP/VOC	0.41	98.96		
	1,2-Dichloropropane (propylene dichloride) - HAP/VOC	0.18	112.99		
	2-Propanol (isopropyl alcohol) - VOC	50	60.11		
	Acetone	7.0	58.08		
	Acrylonitrile - HAP/VOC	6.3	53.06		
	Benzene - No or Unknown Co-disposal - HAP/VOC	1.9	78.11		
	Benzene - Co-disposal - HAP/VOC	11	78.11		
	Bromodichloromethane - VOC	3.1	163.83		
	Butane - VOC	5.0	58.12		
	Carbon disulfide - HAP/VOC	0.58	76.13		
	Carbon monoxide	140	28.01		
	Carbon tetrachloride - HAP/VOC	4.0E-03	153.84		
	Carbonyl sulfide - HAP/VOC	0.49	60.07		
	Chlorobenzene - HAP/VOC	0.25	112.56		
	Chlorodifluoromethane	1.3	86.47		
	Chloroethane (ethyl chloride) - HAP/VOC	1.3	64.52		
	Chloroform - HAP/VOC	0.03	119.39		
	Chloromethane - VOC	1.2	50.49		
	Dichlorobenzene - (HAP for para isomer/VOC)	0.21	147		
	Dichlorodifluoromethane	16	120.91		
	Dichlorofluoromethane - VOC	2.6	102.92		
	Dichloromethane (methylene chloride) - HAP	14	84.94		
	Dimethyl sulfide (methyl sulfide) - VOC	7.8	62.13		
	Ethane	890	30.07		
	Ethanol - VOC	27	46.08		



**Graphs**

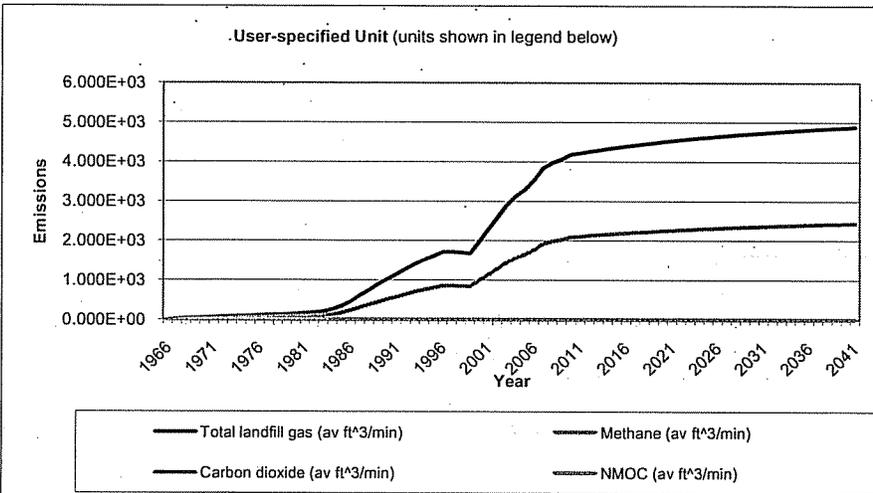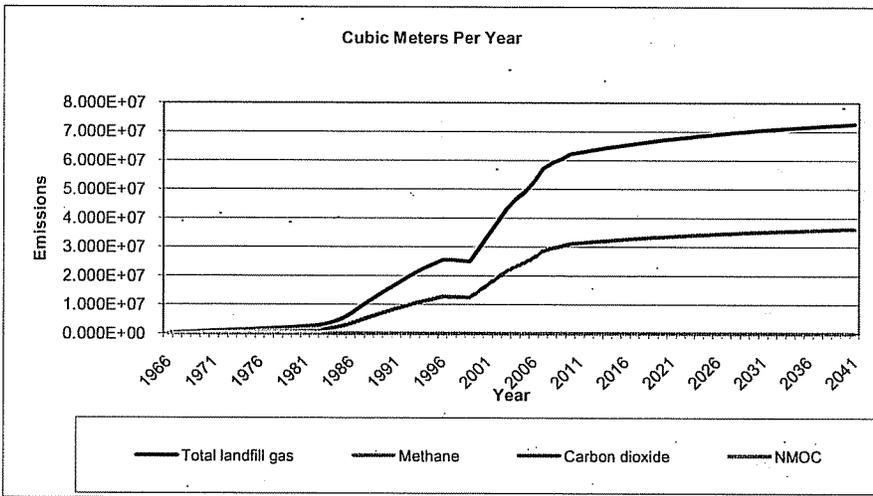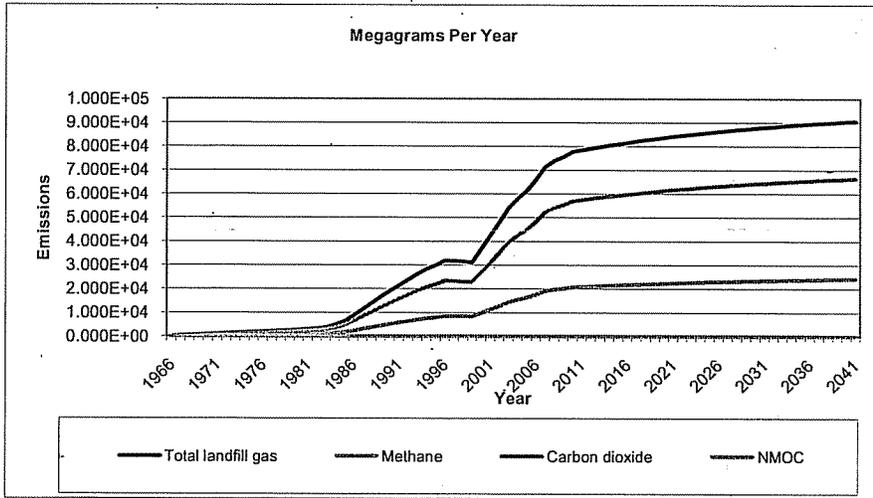

**Results**

Year	Total landfill gas			Methane		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
1966	0	0	0	0	0	0
1967	1.935E+02	1.550E+05	1.041E+01	5.169E+01	7.748E+04	5.206E+00
1968	3.853E+02	3.086E+05	2.073E+01	1.029E+02	1.543E+05	1.037E+01
1969	5.756E+02	4.609E+05	3.097E+01	1.537E+02	2.305E+05	1.548E+01
1970	7.645E+02	6.122E+05	4.113E+01	2.042E+02	3.061E+05	2.057E+01
1971	9.522E+02	7.625E+05	5.123E+01	2.543E+02	3.812E+05	2.561E+01
1972	1.140E+03	9.125E+05	6.131E+01	3.044E+02	4.563E+05	3.066E+01
1973	1.325E+03	1.061E+06	7.131E+01	3.541E+02	5.307E+05	3.566E+01
1974	1.512E+03	1.211E+06	8.135E+01	4.039E+02	6.054E+05	4.067E+01
1975	1.698E+03	1.360E+06	9.136E+01	4.536E+02	6.798E+05	4.568E+01
1976	1.884E+03	1.508E+06	1.013E+02	5.031E+02	7.542E+05	5.067E+01
1977	2.070E+03	1.657E+06	1.114E+02	5.529E+02	8.287E+05	5.568E+01
1978	2.257E+03	1.807E+06	1.214E+02	6.027E+02	9.035E+05	6.070E+01
1979	2.445E+03	1.958E+06	1.315E+02	6.530E+02	9.788E+05	6.577E+01
1980	2.669E+03	2.137E+06	1.436E+02	7.129E+02	1.069E+06	7.180E+01
1981	2.947E+03	2.360E+06	1.586E+02	7.871E+02	1.180E+06	7.928E+01
1982	3.277E+03	2.624E+06	1.763E+02	8.753E+02	1.312E+06	8.815E+01
1983	3.816E+03	3.055E+06	2.053E+02	1.019E+03	1.528E+06	1.026E+02
1984	4.779E+03	3.827E+06	2.571E+02	1.276E+03	1.913E+06	1.286E+02
1985	6.373E+03	5.103E+06	3.429E+02	1.702E+03	2.551E+06	1.714E+02
1986	8.566E+03	6.859E+06	4.609E+02	2.288E+03	3.430E+06	2.304E+02
1987	1.135E+04	9.089E+06	6.107E+02	3.032E+03	4.545E+06	3.053E+02
1988	1.402E+04	1.122E+07	7.541E+02	3.744E+03	5.612E+06	3.771E+02
1989	1.659E+04	1.328E+07	8.924E+02	4.431E+03	6.641E+06	4.462E+02
1990	1.906E+04	1.526E+07	1.025E+03	5.090E+03	7.630E+06	5.127E+02
1991	2.142E+04	1.715E+07	1.153E+03	5.722E+03	8.576E+06	5.763E+02
1992	2.383E+04	1.908E+07	1.282E+03	6.365E+03	9.541E+06	6.410E+02
1993	2.626E+04	2.103E+07	1.413E+03	7.015E+03	1.051E+07	7.064E+02
1994	2.823E+04	2.261E+07	1.519E+03	7.542E+03	1.130E+07	7.595E+02
1995	2.988E+04	2.393E+07	1.608E+03	7.982E+03	1.196E+07	8.039E+02
1996	3.189E+04	2.554E+07	1.716E+03	8.519E+03	1.277E+07	8.579E+02
1997	3.180E+04	2.546E+07	1.711E+03	8.494E+03	1.273E+07	8.554E+02
1998	3.145E+04	2.518E+07	1.692E+03	8.399E+03	1.259E+07	8.459E+02
1999	3.111E+04	2.491E+07	1.674E+03	8.309E+03	1.245E+07	8.368E+02
2000	3.680E+04	2.947E+07	1.980E+03	9.831E+03	1.474E+07	9.901E+02
2001	4.244E+04	3.398E+07	2.283E+03	1.134E+04	1.699E+07	1.142E+03
2002	4.801E+04	3.845E+07	2.583E+03	1.283E+04	1.922E+07	1.292E+03
2003	5.396E+04	4.321E+07	2.903E+03	1.441E+04	2.161E+07	1.452E+03
2004	5.805E+04	4.648E+07	3.123E+03	1.551E+04	2.324E+07	1.562E+03
2005	6.131E+04	4.909E+07	3.299E+03	1.638E+04	2.455E+07	1.649E+03
2006	6.586E+04	5.274E+07	3.544E+03	1.759E+04	2.637E+07	1.772E+03
2007	7.134E+04	5.713E+07	3.838E+03	1.906E+04	2.856E+07	1.919E+03
2008	7.384E+04	5.913E+07	3.973E+03	1.972E+04	2.956E+07	1.986E+03
2009	7.549E+04	6.045E+07	4.062E+03	2.016E+04	3.023E+07	2.031E+03
2010	7.772E+04	6.223E+07	4.181E+03	2.076E+04	3.112E+07	2.091E+03
2011	7.843E+04	6.280E+07	4.220E+03	2.095E+04	3.140E+07	2.110E+03
2012	7.911E+04	6.335E+07	4.256E+03	2.113E+04	3.167E+07	2.128E+03
2013	7.977E+04	6.387E+07	4.292E+03	2.131E+04	3.194E+07	2.146E+03
2014	8.040E+04	6.438E+07	4.326E+03	2.148E+04	3.219E+07	2.163E+03
2015	8.100E+04	6.486E+07	4.358E+03	2.164E+04	3.243E+07	2.179E+03

**Results (Continued)**

Year	Total landfill gas			Methane		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
2016	8.159E+04	6.533E+07	4.390E+03	2.179E+04	3.267E+07	2.195E+03
2017	8.215E+04	6.578E+07	4.420E+03	2.194E+04	3.289E+07	2.210E+03
2018	8.268E+04	6.621E+07	4.449E+03	2.209E+04	3.310E+07	2.224E+03
2019	8.320E+04	6.662E+07	4.476E+03	2.222E+04	3.331E+07	2.238E+03
2020	8.370E+04	6.702E+07	4.503E+03	2.236E+04	3.351E+07	2.252E+03
2021	8.417E+04	6.740E+07	4.529E+03	2.248E+04	3.370E+07	2.264E+03
2022	8.463E+04	6.777E+07	4.553E+03	2.261E+04	3.388E+07	2.277E+03
2023	8.507E+04	6.812E+07	4.577E+03	2.272E+04	3.406E+07	2.289E+03
2024	8.549E+04	6.846E+07	4.600E+03	2.284E+04	3.423E+07	2.300E+03
2025	8.590E+04	6.878E+07	4.622E+03	2.294E+04	3.439E+07	2.311E+03
2026	8.629E+04	6.910E+07	4.643E+03	2.305E+04	3.455E+07	2.321E+03
2027	8.666E+04	6.940E+07	4.663E+03	2.315E+04	3.470E+07	2.331E+03
2028	8.703E+04	6.969E+07	4.682E+03	2.325E+04	3.484E+07	2.341E+03
2029	8.737E+04	6.996E+07	4.701E+03	2.334E+04	3.498E+07	2.350E+03
2030	8.770E+04	7.023E+07	4.719E+03	2.343E+04	3.511E+07	2.359E+03
2031	8.802E+04	7.049E+07	4.736E+03	2.351E+04	3.524E+07	2.368E+03
2032	8.833E+04	7.073E+07	4.752E+03	2.359E+04	3.537E+07	2.376E+03
2033	8.863E+04	7.097E+07	4.768E+03	2.367E+04	3.548E+07	2.384E+03
2034	8.891E+04	7.119E+07	4.784E+03	2.375E+04	3.560E+07	2.392E+03
2035	8.918E+04	7.141E+07	4.798E+03	2.382E+04	3.571E+07	2.399E+03
2036	8.944E+04	7.162E+07	4.812E+03	2.389E+04	3.581E+07	2.406E+03
2037	8.969E+04	7.182E+07	4.826E+03	2.396E+04	3.591E+07	2.413E+03
2038	8.994E+04	7.202E+07	4.839E+03	2.402E+04	3.601E+07	2.419E+03
2039	9.017E+04	7.220E+07	4.851E+03	2.408E+04	3.610E+07	2.426E+03
2040	9.039E+04	7.238E+07	4.863E+03	2.414E+04	3.619E+07	2.432E+03
2041	9.060E+04	7.255E+07	4.875E+03	2.420E+04	3.628E+07	2.437E+03
2042	9.081E+04	7.272E+07	4.886E+03	2.426E+04	3.636E+07	2.443E+03
2043	9.101E+04	7.288E+07	4.896E+03	2.431E+04	3.644E+07	2.448E+03
2044	9.120E+04	7.303E+07	4.907E+03	2.436E+04	3.651E+07	2.453E+03
2045	9.138E+04	7.317E+07	4.917E+03	2.441E+04	3.659E+07	2.458E+03
2046	9.156E+04	7.331E+07	4.926E+03	2.446E+04	3.666E+07	2.463E+03
2047	8.797E+04	7.044E+07	4.733E+03	2.350E+04	3.522E+07	2.366E+03
2048	8.452E+04	6.768E+07	4.547E+03	2.258E+04	3.384E+07	2.274E+03
2049	8.120E+04	6.502E+07	4.369E+03	2.169E+04	3.251E+07	2.184E+03
2050	7.802E+04	6.247E+07	4.198E+03	2.084E+04	3.124E+07	2.099E+03
2051	7.496E+04	6.002E+07	4.033E+03	2.002E+04	3.001E+07	2.017E+03
2052	7.202E+04	5.767E+07	3.875E+03	1.924E+04	2.884E+07	1.937E+03
2053	6.920E+04	5.541E+07	3.723E+03	1.848E+04	2.770E+07	1.861E+03
2054	6.648E+04	5.324E+07	3.577E+03	1.776E+04	2.662E+07	1.788E+03
2055	6.388E+04	5.115E+07	3.437E+03	1.706E+04	2.557E+07	1.718E+03
2056	6.137E+04	4.914E+07	3.302E+03	1.639E+04	2.457E+07	1.651E+03
2057	5.897E+04	4.722E+07	3.173E+03	1.575E+04	2.361E+07	1.586E+03
2058	5.665E+04	4.537E+07	3.048E+03	1.513E+04	2.268E+07	1.524E+03
2059	5.443E+04	4.359E+07	2.929E+03	1.454E+04	2.179E+07	1.464E+03
2060	5.230E+04	4.188E+07	2.814E+03	1.397E+04	2.094E+07	1.407E+03
2061	5.025E+04	4.024E+07	2.703E+03	1.342E+04	2.012E+07	1.352E+03
2062	4.828E+04	3.866E+07	2.597E+03	1.290E+04	1.933E+07	1.299E+03
2063	4.638E+04	3.714E+07	2.496E+03	1.239E+04	1.857E+07	1.248E+03
2064	4.457E+04	3.569E+07	2.398E+03	1.190E+04	1.784E+07	1.199E+03
2065	4.282E+04	3.429E+07	2.304E+03	1.144E+04	1.714E+07	1.152E+03
2066	4.114E+04	3.294E+07	2.213E+03	1.099E+04	1.647E+07	1.107E+03

**Results (Continued)**

Year	Total landfill gas			Methane		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
2067	3.953E+04	3.165E+07	2.127E+03	1.056E+04	1.583E+07	1.063E+03
2068	3.798E+04	3.041E+07	2.043E+03	1.014E+04	1.520E+07	1.022E+03
2069	3.649E+04	2.922E+07	1.963E+03	9.746E+03	1.461E+07	9.815E+02
2070	3.506E+04	2.807E+07	1.886E+03	9.364E+03	1.404E+07	9.431E+02
2071	3.368E+04	2.697E+07	1.812E+03	8.997E+03	1.349E+07	9.061E+02
2072	3.236E+04	2.591E+07	1.741E+03	8.644E+03	1.296E+07	8.706E+02
2073	3.109E+04	2.490E+07	1.673E+03	8.305E+03	1.245E+07	8.364E+02
2074	2.987E+04	2.392E+07	1.607E+03	7.979E+03	1.196E+07	8.036E+02
2075	2.870E+04	2.298E+07	1.544E+03	7.667E+03	1.149E+07	7.721E+02
2076	2.758E+04	2.208E+07	1.484E+03	7.366E+03	1.104E+07	7.418E+02
2077	2.649E+04	2.122E+07	1.425E+03	7.077E+03	1.061E+07	7.127E+02
2078	2.546E+04	2.038E+07	1.370E+03	6.800E+03	1.019E+07	6.848E+02
2079	2.446E+04	1.958E+07	1.316E+03	6.533E+03	9.792E+06	6.579E+02
2080	2.350E+04	1.882E+07	1.264E+03	6.277E+03	9.408E+06	6.322E+02
2081	2.258E+04	1.808E+07	1.215E+03	6.031E+03	9.040E+06	6.074E+02
2082	2.169E+04	1.737E+07	1.167E+03	5.794E+03	8.685E+06	5.835E+02
2083	2.084E+04	1.669E+07	1.121E+03	5.567E+03	8.345E+06	5.607E+02
2084	2.002E+04	1.603E+07	1.077E+03	5.349E+03	8.017E+06	5.387E+02
2085	1.924E+04	1.541E+07	1.035E+03	5.139E+03	7.703E+06	5.176E+02
2086	1.848E+04	1.480E+07	9.945E+02	4.938E+03	7.401E+06	4.973E+02
2087	1.776E+04	1.422E+07	9.555E+02	4.744E+03	7.111E+06	4.778E+02
2088	1.706E+04	1.366E+07	9.181E+02	4.558E+03	6.832E+06	4.590E+02
2089	1.639E+04	1.313E+07	8.821E+02	4.379E+03	6.564E+06	4.410E+02
2090	1.575E+04	1.261E+07	8.475E+02	4.207E+03	6.307E+06	4.237E+02
2091	1.513E+04	1.212E+07	8.143E+02	4.042E+03	6.059E+06	4.071E+02
2092	1.454E+04	1.164E+07	7.823E+02	3.884E+03	5.822E+06	3.912E+02
2093	1.397E+04	1.119E+07	7.517E+02	3.732E+03	5.594E+06	3.758E+02
2094	1.342E+04	1.075E+07	7.222E+02	3.585E+03	5.374E+06	3.611E+02
2095	1.290E+04	1.033E+07	6.939E+02	3.445E+03	5.163E+06	3.469E+02
2096	1.239E+04	9.922E+06	6.667E+02	3.310E+03	4.961E+06	3.333E+02
2097	1.190E+04	9.533E+06	6.405E+02	3.180E+03	4.766E+06	3.203E+02
2098	1.144E+04	9.159E+06	6.154E+02	3.055E+03	4.580E+06	3.077E+02
2099	1.099E+04	8.800E+06	5.913E+02	2.935E+03	4.400E+06	2.956E+02
2100	1.056E+04	8.455E+06	5.681E+02	2.820E+03	4.227E+06	2.840E+02
2101	1.014E+04	8.123E+06	5.458E+02	2.710E+03	4.062E+06	2.729E+02
2102	9.747E+03	7.805E+06	5.244E+02	2.604E+03	3.902E+06	2.622E+02
2103	9.365E+03	7.499E+06	5.038E+02	2.501E+03	3.749E+06	2.519E+02
2104	8.998E+03	7.205E+06	4.841E+02	2.403E+03	3.602E+06	2.420E+02
2105	8.645E+03	6.922E+06	4.651E+02	2.309E+03	3.461E+06	2.326E+02
2106	8.306E+03	6.651E+06	4.469E+02	2.219E+03	3.325E+06	2.234E+02

**Results (Continued)**

Year	Carbon dioxide			NMOC		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
1966	0	0	0	0	0	0
1967	1.418E+02	7.748E+04	5.206E+00	3.305E-01	9.220E+01	6.195E-03
1968	2.824E+02	1.543E+05	1.037E+01	6.581E-01	1.836E+02	1.234E-02
1969	4.219E+02	2.305E+05	1.548E+01	9.830E-01	2.742E+02	1.843E-02
1970	5.603E+02	3.061E+05	2.057E+01	1.306E+00	3.642E+02	2.447E-02
1971	6.978E+02	3.812E+05	2.561E+01	1.626E+00	4.537E+02	3.048E-02
1972	8.352E+02	4.563E+05	3.066E+01	1.946E+00	5.429E+02	3.648E-02
1973	9.714E+02	5.307E+05	3.566E+01	2.264E+00	6.315E+02	4.243E-02
1974	1.108E+03	6.054E+05	4.067E+01	2.582E+00	7.204E+02	4.840E-02
1975	1.244E+03	6.798E+05	4.568E+01	2.900E+00	8.090E+02	5.436E-02
1976	1.380E+03	7.542E+05	5.067E+01	3.217E+00	8.974E+02	6.030E-02
1977	1.517E+03	8.287E+05	5.568E+01	3.535E+00	9.862E+02	6.626E-02
1978	1.654E+03	9.035E+05	6.070E+01	3.854E+00	1.075E+03	7.224E-02
1979	1.792E+03	9.788E+05	6.577E+01	4.175E+00	1.165E+03	7.826E-02
1980	1.956E+03	1.069E+06	7.180E+01	4.558E+00	1.272E+03	8.544E-02
1981	2.160E+03	1.180E+06	7.928E+01	5.033E+00	1.404E+03	9.434E-02
1982	2.402E+03	1.312E+06	8.815E+01	5.596E+00	1.561E+03	1.049E-01
1983	2.796E+03	1.528E+06	1.026E+02	6.516E+00	1.818E+03	1.221E-01
1984	3.502E+03	1.913E+06	1.286E+02	8.161E+00	2.277E+03	1.530E-01
1985	4.670E+03	-2.551E+06	1.714E+02	1.088E+01	3.036E+03	2.040E-01
1986	6.278E+03	3.430E+06	2.304E+02	1.463E+01	4.081E+03	2.742E-01
1987	8.319E+03	4.545E+06	3.053E+02	1.938E+01	5.408E+03	3.634E-01
1988	1.027E+04	5.612E+06	3.771E+02	2.394E+01	6.678E+03	4.487E-01
1989	1.216E+04	6.641E+06	4.462E+02	2.833E+01	7.903E+03	5.310E-01
1990	1.397E+04	7.630E+06	5.127E+02	3.255E+01	9.080E+03	6.101E-01
1991	1.570E+04	8.576E+06	5.763E+02	3.658E+01	1.021E+04	6.857E-01
1992	1.746E+04	9.541E+06	6.410E+02	4.070E+01	1.135E+04	7.628E-01
1993	1.925E+04	1.051E+07	7.064E+02	4.485E+01	1.251E+04	8.407E-01
1994	2.069E+04	1.130E+07	7.595E+02	4.822E+01	1.345E+04	9.038E-01
1995	2.190E+04	1.196E+07	8.039E+02	5.104E+01	1.424E+04	9.567E-01
1996	2.337E+04	1.277E+07	8.579E+02	5.447E+01	1.519E+04	1.021E+00
1997	2.331E+04	1.273E+07	8.554E+02	5.431E+01	1.515E+04	1.018E+00
1998	2.305E+04	1.259E+07	8.459E+02	5.370E+01	1.498E+04	1.007E+00
1999	2.280E+04	1.245E+07	8.368E+02	5.312E+01	1.482E+04	9.958E-01
2000	2.697E+04	1.474E+07	9.901E+02	6.285E+01	1.754E+04	1.178E+00
2001	3.110E+04	1.699E+07	1.142E+03	7.247E+01	2.022E+04	1.358E+00
2002	3.519E+04	1.922E+07	1.292E+03	8.200E+01	2.288E+04	1.537E+00
2003	3.955E+04	2.161E+07	1.452E+03	9.216E+01	2.571E+04	1.727E+00
2004	4.254E+04	2.324E+07	1.562E+03	9.914E+01	2.766E+04	1.858E+00
2005	4.493E+04	2.455E+07	1.649E+03	1.047E+02	2.921E+04	1.963E+00
2006	4.827E+04	2.637E+07	1.772E+03	1.125E+02	3.138E+04	2.108E+00
2007	5.228E+04	2.856E+07	1.919E+03	1.218E+02	3.399E+04	2.284E+00
2008	5.411E+04	2.956E+07	1.986E+03	1.261E+02	3.518E+04	2.364E+00
2009	5.533E+04	3.023E+07	2.031E+03	1.289E+02	3.597E+04	2.417E+00
2010	5.696E+04	3.112E+07	2.091E+03	1.327E+02	3.703E+04	2.488E+00
2011	5.748E+04	3.140E+07	2.110E+03	1.339E+02	3.737E+04	2.511E+00
2012	5.798E+04	3.167E+07	2.128E+03	1.351E+02	3.769E+04	2.533E+00
2013	5.846E+04	3.194E+07	2.146E+03	1.362E+02	3.800E+04	2.554E+00
2014	5.892E+04	3.219E+07	2.163E+03	1.373E+02	3.831E+04	2.574E+00
2015	5.937E+04	3.243E+07	2.179E+03	1.383E+02	3.859E+04	2.593E+00

**Results (Continued)**

Year	Carbon dioxide			NMOC		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
2016	5.979E+04	3.267E+07	2.195E+03	1.393E+02	3.887E+04	2.612E+00
2017	6.020E+04	3.289E+07	2.210E+03	1.403E+02	3.914E+04	2.630E+00
2018	6.060E+04	3.310E+07	2.224E+03	1.412E+02	3.939E+04	2.647E+00
2019	6.098E+04	3.331E+07	2.238E+03	1.421E+02	3.964E+04	2.663E+00
2020	6.134E+04	3.351E+07	2.252E+03	1.429E+02	3.988E+04	2.679E+00
2021	6.169E+04	3.370E+07	2.264E+03	1.438E+02	4.010E+04	2.695E+00
2022	6.202E+04	3.388E+07	2.277E+03	1.445E+02	4.032E+04	2.709E+00
2023	6.235E+04	3.406E+07	2.289E+03	1.453E+02	4.053E+04	2.723E+00
2024	6.266E+04	3.423E+07	2.300E+03	1.460E+02	4.073E+04	2.737E+00
2025	6.295E+04	3.439E+07	2.311E+03	1.467E+02	4.093E+04	2.750E+00
2026	6.324E+04	3.455E+07	2.321E+03	1.474E+02	4.111E+04	2.762E+00
2027	6.352E+04	3.470E+07	2.331E+03	1.480E+02	4.129E+04	2.774E+00
2028	6.378E+04	3.484E+07	2.341E+03	1.486E+02	4.146E+04	2.786E+00
2029	6.403E+04	3.498E+07	2.350E+03	1.492E+02	4.163E+04	2.797E+00
2030	6.428E+04	3.511E+07	2.359E+03	1.498E+02	4.179E+04	2.808E+00
2031	6.451E+04	3.524E+07	2.368E+03	1.503E+02	4.194E+04	2.818E+00
2032	6.474E+04	3.537E+07	2.376E+03	1.509E+02	4.208E+04	2.828E+00
2033	6.495E+04	3.548E+07	2.384E+03	1.514E+02	4.223E+04	2.837E+00
2034	6.516E+04	3.560E+07	2.392E+03	1.518E+02	4.236E+04	2.846E+00
2035	6.536E+04	3.571E+07	2.399E+03	1.523E+02	4.249E+04	2.855E+00
2036	6.555E+04	3.581E+07	2.406E+03	1.528E+02	4.261E+04	2.863E+00
2037	6.574E+04	3.591E+07	2.413E+03	1.532E+02	4.273E+04	2.871E+00
2038	6.591E+04	3.601E+07	2.419E+03	1.536E+02	4.285E+04	2.879E+00
2039	6.608E+04	3.610E+07	2.426E+03	1.540E+02	4.296E+04	2.886E+00
2040	6.625E+04	3.619E+07	2.432E+03	1.544E+02	4.307E+04	2.894E+00
2041	6.640E+04	3.628E+07	2.437E+03	1.547E+02	4.317E+04	2.900E+00
2042	6.655E+04	3.636E+07	2.443E+03	1.551E+02	4.327E+04	2.907E+00
2043	6.670E+04	3.644E+07	2.448E+03	1.554E+02	4.336E+04	2.913E+00
2044	6.684E+04	3.651E+07	2.453E+03	1.557E+02	4.345E+04	2.919E+00
2045	6.697E+04	3.659E+07	2.458E+03	1.561E+02	4.354E+04	2.925E+00
2046	6.710E+04	3.666E+07	2.463E+03	1.564E+02	4.362E+04	2.931E+00
2047	6.447E+04	3.522E+07	2.366E+03	1.502E+02	4.191E+04	2.816E+00
2048	6.194E+04	3.384E+07	2.274E+03	1.443E+02	4.027E+04	2.706E+00
2049	5.951E+04	3.251E+07	2.184E+03	1.387E+02	3.869E+04	2.600E+00
2050	5.718E+04	3.124E+07	2.099E+03	1.332E+02	3.717E+04	2.498E+00
2051	5.494E+04	3.001E+07	2.017E+03	1.280E+02	3.571E+04	2.400E+00
2052	5.278E+04	2.884E+07	1.937E+03	1.230E+02	3.431E+04	2.306E+00
2053	5.071E+04	2.770E+07	1.861E+03	1.182E+02	3.297E+04	2.215E+00
2054	4.873E+04	2.662E+07	1.788E+03	1.135E+02	3.168E+04	2.128E+00
2055	4.681E+04	2.557E+07	1.718E+03	1.091E+02	3.043E+04	2.045E+00
2056	4.498E+04	2.457E+07	1.651E+03	1.048E+02	2.924E+04	1.965E+00
2057	4.322E+04	2.361E+07	1.586E+03	1.007E+02	2.809E+04	1.888E+00
2058	4.152E+04	2.268E+07	1.524E+03	9.675E+01	2.699E+04	1.814E+00
2059	3.989E+04	2.179E+07	1.464E+03	9.296E+01	2.593E+04	1.743E+00
2060	3.833E+04	2.094E+07	1.407E+03	8.931E+01	2.492E+04	1.674E+00
2061	3.683E+04	2.012E+07	1.352E+03	8.581E+01	2.394E+04	1.609E+00
2062	3.538E+04	1.933E+07	1.299E+03	8.245E+01	2.300E+04	1.545E+00
2063	3.399E+04	1.857E+07	1.248E+03	7.922E+01	2.210E+04	1.485E+00
2064	3.266E+04	1.784E+07	1.199E+03	7.611E+01	2.123E+04	1.427E+00
2065	3.138E+04	1.714E+07	1.152E+03	7.312E+01	2.040E+04	1.371E+00
2066	3.015E+04	1.647E+07	1.107E+03	7.026E+01	1.960E+04	1.317E+00

**Results (Continued)**

Year	Carbon dioxide			NMOC		
	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)	(Mg/year)	(m <sup>3</sup> /year)	(av ft <sup>3</sup> /min)
2067	2.897E+04	1.583E+07	1.063E+03	6.750E+01	1.883E+04	1.265E+00
2068	2.783E+04	1.520E+07	1.022E+03	6.486E+01	1.809E+04	1.216E+00
2069	2.674E+04	1.461E+07	9.815E+02	6.231E+01	1.738E+04	1.168E+00
2070	2.569E+04	1.404E+07	9.431E+02	5.987E+01	1.670E+04	1.122E+00
2071	2.468E+04	1.349E+07	9.061E+02	5.752E+01	1.605E+04	1.078E+00
2072	2.372E+04	1.296E+07	8.706E+02	5.527E+01	1.542E+04	1.036E+00
2073	2.279E+04	1.245E+07	8.364E+02	5.310E+01	1.481E+04	9.953E-01
2074	2.189E+04	1.196E+07	8.036E+02	5.102E+01	1.423E+04	9.563E-01
2075	2.104E+04	1.149E+07	7.721E+02	4.902E+01	1.367E+04	9.188E-01
2076	2.021E+04	1.104E+07	7.418E+02	4.710E+01	1.314E+04	8.828E-01
2077	1.942E+04	1.061E+07	7.127E+02	4.525E+01	1.262E+04	8.482E-01
2078	1.866E+04	1.019E+07	6.848E+02	4.347E+01	1.213E+04	8.149E-01
2079	1.792E+04	9.792E+06	6.579E+02	4.177E+01	1.165E+04	7.830E-01
2080	1.722E+04	9.408E+06	6.322E+02	4.013E+01	1.120E+04	7.523E-01
2081	1.655E+04	9.040E+06	6.074E+02	3.856E+01	1.076E+04	7.228E-01
2082	1.590E+04	8.685E+06	5.835E+02	3.705E+01	1.034E+04	6.944E-01
2083	1.527E+04	8.345E+06	5.607E+02	3.559E+01	9.930E+03	6.672E-01
2084	1.468E+04	8.017E+06	5.387E+02	3.420E+01	9.541E+03	6.410E-01
2085	1.410E+04	7.703E+06	5.176E+02	3.286E+01	9.167E+03	6.159E-01
2086	1.355E+04	7.401E+06	4.973E+02	3.157E+01	8.807E+03	5.917E-01
2087	1.302E+04	7.111E+06	4.778E+02	3.033E+01	8.462E+03	5.685E-01
2088	1.251E+04	6.832E+06	4.590E+02	2.914E+01	8.130E+03	5.463E-01
2089	1.202E+04	6.564E+06	4.410E+02	2.800E+01	7.811E+03	5.248E-01
2090	1.154E+04	6.307E+06	4.237E+02	2.690E+01	7.505E+03	5.043E-01
2091	1.109E+04	6.059E+06	4.071E+02	2.585E+01	7.211E+03	4.845E-01
2092	1.066E+04	5.822E+06	3.912E+02	2.483E+01	6.928E+03	4.655E-01
2093	1.024E+04	5.594E+06	3.758E+02	2.386E+01	6.656E+03	4.472E-01
2094	9.837E+03	5.374E+06	3.611E+02	2.292E+01	6.395E+03	4.297E-01
2095	9.452E+03	5.163E+06	3.469E+02	2.202E+01	6.145E+03	4.128E-01
2096	9.081E+03	4.961E+06	3.333E+02	2.116E+01	5.904E+03	3.967E-01
2097	8.725E+03	4.766E+06	3.203E+02	2.033E+01	5.672E+03	3.811E-01
2098	8.383E+03	4.580E+06	3.077E+02	1.953E+01	5.450E+03	3.662E-01
2099	8.054E+03	4.400E+06	2.956E+02	1.877E+01	5.236E+03	3.518E-01
2100	7.738E+03	4.227E+06	2.840E+02	1.803E+01	5.031E+03	3.380E-01
2101	7.435E+03	4.062E+06	2.729E+02	1.733E+01	4.833E+03	3.248E-01
2102	7.143E+03	3.902E+06	2.622E+02	1.665E+01	4.644E+03	3.120E-01
2103	6.863E+03	3.749E+06	2.519E+02	1.599E+01	4.462E+03	2.998E-01
2104	6.594E+03	3.602E+06	2.420E+02	1.537E+01	4.287E+03	2.880E-01
2105	6.336E+03	3.461E+06	2.326E+02	1.476E+01	4.119E+03	2.767E-01
2106	6.087E+03	3.325E+06	2.234E+02	1.418E+01	3.957E+03	2.659E-01





# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
**Governor**

*Thomas W. Easterly*  
**Commissioner**

100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

## SENT VIA U.S. MAIL: CONFIRMED DELIVERY AND SIGNATURE REQUESTED

TO: Tom Brown  
Republic Services of Indiana, LP d/b/a National Serv-all Landfill  
6231 McBeth Road  
Fort Wayne, IN 46809

DATE: December 9, 2011

FROM: Matt Stuckey, Branch Chief  
Permits Branch  
Office of Air Quality

SUBJECT: Final Decision  
Part 70 Operating Permit Renewal  
003-30376-00257

Enclosed is the final decision and supporting materials for the air permit application referenced above. Please note that this packet contains the original, signed, permit documents.

The final decision is being sent to you because our records indicate that you are the contact person for this application. However, if you are not the appropriate person within your company to receive this document, please forward it to the correct person.

A copy of the final decision and supporting materials has also been sent via standard mail to:  
Bob Walls - GM  
Matthew Bourdreau – Cornerstone Environmental Group, LLC  
OAQ Permits Branch Interested Parties List

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit. If you think you have received this document in error, please contact Joanne Smiddie-Brush of my staff at 1-800-451-6027 (ext 3-0185), or via e-mail at [jbrush@idem.IN.gov](mailto:jbrush@idem.IN.gov).

Final Applicant Cover letter.dot 11/30/07



# INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

*We Protect Hoosiers and Our Environment.*

*Mitchell E. Daniels Jr.*  
**Governor**

*Thomas W. Easterly*  
**Commissioner**

100 North Senate Avenue  
Indianapolis, Indiana 46204  
(317) 232-8603  
Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

December 9, 2011

TO: Allen County Public Library – Waynedale Branch

From: Matthew Stuckey, Branch Chief  
Permits Branch  
Office of Air Quality

Subject: **Important Information for Display Regarding a Final Determination**

**Applicant Name: Republic Services of Indiana LP d/b/a National Serv-all  
Landfill**  
**Permit Number: 003-30376-00257**

You previously received information to make available to the public during the public comment period of a draft permit. Enclosed is a copy of the final decision and supporting materials for the same project. Please place the enclosed information along with the information you previously received. To ensure that your patrons have ample opportunity to review the enclosed permit, **we ask that you retain this document for at least 60 days.**

The applicant is responsible for placing a copy of the application in your library. If the permit application is not on file, or if you have any questions concerning this public review process, please contact Joanne Smiddie-Brush, OAQ Permits Administration Section at 1-800-451-6027, extension 3-0185.

Enclosures  
Final Library.dot 11/30/07

# Mail Code 61-53

IDEM Staff	GHOTOPP 12/9/2011 Republic Services of IN, LP d/b/a National Serv-All Landfill 003-30376-00257 Final		AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender	 Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail:  <b>CERTIFICATE OF MAILING ONLY</b>	

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee	Remarks
1		Tom Brown Republic Services of IN, LP d/b/a National Serv-AI 6231 McBeth Rd Ft Wayne IN 46809 (Source CAATS) via confirmed delivery										
2		Bob Walls GM Republic Services of IN, LP d/b/a National Serv-AI 6231 McBeth Rd Ft Wayne IN 46809 (RO CAATS)										
3		Daniel & Sandy Trimmer 15021 Yellow River Road Columbia City IN 46725 (Affected Party)										
4		Duane & Deborah Clark Clark Farms 6973 E. 500 S. Columbia City IN 46725 (Affected Party)										
5		Mr. Victor Locke WPTA-TV P.O.Box 2121 Fort Wayne IN 46801 (Affected Party)										
6		Fort Wayne City Council and Mayors Office One Main Street Fort Wayne IN 46802 (Local Official)										
7		Allen County Public Library, Waynedale Branch 2200 Lower Huntington Rd Fort Wayne IN 46809 (Library)										
8		Mr. John E. Hampton Plumbers & Steamfitters, Local 166 2930 W Ludwig Rd Fort Wayne IN 46818-1328 (Affected Party)										
9		Allen Co. Board of Commissioners One Main St. Fort Wayne IN 46802 (Local Official)										
10		Fort Wayne-Allen County Health Department 200 E Berry St Suite 360 Fort Wayne IN 46802 (Health Department)										
11		Mr. Matthew Bourdreau Cornerstone Environmental Group, LLC 39395 W 12 Mile Road Farmington Hills MI 48331 (Consultant)										
12		Mark Zeltwanger 26545 CR 52 Nappanee IN 46550 (Affected Party)										
13												
14												
15												

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is \$50,000 per piece subject to a limit of \$50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is \$500. The maximum indemnity payable is \$25,000 for registered mail, sent with optional postal insurance. See <b>Domestic Mail Manual R900, S913, and S921</b> for limitations of coverage on inured and COD mail. See <b>International Mail Manual</b> for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
<b>11</b>			