



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • www.idem.IN.gov

Michael R. Pence
Governor

Carol S. Comer
Commissioner

To: Interested Parties

Date: January 20, 2016

From: Matthew Stuckey, Chief
Permits Branch
Office of Air Quality

Source Name: Lafarge North America

Permit Level: Administrative Title V Operating Permit Renewal

Permit Number: 089-36118-00458

Source Location: 3210 Watling Street
East Chicago, Indiana

Type of Action Taken: Permit Renewal

Notice of Decision: Approval - Effective Immediately

Please be advised that on behalf of the Commissioner of the Department of Environmental Management, I have issued a decision regarding the matter referenced above.

The final decision is available on the IDEM website at: <http://www.in.gov/apps/idem/caats/>
To view the document, select Search option 3, then enter permit 36118.

If you would like to request a paper copy of the permit document, please contact IDEM's central file room:

Indiana Government Center North, Room 1201
100 North Senate Avenue, MC 50-07
Indianapolis, IN 46204
Phone: 1-800-451-6027 (ext. 4-0965)
Fax (317) 232-8659

Pursuant to IC 13-15-5-3, this permit is effective immediately, unless a petition for stay of effectiveness is filed and granted according to IC 13-15-6-3, and may be revoked or modified in accordance with the provisions of IC 13-15-7-1.

(continues on next page)

If you wish to challenge this decision, IC 4-21.5-3-7 and IC 13-15-6-1(b) or IC 13-15-6-1(a) require that you file a petition for administrative review. This petition may include a request for stay of effectiveness and must be submitted to the Office of Environmental Adjudication, 100 North Senate Avenue, Government Center North, Suite N 501E, Indianapolis, IN 46204.

For an **initial Title V Operating Permit**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **thirty (30)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(b).

For a **Title V Operating Permit renewal**, a petition for administrative review must be submitted to the Office of Environmental Adjudication within **fifteen (15)** days from the receipt of this notice provided under IC 13-15-5-3, pursuant to IC 13-15-6-1(a).

The filing of a petition for administrative review is complete on the earliest of the following dates that apply to the filing:

- (1) the date the document is delivered to the Office of Environmental Adjudication (OEA);
- (2) the date of the postmark on the envelope containing the document, if the document is mailed to OEA by U.S. mail; or
- (3) The date on which the document is deposited with a private carrier, as shown by receipt issued by the carrier, if the document is sent to the OEA by private carrier.

The petition must include facts demonstrating that you are either the applicant, a person aggrieved or adversely affected by the decision or otherwise entitled to review by law. Please identify the permit, decision, or other order for which you seek review by permit number, name of the applicant, location, date of this notice and all of the following:

- (1) the name and address of the person making the request;
- (2) the interest of the person making the request;
- (3) identification of any persons represented by the person making the request;
- (4) the reasons, with particularity, for the request;
- (5) the issues, with particularity, proposed for considerations at any hearing; and
- (6) identification of the terms and conditions which, in the judgment of the person making the request, would be appropriate in the case in question to satisfy the requirements of the law governing documents of the type issued by the Commissioner.

Pursuant to 326 IAC 2-7-18(d), any person may petition the U.S. EPA to object to the issuance of an initial Title V operating permit, permit renewal, or modification within sixty (60) days of the end of the forty-five (45) day EPA review period. Such an objection must be based only on issues that were raised with reasonable specificity during the public comment period, unless the petitioner demonstrates that it was impracticable to raise such issues, or if the grounds for such objection arose after the comment period.

To petition the U.S. EPA to object to the issuance of a Title V operating permit, contact:

U.S. Environmental Protection Agency
401 M Street
Washington, D.C. 20406

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178. Callers from within Indiana may call toll-free at 1-800-451-6027, ext. 3-0178.



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

100 N. Senate Avenue • Indianapolis, IN 46204

(800) 451-6027 • (317) 232-8603 • www.idem.IN.gov

Michael R. Pence
Governor

Carol S. Comer
Commissioner

Administrative Part 70 Operating Permit Renewal OFFICE OF AIR QUALITY

**Lafarge North America
3210 Watling Street
East Chicago, Indiana 46312**

(herein known as the Permittee) is hereby authorized to operate subject to the conditions contained herein, the source described in Section A (Source Summary) of this permit.

The Permittee must comply with all conditions of this permit. Noncompliance with any provisions of this permit is grounds for enforcement action; permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Noncompliance with any provision of this permit, except any provision specifically designated as not federally enforceable, constitutes a violation of the Clean Air Act. It shall not be a defense for the Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. An emergency does constitute an affirmative defense in an enforcement action provided the Permittee complies with the applicable requirements set forth in Section B, Emergency Provisions.

This permit is issued in accordance with 326 IAC 2 and 40 CFR Part 70 Appendix A and contains the conditions and provisions specified in 326 IAC 2-7 as required by 42 U.S.C. 7401, et. seq. (Clean Air Act as amended by the 1990 Clean Air Act Amendments), 40 CFR Part 70.6, IC 13-15 and IC 13-17.

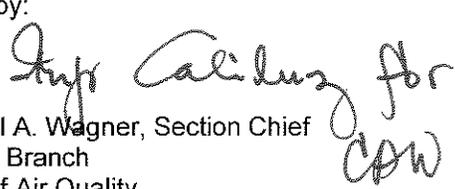
Operation Permit No.: T089-36118-00458	
Issued by:  Chrystal A. Wagner, Section Chief Permits Branch Office of Air Quality	Issuance Date: January 20, 2016 Expiration Date: January 20, 2021

TABLE OF CONTENTS

SECTION A	SOURCE SUMMARY	4
A.1	General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(14)][326 IAC 2-7-1(22)]	
A.2	Part 70 Source Definition [326 IAC 2-7-1(22)]	
A.3	Emission Units and Pollution Control Equipment Summary [326 IAC 2-7-4(c)(3)][326 IAC 2-7-5(14)]	
A.4	Specifically Regulated Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-7-4(c)][326 IAC 2-7-5(14)]	
A.5	Part 70 Permit Applicability [326 IAC 2-7-2]	
SECTION B	GENERAL CONDITIONS	10
B.1	Definitions [326 IAC 2-7-1]	
B.2	Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]	
B.3	Term of Conditions [326 IAC 2-1.1-9.5]	
B.4	Enforceability [326 IAC 2-7-7] [IC 13-17-12]	
B.5	Severability [326 IAC 2-7-5(5)]	
B.6	Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]	
B.7	Duty to Provide Information [326 IAC 2-7-5(6)(E)]	
B.8	Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]	
B.9	Annual Compliance Certification [326 IAC 2-7-6(5)]	
B.10	Preventive Maintenance Plan [326 IAC 2-7-5(12)][326 IAC 1-6-3]	
B.11	Emergency Provisions [326 IAC 2-7-16]	
B.12	Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]	
B.13	Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]	
B.14	Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]	
B.15	Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]	
B.16	Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]	
B.17	Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]	
B.18	Permit Revision Under Economic Incentives and Other Programs [326 IAC 2-7-5(8)][326 IAC 2-7-12(b)(2)]	
B.19	Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]	
B.20	Source Modification Requirement [326 IAC 2-7-10.5]	
B.21	Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]	
B.22	Transfer of Ownership or Operational Control [326 IAC 2-7-11]	
B.23	Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]	
B.24	Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]	
SECTION C	SOURCE OPERATION CONDITIONS.....	20
	Emission Limitations and Standards [326 IAC 2-7-5(1)].....	20
C.1	Opacity [326 IAC 5-1]	
C.2	Open Burning [326 IAC 4-1] [IC 13-17-9]	
C.3	Incineration [326 IAC 4-2] [326 IAC 9-1-2]	
C.4	Fugitive Dust Emissions [326 IAC 6-4]	
C.5	Fugitive Particulate Matter Emissions [326 IAC 6.8-10-3]	
C.6	Stack Height [326 IAC 1-7]	
C.7	Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]	
	Testing Requirements [326 IAC 2-7-6(1)].....	23
C.8	Performance Testing [326 IAC 3-6]	
	Compliance Requirements [326 IAC 2-1.1-11].....	23
C.9	Compliance Requirements [326 IAC 2-1.1-11]	
	Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)].....	23
C.10	Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]	

C.11	Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]	
	Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]	24
C.12	Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]	
C.13	Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]	
C.14	Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]	
C.15	Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]	
	Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]	255
C.16	Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]	
C.17	General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6] [326 IAC 2-2][326 IAC 2-3]	
C.18	General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11] [326 IAC 2-2][326 IAC 2-3]	
	Stratospheric Ozone Protection	288
C.19	Compliance with 40 CFR 82 and 326 IAC 22-1	
SECTION D.1	EMISSIONS UNIT OPERATION CONDITIONS	29
	Emission Limitations and Standards [326 IAC 2-7-5(1)].....	300
D.1.1	Emission Offset Minor Limitations [326 IAC 2-3]	
D.1.2	Nonattainment Area Particulate Limitations [326 IAC 6.8-1-2]	
D.1.3	Particulate Matter Emission Limitations [326 IAC 6.8-10-3]	
	Compliance Determination Requirements	31
D.1.4	Particulate Matter (PM) Emission Limitations [326 IAC 6.8-10-3]	
D.1.5	Particulate Matter (PM) [326 IAC 6.8-10]	
	Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]	322
D.1.6	Record Keeping Requirements	
D.1.7	Reporting Requirement	
SECTION D.2	EMISSIONS UNIT OPERATION CONDITIONS	355
	Emission Limitations and Standards [326 IAC 2-7-5(1)].....	355
D.2.1	Nitrogen Oxide (NOx) Emission Offset Minor Limitation [326 IA 2-3]	
	Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]	355
D.2.2	Record Keeping Requirements	
D.2.3	Reporting Requirement	
SECTION E.1	EMISSIONS UNIT OPERATION CONDITIONS	366
E.1.1	General Provisions Relating to NESHAP [326 IAC 20-1] [40 CFR Part 63, Subpart A]	
E.1.2	National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines [40 CFR Part 63, Subpart ZZZZ - Emission Units > 500 HP Site Rating constructed before December 19, 2002]	
CERTIFICATION		377
EMERGENCY OCCURRENCE REPORT		388
Part 70 Quarterly Report.....		400
QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT		411
Attachment A - Fugitive Particulate Matter Control Plan		
Attachment B - 40 CFR 63 Subpart ZZZZ		

SECTION A SOURCE SUMMARY

This permit is based on information requested by the Indiana Department of Environmental Management (IDEM), Office of Air Quality (OAQ). The information describing the source contained in conditions A.1 through A.3 is descriptive information and does not constitute enforceable conditions. However, the Permittee should be aware that a physical change or a change in the method of operation that may render this descriptive information obsolete or inaccurate may trigger requirements for the Permittee to obtain additional permits or seek modification of this permit pursuant to 326 IAC 2, or change other applicable requirements presented in the permit application.

A.1 General Information [326 IAC 2-7-4(c)][326 IAC 2-7-5(14)][326 IAC 2-7-1(22)]

The Permittee owns and operates a stationary slag granulating and pelletizing operation.

Source Address: 3210 Watling Street, East Chicago, Indiana 46312
 General Source Phone Number: 219-378-1193
 SIC Code: 3312
 County Location: Lake
 Source Location Status: Nonattainment for 8-hour ozone standard
 Attainment for all other criteria pollutants
 Source Status: Administrative Part 70 Operating Permit Program
 Major Source, under PSD and Emission Offset Rules
 Major Source, Section 112 of the Clean Air Act
 1 of 28 Source Categories

A.2 Part 70 Source Definition [326 IAC 2-7-1(22)]

The source, a slag granulator and pelletizer, includes the primary operation, ArcelorMittal USA, LLC. (Source ID 089-00316), an integrated steel mill, at 3210 Watling Street, East Chicago, Indiana, collocated with the secondary operation, ArcelorMittal Indiana Harbor, LLC (Source ID 089-00318), at 3001 Dickey Road, East Chicago, Indiana, and other onsite contractors:

	Company Name	Source ID	Operation Description
1	ArcelorMittal USA LLC	089-00316	Integrated steel mill
2	ArcelorMittal Indiana Harbor LLC	089-00318	Integrated steel mill
	Onsite Contractors		
3	Lafarge North America	089-00458	Slag granulator and pelletizer
4	Beemsterboer Slag Corp.	089-00356	Slag crushing and sizing
5	Beemsterboer Slag Corp.	089-00537	Metallurgical coke screening
6	Cokenergy LLC	089-00383	Heated gas steam from coal carbonization
7	Fritz Enterprises, Inc.	089-00465	Iron and steel recycling process and coke screening
8	Harsco Metals Americas	089-00358	Briquetting facility
9	Indiana Harbor Coke Company LP	089-00382	Heat recovery coal carbonization
10	Ironside Energy, LLC	089-00448	Industrial steam and electric power cogeneration
11	Mid-Continent Coal & Coke	089-00371	Metallurgical coke separation
12	Oil Technology, Inc.	089-00375	Used oil recycling
13	Oil Technology, Inc.	089-00369	Used oil recycling
14	Phoenix Services, LLC	089-00538	Slag and kish processing
15	Phoenix Services, LLC, dba Metal Services LLC	089-00536	Slag and kish processing
16	Tube City IMS	089-00353	Steel slab scarfer
17	Hoosier Pig Services LL	089-00582	Pig iron ingot casting

IDEM has determined that ArcelorMittal Indiana Harbor LLC, Lafarge and the other on-site contractors are under the common control of ArcelorMittal USA LLC. These plants are considered one source due to contractual control. Therefore, the term "source" in the Part 70

documents refers to ArcelorMittal USA LLC, ArcelorMittal Indiana Harbor LLC, Lafarge and the other on-site contractors as one source.

Separate Part 70 permits have been issued to these sources solely for administrative purposes.

A.3 Emission Units and Pollution Control Equipment Summary
[326 IAC 2-7-4(c)(3)][326 IAC 2-7-5(14)]

This stationary source consists of the following emission units and pollution control devices:

Expanded (Pelletized) Slag Production

- (a) One (1) slag pelletizer, identified as EU-302, with a maximum capacity of 3600 tons per day, with emissions inherently reduced by quench water, and exhausting to the atmosphere through the top of the structure, installed in 2000.

Granulated (Excess) Slag Production

- (b) One (1) slag granulator, identified as EU-301, with a maximum capacity of 3600 tons of slag per day, with emissions inherently reduced by quench water, and exhausting to stack S-301, installed in 2000. The following equipment is also used in connection with the slag granulator:
- (1) Two (2) slurry dewatering drums, with negligible emissions due to water content and exhausting directly to the ambient air.
 - (2) Five (5) conveyors, identified as East Exit, West Exit, East Cross, West Cross, Granulator Stacker, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (3) Two (2) stockpile stackers, identified as S-1 and S-2, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (4) Various granulated slag piles, termed "A-Lot" material, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (5) One (1) granulated slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, constructed in approximately 2000, permitted in 2015, including the following:
- (1) One (1) diesel fired generator, identified as EG-1, with a maximum site rating of 731 Horsepower (Hp).
 - (2) One (1) above ground diesel fuel storage tank, with a capacity of 5,000 gallons or less.
 - (3) One (1) 12 cubic yard front-end loader for loading unprocessed slag into the hopper and loading out processed/crushed slag onto transport trucks.
 - (4) Six (6) main conveyors, identified from C-1 to C-6, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (5) One (1) pellet crusher, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (6) One (1) pellet screening station, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

- (7) Various pelletized slag piles, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
- (8) One (1) pelletized slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
- (9) One (1) loading (feed) hopper, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

EG-2 Excess Granulated Slag Screening

- (d) Excess Slag Processing, identified as EG-2, constructed in approximately 2000, permitted in 2015, consisting of the following emission units and storage piles (unprocessed slag piles and processed/crushed slag piles):
- (1) One (1) above ground diesel fuel storage tank, with a capacity of 5,000 gallons or less.
 - (2) One (1) jaw crusher, with a maximum throughput rate of 150 tons per hour.
 - (3) Two (2) under-feed belt conveyors, with a maximum throughput rate of 93 tons per hour.
 - (4) Two (2) stacker conveyors with a maximum throughput rate of 93 tons per hour.
 - (5) One (1) 12 cubic yard front-end loader for loading unprocessed slag into the crusher and loading out processed/crushed slag onto transport trucks.
 - (6) One (1) granulated slag screening station, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (7) One (1) mini-jaw crusher, with a maximum throughput rate 57 of tons per hour.
 - (8) Various granulated slag piles, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (9) One (1) granulated slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

A.4 Insignificant Activities [326 IAC 2-7-1(21)][326 IAC 2-7-4(c)][326 IAC 2-7-5(14)]

This stationary source has the following insignificant activities, as defined in 326 IAC 2-7-1(21):

- (1) Production of hot water for on-site personal use not related to any industrial or production process.
- (2) Pressure washing of equipment.
- (3) Portable electrical generators that can be moved by hand from one location to another. "Moved by hand" means that it can be moved without the assistance of any motorized or non-motorized vehicle, conveyance, or device.
- (4) Combustion emissions from propulsion of mobile sources.
- (5) Tobacco smoking rooms and areas.
- (6) Indoor and outdoor kerosene heaters.

- (7) Ventilation exhaust, central chiller water systems, refrigeration and air conditioning equipment, not related to any industrial or production process, including natural draft hoods or ventilating systems that do not remove air pollutants.
- (8) Stack and vents from plumbing traps used to prevent the discharge of sewer gases, handling domestic sewage only, excluding those at wastewater treatment plants or those handling any industrial waste.
- (9) Air vents from air compressors.
- (10) Vents for air cooling of electric motors provided the air does not commingle with regulated air pollutants.
- (11) Painting, including interior and exterior painting of buildings, and solvent use, excluding degreasing operations utilizing halogenated organic solvents.
- (12) Brazing, soldering, or welding operations and associated equipment.
- (13) Portable blast-cleaning equipment with enclosures.
- (14) Batteries and battery charging stations, except at battery manufacturing plants.
- (15) Lubrication, including hand-held spray can lubrication, dipping metal parts into lubricating oil, and manual or automated addition of cutting oil in machining operations.
- (16) Activities performed using hand-held equipment including the following:
 - (i) Machining wood, metal, or plastic
 - (ii) Turning wood, metal, or plastic
 - (iii) Drilling
 - (iv) Grinding
 - (v) Sawing
 - (vi) Surface grinding
- (17) Rest rooms and associated cleanup operations and supplies.
- (18) Office supplies and equipment.
- (19) Photocopying equipment and associated supplies.
- (20) Storage of drums containing maintenance raw materials.
- (21) Portable containers used for the collection, storage, or disposal of materials provided the container capacity is equal to or less than forty-six hundredths (0.46) cubic meters and the container is closed except when the material is added or removed.
- (22) Activities and equipment associated with on-site medical care not otherwise specifically regulated.
- (23) Vacuum producing devices for the purpose of removing potential accidental releases.
- (24) Equipment used for quality control/assurance or inspection purposes, including sampling equipment used to withdraw materials for analysis.

- (25) Fugitive emissions related to movement of passenger vehicles, provided the emissions are not counted for applicability purposes under 326 IAC 2-7-1(22)(B), and any required fugitive dust control plan or its equivalent is submitted.
- (26) Electrical resistance welding.
- (27) Air compressors and pneumatically operated equipment, including hand tools.
- (28) Compressor or pump lubrication and seal oil systems.
- (29) Electric or steam heated drying ovens and autoclaves, including only the heating emissions and not any associated process emissions.
- (30) Manual loading and unloading operations.
- (31) Natural gas-fired combustion sources with heat input equal to or less than ten million (10,000,000) Btu per hour.
- (32) Equipment powered by diesel fuel fired or natural gas fired internal combustion engines of capacity equal to or less than five hundred thousand (500,000) Btu/hour, except where total capacity of equipment operated by one stationary source exceeds two million (2,000,000) Btu/hour.
- (33) A petroleum fuel, other than gasoline, dispensing facility, having a storage tank capacity less than or equal to ten thousand five hundred (10,500) gallons, and dispensing three thousand five hundred (3,500) gallons per day or less.
- (34) Storage tanks with capacity less than or equal to one thousand (1,000) gallons and annual throughputs less than twelve thousand (12,000) gallons.
- (35) Vessels storing hydraulic and lubricating oil.
- (36) Application of greases and lubricants.
- (37) Machining where an aqueous cutting coolant continuously floods the machining Interface.
- (38) Degreasing operations that do not exceed one hundred forty-five (145) gallons per twelve (12) months, except if subject to 326 IAC 20-6.
- (39) Cleaners and solvents characterized as follows where the use of which, for all cleaners and solvents combined, does not exceed one hundred forty-five (145) gallons per twelve (12) months.
 - (a) Having a vapor pressure equal to or less than two kilo Pascals (2.0 kPa) (fifteen millimeters of mercury (15 mm Hg) or three-tenths pound per square inch (0.3 psi)) measured at thirty-eight degrees Centigrade (38°C) (one hundred degrees Fahrenheit (100°F)).
 - (b) Having a vapor pressure equal to or less than seven-tenths kilo Pascals (0.7 kPa) (five millimeters of mercury (5 mm Hg) or one-tenth pound per square inch (0.1 psi)) measured at twenty degrees Centigrade (20°C) (sixty-eight degrees Fahrenheit (68°F)).
- (40) The following equipment related to manufacturing activities not resulting in the emission of HAPs: brazing equipment, cutting torches, soldering equipment; welding equipment.

- (41) Closed loop heating and cooling systems.
- (42) Any of the following structural steel and bridge fabrication activities: cutting two hundred thousand (200,000) linear feet or less of one (1) inch plate or equivalent using eighty (80) tons or less of welding consumables.

A.5 Part 70 Permit Applicability [326 IAC 2-7-2]

This stationary source is required to have a Part 70 permit by 326 IAC 2-7-2 (Applicability) because:

- (a) It is a major source, as defined in 326 IAC 2-7-1(22);
- (b) It is a source in a source category designated by the United States Environmental Protection Agency (U.S. EPA) under 40 CFR 70.3 (Part 70 - Applicability).

SECTION B GENERAL CONDITIONS

B.1 Definitions [326 IAC 2-7-1]

Terms in this permit shall have the definition assigned to such terms in the referenced regulation. In the absence of definitions in the referenced regulation, the applicable definitions found in the statutes or regulations (IC 13-11, 326 IAC 1-2 and 326 IAC 2-7) shall prevail.

B.2 Permit Term [326 IAC 2-7-5(2)][326 IAC 2-1.1-9.5][326 IAC 2-7-4(a)(1)(D)][IC 13-15-3-6(a)]

- (a) This permit, T089-36118-00458, is issued for a fixed term of five (5) years from the issuance date of this permit, as determined in accordance with IC 4-21.5-3-5(f) and IC 13-15-5-3. Subsequent revisions, modifications, or amendments of this permit do not affect the expiration date of this permit.
- (b) If IDEM, OAQ, upon receiving a timely and complete renewal permit application, fails to issue or deny the permit renewal prior to the expiration date of this permit, this existing permit shall not expire and all terms and conditions shall continue in effect, including any permit shield provided in 326 IAC 2-7-15, until the renewal permit has been issued or denied.

B.3 Term of Conditions [326 IAC 2-1.1-9.5]

Notwithstanding the permit term of a permit to construct, a permit to operate, or a permit modification, any condition established in a permit issued pursuant to a permitting program approved in the state implementation plan shall remain in effect until:

- (a) the condition is modified in a subsequent permit action pursuant to Title I of the Clean Air Act; or
- (b) the emission unit to which the condition pertains permanently ceases operation.

B.4 Enforceability [326 IAC 2-7-7] [IC 13-17-12]

Unless otherwise stated, all terms and conditions in this permit, including any provisions designed to limit the source's potential to emit, are enforceable by IDEM, the United States Environmental Protection Agency (U.S. EPA) and by citizens in accordance with the Clean Air Act.

B.5 Severability [326 IAC 2-7-5(5)]

The provisions of this permit are severable; a determination that any portion of this permit is invalid shall not affect the validity of the remainder of the permit.

B.6 Property Rights or Exclusive Privilege [326 IAC 2-7-5(6)(D)]

This permit does not convey any property rights of any sort or any exclusive privilege.

B.7 Duty to Provide Information [326 IAC 2-7-5(6)(E)]

- (a) The Permittee shall furnish to IDEM, OAQ, within a reasonable time, any information that IDEM, OAQ may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. Upon request, the Permittee shall also furnish to IDEM, OAQ copies of records required to be kept by this permit.
- (b) For information furnished by the Permittee to IDEM, OAQ, the Permittee may include a claim of confidentiality in accordance with 326 IAC 17.1. When furnishing copies of requested records directly to U. S. EPA, the Permittee may assert a claim of confidentiality in accordance with 40 CFR 2, Subpart B.

B.8 Certification [326 IAC 2-7-4(f)][326 IAC 2-7-6(1)][326 IAC 2-7-5(3)(C)]

- (a) A certification required by this permit meets the requirements of 326 IAC 2-7-6(1) if:

- (1) it contains a certification by a "responsible official" as defined by 326 IAC 2-7-1(35), and
 - (2) the certification states that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.
- (b) The Permittee may use the attached Certification Form, or its equivalent with each submittal requiring certification. One (1) certification may cover multiple forms in one (1) submittal.
 - (c) A "responsible official" is defined at 326 IAC 2-7-1(35).

B.9 Annual Compliance Certification [326 IAC 2-7-6(5)]

- (a) The Permittee shall annually submit a compliance certification report which addresses the status of the source's compliance with the terms and conditions contained in this permit, including emission limitations, standards, or work practices. All certifications shall cover the time period from January 1 to December 31 of the previous year, and shall be submitted no later than April 15 of each year to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region 5
Air and Radiation Division, Air Enforcement Branch - Indiana (AE-17J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

- (b) The annual compliance certification report required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (c) The annual compliance certification report shall include the following:
 - (1) The appropriate identification of each term or condition of this permit that is the basis of the certification;
 - (2) The compliance status;
 - (3) Whether compliance was continuous or intermittent;
 - (4) The methods used for determining the compliance status of the source, currently and over the reporting period consistent with 326 IAC 2-7-5(3); and
 - (5) Such other facts, as specified in Sections D of this permit, as IDEM, OAQ may require to determine the compliance status of the source.

The submittal by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

B.10 Preventive Maintenance Plan [326 IAC 2-7-5(12)][326 IAC 1-6-3]

- (a) A Preventive Maintenance Plan meets the requirements of 326 IAC 1-6-3 if it includes, at a minimum:
- (1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;
 - (2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and
 - (3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

The Permittee shall implement the PMPs.

- (b) If required by specific condition(s) in Section D of this permit where no PMP was previously required, the Permittee shall prepare and maintain Preventive Maintenance Plans (PMPs) no later than ninety (90) days after issuance of this permit or ninety (90) days after initial start-up, whichever is later, including the following information on each facility:
- (1) Identification of the individual(s) responsible for inspecting, maintaining, and repairing emission control devices;
 - (2) A description of the items or conditions that will be inspected and the inspection schedule for said items or conditions; and
 - (3) Identification and quantification of the replacement parts that will be maintained in inventory for quick replacement.

If, due to circumstances beyond the Permittee's control, the PMPs cannot be prepared and maintained within the above time frame, the Permittee may extend the date an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

The PMP extension notification does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

The Permittee shall implement the PMPs.

- (c) A copy of the PMPs shall be submitted to IDEM, OAQ upon request and within a reasonable time, and shall be subject to review and approval by IDEM, OAQ. IDEM, OAQ may require the Permittee to revise its PMPs whenever lack of proper maintenance causes or is the primary contributor to an exceedance of any limitation on emissions. The PMPs and their submittal do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).
- (d) To the extent the Permittee is required by 40 CFR Part 60/63 to have an Operation Maintenance, and Monitoring (OMM) Plan for a unit, such Plan is deemed to satisfy the PMP requirements of 326 IAC 1-6-3 for that unit.

B.11 Emergency Provisions [326 IAC 2-7-16]

- (a) An emergency, as defined in 326 IAC 2-7-1(12), is not an affirmative defense for an action brought for noncompliance with a federal or state health-based emission limitation.
- (b) An emergency, as defined in 326 IAC 2-7-1(12), constitutes an affirmative defense to an action brought for noncompliance with a technology-based emission limitation if the affirmative defense of an emergency is demonstrated through properly signed, contemporaneous operating logs or other relevant evidence that describe the following:
- (1) An emergency occurred and the Permittee can, to the extent possible, identify the causes of the emergency;
 - (2) The permitted facility was at the time being properly operated;
 - (3) During the period of an emergency, the Permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards or other requirements in this permit;
 - (4) For each emergency lasting one (1) hour or more, the Permittee notified IDEM, OAQ within four (4) daytime business hours after the beginning of the emergency, or after the emergency was discovered or reasonably should have been discovered;

Telephone Number: 1-800-451-6027 (ask for Office of Air Quality, Compliance and Enforcement Branch), or
Telephone Number: 317-233-0178 (ask for Office of Air Quality, Compliance and Enforcement Branch)
Facsimile Number: 317-233-6865

- (5) For each emergency lasting one (1) hour or more, the Permittee submitted the attached Emergency Occurrence Report Form or its equivalent, either by mail or facsimile to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

within two (2) working days of the time when emission limitations were exceeded due to the emergency.

The notice fulfills the requirement of 326 IAC 2-7-5(3)(C)(ii) and must contain the following:

- (A) A description of the emergency;
- (B) Any steps taken to mitigate the emissions; and
- (C) Corrective actions taken.

The notification which shall be submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

- (6) The Permittee immediately took all reasonable steps to correct the emergency.

- (c) In any enforcement proceeding, the Permittee seeking to establish the occurrence of an emergency has the burden of proof.
- (d) This emergency provision supersedes 326 IAC 1-6 (Malfunctions). This permit condition is in addition to any emergency or upset provision contained in any applicable requirement.
- (e) The Permittee seeking to establish the occurrence of an emergency shall make records available upon request to ensure that failure to implement a PMP did not cause or contribute to an exceedance of any limitations on emissions. However, IDEM, OAQ may require that the Preventive Maintenance Plans required under 326 IAC 2-7-4(c)(8) be revised in response to an emergency.
- (f) Failure to notify IDEM, OAQ by telephone or facsimile of an emergency lasting more than one (1) hour in accordance with (b)(4) and (5) of this condition shall constitute a violation of 326 IAC 2-7 and any other applicable rules.
- (g) If the emergency situation causes a deviation from a technology-based limit, the Permittee may continue to operate the affected emitting facilities during the emergency provided the Permittee immediately takes all reasonable steps to correct the emergency and minimize emissions.

B.12 Permit Shield [326 IAC 2-7-15][326 IAC 2-7-20][326 IAC 2-7-12]

- (a) Pursuant to 326 IAC 2-7-15, the Permittee has been granted a permit shield. The permit shield provides that compliance with the conditions of this permit shall be deemed compliance with any applicable requirements as of the date of permit issuance, provided that either the applicable requirements are included and specifically identified in this permit or the permit contains an explicit determination or concise summary of a determination that other specifically identified requirements are not applicable. The Indiana statutes from IC 13 and rules from 326 IAC, referenced in conditions in this permit, are those applicable at the time the permit was issued. The issuance or possession of this permit shall not alone constitute a defense against an alleged violation of any law, regulation or standard, except for the requirement to obtain a Part 70 permit under 326 IAC 2-7 or for applicable requirements for which a permit shield has been granted.

This permit shield does not extend to applicable requirements which are promulgated after the date of issuance of this permit unless this permit has been modified to reflect such new requirements.

- (b) If, after issuance of this permit, it is determined that the permit is in nonconformance with an applicable requirement that applied to the source on the date of permit issuance, IDEM, OAQ shall immediately take steps to reopen and revise this permit and issue a compliance order to the Permittee to ensure expeditious compliance with the applicable requirement until the permit is reissued. The permit shield shall continue in effect so long as the Permittee is in compliance with the compliance order.
- (c) No permit shield shall apply to any permit term or condition that is determined after issuance of this permit to have been based on erroneous information supplied in the permit application. Erroneous information means information that the Permittee knew to be false, or in the exercise of reasonable care should have been known to be false, at the time the information was submitted.
- (d) Nothing in 326 IAC 2-7-15 or in this permit shall alter or affect the following:
 - (1) The provisions of Section 303 of the Clean Air Act (emergency orders), including the authority of the U.S. EPA under Section 303 of the Clean Air Act;

- (2) The liability of the Permittee for any violation of applicable requirements prior to or at the time of this permit's issuance;
- (3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act; and
- (4) The ability of U.S. EPA to obtain information from the Permittee under Section 114 of the Clean Air Act.
- (e) This permit shield is not applicable to any change made under 326 IAC 2-7-20(b)(2) (Sections 502(b)(10) of the Clean Air Act changes) and 326 IAC 2-7-20(c)(2) (trading based on State Implementation Plan (SIP) provisions).
- (f) This permit shield is not applicable to modifications eligible for group processing until after IDEM, OAQ, has issued the modifications. [326 IAC 2-7-12(c)(7)]
- (g) This permit shield is not applicable to minor Part 70 permit modifications until after IDEM, OAQ, has issued the modification. [326 IAC 2-7-12(b)(8)]

B.13 Prior Permits Superseded [326 IAC 2-1.1-9.5][326 IAC 2-7-10.5]

- (a) All terms and conditions of permits established prior to T089-36118-00458 and issued pursuant to permitting programs approved into the state implementation plan have been either:
 - (1) incorporated as originally stated,
 - (2) revised under 326 IAC 2-7-10.5, or
 - (3) deleted under 326 IAC 2-7-10.5.
- (b) Provided that all terms and conditions are accurately reflected in this permit, all previous registrations and permits are superseded by this Administrative Part 70 Operating Permit.

B.14 Termination of Right to Operate [326 IAC 2-7-10][326 IAC 2-7-4(a)]

The Permittee's right to operate this source terminates with the expiration of this permit unless a timely and complete renewal application is submitted at least nine (9) months prior to the date of expiration of the source's existing permit, consistent with 326 IAC 2-7-3 and 326 IAC 2-7-4(a).

B.15 Permit Modification, Reopening, Revocation and Reissuance, or Termination [326 IAC 2-7-5(6)(C)][326 IAC 2-7-8(a)][326 IAC 2-7-9]

- (a) This permit may be modified, reopened, revoked and reissued, or terminated for cause. The filing of a request by the Permittee for an Administrative Part 70 Operating Permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any condition of this permit. [326 IAC 2-7-5(6)(C)] The notification by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).
- (b) This permit shall be reopened and revised under any of the circumstances listed in IC 13-15-7-2 or if IDEM, OAQ determines any of the following:
 - (1) That this permit contains a material mistake.
 - (2) That inaccurate statements were made in establishing the emissions standards or other terms or conditions.

- (3) That this permit must be revised or revoked to assure compliance with an applicable requirement. [326 IAC 2-7-9(a)(3)]
- (c) Proceedings by IDEM, OAQ to reopen and revise this permit shall follow the same procedures as apply to initial permit issuance and shall affect only those parts of this permit for which cause to reopen exists. Such reopening and revision shall be made as expeditiously as practicable. [326 IAC 2-7-9(b)]
- (d) The reopening and revision of this permit, under 326 IAC 2-7-9(a), shall not be initiated before notice of such intent is provided to the Permittee by IDEM, OAQ at least thirty (30) days in advance of the date this permit is to be reopened, except that IDEM, OAQ may provide a shorter time period in the case of an emergency. [326 IAC 2-7-9(c)]

B.16 Permit Renewal [326 IAC 2-7-3][326 IAC 2-7-4][326 IAC 2-7-8(e)]

- (a) The application for renewal shall be submitted using the application form or forms prescribed by IDEM, OAQ and shall include the information specified in 326 IAC 2-7-4. Such information shall be included in the application for each emission unit at this source, except those emission units included on the trivial or insignificant activities list contained in 326 IAC 2-7-1(21) and 326 IAC 2-7-1(42). The renewal application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

Request for renewal shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

- (b) A timely renewal application is one that is:
 - (1) Submitted at least nine (9) months prior to the date of the expiration of this permit; and
 - (2) If the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.
- (c) If the Permittee submits a timely and complete application for renewal of this permit, the source's failure to have a permit is not a violation of 326 IAC 2-7 until IDEM, OAQ takes final action on the renewal application, except that this protection shall cease to apply if, subsequent to the completeness determination, the Permittee fails to submit by the deadline specified, pursuant to 326 IAC 2-7-4(a)(2)(D), in writing by IDEM, OAQ any additional information identified as being needed to process the application.

B.17 Permit Amendment or Modification [326 IAC 2-7-11][326 IAC 2-7-12]

- (a) Permit amendments and modifications are governed by the requirements of 326 IAC 2-7-11 or 326 IAC 2-7-12 whenever the Permittee seeks to amend or modify this permit.
- (b) Any application requesting an amendment or modification of this permit shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue

MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

- (c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.18 Permit Revision Under Economic Incentives and Other Programs
[326 IAC 2-7-5(8)][326 IAC 2-7-12(b)(2)]

- (a) No Part 70 permit revision or notice shall be required under any approved economic incentives, marketable Part 70 permits, emissions trading, and other similar programs or processes for changes that are provided for in a Part 70 permit.
- (b) Notwithstanding 326 IAC 2-7-12(b)(1) and 326 IAC 2-7-12(c)(1), minor Part 70 permit modification procedures may be used for Part 70 modifications involving the use of economic incentives, marketable Part 70 permits, emissions trading, and other similar approaches to the extent that such minor Part 70 permit modification procedures are explicitly provided for in the applicable State Implementation Plan (SIP) or in applicable requirements promulgated or approved by the U.S. EPA.

B.19 Operational Flexibility [326 IAC 2-7-20][326 IAC 2-7-10.5]

- (a) The Permittee may make any change or changes at the source that are described in 326 IAC 2-7-20(b) or (c) without a prior permit revision, if each of the following conditions is met:
- (1) The changes are not modifications under any provision of Title I of the Clean Air Act;
 - (2) Any preconstruction approval required by 326 IAC 2-7-10.5 has been obtained;
 - (3) The changes do not result in emissions which exceed the limitations provided in this permit (whether expressed herein as a rate of emissions or in terms of total emissions);
 - (4) The Permittee notifies the:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

and

United States Environmental Protection Agency, Region 5
Air and Radiation Division, Regulation Development Branch - Indiana (AR-18J)
77 West Jackson Boulevard
Chicago, Illinois 60604-3590

in advance of the change by written notification at least ten (10) days in advance of the proposed change. The Permittee shall attach every such notice to the Permittee's copy of this permit; and
 - (5) The Permittee maintains records on-site, on a rolling five (5) year basis, which document all such changes and emission trades that are subject to

326 IAC 2-7-20(b)(1) and (c)(1). The Permittee shall make such records available, upon reasonable request, for public review.

Such records shall consist of all information required to be submitted to IDEM, OAQ in the notices specified in 326 IAC 2-7-20(b)(1) and (c)(1).

(b) The Permittee may make Section 502(b)(10) of the Clean Air Act changes (this term is defined at 326 IAC 2-7-1(37)) without a permit revision, subject to the constraint of 326 IAC 2-7-20(a). For each such Section 502(b)(10) of the Clean Air Act change, the required written notification shall include the following:

- (1) A brief description of the change within the source;
- (2) The date on which the change will occur;
- (3) Any change in emissions; and
- (4) Any permit term or condition that is no longer applicable as a result of the change.

The notification which shall be submitted is not considered an application form, report or compliance certification. Therefore, the notification by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

(c) Emission Trades [326 IAC 2-7-20(c)]

The Permittee may trade emissions increases and decreases at the source, where the applicable SIP provides for such emission trades without requiring a permit revision, subject to the constraints of Section (a) of this condition and those in 326 IAC 2-7-20(c).

(d) Alternative Operating Scenarios [326 IAC 2-7-20(d)]

The Permittee may make changes at the source within the range of alternative operating scenarios that are described in the terms and conditions of this permit in accordance with 326 IAC 2-7-5(9). No prior notification of IDEM, OAQ or U.S. EPA is required.

(e) Backup fuel switches specifically addressed in, and limited under, Section D of this permit shall not be considered alternative operating scenarios. Therefore, the notification requirements of part (a) of this condition do not apply.

B.20 Source Modification Requirement [326 IAC 2-7-10.5]

A modification, construction, or reconstruction is governed by the requirements of 326 IAC 2.

B.21 Inspection and Entry [326 IAC 2-7-6][IC 13-14-2-2][IC 13-30-3-1][IC 13-17-3-2]

Upon presentation of proper identification cards, credentials, and other documents as may be required by law, and subject to the Permittee's right under all applicable laws and regulations to assert that the information collected by the agency is confidential and entitled to be treated as such, the Permittee shall allow IDEM, OAQ, U.S. EPA, or an authorized representative to perform the following:

- (a) Enter upon the Permittee's premises where a Part 70 source is located, or emissions related activity is conducted, or where records must be kept under the conditions of this permit;
- (b) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, have access to and copy any records that must be kept under the conditions of this permit;

- (c) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, inspect any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit;
- (d) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, sample or monitor substances or parameters for the purpose of assuring compliance with this permit or applicable requirements; and
- (e) As authorized by the Clean Air Act, IC 13-14-2-2, IC 13-17-3-2, and IC 13-30-3-1, utilize any photographic, recording, testing, monitoring, or other equipment for the purpose of assuring compliance with this permit or applicable requirements.

B.22 Transfer of Ownership or Operational Control [326 IAC 2-7-11]

- (a) The Permittee must comply with the requirements of 326 IAC 2-7-11 whenever the Permittee seeks to change the ownership or operational control of the source and no other change in the permit is necessary.
- (b) Any application requesting a change in the ownership or operational control of the source shall contain a written agreement containing a specific date for transfer of permit responsibility, coverage and liability between the current and new Permittee. The application shall be submitted to:

Indiana Department of Environmental Management
Permit Administration and Support Section, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

Any such application does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).
- (c) The Permittee may implement administrative amendment changes addressed in the request for an administrative amendment immediately upon submittal of the request. [326 IAC 2-7-11(c)(3)]

B.23 Annual Fee Payment [326 IAC 2-7-19] [326 IAC 2-7-5(7)][326 IAC 2-1.1-7]

- (a) The Permittee shall pay annual fees to IDEM, OAQ within thirty (30) calendar days of receipt of a billing. Pursuant to 326 IAC 2-7-19(b), if the Permittee does not receive a bill from IDEM, OAQ the applicable fee is due April 1 of each year.
- (b) Except as provided in 326 IAC 2-7-19(e), failure to pay may result in administrative enforcement action or revocation of this permit.
- (c) The Permittee may call the following telephone numbers: 1-800-451-6027 or 317-233-4230 (ask for OAQ, Billing, Licensing, and Training Section), to determine the appropriate permit fee.

B.24 Credible Evidence [326 IAC 2-7-5(3)][326 IAC 2-7-6][62 FR 8314] [326 IAC 1-1-6]

For the purpose of submitting compliance certifications or establishing whether or not the Permittee has violated or is in violation of any condition of this permit, nothing in this permit shall preclude the use, including the exclusive use, of any credible evidence or information relevant to whether the Permittee would have been in compliance with the condition of this permit if the appropriate performance or compliance test or procedure had been performed.

SECTION C SOURCE OPERATION CONDITIONS

Entire Source

Emission Limitations and Standards [326 IAC 2-7-5(1)]

C.1 Opacity [326 IAC 5-1]

Pursuant to 326 IAC 5-1-2 (Opacity Limitations), except as provided in 326 IAC 5-1-1 (Applicability) and 326 IAC 5-1-3 (Temporary Alternative Opacity Limitations), opacity shall meet the following, unless otherwise stated in this permit:

- (a) Opacity shall not exceed an average of twenty percent (20%) in any one (1) six (6) minute averaging period as determined in 326 IAC 5-1-4.
- (b) Opacity shall not exceed sixty percent (60%) for more than a cumulative total of fifteen (15) minutes (sixty (60) readings as measured according to 40 CFR 60, Appendix A, Method 9 or fifteen (15) one (1) minute nonoverlapping integrated averages for a continuous opacity monitor) in a six (6) hour period.

C.2 Open Burning [326 IAC 4-1] [IC 13-17-9]

The Permittee shall not open burn any material except as provided in 326 IAC 4-1-3, 326 IAC 4-1-4 or 326 IAC 4-1-6. The previous sentence notwithstanding, the Permittee may open burn in accordance with an open burning approval issued by the Commissioner under 326 IAC 4-1-4.1.

C.3 Incineration [326 IAC 4-2] [326 IAC 9-1-2]

The Permittee shall not operate an incinerator except as provided in 326 IAC 4-2 or in this permit. The Permittee shall not operate a refuse incinerator or refuse burning equipment except as provided in 326 IAC 9-1-2 or in this permit.

C.4 Fugitive Dust Emissions [326 IAC 6-4]

The Permittee shall not allow fugitive dust to escape beyond the property line or boundaries of the property, right-of-way, or easement on which the source is located, in a manner that would violate 326 IAC 6-4 (Fugitive Dust Emissions). 326 IAC 6-4-2(4) is not federally enforceable.

C.5 Fugitive Particulate Matter Emissions [326 IAC 6.8-10-3]

Pursuant to 326 IAC 6.8-10-3 (formerly 326 IAC 6-1-11.1) (Lake County Fugitive Particulate Matter Control Requirements), the particulate matter emissions from source wide activities shall meet the following requirements:

- (a) The average instantaneous opacity of fugitive particulate emissions from a paved road shall not exceed ten percent (10%).
- (b) The average instantaneous opacity of fugitive particulate emissions from an unpaved road shall not exceed ten percent (10%).
- (c) The opacity of fugitive particulate emissions from exposed areas shall not exceed ten percent (10%) on a six (6) minute average.
- (d) The opacity of fugitive particulate emissions from continuous transfer of material onto and out of storage piles shall not exceed ten percent (10%) on a three (3) minute average.
- (e) The opacity of fugitive particulate emissions from storage piles shall not exceed ten percent (10%) on a six (6) minute average.

- (f) There shall be a zero (0) percent frequency of visible emission observations of a material during the inplant transportation of material by truck or rail at any time.
- (g) The opacity of fugitive particulate emissions from the inplant transportation of material by front end loaders and skip hoists shall not exceed ten percent (10%).
- (h) Material processing facilities shall include the following:
 - (1) There shall be a zero (0) percent frequency of visible emission observations from a building enclosing all or part of the material processing equipment, except from a vent in the building.
 - (2) The PM₁₀ emissions from building vents shall not exceed twenty-two thousandths (0.022) grains per dry standard cubic foot and ten percent (10%) opacity.
 - (3) The PM₁₀ stack emissions from a material processing facility shall not exceed twenty-two thousandths (0.022) grains per dry standard cubic foot and ten percent (10%) opacity.
 - (4) The opacity of fugitive particulate emissions from the material processing facilities, except a crusher at which a capture system is not used, shall not exceed ten percent (10%) opacity.
 - (5) The opacity of fugitive particulate emissions from a crusher at which a capture system is not used shall not exceed fifteen percent (15%).
- (i) The opacity of particulate emissions from dust handling equipment shall not exceed ten percent (10%).
- (j) Material transfer limits shall be as follows:
 - (1) The average instantaneous opacity of fugitive particulate emissions from batch transfer shall not exceed ten percent (10%).
 - (2) Where adequate wetting of the material for fugitive particulate emissions control is prohibitive to further processing or reuse of the material, the opacity shall not exceed ten percent (10%), three (3) minute average.
 - (3) Slag and kish handling activities at integrated iron and steel plants shall comply with the following particulate emissions limits:
 - (A) The opacity of fugitive particulate emissions from transfer from pots and trucks into pits shall not exceed twenty percent (20%) on a six (6) minute average.
 - (B) The opacity of fugitive particulate emissions from transfer from piles into front end loaders and from transfer from front end loaders into trucks shall comply with the fugitive particulate emission limits in 326 IAC 6.8-10-3(9).
- (k) Any facility or operation not specified in 326 IAC 6.8-10-3 shall meet a twenty percent (20%), three (3) minute average opacity standard.

The Permittee shall achieve these limits by controlling fugitive particulate matter emissions according to the attached Fugitive Dust Control Plan (Attachment A).

C.6 Stack Height [326 IAC 1-7]

The Permittee shall comply with the applicable provisions of 326 IAC 1-7 (Stack Height Provisions), for all exhaust stacks through which a potential (before controls) of twenty-five (25) tons per year or more of particulate matter or sulfur dioxide is emitted. The provisions of 326 IAC 1-7-1(3), 326 IAC 1-7-2, 326 IAC 1-7-3(c) and (d), 326 IAC 1-7-4, and 326 IAC 1-7-5(a), (b), and (d) are not federally enforceable.

C.7 Asbestos Abatement Projects [326 IAC 14-10] [326 IAC 18] [40 CFR 61, Subpart M]

- (a) Notification requirements apply to each owner or operator. If the combined amount of regulated asbestos containing material (RACM) to be stripped, removed or disturbed is at least 260 linear feet on pipes or 160 square feet on other facility components, or at least thirty-five (35) cubic feet on all facility components, then the notification requirements of 326 IAC 14-10-3 are mandatory. All demolition projects require notification whether or not asbestos is present.
- (b) The Permittee shall ensure that a written notification is sent on a form provided by the Commissioner at least ten (10) working days before asbestos stripping or removal work or before demolition begins, per 326 IAC 14-10-3, and shall update such notice as necessary, including, but not limited to the following:
- (1) When the amount of affected asbestos containing material increases or decreases by at least twenty percent (20%); or
- (2) If there is a change in the following:
- (A) Asbestos removal or demolition start date;
- (B) Removal or demolition contractor; or
- (C) Waste disposal site.
- (c) The Permittee shall ensure that the notice is postmarked or delivered according to the guidelines set forth in 326 IAC 14-10-3(2).
- (d) The notice to be submitted shall include the information enumerated in 326 IAC 14-10-3(3).

All required notifications shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

The notice shall include a signed certification from the owner or operator that the information provided in this notification is correct and that only Indiana licensed workers and project supervisors will be used to implement the asbestos removal project. The notifications do not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

- (e) Procedures for Asbestos Emission Control
The Permittee shall comply with the applicable emission control procedures in 326 IAC 14-10-4 and 40 CFR 61.145(c). Per 326 IAC 14-10-1, emission control requirements are applicable for any removal or disturbance of RACM greater than three (3) linear feet on pipes or three (3) square feet on any other facility components or a total of at least 0.75 cubic feet on all facility components.

- (f) Demolition and Renovation
The Permittee shall thoroughly inspect the affected facility or part of the facility where the demolition or renovation will occur for the presence of asbestos pursuant to 40 CFR 61.145(a).
- (g) Indiana Licensed Asbestos Inspector
The Permittee shall comply with 326 IAC 14-10-1(a) that requires the owner or operator, prior to a renovation/demolition, to use an Indiana Licensed Asbestos Inspector to thoroughly inspect the affected portion of the facility for the presence of asbestos. The requirement to use an Indiana Licensed Asbestos inspector is not federally enforceable.

Testing Requirements [326 IAC 2-7-6(1)]

C.8 Performance Testing [326 IAC 3-6]

- (a) For performance testing required by this permit, a test protocol, except as provided elsewhere in this permit, shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

no later than thirty-five (35) days prior to the intended test date. The protocol submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).
- (b) The Permittee shall notify IDEM, OAQ of the actual test date at least fourteen (14) days prior to the actual test date. The notification submitted by the Permittee does not require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).
- (c) Pursuant to 326 IAC 3-6-4(b), all test reports must be received by IDEM, OAQ not later than forty-five (45) days after the completion of the testing. An extension may be granted by IDEM, OAQ if the Permittee submits to IDEM, OAQ a reasonable written explanation not later than five (5) days prior to the end of the initial forty-five (45) day period.

Compliance Requirements [326 IAC 2-1.1-11]

C.9 Compliance Requirements [326 IAC 2-1.1-11]

The commissioner may require stack testing, monitoring, or reporting at any time to assure compliance with all applicable requirements by issuing an order under 326 IAC 2-1.1-11. Any monitoring or testing shall be performed in accordance with 326 IAC 3 or other methods approved by the commissioner or the U. S. EPA.

Compliance Monitoring Requirements [326 IAC 2-7-5(1)][326 IAC 2-7-6(1)]

C.10 Compliance Monitoring [326 IAC 2-7-5(3)][326 IAC 2-7-6(1)]

- (a) For new units:
Unless otherwise specified in the approval for the new emission unit(s), compliance monitoring for new emission units shall be implemented on and after the date of initial start-up.
- (b) For existing units:
Unless otherwise specified in this permit, for all monitoring requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance to begin such monitoring. If, due to circumstances beyond the Permittee's control, any monitoring equipment required by this permit cannot be installed

and operated no later than ninety (90) days after permit issuance, the Permittee may extend the compliance schedule related to the equipment for an additional ninety (90) days provided the Permittee notifies:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

in writing, prior to the end of the initial ninety (90) day compliance schedule, with full justification of the reasons for the inability to meet this date.

The notification which shall be submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

C.11 Instrument Specifications [326 IAC 2-1.1-11] [326 IAC 2-7-5(3)] [326 IAC 2-7-6(1)]

- (a) When required by any condition of this permit, an analog instrument used to measure a parameter related to the operation of an air pollution control device shall have a scale such that the expected maximum reading for the normal range shall be no less than twenty percent (20%) of full scale. The analog instrument shall be capable of measuring values outside of the normal range.
- (b) The Permittee may request that the IDEM, OAQ approve the use of an instrument that does not meet the above specifications provided the Permittee can demonstrate that an alternative instrument specification will adequately ensure compliance with permit conditions requiring the measurement of the parameters.

Corrective Actions and Response Steps [326 IAC 2-7-5][326 IAC 2-7-6]

C.12 Emergency Reduction Plans [326 IAC 1-5-2] [326 IAC 1-5-3]

Pursuant to 326 IAC 1-5-2 (Emergency Reduction Plans; Submission):

- (a) The Permittee shall maintain the most recently submitted written emergency reduction plans (ERPs) consistent with safe operating procedures.
- (b) Upon direct notification by IDEM, OAQ that a specific air pollution episode level is in effect, the Permittee shall immediately put into effect the actions stipulated in the approved ERP for the appropriate episode level. [326 IAC 1-5-3]

C.13 Risk Management Plan [326 IAC 2-7-5(12)] [40 CFR 68]

If a regulated substance, as defined in 40 CFR 68, is present at a source in more than a threshold quantity, the Permittee must comply with the applicable requirements of 40 CFR 68.

C.14 Response to Excursions or Exceedances [326 IAC 2-7-5] [326 IAC 2-7-6]

Upon detecting an excursion where a response step is required by the D Section or an exceedance of a limitation in this permit:

- (a) The Permittee shall take reasonable response steps to restore operation of the emissions unit (including any control device and associated capture system) to its normal or usual manner of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing excess emissions.
- (b) The response shall include minimizing the period of any startup, shutdown or malfunction. The response may include, but is not limited to, the following:
 - (1) initial inspection and evaluation;

- (2) recording that operations returned or are returning to normal without operator action (such as through response by a computerized distribution control system); or
 - (3) any necessary follow-up actions to return operation to normal or usual manner of operation.
- (c) A determination of whether the Permittee has used acceptable procedures in response to an excursion or exceedance will be based on information available, which may include, but is not limited to, the following:
- (1) monitoring results;
 - (2) review of operation and maintenance procedures and records; and/or
 - (3) inspection of the control device, associated capture system, and the process.
- (d) Failure to take reasonable response steps shall be considered a deviation from the permit.
- (e) The Permittee shall record the reasonable response steps taken.

C.15 Actions Related to Noncompliance Demonstrated by a Stack Test [326 IAC 2-7-5][326 IAC 2-7-6]

- (a) When the results of a stack test performed in conformance with Section C - Performance Testing, of this permit exceed the level specified in any condition of this permit, the Permittee shall submit a description of its response actions to IDEM, OAQ no later than seventy-five (75) days after the date of the test.
- (b) A retest to demonstrate compliance shall be performed no later than one hundred eighty (180) days after the date of the test. Should the Permittee demonstrate to IDEM, OAQ that retesting in one hundred eighty (180) days is not practicable, IDEM, OAQ may extend the retesting deadline.
- (c) IDEM, OAQ reserves the authority to take any actions allowed under law in response to noncompliant stack tests.

The response action documents submitted pursuant to this condition do require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

C.16 Emission Statement [326 IAC 2-7-5(3)(C)(iii)][326 IAC 2-7-5(7)][326 IAC 2-7-19(c)][326 IAC 2-6]
Pursuant to 326 IAC 2-6-3(a)(1), the Permittee shall submit by July 1 of each year an emission statement covering the previous calendar year. The emission statement shall contain, at a minimum, the information specified in 326 IAC 2-6-4(c) and shall meet the following requirements:

- (1) Indicate estimated actual emissions of all pollutants listed in 326 IAC 2-6-4(a);
- (2) Indicate estimated actual emissions of regulated pollutants as defined by 326 IAC 2-7-1(33) ("Regulated pollutant, which is used only for purposes of Section 19 of this rule") from the source, for purpose of fee assessment.

The statement must be submitted to:

Indiana Department of Environmental Management
Technical Support and Modeling Section, Office of Air Quality

100 North Senate Avenue
MC 61-50 IGCN 1003
Indianapolis, Indiana 46204-2251

The emission statement does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a responsible official as defined by 326 IAC 326 IAC 2-7-1(35).

C.17 General Record Keeping Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-6]
[326 IAC 2-2][326 IAC 2-3]

(a) Records of all required monitoring data, reports and support information required by this permit shall be retained for a period of at least five (5) years from the date of monitoring sample, measurement, report, or application. Support information includes the following, where applicable:

- (AA) All calibration and maintenance records.
- (BB) All original strip chart recordings for continuous monitoring instrumentation.
- (CC) Copies of all reports required by the Part 70 permit.

Records of required monitoring information include the following, where applicable:

- (AA) The date, place, as defined in this permit, and time of sampling or measurements.
- (BB) The dates analyses were performed.
- (CC) The company or entity that performed the analyses.
- (DD) The analytical techniques or methods used.
- (EE) The results of such analyses.
- (FF) The operating conditions as existing at the time of sampling or measurement.

These records shall be physically present or electronically accessible at the source location for a minimum of three (3) years. The records may be stored elsewhere for the remaining two (2) years as long as they are available upon request. If the Commissioner makes a request for records to the Permittee, the Permittee shall furnish the records to the Commissioner within a reasonable time.

- (b) Unless otherwise specified in this permit, for all record keeping requirements not already legally required, the Permittee shall be allowed up to ninety (90) days from the date of permit issuance or the date of initial start-up, whichever is later, to begin such record keeping.
- (c) If there is a reasonable possibility (as defined in 326 IAC 2-2-8 (b)(6)(A), 326 IAC 2-2-8 (b)(6)(B), 326 IAC 2-3-2 (l)(6)(A), and/or 326 IAC 2-3-2 (l)(6)(B)) that a "project" (as defined in 326 IAC 2-2-1(oo) and/or 326 IAC 2-3-1(jj)) at an existing emissions unit, other than projects at a source with a Plantwide Applicability Limitation (PAL), which is not part of a "major modification" (as defined in 326 IAC 2-2-1(dd) and/or 326 IAC 2-3-1(y)) may result in significant emissions increase and the Permittee elects to utilize the "projected actual emissions" (as defined in 326 IAC 2-2-1(pp) and/or 326 IAC 2-3-1(kk)), the Permittee shall comply with following:
- (1) Before beginning actual construction of the "project" (as defined in 326 IAC 2-2-1(oo) and/or 326 IAC 2-3-1(jj)) at an existing emissions unit, document and maintain the following records:
 - (A) A description of the project.
 - (B) Identification of any emissions unit whose emissions of a regulated new source review pollutant could be affected by the project.
 - (C) A description of the applicability test used to determine that the project is not a major modification for any regulated NSR pollutant, including:

- (i) Baseline actual emissions;
 - (ii) Projected actual emissions;
 - (iii) Amount of emissions excluded under section 326 IAC 2-2-1(pp)(2)(A)(iii) and/or 326 IAC 2-3-1 (kk)(2)(A)(iii); and
 - (iv) An explanation for why the amount was excluded, and any netting calculations, if applicable.
- (d) If there is a reasonable possibility (as defined in 326 IAC 2-2-8 (b)(6)(A) and/or 326 IAC 2-3-2 (l)(6)(A)) that a "project" (as defined in 326 IAC 2-2-1(oo) and/or 326 IAC 2-3-1(jj)) at an existing emissions unit, other than projects at a source with a Plantwide Applicability Limitation (PAL), which is not part of a "major modification" (as defined in 326 IAC 2-2-1(dd) and/or 326 IAC 2-3-1(y)) may result in significant emissions increase and the Permittee elects to utilize the "projected actual emissions" (as defined in 326 IAC 2-2-1(pp) and/or 326 IAC 2-3-1(kk)), the Permittee shall comply with following:
- (1) Monitor the emissions of any regulated NSR pollutant that could increase as a result of the project and that is emitted by any existing emissions unit identified in (1)(B) above; and
 - (2) Calculate and maintain a record of the annual emissions, in tons per year on a calendar year basis, for a period of five (5) years following resumption of regular operations after the change, or for a period of ten (10) years following resumption of regular operations after the change if the project increases the design capacity of or the potential to emit that regulated NSR pollutant at the emissions unit.

C.18 General Reporting Requirements [326 IAC 2-7-5(3)(C)] [326 IAC 2-1.1-11]
[326 IAC 2-2][326 IAC 2-3]

- (a) The Permittee shall submit the attached Quarterly Deviation and Compliance Monitoring Report or its equivalent. Proper notice submittal under Section B –Emergency Provisions satisfies the reporting requirements of this paragraph. Any deviation from permit requirements, the date(s) of each deviation, the cause of the deviation, and the response steps taken must be reported except that a deviation required to be reported pursuant to an applicable requirement that exists independent of this permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. This report shall be submitted not later than thirty (30) days after the end of the reporting period. The Quarterly Deviation and Compliance Monitoring Report shall include a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35). A deviation is an exceedance of a permit limitation or a failure to comply with a requirement of the permit.
- (b) The address for report submittal is:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
- (c) Unless otherwise specified in this permit, any notice, report, or other submission required by this permit shall be considered timely if the date postmarked on the envelope or certified mail receipt, or affixed by the shipper on the private shipping receipt, is on or before the date it is due. If the document is submitted by any other means, it shall be considered timely if received by IDEM, OAQ on or before the date it is due.

- (d) Reporting periods are based on calendar years, unless otherwise specified in this permit. For the purpose of this permit "calendar year" means the twelve (12) month period from January 1 to December 31 inclusive.
- (e) If the Permittee is required to comply with the recordkeeping provisions of (d) in Section C - General Record Keeping Requirements for any "project" (as defined in 326 IAC 2-2-1 (oo) and/or 326 IAC 2-3-1 (jj)) at an existing emissions unit, and the project meets the following criteria, then the Permittee shall submit a report to IDEM, OAQ:
 - (1) The annual emissions, in tons per year, from the project identified in (c)(1) in Section C- General Record Keeping Requirements exceed the baseline actual emissions, as documented and maintained under Section C- General Record Keeping Requirements (c)(1)(C)(i), by a significant amount, as defined in 326 IAC 2-2-1 (ww) and/or 326 IAC 2-3-1 (pp), for that regulated NSR pollutant, and
 - (2) The emissions differ from the preconstruction projection as documented and maintained under Section C - General Record Keeping Requirements (c)(1)(C)(ii).
- (f) The report for project at an existing emissions unit shall be submitted no later than sixty (60) days after the end of the year and contain the following:
 - (1) The name, address, and telephone number of the major stationary source.
 - (2) The annual emissions calculated in accordance with (d)(1) and (2) in Section C - General Record Keeping Requirements.
 - (3) The emissions calculated under the actual-to-projected actual test stated in 326 IAC 2-2-2(d)(3) and/or 326 IAC 2-3-2(c)(3).
 - (4) Any other information that the Permittee wishes to include in this report such as an explanation as to why the emissions differ from the preconstruction projection.

Reports required in this part shall be submitted to:

Indiana Department of Environmental Management
Compliance and Enforcement Branch, Office of Air Quality
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251

- (g) The Permittee shall make the information required to be documented and maintained in accordance with (c) in Section C - General Record Keeping Requirements available for review upon a request for inspection by IDEM, OAQ. The general public may request this information from the IDEM, OAQ under 326 IAC 17.1.

Stratospheric Ozone Protection

C.19 Compliance with 40 CFR 82 and 326 IAC 22-1

Pursuant to 40 CFR 82 (Protection of Stratospheric Ozone), Subpart F, except as provided for motor vehicle air conditioners in Subpart B, the Permittee shall comply with applicable standards for recycling and emissions reduction.

SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

LAFARGE NORTH AMERICA consists of the following permitted emission units and pollution control devices:

Expanded (Pelletized) Slag Production

- (a) One (1) slag pelletizer, identified as EU-302, with a maximum capacity of 3600 tons per day, with emissions inherently reduced by quench water, and exhausting to the atmosphere through the top of the structure, installed in 2000.

Granulated (Excess) Slag Production

- (b) One (1) slag granulator, identified as EU-301, with a maximum capacity of 3600 tons of slag per day, with emissions inherently reduced by quench water, and exhausting to stack S-301, installed in 2000. The following equipment is also used in connection with the slag granulator:
- (1) Two (2) slurry dewatering drums, with negligible emissions due to water content and exhausting directly to the ambient air.
 - (2) Five (5) conveyors, identified as East Exit, West Exit, East Cross, West Cross, Granulator Stacker, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (3) Two (2) stockpile stackers, identified as S-1 and S-2, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (4) Various granulated slag piles, termed "A-Lot" material, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (5) One (1) granulated slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, constructed in approximately 2000, permitted in 2015, including the following:
- (3) One (1) 12 cubic yard front-end loader for loading unprocessed slag into the hopper and loading out processed/crushed slag onto transport trucks.
 - (4) Six (6) main conveyors, identified from C-1 to C-6, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (5) One (1) pellet crusher, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (6) One (1) pellet screening stations, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

- (7) Various pelletized slag piles, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
- (8) One (1) pelletized slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
- (9) One (1) loading (feed) hopper, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

EG-2 Excess Granulated Slag Screening

- (d) Excess Slag Processing, identified as EG-2, constructed in approximately 2000, permitted in 2015, consisting of the following emission units and storage piles (unprocessed slag piles and processed/crushed slag piles):
 - (2) One (1) jaw crusher, with a maximum throughput rate of 150 tons per hour.
 - (3) Two (2) under-feed belt conveyors, with a maximum throughput rate of 93 tons per hour.
 - (4) Two (2) stacker conveyors with a maximum throughput rate of 93 tons per hour.
 - (5) One (1) 12 cubic yard front-end loader for loading unprocessed slag into the crusher and loading out processed/crushed slag onto transport trucks.
 - (6) One (1) granulated slag screening station, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (7) One (1) mini-jaw crusher, with a maximum throughput rate of 57 tons per hour.
 - (8) Various granulated slag piles, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (9) One (1) granulated slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.1.1 Emission Offset Minor Limitations [326 IAC 2-3]

Pursuant to SSM 089-11512-00458, issued on March 14, 2000, the Permittee may split the slag stream between the granulator/pelletizer system and the slag pits; however, the Permittee shall not utilize both the granulator/pelletizer system and the slag pits in order to increase slag processing throughput. Any operational change or modification that would increase slag processing throughput to either system would need prior approval from the IDEM OAQ. In addition, at all times the slag granulator or pelletizer is operating, the associated quench water spray shall be operating.

D.1.2 Nonattainment Area Particulate Limitations [326 IAC 6.8-1-2]

Pursuant to 326 IAC 6.8-1-2 (Nonattainment Area Particulate Limitations), the particulate matter emissions from the Expanded (Pelletized) Slag Production, the Granulated (Excess) Slag Production, the EG-1 Expanded (Pelletized) Slag Screening, and the EG-2 Excess Granulated Slag Screening operations shall not exceed 0.03 grains per dry standard cubic foot (gr/dscf).

D.1.3 Particulate Matter Emission Limitations [326 IAC 6.8-10-3]

(a) Pursuant to 326 IAC 6.8-10-3 (Particulate Matter Emission Limitations), the particulate matter emissions from paved roads, unpaved roads, storage piles, inplant transportation, material processing and continuous transfer of materials onto and out of storage piles associated with the Expanded (Pelletized) Slag Production, the Granulated (Excess) Slag Production, the EG-1 Expanded (Pelletized) Slag Screening, and the EG-2 Excess Granulated Slag Screening operations shall meet the opacity limits in Condition C.5.

Compliance Determination Requirements [326 IAC 2-7-5]

D.1.4 Particulate Matter (PM) Emission Limitations [326 IAC 6.8-10-3]

Pursuant to 326 IAC 6.8-10-3 (Particulate Matter Emission Limitations), compliance with Condition D.1.3 shall be achieved by controlling fugitive particulate matter emissions for the Expanded (Pelletized) Slag Production, the Granulated (Excess) Slag Production, the EG-1 Expanded (Pelletized) Slag Screening, and the EG-2 Excess Granulated Slag Screening operations according to the Fugitive Dust Control Plan (FDCP), dated October 22, 2015.

D.1.5 Particulate Matter (PM) [326 IAC 6.8-10]

Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter Control Requirements), compliance with the opacity limits specified in Condition C.5 shall be achieved by controlling fugitive particulate matter emissions according to the Fugitive Dust Control Plan (FDCP), dated October 22, 2015, and included as Attachment A to this permit. If it is determined that the control procedures specified in the FDCP do not demonstrate compliance with the fugitive emission limitations, IDEM, OAQ may request that the FDCP be revised and submitted for approval.

Opacity from the activities shall be determined as follows:

(a) **Paved Roads and Parking Lots**
The average instantaneous opacity shall be the average of twelve (12) instantaneous opacity readings, taken for four (4) vehicle passes, consisting of three (3) opacity readings for each vehicle pass. The three (3) opacity readings for each vehicle pass shall be taken as follows:

- (1) The first will be taken at the time of emission generation.
- (2) The second will be taken five (5) seconds later.
- (3) The third will be taken five (5) seconds later or ten (10) seconds after the first.

The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.

(b) **Unpaved Roads and Parking**
The fugitive particulate emissions from unpaved roads shall be controlled by the implementation of a work program and work practice under the fugitive dust control plan.

(c) **Batch Transfer**
The average instantaneous opacity shall consist of the average of three (3) opacity readings taken five (5) seconds, ten (10) seconds, and fifteen (15) seconds after the end of one (1) batch loading or unloading operation. The three (3) readings shall be taken at

the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume.

- (d) **Continuous Transfer**
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9. The opacity readings shall be taken at least four (4) feet from the point of origin.
- (e) **Wind Erosion from Storage Piles**
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9, except that the opacity shall be observed at approximately four (4) feet from the surface at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. The limitations may not apply during periods when application of fugitive particulate control measures are either ineffective or unreasonable due to sustained very high wind speeds. During such periods, the company must continue to implement all reasonable fugitive particulate control measures and maintain records documenting the application of measures and the basis for a claim that meeting the opacity limitation was not reasonable given prevailing wind conditions.
- (f) **Wind Erosion from Exposed Areas**
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9.
- (g) **Material Transported by Truck or Rail**
Compliance with this limitation shall be determined by 40 CFR 60, Appendix A, Method 22, except that the observation shall be taken at approximately right angles to the prevailing wind from the leeward side of the truck or railroad car. Material transported by truck or rail that is enclosed and covered shall be considered in compliance with the inplant transportation requirement.
- (h) **Material Transported by Front End Loader or Skip Hoist**
Compliance with this limitation shall be determined by the average of three (3) opacity readings taken at five (5) second intervals. The three (3) opacity readings shall be taken as follows:
 - (1) The first will be taken at the time of emission generation.
 - (2) The second will be taken five (5) seconds later.
 - (3) The third will be taken five (5) seconds later or ten (10) seconds after the first.The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand at least fifteen (15) feet from the plume approximately and at right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.
- (i) **Material Processing Limitations**
Compliance with all opacity limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 9. Compliance with all visible emissions limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 22. Compliance with all particulate matter limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 5 or 17.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.1.6 Record Keeping Requirements

Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter Control Requirements):

- (a) The source shall keep the following documentation to document compliance with each of its control measures and control practices:
 - (1) A map or diagram showing the location of all emission sources controlled, including the location, identification, length, and width of roadways.
 - (2) For each application of water or chemical solution to roadways, the following shall be recorded:
 - (A) The name and location of the roadway controlled
 - (B) Application rate
 - (C) Time of each application
 - (D) Width of each application
 - (E) Identification of each method of application
 - (F) Total quantity of water or chemical used for each application
 - (G) For each application of chemical solution, the concentration and identity of the chemical
 - (H) The material data safety sheets for each chemical
 - (3) For application of physical or chemical control agents not covered by 326 IAC 6.8-10, the following:
 - (A) The name of the agent
 - (B) Location of application
 - (C) Application rate
 - (D) Total quantity of agent used
 - (E) If diluted, percent of concentration
 - (F) The material data safety sheets for each chemical
 - (4) A log recording incidents when control measures were not used and a statement of explanation.
 - (5) Copies of all records required by this section shall be submitted to the department within twenty (20) working days of a written request by the department.
- (b) Section C - General Record Keeping Requirements of this permit contains the Permittee's obligations with regard to the records required by this condition

D.1.7 Reporting Requirement

- (a) Pursuant to 326 IAC 6.8-10 (Lake County Fugitive Particulate Matter Control Requirements), a quarterly report shall be submitted, not later than thirty (30) days after the end of the quarter being reported stating the following:
 - (1) The dates any required control measures were not implemented

- (2) A listing of those control measures
 - (3) The reasons that the control measures were not implemented
 - (4) Any corrective action taken
- (b) Section C - General Reporting contains the Permittee's obligation with regard to the reporting required by this condition.

SECTION D.2 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

LAFARGE NORTH AMERICA consists of the following permitted emission units and pollution control devices:

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, constructed in approximately 2000, permitted in 2015, including the following:
 - (1) One (1) diesel fired generator, identified as EG-1, with a maximum site rating of 731 Horsepower (Hp).
 - (2) One (1) above ground diesel fuel storage tank, with a capacity of 5,000 gallons or less.

The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Emission Limitations and Standards [326 IAC 2-7-5(1)]

D.2.1 Nitrogen Oxide (NO_x) Emission Offset Minor Limitation [326 IA 2-3]

In order to render the requirements of 326 IAC 2-3 (Emission Offset Rules) not applicable and pursuant to SSM 089-34843-00458, issued May 5, 2015, the Permittee shall comply with the following:

- (a) The total diesel fuel used by the one (1) generator, identified as EG-1, shall be limited to less than 142,857 gallons per twelve consecutive month period, with compliance demonstrated at the end of each month.
- (b) The total NO_x emissions from the one (1) generator, identified as EG-1, shall not exceed an allowable NO_x emission rate of 0.448 pounds per gallon diesel fuel.

Compliance with these limits shall limit the NO_x to less than 40 tons per twelve (12) consecutive month period, and shall render the requirements of 326 IAC 2-3, (Emission Offset Rules), not applicable.

Record Keeping and Reporting Requirements [326 IAC 2-7-5(3)] [326 IAC 2-7-19]

D.2.2 Record Keeping Requirements

- (a) To document the compliance status with Condition D.2.1, the Permittee shall maintain monthly records of the diesel fuel used from the one (1) generator, identified as EG-1. Records necessary to demonstrate compliance shall be available not later than 30 days after the end of each compliance period.
- (b) Section C - General Record Keeping Requirements contains the Permittee's obligations with regard to the records required by this condition.

D.2.3 Reporting Requirement

A quarterly summary of the information to document the compliance status with Conditions D.2.1(a) shall be submitted not later than thirty (30) days after the end of each quarter being reported. Section C - General Reporting Requirements contains the Permittee's obligations with regard to the reporting required by this condition. The report submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

SECTION E.1 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

LAFARGE NORTH AMERICA consists of the following permitted emission units and pollution control devices:

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, constructed in approximately 2000, permitted in 2015, including the following:
 - (1) One (1) diesel fired generator, identified as EG-1, with a maximum site rating of 731 Horsepower (Hp).

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

E.1.1 General Provisions Relating to NESHAP [326 IAC 20-1] [40 CFR Part 63, Subpart A]

The Permittee shall comply with the provisions of 40 CFR Part 63, Subpart A – General Provisions, which are incorporated by reference as 326 IAC 20-1-1, for the generator, identified as EG-1 except when otherwise specified in 40 CFR Part 63, Subpart ZZZZ.

E.1.2 National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines [40 CFR Part 63, Subpart ZZZZ - Emission Units > 500 HP Site Rating constructed before December 19, 2002]

Pursuant to 40 CFR Part 63, Subpart ZZZZ, the generator, identified as EG-1 with site rating > 500 HP, constructed before December 19, 2002 shall comply with the following provisions of 40 CFR Part 63, Subpart ZZZZ no later than May 3, 2013:

- (1) 40 CFR §63.6580
- (2) 40 CFR §63.6585
- (3) 40 CFR §63.6590(a)(1)(i), (iv)
- (4) 40 CFR §63.6595
- (5) 40 CFR §63.6600
- (6) 40 CFR §63.6605
- (7) 40 CFR §63.6610
- (8) 40 CFR §63.6615
- (9) 40 CFR §63.6620
- (10) 40 CFR §63.6625
- (11) 40 CFR §63.6630(b), (c)
- (12) 40 CFR §63.6635
- (13) 40 CFR §63.6640(a), (b)
- (14) 40 CFR §63.6645
- (15) 40 CFR §63.6650
- (16) 40 CFR §63.6655
- (17) 40 CFR §63.6660
- (18) 40 CFR §63.6665
- (19) 40 CFR §63.6670
- (20) 40 CFR §63.6675
- (21) Table 2b to Subpart ZZZZ of Part 63

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
ADMINISTRATIVE PART 70 OPERATING PERMIT
CERTIFICATION**

Source Name: Lafarge North America
Source Address: 3210 Watling Street, East Chicago, Indiana 46312
Part 70 Permit No.: T089-36118-00458

This certification shall be included when submitting monitoring, testing reports/results or other documents as required by this permit.

Please check what document is being certified:

- Annual Compliance Certification Letter
- Test Result (specify)
- Report (specify)
- Notification (specify)
- Affidavit (specify)
- Other (specify)

I certify that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

Signature:

Printed Name:

Title/Position:

Phone:

Date:

INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH
100 North Senate Avenue
MC 61-53 IGCN 1003
Indianapolis, Indiana 46204-2251
Phone: (317) 233-0178
Fax: (317) 233-6865

ADMINISTRATIVE PART 70 OPERATING PERMIT
EMERGENCY OCCURRENCE REPORT

Source Name: Lafarge North America
Source Address: 3210 Watling Street, East Chicago, Indiana 46312
Part 70 Permit No.: T089-36118-00458

This form consists of 2 pages

Page 1 of 2

- This is an emergency as defined in 326 IAC 2-7-1(12)
- The Permittee must notify the Office of Air Quality (OAQ), within four (4) daytime business hours (1-800-451-6027 or 317-233-0178, ask for Compliance Section); and
 - The Permittee must submit notice in writing or by facsimile within two (2) working days (Facsimile Number: 317-233-6865), and follow the other requirements of 326 IAC 2-7-16.

If any of the following are not applicable, mark N/A

Facility/Equipment/Operation:
Control Equipment:
Permit Condition or Operation Limitation in Permit:
Description of the Emergency:
Describe the cause of the Emergency:

If any of the following are not applicable, mark N/A

Page 2 of 2

Date/Time Emergency started:
Date/Time Emergency was corrected:
Was the facility being properly operated at the time of the emergency? Y N
Type of Pollutants Emitted: TSP, PM-10, SO ₂ , VOC, NO _x , CO, Pb, other:
Estimated amount of pollutant(s) emitted during emergency:
Describe the steps taken to mitigate the problem:
Describe the corrective actions/response steps taken:
Describe the measures taken to minimize emissions:
If applicable, describe the reasons why continued operation of the facilities are necessary to prevent imminent injury to persons, severe damage to equipment, substantial loss of capital investment, or loss of product or raw materials of substantial economic value:

Form Completed by: _____

Title / Position: _____

Date: _____

Phone: _____

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
OFFICE OF AIR QUALITY
COMPLIANCE AND ENFORCEMENT BRANCH**

Part 70 Quarterly Report

Source Name: Lafarge North America
Source Address: 3210 Watling Street, East Chicago, Indiana 46312
Part 70 Permit No.: T089-36118-00458
Facilities: One (1) Generator, identified as EG-1
Parameter: Fuel usage
Limits: The total diesel fuel used by the one (1) Generator, identified as EG-1 shall be limited to less than 142,857 gallons per twelve consecutive month period, with compliance demonstrated at the end of each month

QUARTER: _____ YEAR: _____

Month	Total Diesel Fuel Usage (gallons)	Total Diesel Fuel Usage (gallons)	Total Diesel Fuel Usage (gallons)
	This Month	Previous 11 Months	12 Month Total

- No deviation occurred in this month.
- Deviation/s occurred in this month.
Deviation has been reported on: _____

Submitted by: _____

Title/Position: _____

Signature: _____

Date: _____

Phone: _____

**INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT
 OFFICE OF AIR QUALITY
 COMPLIANCE AND ENFORCEMENT BRANCH
 ADMINISTRATIVE PART 70 OPERATING PERMIT
 QUARTERLY DEVIATION AND COMPLIANCE MONITORING REPORT**

Source Name: Lafarge North America
 Source Address: 3210 Watling Street, East Chicago, Indiana 46312
 Part 70 Permit No.: T089-36118-00458

Months: _____ to _____ Year: _____

This report shall be submitted quarterly based on a calendar year. Proper notice submittal under Section B –Emergency Provisions satisfies the reporting requirements of paragraph (a) of Section C- General Reporting. Any deviation from the requirements of this permit, the date(s) of each deviation, the probable cause of the deviation, and the response steps taken must be reported. A deviation required to be reported pursuant to an applicable requirement that exists independent of the permit, shall be reported according to the schedule stated in the applicable requirement and does not need to be included in this report. Additional pages may be attached if necessary. If no deviations occurred, please specify in the box marked "No deviations occurred this reporting period".	
<input type="checkbox"/> NO DEVIATIONS OCCURRED THIS REPORTING PERIOD.	
<input type="checkbox"/> THE FOLLOWING DEVIATIONS OCCURRED THIS REPORTING PERIOD	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	
Permit Requirement (specify permit condition #)	
Date of Deviation:	Duration of Deviation:
Number of Deviations:	
Probable Cause of Deviation:	
Response Steps Taken:	

Form Completed by: _____

Title / Position: _____

Date: _____

Phone: _____

**THE LAFARGE NORTH AMERICA
CONTRACTOR OF ARCELORMITTAL USA, LLC
FUGITIVE DUST CONTROL PLAN
REVISION 0
October 2015**

Fugitive Dust Control Plan

TABLE OF CONTENTS

Facility Description	1
Roadways and Fugitive Roadway PM ₁₀ Emissions	1
Storage Piles.....	1
Material Process Flow	1
Control Measures and Practices	2
I. Site Roadways / Plant Yard	2
II. Process Operations	2
III. Storage Piles.....	2
IV. Loading and Transfer; Trucks and Front-End Loaders.....	3
Documentation and Record Keeping	3
Figure 1 Site Map	
Sample Documentation Log	

FUGITIVE DUST CONTROL PLAN
LAFARGE NORTH AMERICA
ARCELORMITTAL USA, LLC

Facility Description

The LaFarge North America Company ("LaFarge ") owns and operates a small slag granulator and pelletizer operation located within the ArcelorMittal USA, LLC in East Chicago, Indiana. Aggregates are produced from the various slag materials received from local integrated steel-making facilities.

Roadways and Fugitive Roadway PM₁₀ Emissions

Specified roadways cannot be defined at this facility because continuously moving stockpiles create roving roadways. Road designations change with the pile formations. All roadways within the LaFarge boundaries are under the control of LaFarge and average approximately 30 feet wide with varying lengths. Figure 1 shows the general site layout. Trucks are utilized for transportation of materials in and out of the facility. Front end loaders are utilized for feeding the material process units. The process units are portable and are located adjacent to or near the pile that is being handled so roadway travel onsite is very low. The Technical Support Document (TSD) Appendix A provides a sample of the potential roadway PM₁₀ emission calculations for the facility.

Storage Piles

Raw material and product piles are stored in various locations on the facility site and product pile locations will move within a general area throughout the year. Figure 1 shows the general site layout. Front end loaders and stacking conveyors are used to load onto and load out of the storage piles. The moisture content of the materials stored in piles can range from 7% to 10% and greatly depends on atmospheric precipitation throughout the year. Stockpiles are wetted with water or chemical suppressants when needed.

Material Process Flow

In the processes, material is moved through a series emission units; including a granulator, various conveyors and stackers, a pelletizer, crushers, feeders, screens, and loaders. Wet suppression control is utilized at strategic points in the process which can provide up to 90% efficiency where needed to control dust.

Control Measures and Practices

Water (or chemical) application is used where and when needed to control fugitive dust on process equipment, roadways and piles. Water/chemical application may be suspended based on weather events as follows:

- during periods of rainfall (0.10 inches or more)
- when temperatures are at or below freezing
- when ice or snow cover is present.

The phrase "weather permitting" used in the following paragraphs herein designates the suspension of control application during the weather events listed above.

I. Site Roadways / Plant Yard

Dust on unpaved roads is controlled by applications of water or chemical suppressant during operating hours, weather permitting. Paved roads are treated with a water truck during operating hours, weather permitting. Applications of dust control material are done as often as necessary.

FUGITIVE DUST CONTROL PLAN
LAFARGE NORTH AMERICA
ARCELORMITTAL USA, LLC

II. Process Operations

To help minimize dust emissions, the drop distance at each conveyor transfer point in the plant is set at the minimum distance in which the equipment can operate effectively. Wet suppression methods are utilized, weather permitting, and located strategically throughout the plant to control dust emissions. During water application, caution must be taken to avoid saturating the material which results in blinding the screens and producing an off-spec material.

III. Storage Piles


To reduce potential dust emissions, stockpiling is performed at minimum drop distances, to the extent practicable. Materials are stored in various locations on the facility site and product pile locations will move within a general area throughout the year. Figure 1 shows the general site layout. Front end loaders and stacking conveyors may be used to load onto and load out of the storage piles. The moisture content of the slag stored on site is permitted to be 7% to 10% and will vary within this range depending on atmospheric precipitation throughout the year.

IV. Loading and Transfer; Trucks and Front-End Loaders

Trucks are loaded in a manner to reduce or prevent materials from dropping, blowing or otherwise escaping. The drop distance is minimized to reduce dust during loading operations.


Documentation and Record Keeping

Wet suppression records for roadways are maintained in accordance with 326 IAC 6-1-11.1 using a documentation log. A sample of this log is included in this plan, however, the most recent version should be confirmed with onsite management. Records are retained for a minimum of five (5) years.





Products Processed

- ① Expanded Slag
- ② Granulated Slag
- ③ Air Cooled Slag

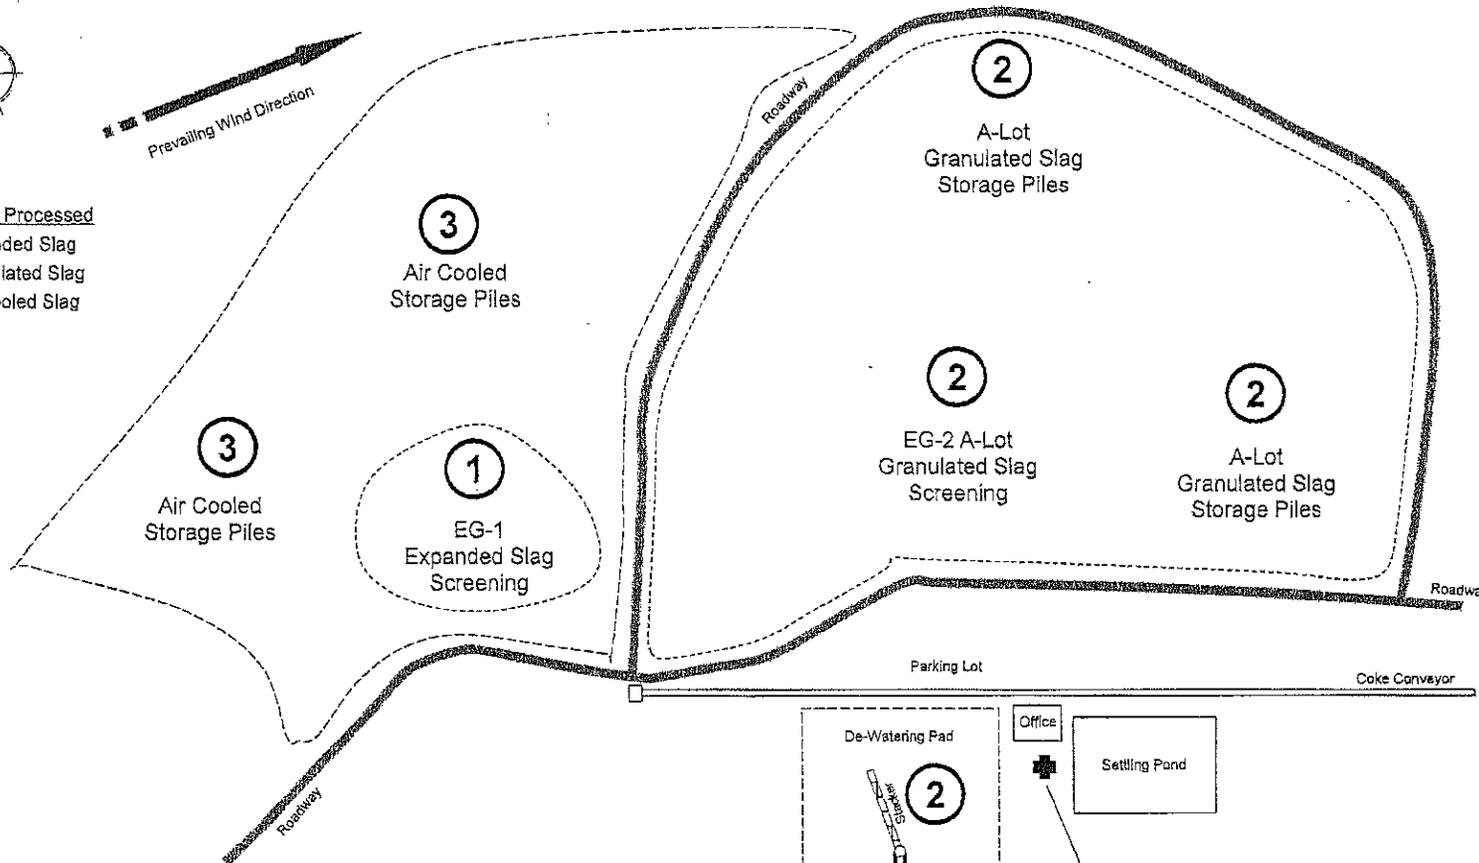

Area Detail

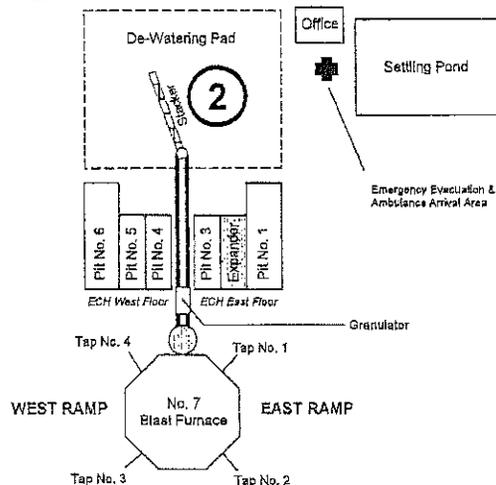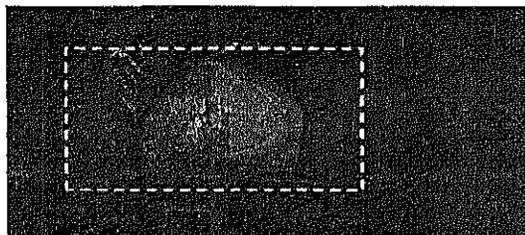

Not To Scale

ChemReport
 Environmental & Safety Engineers
 9725 - 12th Street - Kenosha, WI 53144
 (800) 965-5323 www.chemreport.com

Project Title and Address

LAFARGE NORTH AMERICA

SITE OVERVIEW

3210 WATLING STREET
 EAST CHICAGO, INDIANA 46312


Sheet Description

SITE OVERVIEW

Project Number:	Sheet
Date Drawn:	1
Date Updated:	1 of 5
Drawn By:	BJM



Coke Conveyor

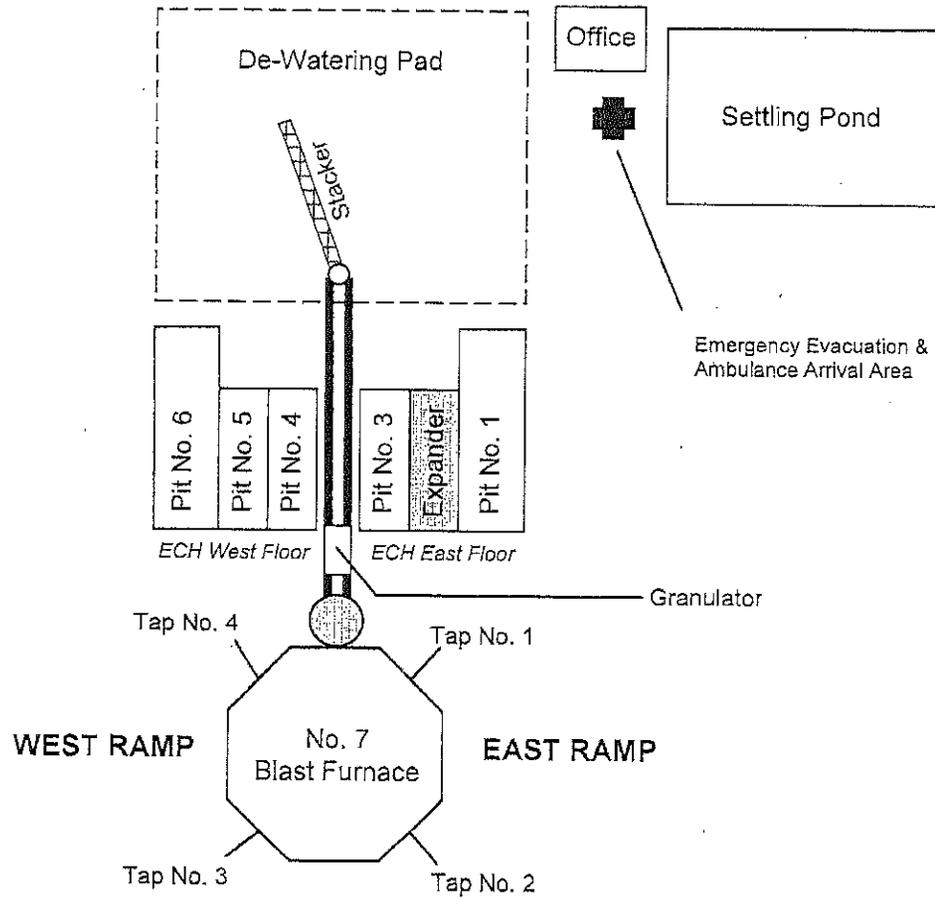

ChemReport®
 Environmental & Safety Engineers
 9726 - 12th Street - Kanosha, WI 53144
 (800) 965-6323 www.chemreport.com


LAFARGE NORTH AMERICA
PROCESS AREA ENLARGEMENT
 3210 WATLING STREET
 EAST CHICAGO, INDIANA 46312

Sheet Description

PROCESS AREA

Project Number:	Sheet:
Date Drawn: 03/21/11	2
Date Updated: 09/29/15	2 of 5
Drawn By: BJM	

Not To Scale




Process Flow

- ① Granulated Slag
- ② Air Cooled Slag
- ③ Expanded Slag

Note: Production and product type are dependent on process conditions. As a result, slag flow from furnace can be directed to any of the above three product process lines through the use of diverter gate valves (not shown).

Note: Granulated Slag is the preferred product of choice although Expanded Slag is also produced as an alternative product offering. Air Cooled Slag is only produced when process conditions do not allow the production of the other two products. When this is the case, slag is diverted to the slag pits for cooling and ultimate removal to the air-cooled processing and storage pile area.

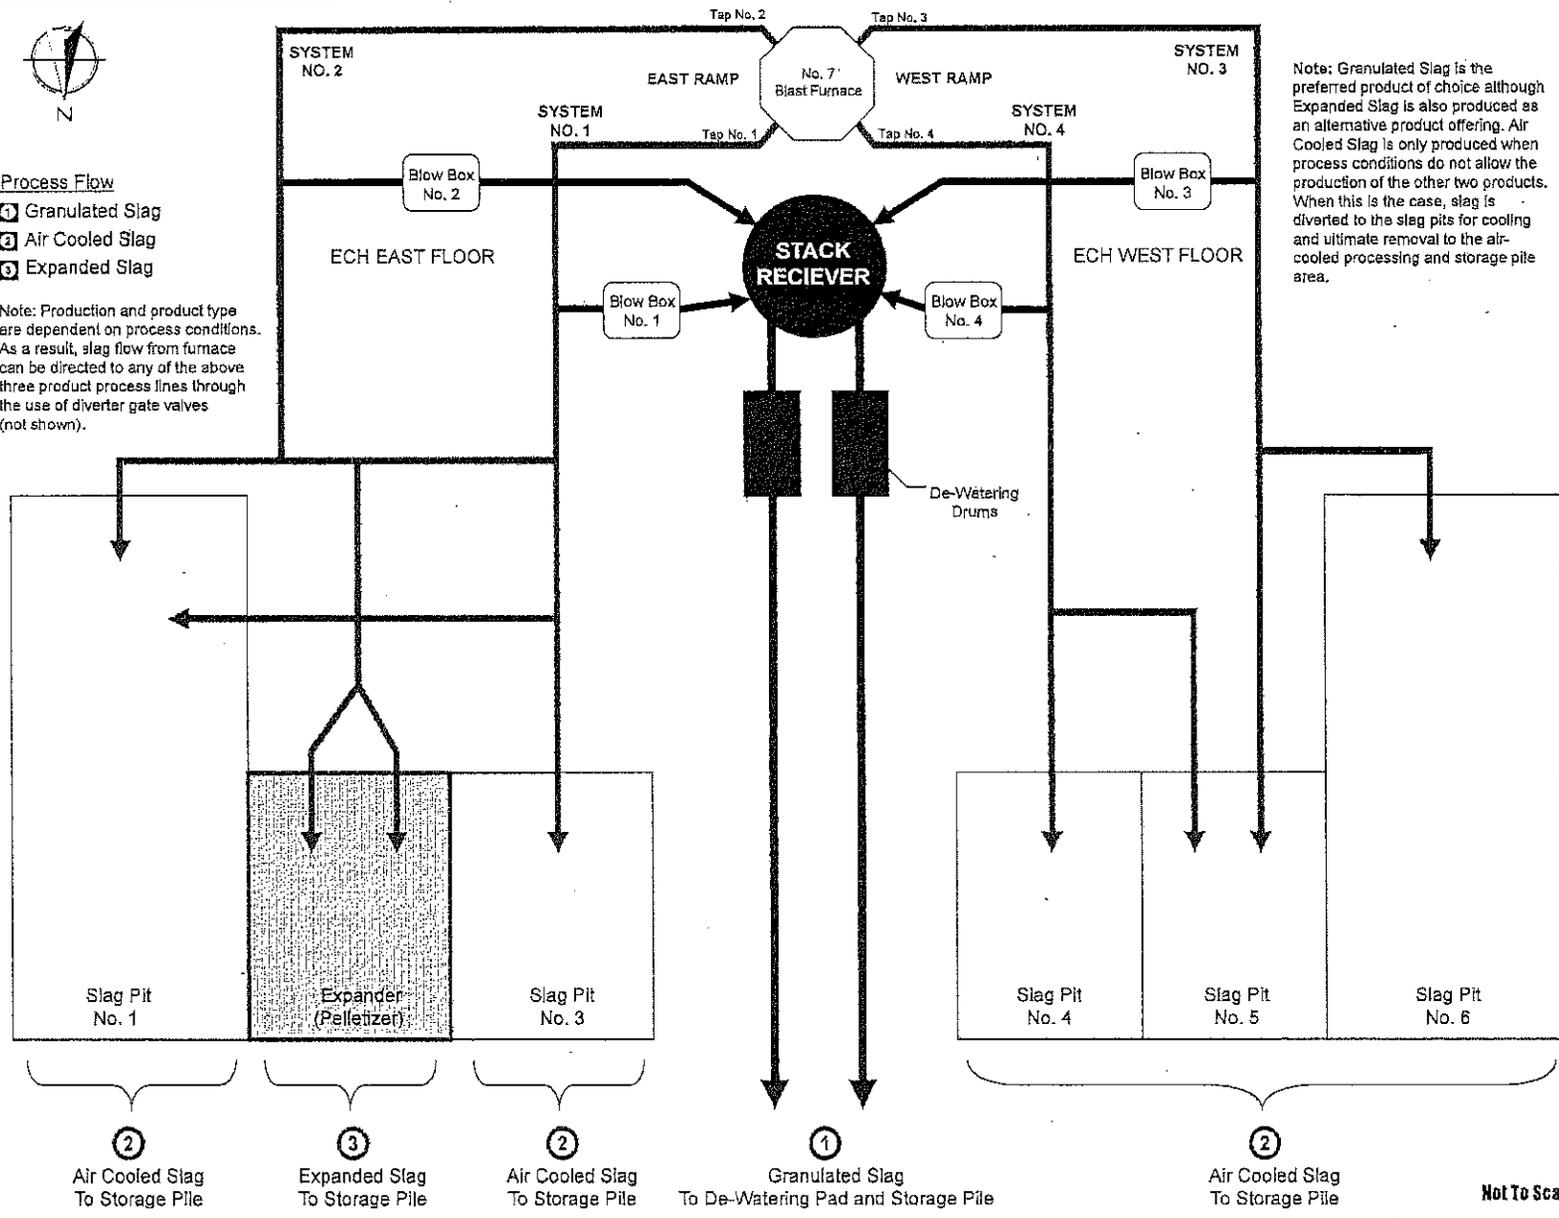

ChemReport
 Environmental & Safety Engineers
 9725 - 12th Street • Kenosha, WI 53144
 (800) 865-6323 www.chemreport.com

Project Title and Address


LAFARGE NORTH AMERICA

PROCESS BLOCK FLOW DIAGRAM


3210 WATLING STREET
 EAST CHICAGO, INDIANA 46312

Sheet Description	
BLOCK FLOW	
Project Number:	Sheet
Date Drawn: 03/21/11	3
Date Updated: 09/29/15	3 of 5
Drawn By: BJM	

EG-1 Expanded Slag Screening Block Flow

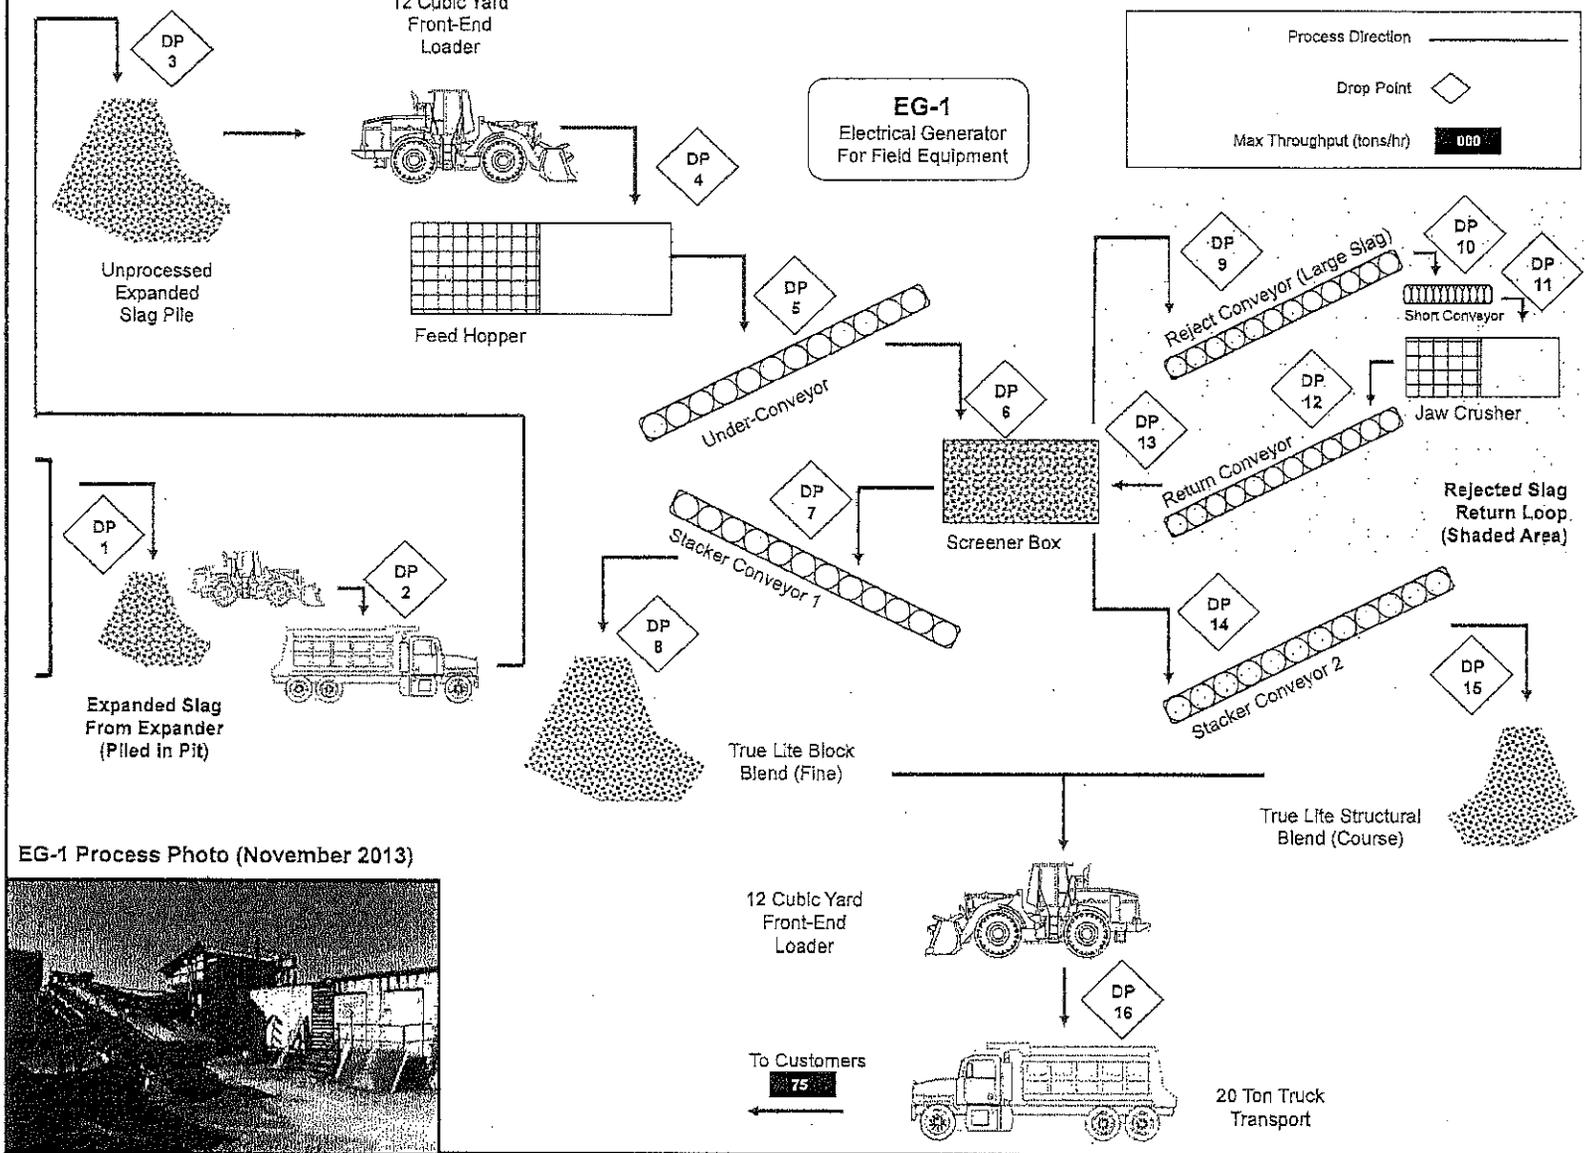

EG-1 Process Photo (November 2013)

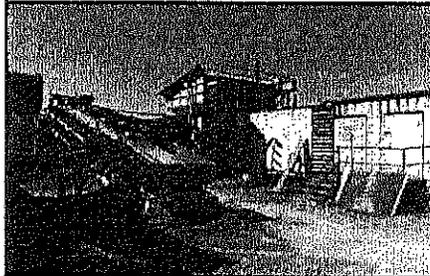

ChemReport
 Environmental & Safety Engineers
 9725 - 12th Street - Kanosha, WI 53144
 (800) 965-5323 www.chemreport.com

Project Title and Address

LAFARGE NORTH AMERICA EG-1 EXPANDED SLAG SCREENING


3210 WATLING STREET
 EAST CHICAGO, INDIANA 46312

Sheet Description


EG-1 Expanded Slag

Project Number:	Sheet
Drawn:	4
Date Drawn: 09/29/2015	
Date Updated:	4 of 5
Drawn By:	MBoozar - CRI

EG-2 Excess Slag Screening Block Flow

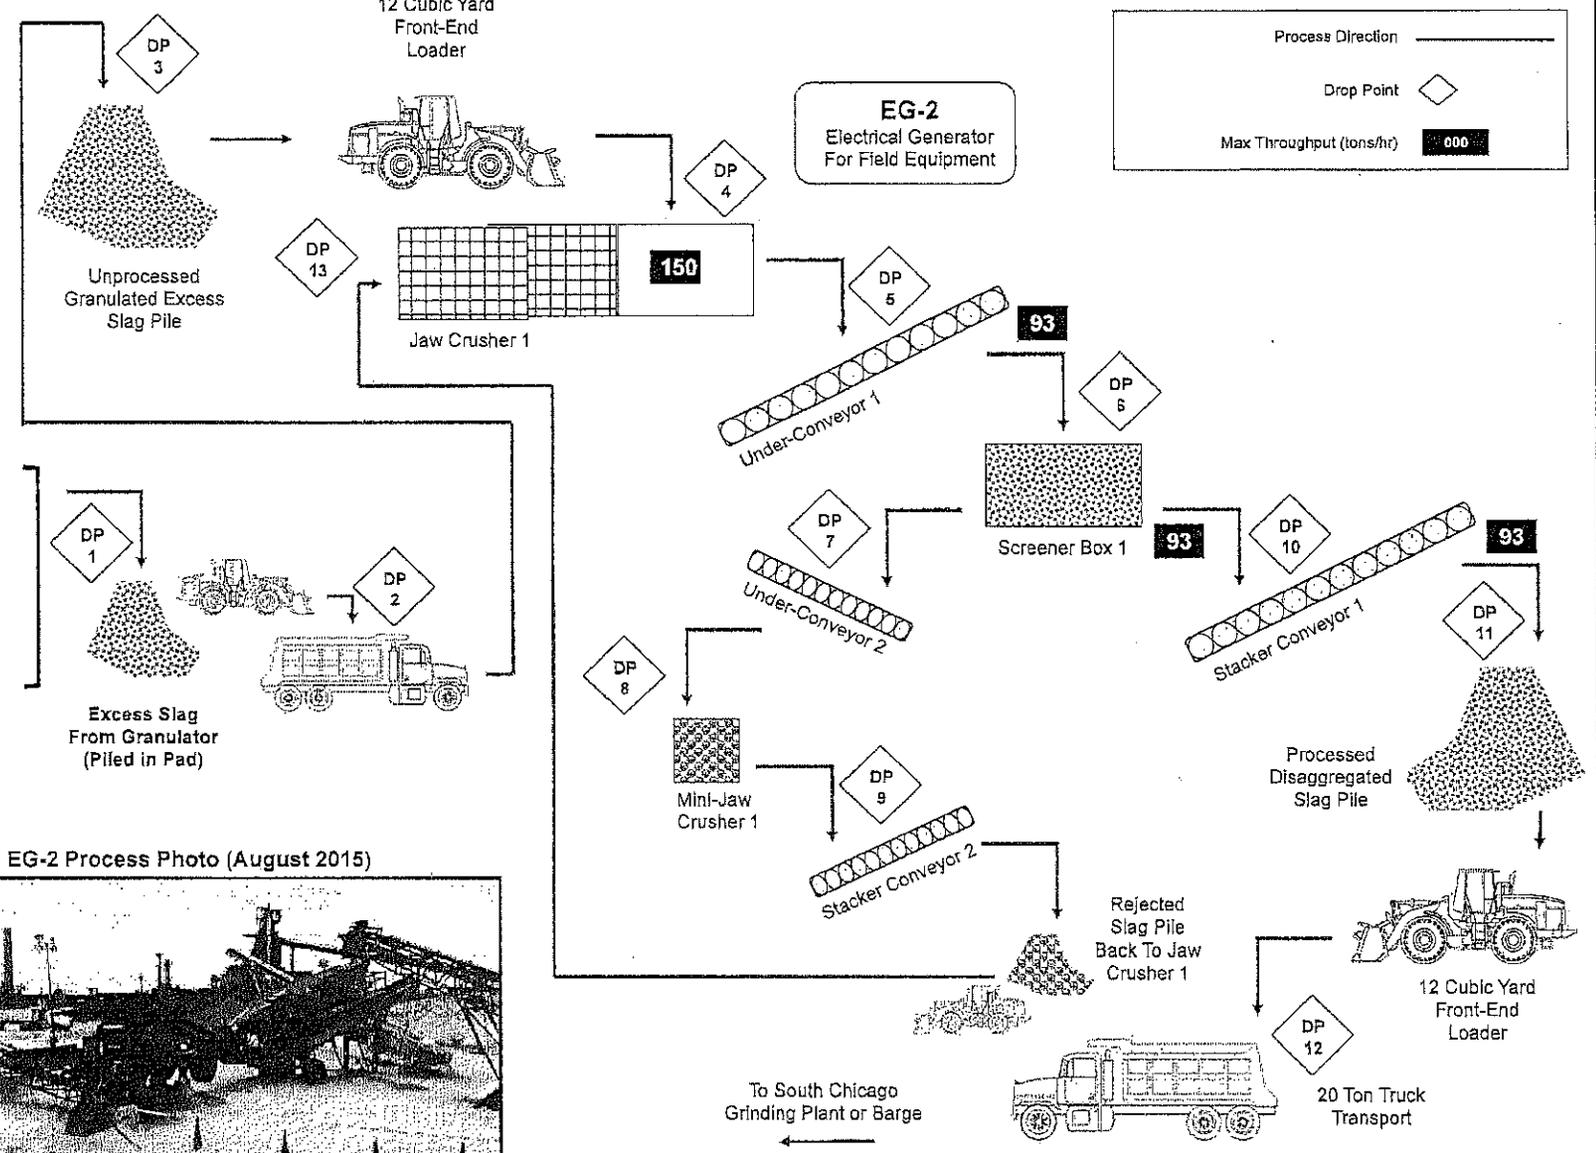

EG-2 Process Photo (August 2015)

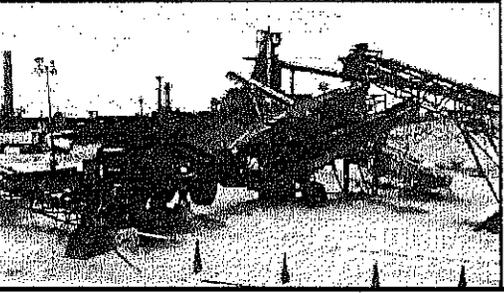

ChemReport®
 Environmental & Safety Engineers
 9725 - 12th Street - Knappa, WI 53144
 (800) 966-5323 www.chemreport.com

Project Title and Address

LAFARGE NORTH AMERICA

EG-2 EXCESS SLAG SCREENING

3210 WATLING STREET
 EAST CHICAGO, INDIANA 46312

Sheet Description

EG-2 Excess Slag

Project Number:	Sheet
Date Drawn:	5
Date Updated:	
Drawn By:	5 of 5

MBoozar - CRI

Fugitive Dust Control Tracking Log

Constants for Road Watering:

All applications performed by water truck
 Truck Capacity: 8,000 gallons
 Width of Application: 20 feet
 Application Rate: 400 gallons/minute

Locations: (1) Hot Slag Pits
 (2) Dewatering Pad / Cast Out
 (3) Parking Lot
 (4) Lightweight Screening Area
 (5) Lot A

Day	Date	Temperature (°F @ 8 am)	Conditions	Wind (mph)	Supervisor	Locations Treated (1-5)	Time of Application	Chemical Addition (Y / N)	If No Water Required (Explain)
1									
2									
3									
4									
5									
6									
7									
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									
21									
22									
23									
24									
25									
26									
27									
28									
29									
30									
31									

Environmental Approval: _____

Attachment B
40 CFR 63 Subpart ZZZZ

Administrative Part 70 Operating Permit No: 089-36118-00458

[Downloaded from the eCFR on July 23, 2014]

Electronic Code of Federal Regulations

Title 40: Protection of Environment

PART 63—NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES

Subpart ZZZZ—National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

Source: 69 FR 33506, June 15, 2004, unless otherwise noted.

What This Subpart Covers

§63.6580 What is the purpose of subpart ZZZZ?

Subpart ZZZZ establishes national emission limitations and operating limitations for hazardous air pollutants (HAP) emitted from stationary reciprocating internal combustion engines (RICE) located at major and area sources of HAP emissions. This subpart also establishes requirements to demonstrate initial and continuous compliance with the emission limitations and operating limitations.

[73 FR 3603, Jan. 18, 2008]

§63.6585 Am I subject to this subpart?

You are subject to this subpart if you own or operate a stationary RICE at a major or area source of HAP emissions, except if the stationary RICE is being tested at a stationary RICE test cell/stand.

(a) A stationary RICE is any internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

(b) A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site.

(c) An area source of HAP emissions is a source that is not a major source.

(d) If you are an owner or operator of an area source subject to this subpart, your status as an entity subject to a standard or other requirements under this subpart does not subject you to the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

(e) If you are an owner or operator of a stationary RICE used for national security purposes, you may be eligible to request an exemption from the requirements of this subpart as described in 40 CFR part 1068, subpart C.

(f) The emergency stationary RICE listed in paragraphs (f)(1) through (3) of this section are not subject to this subpart. The stationary RICE must meet the definition of an emergency stationary RICE in §63.6675, which includes operating according to the provisions specified in §63.6640(f).

(1) Existing residential emergency stationary RICE located at an area source of HAP emissions that do not operate or are not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) and that do not operate for the purpose specified in §63.6640(f)(4)(ii).

(2) Existing commercial emergency stationary RICE located at an area source of HAP emissions that do not operate or are not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) and that do not operate for the purpose specified in §63.6640(f)(4)(ii).

(3) Existing institutional emergency stationary RICE located at an area source of HAP emissions that do not operate or are not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) and that do not operate for the purpose specified in §63.6640(f)(4)(ii).

[69 FR 33506, June 15, 2004, as amended at 73 FR 3603, Jan. 18, 2008; 78 FR 6700, Jan. 30, 2013]

§63.6590 What parts of my plant does this subpart cover?

This subpart applies to each affected source.

(a) *Affected source.* An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.

(1) *Existing stationary RICE.*

(i) For stationary RICE with a site rating of more than 500 brake horsepower (HP) located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before December 19, 2002.

(ii) For stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.

(2) *New stationary RICE.* (i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is new if you commenced construction of the stationary RICE on or after June 12, 2006.

(3) *Reconstructed stationary RICE.* (i) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after December 19, 2002.

(ii) A stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after June 12, 2006.

(iii) A stationary RICE located at an area source of HAP emissions is reconstructed if you meet the definition of reconstruction in §63.2 and reconstruction is commenced on or after June 12, 2006.

(b) *Stationary RICE subject to limited requirements.* (1) An affected source which meets either of the criteria in paragraphs (b)(1)(i) through (ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of §63.6645(f).

(i) The stationary RICE is a new or reconstructed emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that does not operate or is not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(ii) The stationary RICE is a new or reconstructed limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(2) A new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis must meet the initial notification requirements of §63.6645(f) and the requirements of §§63.6625(c), 63.6650(g), and 63.6655(c). These stationary RICE do not have to meet the emission limitations and operating limitations of this subpart.

(3) The following stationary RICE do not have to meet the requirements of this subpart and of subpart A of this part, including initial notification requirements:

(i) Existing spark ignition 2 stroke lean burn (2SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(ii) Existing spark ignition 4 stroke lean burn (4SLB) stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(iii) Existing emergency stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that does not operate or is not contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(iv) Existing limited use stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions;

(v) Existing stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;

(c) *Stationary RICE subject to Regulations under 40 CFR Part 60.* An affected source that meets any of the criteria in paragraphs (c)(1) through (7) of this section must meet the requirements of this part by meeting the requirements of 40 CFR part 60 subpart IIII, for compression ignition engines or 40 CFR part 60 subpart JJJJ, for spark ignition engines. No further requirements apply for such engines under this part.

(1) A new or reconstructed stationary RICE located at an area source;

(2) A new or reconstructed 2SLB stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;

(3) A new or reconstructed 4SLB stationary RICE with a site rating of less than 250 brake HP located at a major source of HAP emissions;

(4) A new or reconstructed spark ignition 4 stroke rich burn (4SRB) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;

(5) A new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis;

(6) A new or reconstructed emergency or limited use stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions;

(7) A new or reconstructed compression ignition (CI) stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9674, Mar. 3, 2010; 75 FR 37733, June 30, 2010; 75 FR 51588, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

§63.6595 When do I have to comply with this subpart?

(a) *Affected sources.* (1) If you have an existing stationary RICE, excluding existing non-emergency CI stationary RICE, with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the applicable emission limitations, operating limitations and other requirements no later than June 15, 2007. If you have an existing non-emergency CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, an existing stationary CI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary CI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations, operating limitations, and other requirements no later than May 3, 2013. If you have an existing stationary SI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or an existing stationary SI RICE located at an area source of HAP emissions, you must comply with the applicable emission limitations, operating limitations, and other requirements no later than October 19, 2013.

(2) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart no later than August 16, 2004.

(3) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions after August 16, 2004, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(4) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(5) If you start up your new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(6) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions before January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart no later than January 18, 2008.

(7) If you start up your new or reconstructed stationary RICE located at an area source of HAP emissions after January 18, 2008, you must comply with the applicable emission limitations and operating limitations in this subpart upon startup of your affected source.

(b) *Area sources that become major sources.* If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, the compliance dates in paragraphs (b)(1) and (2) of this section apply to you.

(1) Any stationary RICE for which construction or reconstruction is commenced after the date when your area source becomes a major source of HAP must be in compliance with this subpart upon startup of your affected source.

(2) Any stationary RICE for which construction or reconstruction is commenced before your area source becomes a major source of HAP must be in compliance with the provisions of this subpart that are applicable to RICE located at major sources within 3 years after your area source becomes a major source of HAP.

(c) If you own or operate an affected source, you must meet the applicable notification requirements in §63.6645 and in 40 CFR part 63, subpart A.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 78 FR 6701, Jan. 30, 2013]

Emission and Operating Limitations

§63.6600 What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing, new, or reconstructed spark ignition 4SRB stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 1a to this subpart and the operating limitations in Table 1b to this subpart which apply to you.

(b) If you own or operate a new or reconstructed 2SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, a new or reconstructed 4SLB stationary RICE with a site rating of more than 500 brake HP located at major source of HAP emissions, or a new or reconstructed CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

(c) If you own or operate any of the following stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the emission limitations in Tables 1a, 2a, 2c, and 2d to this subpart or operating limitations in Tables 1b and 2b to this subpart: an existing 2SLB stationary RICE; an existing 4SLB stationary RICE; a stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis; an emergency stationary RICE; or a limited use stationary RICE.

(d) If you own or operate an existing non-emergency stationary CI RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations in Table 2c to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010]

§63.6601 What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart. If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at major source of HAP emissions manufactured on or after January 1, 2008, you must comply with the emission limitations in Table 2a to this subpart and the operating limitations in Table 2b to this subpart which apply to you.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010]

§63.6602 What emission limitations and other requirements must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?

If you own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions, you must comply with the emission limitations and other requirements in Table 2c to this subpart which apply to you. Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

[78 FR 6701, Jan. 30, 2013]

§63.6603 What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in §63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, you must comply with the requirements in Table 2d to this subpart and the operating limitations in Table 2b to this subpart that apply to you.

(b) If you own or operate an existing stationary non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP that meets either paragraph (b)(1) or (2) of this section, you do not have to meet the numerical CO emission limitations specified in Table 2d of this subpart. Existing stationary non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP that meet either paragraph (b)(1) or (2) of this section must meet the management practices that are shown for stationary non-emergency CI RICE with a site rating of less than or equal to 300 HP in Table 2d of this subpart.

(1) The area source is located in an area of Alaska that is not accessible by the Federal Aid Highway System (FAHS).

(2) The stationary RICE is located at an area source that meets paragraphs (b)(2)(i), (ii), and (iii) of this section.

(i) The only connection to the FAHS is through the Alaska Marine Highway System (AMHS), or the stationary RICE operation is within an isolated grid in Alaska that is not connected to the statewide electrical grid referred to as the Alaska Railbelt Grid.

(ii) At least 10 percent of the power generated by the stationary RICE on an annual basis is used for residential purposes.

(iii) The generating capacity of the area source is less than 12 megawatts, or the stationary RICE is used exclusively for backup power for renewable energy.

(c) If you own or operate an existing stationary non-emergency CI RICE with a site rating of more than 300 HP located on an offshore vessel that is an area source of HAP and is a nonroad vehicle that is an Outer Continental Shelf (OCS) source as defined in 40 CFR 55.2, you do not have to meet the numerical CO emission limitations specified in Table 2d of this subpart. You must meet all of the following management practices:

(1) Change oil every 1,000 hours of operation or annually, whichever comes first. Sources have the option to utilize an oil analysis program as described in §63.6625(i) in order to extend the specified oil change requirement.

(2) Inspect and clean air filters every 750 hours of operation or annually, whichever comes first, and replace as necessary.

(3) Inspect fuel filters and belts, if installed, every 750 hours of operation or annually, whichever comes first, and replace as necessary.

(4) Inspect all flexible hoses every 1,000 hours of operation or annually, whichever comes first, and replace as necessary.

(d) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 1 or Tier 2 emission standards in Table 1 of 40 CFR 89.112 and that is subject to an enforceable state or local standard that requires the engine to be replaced no later than June 1, 2018, you may until January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018, choose to comply with the management practices that are shown for stationary non-emergency CI RICE with a site rating of less than or equal to 300 HP in Table 2d of this subpart instead of the applicable emission limitations in Table 2d, operating limitations in Table 2b, and crankcase ventilation system requirements in §63.6625(g). You must comply with the emission limitations in Table 2d and operating limitations in Table 2b that apply for non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions by January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018. You must also comply with the crankcase ventilation system requirements in §63.6625(g) by January 1, 2015, or 12 years after the installation date of the engine (whichever is later), but not later than June 1, 2018.

(e) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 3 (Tier 2 for engines above 560 kilowatt (kW)) emission standards in Table 1 of 40 CFR 89.112, you may comply with the requirements under this part by meeting the requirements for Tier 3 engines (Tier 2 for engines above 560 kW) in 40 CFR part 60 subpart IIII instead of the emission limitations and other requirements that would otherwise apply under this part for existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions.

(f) An existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP must meet the definition of remote stationary RICE in §63.6675 on the initial compliance date for the engine, October 19, 2013, in order to be considered a remote stationary RICE under this subpart. Owners and operators of existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP that meet the definition of remote stationary RICE in §63.6675 of this subpart as of October 19, 2013 must evaluate the status of their stationary RICE every 12 months. Owners and operators must keep records of the initial and annual evaluation of the status of the engine. If the evaluation indicates that the stationary RICE no longer meets the definition of remote stationary RICE in §63.6675 of this subpart, the owner or operator must comply with all of the requirements for existing non-emergency SI 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at area sources of HAP that are not remote stationary RICE within 1 year of the evaluation.

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6701, Jan. 30, 2013]

§63.6604 What fuel requirements must I meet if I own or operate a stationary CI RICE?

(a) If you own or operate an existing non-emergency, non-black start CI stationary RICE with a site rating of more than 300 brake HP with a displacement of less than 30 liters per cylinder that uses diesel fuel, you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel.

(b) Beginning January 1, 2015, if you own or operate an existing emergency CI stationary RICE with a site rating of more than 100 brake HP and a displacement of less than 30 liters per cylinder that uses diesel fuel and operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in §63.6640(f)(4)(ii), you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.

(c) Beginning January 1, 2015, if you own or operate a new emergency CI stationary RICE with a site rating of more than 500 brake HP and a displacement of less than 30 liters per cylinder located at a major source of HAP that uses diesel fuel and operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii), you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.

(d) Existing CI stationary RICE located in Guam, American Samoa, the Commonwealth of the Northern Mariana Islands, at area sources in areas of Alaska that meet either §63.6603(b)(1) or §63.6603(b)(2), or are on offshore vessels that meet §63.6603(c) are exempt from the requirements of this section.

[78 FR 6702, Jan. 30, 2013]

General Compliance Requirements

§63.6605 What are my general requirements for complying with this subpart?

(a) You must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times.

(b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010, as amended at 78 FR 6702, Jan. 30, 2013]

Testing and Initial Compliance Requirements

§63.6610 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

If you own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions you are subject to the requirements of this section.

(a) You must conduct the initial performance test or other initial compliance demonstrations in Table 4 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions in §63.7(a)(2).

(b) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must demonstrate initial compliance with either the proposed emission limitations or the promulgated emission limitations no later than February 10, 2005 or no later than 180 days after startup of the source, whichever is later, according to §63.7(a)(2)(ix).

(c) If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004 and own or operate stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, and you chose to comply with the proposed emission limitations when demonstrating initial compliance, you must conduct a second performance test to demonstrate compliance with the promulgated emission limitations by December 13, 2007 or after startup of the source, whichever is later, according to §63.7(a)(2)(ix).

(d) An owner or operator is not required to conduct an initial performance test on units for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (d)(1) through (5) of this section.

(1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.

(2) The test must not be older than 2 years.

- (3) The test must be reviewed and accepted by the Administrator.
- (4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.
- (5) The test must be conducted at any load condition within plus or minus 10 percent of 100 percent load.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3605, Jan. 18, 2008]

§63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?

If you own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must conduct an initial performance test within 240 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions specified in Table 4 to this subpart, as appropriate.

[73 FR 3605, Jan. 18, 2008, as amended at 75 FR 51589, Aug. 20, 2010]

§63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?

If you own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions you are subject to the requirements of this section.

- (a) You must conduct any initial performance test or other initial compliance demonstration according to Tables 4 and 5 to this subpart that apply to you within 180 days after the compliance date that is specified for your stationary RICE in §63.6595 and according to the provisions in §63.7(a)(2).
- (b) An owner or operator is not required to conduct an initial performance test on a unit for which a performance test has been previously conducted, but the test must meet all of the conditions described in paragraphs (b)(1) through (4) of this section.
 - (1) The test must have been conducted using the same methods specified in this subpart, and these methods must have been followed correctly.

(2) The test must not be older than 2 years.

(3) The test must be reviewed and accepted by the Administrator.

(4) Either no process or equipment changes must have been made since the test was performed, or the owner or operator must be able to demonstrate that the results of the performance test, with or without adjustments, reliably demonstrate compliance despite process or equipment changes.

[75 FR 9676, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010]

§63.6615 When must I conduct subsequent performance tests?

If you must comply with the emission limitations and operating limitations, you must conduct subsequent performance tests as specified in Table 3 of this subpart.

§63.6620 What performance tests and other procedures must I use?

(a) You must conduct each performance test in Tables 3 and 4 of this subpart that applies to you.

(b) Each performance test must be conducted according to the requirements that this subpart specifies in Table 4 to this subpart. If you own or operate a non-operational stationary RICE that is subject to performance testing, you do not need to start up the engine solely to conduct the performance test. Owners and operators of a non-operational engine can conduct the performance test when the engine is started up again. The test must be conducted at any load condition within plus or minus 10 percent of 100 percent load for the stationary RICE listed in paragraphs (b)(1) through (4) of this section.

(1) Non-emergency 4SRB stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(2) New non-emergency 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP located at a major source of HAP emissions.

(3) New non-emergency 2SLB stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(4) New non-emergency CI stationary RICE with a site rating of greater than 500 brake HP located at a major source of HAP emissions.

(c) [Reserved]

(d) You must conduct three separate test runs for each performance test required in this section, as specified in §63.7(e)(3). Each test run must last at least 1 hour, unless otherwise specified in this subpart.

(e)(1) You must use Equation 1 of this section to determine compliance with the percent reduction requirement:

$$\frac{C_i - C_o}{C_i} \times 100 = R \quad (\text{Eq. 1})$$

Where:

C_i = concentration of carbon monoxide (CO), total hydrocarbons (THC), or formaldehyde at the control device inlet,

C_o = concentration of CO, THC, or formaldehyde at the control device outlet, and

R = percent reduction of CO, THC, or formaldehyde emissions.

(2) You must normalize the CO, THC, or formaldehyde concentrations at the inlet and outlet of the control device to a dry basis and to 15 percent oxygen, or an equivalent percent carbon dioxide (CO₂). If pollutant concentrations are to be corrected to 15 percent oxygen and CO₂ concentration is measured in lieu of oxygen concentration measurement, a CO₂ correction factor is needed. Calculate the CO₂ correction factor as described in paragraphs (e)(2)(i) through (iii) of this section.

(i) Calculate the fuel-specific F_o value for the fuel burned during the test using values obtained from Method 19, Section 5.2, and the following equation:

$$F_o = \frac{0.209 F_d}{F_c} \quad (\text{Eq. 2})$$

Where:

F_o = Fuel factor based on the ratio of oxygen volume to the ultimate CO_2 volume produced by the fuel at zero percent excess air.

0.209 = Fraction of air that is oxygen, percent/100.

F_d = Ratio of the volume of dry effluent gas to the gross calorific value of the fuel from Method 19, dm^3/J ($dscf/106$ Btu).

F_c = Ratio of the volume of CO_2 produced to the gross calorific value of the fuel from Method 19, dm^3/J ($dscf/106$ Btu)

(ii) Calculate the CO_2 correction factor for correcting measurement data to 15 percent O_2 , as follows:

$$X_{CO_2} = \frac{5.9}{F_o} \quad (\text{Eq. 3})$$

Where:

X_{CO_2} = CO_2 correction factor, percent.

5.9 = 20.9 percent O_2 —15 percent O_2 , the defined O_2 correction value, percent.

(iii) Calculate the CO, THC, and formaldehyde gas concentrations adjusted to 15 percent O_2 using CO_2 as follows:

$$C_{adj} = C_d \frac{X_{CO_2}}{\%CO_2} \quad (\text{Eq. 4})$$

Where:

C_{adj} = Calculated concentration of CO, THC, or formaldehyde adjusted to 15 percent O_2 .

C_d = Measured concentration of CO, THC, or formaldehyde, uncorrected.

X_{CO_2} = CO_2 correction factor, percent.

$\%CO_2$ = Measured CO_2 concentration measured, dry basis, percent.

(f) If you comply with the emission limitation to reduce CO and you are not using an oxidation catalyst, if you comply with the emission limitation to reduce formaldehyde and you are not using NSCR, or if you comply with the emission limitation to limit the concentration of formaldehyde in the stationary RICE exhaust and you are not using an oxidation catalyst or NSCR, you must petition the Administrator for operating limitations to be established during the initial performance test and continuously monitored thereafter; or for approval of no operating limitations. You must not conduct the initial performance test until after the petition has been approved by the Administrator.

(g) If you petition the Administrator for approval of operating limitations, your petition must include the information described in paragraphs (g)(1) through (5) of this section.

(1) Identification of the specific parameters you propose to use as operating limitations;

(2) A discussion of the relationship between these parameters and HAP emissions, identifying how HAP emissions change with changes in these parameters, and how limitations on these parameters will serve to limit HAP emissions;

(3) A discussion of how you will establish the upper and/or lower values for these parameters which will establish the limits on these parameters in the operating limitations;

(4) A discussion identifying the methods you will use to measure and the instruments you will use to monitor these parameters, as well as the relative accuracy and precision of these methods and instruments; and

(5) A discussion identifying the frequency and methods for recalibrating the instruments you will use for monitoring these parameters.

(h) If you petition the Administrator for approval of no operating limitations, your petition must include the information described in paragraphs (h)(1) through (7) of this section.

(1) Identification of the parameters associated with operation of the stationary RICE and any emission control device which could change intentionally (e.g., operator adjustment, automatic controller adjustment, etc.) or unintentionally (e.g., wear and tear, error, etc.) on a routine basis or over time;

(2) A discussion of the relationship, if any, between changes in the parameters and changes in HAP emissions;

(3) For the parameters which could change in such a way as to increase HAP emissions, a discussion of whether establishing limitations on the parameters would serve to limit HAP emissions;

(4) For the parameters which could change in such a way as to increase HAP emissions, a discussion of how you could establish upper and/or lower values for the parameters which would establish limits on the parameters in operating limitations;

(5) For the parameters, a discussion identifying the methods you could use to measure them and the instruments you could use to monitor them, as well as the relative accuracy and precision of the methods and instruments;

(6) For the parameters, a discussion identifying the frequency and methods for recalibrating the instruments you could use to monitor them; and

(7) A discussion of why, from your point of view, it is infeasible or unreasonable to adopt the parameters as operating limitations.

(i) The engine percent load during a performance test must be determined by documenting the calculations, assumptions, and measurement devices used to measure or estimate the percent load in a specific application. A written report of the average percent load determination must be included in the notification of compliance status. The following information must be included in the written report: the engine model number, the engine manufacturer, the year of purchase, the manufacturer's site-rated brake horsepower, the ambient temperature, pressure, and humidity during the performance test, and all assumptions that were made to estimate or calculate percent load during the performance test must be clearly explained. If measurement devices such as flow meters, kilowatt meters, beta analyzers, stain gauges, etc. are used, the model number of the measurement device, and an estimate of its accurate in percentage of true value must be provided.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9676, Mar. 3, 2010; 78 FR 6702, Jan. 30, 2013]

§63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?

(a) If you elect to install a CEMS as specified in Table 5 of this subpart, you must install, operate, and maintain a CEMS to monitor CO and either O₂ or CO₂ according to the requirements in paragraphs (a)(1) through (4) of this section. If you are meeting a requirement to reduce CO emissions, the CEMS must be installed at both the inlet and outlet of the control device. If you are meeting a requirement to limit the concentration of CO, the CEMS must be installed at the outlet of the control device.

(1) Each CEMS must be installed, operated, and maintained according to the applicable performance specifications of 40 CFR part 60, appendix B.

(2) You must conduct an initial performance evaluation and an annual relative accuracy test audit (RATA) of each CEMS according to the requirements in §63.8 and according to the applicable performance specifications of 40 CFR

part 60, appendix B as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.

(3) As specified in §63.8(c)(4)(ii), each CEMS must complete a minimum of one cycle of operation (sampling, analyzing, and data recording) for each successive 15-minute period. You must have at least two data points, with each representing a different 15-minute period, to have a valid hour of data.

(4) The CEMS data must be reduced as specified in §63.8(g)(2) and recorded in parts per million or parts per billion (as appropriate for the applicable limitation) at 15 percent oxygen or the equivalent CO₂ concentration.

(b) If you are required to install a continuous parameter monitoring system (CPMS) as specified in Table 5 of this subpart, you must install, operate, and maintain each CPMS according to the requirements in paragraphs (b)(1) through (6) of this section. For an affected source that is complying with the emission limitations and operating limitations on March 9, 2011, the requirements in paragraph (b) of this section are applicable September 6, 2011.

(1) You must prepare a site-specific monitoring plan that addresses the monitoring system design, data collection, and the quality assurance and quality control elements outlined in paragraphs (b)(1)(i) through (v) of this section and in §63.8(d). As specified in §63.8(f)(4), you may request approval of monitoring system quality assurance and quality control procedures alternative to those specified in paragraphs (b)(1) through (5) of this section in your site-specific monitoring plan.

(i) The performance criteria and design specifications for the monitoring system equipment, including the sample interface, detector signal analyzer, and data acquisition and calculations;

(ii) Sampling interface (e.g., thermocouple) location such that the monitoring system will provide representative measurements;

(iii) Equipment performance evaluations, system accuracy audits, or other audit procedures;

(iv) Ongoing operation and maintenance procedures in accordance with provisions in §63.8(c)(1)(ii) and (c)(3); and

(v) Ongoing reporting and recordkeeping procedures in accordance with provisions in §63.10(c), (e)(1), and (e)(2)(i).

(2) You must install, operate, and maintain each CPMS in continuous operation according to the procedures in your site-specific monitoring plan.

(3) The CPMS must collect data at least once every 15 minutes (see also §63.6635).

(4) For a CPMS for measuring temperature range, the temperature sensor must have a minimum tolerance of 2.8 degrees Celsius (5 degrees Fahrenheit) or 1 percent of the measurement range, whichever is larger.

(5) You must conduct the CPMS equipment performance evaluation, system accuracy audits, or other audit procedures specified in your site-specific monitoring plan at least annually.

(6) You must conduct a performance evaluation of each CPMS in accordance with your site-specific monitoring plan.

(c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must monitor and record your fuel usage daily with separate fuel meters to measure the volumetric flow rate of each fuel. In addition, you must operate your stationary RICE in a manner which reasonably minimizes HAP emissions.

(d) If you are operating a new or reconstructed emergency 4SLB stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions, you must install a non-resettable hour meter prior to the startup of the engine.

(e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

- (1) An existing stationary RICE with a site rating of less than 100 HP located at a major source of HAP emissions;
- (2) An existing emergency or black start stationary RICE with a site rating of less than or equal to 500 HP located at a major source of HAP emissions;
- (3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;
- (4) An existing non-emergency, non-black start stationary CI RICE with a site rating less than or equal to 300 HP located at an area source of HAP emissions;
- (5) An existing non-emergency, non-black start 2SLB stationary RICE located at an area source of HAP emissions;
- (6) An existing non-emergency, non-black start stationary RICE located at an area source of HAP emissions which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis.
- (7) An existing non-emergency, non-black start 4SLB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;
- (8) An existing non-emergency, non-black start 4SRB stationary RICE with a site rating less than or equal to 500 HP located at an area source of HAP emissions;
- (9) An existing, non-emergency, non-black start 4SLB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year; and
- (10) An existing, non-emergency, non-black start 4SRB stationary RICE with a site rating greater than 500 HP located at an area source of HAP emissions that is operated 24 hours or less per calendar year.

(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.

(g) If you own or operate an existing non-emergency, non-black start CI engine greater than or equal to 300 HP that is not equipped with a closed crankcase ventilation system, you must comply with either paragraph (g)(1) or paragraph (2) of this section. Owners and operators must follow the manufacturer's specified maintenance requirements for operating and maintaining the open or closed crankcase ventilation systems and replacing the crankcase filters, or can request the Administrator to approve different maintenance requirements that are as protective as manufacturer requirements. Existing CI engines located at area sources in areas of Alaska that meet either §63.6603(b)(1) or §63.6603(b)(2) do not have to meet the requirements of this paragraph (g). Existing CI engines located on offshore vessels that meet §63.6603(c) do not have to meet the requirements of this paragraph (g).

- (1) Install a closed crankcase ventilation system that prevents crankcase emissions from being emitted to the atmosphere, or
- (2) Install an open crankcase filtration emission control system that reduces emissions from the crankcase by filtering the exhaust stream to remove oil mist, particulates and metals.

(h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply.

(i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of Table 2c to this subpart or in items 1 or 4 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.

(j) If you own or operate a stationary SI engine that is subject to the work, operation or management practices in items 6, 7, or 8 of Table 2c to this subpart or in items 5, 6, 7, 9, or 11 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Acid Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Acid Number increases by more than 3.0 milligrams of potassium hydroxide (KOH) per gram from Total Acid Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6703, Jan. 30, 2013]

§63.6630 How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate initial compliance with each emission limitation, operating limitation, and other requirement that applies to you according to Table 5 of this subpart.

(b) During the initial performance test, you must establish each operating limitation in Tables 1b and 2b of this subpart that applies to you.

(c) You must submit the Notification of Compliance Status containing the results of the initial compliance demonstration according to the requirements in §63.6645.

(d) Non-emergency 4SRB stationary RICE complying with the requirement to reduce formaldehyde emissions by 76 percent or more can demonstrate initial compliance with the formaldehyde emission limit by testing for THC instead of formaldehyde. The testing must be conducted according to the requirements in Table 4 of this subpart. The average reduction of emissions of THC determined from the performance test must be equal to or greater than 30 percent.

(e) The initial compliance demonstration required for existing non-emergency 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year must be conducted according to the following requirements:

(1) The compliance demonstration must consist of at least three test runs.

(2) Each test run must be of at least 15 minute duration, except that each test conducted using the method in appendix A to this subpart must consist of at least one measurement cycle and include at least 2 minutes of test data phase measurement.

(3) If you are demonstrating compliance with the CO concentration or CO percent reduction requirement, you must measure CO emissions using one of the CO measurement methods specified in Table 4 of this subpart, or using appendix A to this subpart.

(4) If you are demonstrating compliance with the THC percent reduction requirement, you must measure THC emissions using Method 25A, reported as propane, of 40 CFR part 60, appendix A.

(5) You must measure O₂ using one of the O₂ measurement methods specified in Table 4 of this subpart. Measurements to determine O₂ concentration must be made at the same time as the measurements for CO or THC concentration.

(6) If you are demonstrating compliance with the CO or THC percent reduction requirement, you must measure CO or THC emissions and O₂ emissions simultaneously at the inlet and outlet of the control device.

[69 FR 33506, June 15, 2004, as amended at 78 FR 6704, Jan. 30, 2013]

Continuous Compliance Requirements

§63.6635 How do I monitor and collect data to demonstrate continuous compliance?

(a) If you must comply with emission and operating limitations, you must monitor and collect data according to this section.

(b) Except for monitor malfunctions, associated repairs, required performance evaluations, and required quality assurance or control activities, you must monitor continuously at all times that the stationary RICE is operating. A monitoring malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring to provide valid data. Monitoring failures that are caused in part by poor maintenance or careless operation are not malfunctions.

(c) You may not use data recorded during monitoring malfunctions, associated repairs, and required quality assurance or control activities in data averages and calculations used to report emission or operating levels. You must, however, use all the valid data collected during all other periods.

[69 FR 33506, June 15, 2004, as amended at 76 FR 12867, Mar. 9, 2011]

§63.6640 How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate continuous compliance with each emission limitation, operating limitation, and other requirements in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart.

(b) You must report each instance in which you did not meet each emission limitation or operating limitation in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you. These instances are deviations from the emission and operating limitations in this subpart. These deviations must be reported according to the requirements in §63.6650. If you change your catalyst, you must reestablish the values of the operating parameters measured during the initial performance test. When you reestablish the values of your operating parameters, you must also conduct a performance test to demonstrate that you are meeting the required emission limitation applicable to your stationary RICE.

(c) The annual compliance demonstration required for existing non-emergency 4SLB and 4SRB stationary RICE with a site rating of more than 500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year must be conducted according to the following requirements:

- (1) The compliance demonstration must consist of at least one test run.
 - (2) Each test run must be of at least 15 minute duration, except that each test conducted using the method in appendix A to this subpart must consist of at least one measurement cycle and include at least 2 minutes of test data phase measurement.
 - (3) If you are demonstrating compliance with the CO concentration or CO percent reduction requirement, you must measure CO emissions using one of the CO measurement methods specified in Table 4 of this subpart, or using appendix A to this subpart.
 - (4) If you are demonstrating compliance with the THC percent reduction requirement, you must measure THC emissions using Method 25A, reported as propane, of 40 CFR part 60, appendix A.
 - (5) You must measure O₂ using one of the O₂ measurement methods specified in Table 4 of this subpart. Measurements to determine O₂ concentration must be made at the same time as the measurements for CO or THC concentration.
 - (6) If you are demonstrating compliance with the CO or THC percent reduction requirement, you must measure CO or THC emissions and O₂ emissions simultaneously at the inlet and outlet of the control device.
 - (7) If the results of the annual compliance demonstration show that the emissions exceed the levels specified in Table 6 of this subpart, the stationary RICE must be shut down as soon as safely possible, and appropriate corrective action must be taken (e.g., repairs, catalyst cleaning, catalyst replacement). The stationary RICE must be retested within 7 days of being restarted and the emissions must meet the levels specified in Table 6 of this subpart. If the retest shows that the emissions continue to exceed the specified levels, the stationary RICE must again be shut down as soon as safely possible, and the stationary RICE may not operate, except for purposes of startup and testing, until the owner/operator demonstrates through testing that the emissions do not exceed the levels specified in Table 6 of this subpart.
- (d) For new, reconstructed, and rebuilt stationary RICE, deviations from the emission or operating limitations that occur during the first 200 hours of operation from engine startup (engine burn-in period) are not violations. Rebuilt stationary RICE means a stationary RICE that has been rebuilt as that term is defined in 40 CFR 94.11(a).
- (e) You must also report each instance in which you did not meet the requirements in Table 8 to this subpart that apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing emergency stationary RICE, an existing limited use stationary RICE, or an existing stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart, except for the initial notification requirements: a new or reconstructed stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new or reconstructed emergency stationary RICE, or a new or reconstructed limited use stationary RICE.
- (f) If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.
- (1) There is no time limit on the use of emergency stationary RICE in emergency situations.

(2) You may operate your emergency stationary RICE for any combination of the purposes specified in paragraphs (f)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).

(i) Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.

(ii) Emergency stationary RICE may be operated for emergency demand response for periods in which the Reliability Coordinator under the North American Electric Reliability Corporation (NERC) Reliability Standard EOP-002-3, Capacity and Energy Emergencies (incorporated by reference, see §63.14), or other authorized entity as determined by the Reliability Coordinator, has declared an Energy Emergency Alert Level 2 as defined in the NERC Reliability Standard EOP-002-3.

(iii) Emergency stationary RICE may be operated for periods where there is a deviation of voltage or frequency of 5 percent or greater below standard voltage or frequency.

(3) Emergency stationary RICE located at major sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. The 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to supply power to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(4) Emergency stationary RICE located at area sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. Except as provided in paragraphs (f)(4)(i) and (ii) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(i) Prior to May 3, 2014, the 50 hours per year for non-emergency situations can be used for peak shaving or non-emergency demand response to generate income for a facility, or to otherwise supply power as part of a financial arrangement with another entity if the engine is operated as part of a peak shaving (load management program) with the local distribution system operator and the power is provided only to the facility itself or to support the local distribution system.

(ii) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:

(A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator.

(B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.

(C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.

(D) The power is provided only to the facility itself or to support the local transmission and distribution system.

(E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the

engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6704, Jan. 30, 2013]

Notifications, Reports, and Records

§63.6645 What notifications must I submit and when?

(a) You must submit all of the notifications in §§63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), and (g) and (h) that apply to you by the dates specified if you own or operate any of the following;

(1) An existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions.

(2) An existing stationary RICE located at an area source of HAP emissions.

(3) A stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions.

(4) A new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 HP located at a major source of HAP emissions.

(5) This requirement does not apply if you own or operate an existing stationary RICE less than 100 HP, an existing stationary emergency RICE, or an existing stationary RICE that is not subject to any numerical emission standards.

(b) As specified in §63.9(b)(2), if you start up your stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart, you must submit an Initial Notification not later than December 13, 2004.

(c) If you start up your new or reconstructed stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions on or after August 16, 2004, you must submit an Initial Notification not later than 120 days after you become subject to this subpart.

(d) As specified in §63.9(b)(2), if you start up your stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions before the effective date of this subpart and you are required to submit an initial notification, you must submit an Initial Notification not later than July 16, 2008.

(e) If you start up your new or reconstructed stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions on or after March 18, 2008 and you are required to submit an initial notification, you must submit an Initial Notification not later than 120 days after you become subject to this subpart.

(f) If you are required to submit an Initial Notification but are otherwise not affected by the requirements of this subpart, in accordance with §63.6590(b), your notification should include the information in §63.9(b)(2)(i) through (v), and a statement that your stationary RICE has no additional requirements and explain the basis of the exclusion (for example, that it operates exclusively as an emergency stationary RICE if it has a site rating of more than 500 brake HP located at a major source of HAP emissions).

(g) If you are required to conduct a performance test, you must submit a Notification of Intent to conduct a performance test at least 60 days before the performance test is scheduled to begin as required in §63.7(b)(1).

(h) If you are required to conduct a performance test or other initial compliance demonstration as specified in Tables 4 and 5 to this subpart, you must submit a Notification of Compliance Status according to §63.9(h)(2)(ii).

(1) For each initial compliance demonstration required in Table 5 to this subpart that does not include a performance test, you must submit the Notification of Compliance Status before the close of business on the 30th day following the completion of the initial compliance demonstration.

(2) For each initial compliance demonstration required in Table 5 to this subpart that includes a performance test conducted according to the requirements in Table 3 to this subpart, you must submit the Notification of Compliance Status, including the performance test results, before the close of business on the 60th day following the completion of the performance test according to §63.10(d)(2).

(i) If you own or operate an existing non-emergency CI RICE with a site rating of more than 300 HP located at an area source of HAP emissions that is certified to the Tier 1 or Tier 2 emission standards in Table 1 of 40 CFR 89.112 and subject to an enforceable state or local standard requiring engine replacement and you intend to meet management practices rather than emission limits, as specified in §63.6603(d), you must submit a notification by March 3, 2013, stating that you intend to use the provision in §63.6603(d) and identifying the state or local regulation that the engine is subject to.

[73 FR 3606, Jan. 18, 2008, as amended at 75 FR 9677, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6705, Jan. 30, 2013]

§63.6650 What reports must I submit and when?

(a) You must submit each report in Table 7 of this subpart that applies to you.

(b) Unless the Administrator has approved a different schedule for submission of reports under §63.10(a), you must submit each report by the date in Table 7 of this subpart and according to the requirements in paragraphs (b)(1) through (b)(9) of this section.

(1) For semiannual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in §63.6595 and ending on June 30 or December 31, whichever date is the first date following the end of the first calendar half after the compliance date that is specified for your source in §63.6595.

(2) For semiannual Compliance reports, the first Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date follows the end of the first calendar half after the compliance date that is specified for your affected source in §63.6595.

(3) For semiannual Compliance reports, each subsequent Compliance report must cover the semiannual reporting period from January 1 through June 30 or the semiannual reporting period from July 1 through December 31.

(4) For semiannual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than July 31 or January 31, whichever date is the first date following the end of the semiannual reporting period.

(5) For each stationary RICE that is subject to permitting regulations pursuant to 40 CFR part 70 or 71, and if the permitting authority has established dates for submitting semiannual reports pursuant to 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6 (a)(3)(iii)(A), you may submit the first and subsequent Compliance reports according to the dates the permitting authority has established instead of according to the dates in paragraphs (b)(1) through (b)(4) of this section.

(6) For annual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in §63.6595 and ending on December 31.

(7) For annual Compliance reports, the first Compliance report must be postmarked or delivered no later than January 31 following the end of the first calendar year after the compliance date that is specified for your affected source in §63.6595.

(8) For annual Compliance reports, each subsequent Compliance report must cover the annual reporting period from January 1 through December 31.

(9) For annual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than January 31.

(c) The Compliance report must contain the information in paragraphs (c)(1) through (6) of this section.

(1) Company name and address.

(2) Statement by a responsible official, with that official's name, title, and signature, certifying the accuracy of the content of the report.

(3) Date of report and beginning and ending dates of the reporting period.

(4) If you had a malfunction during the reporting period, the compliance report must include the number, duration, and a brief description for each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report must also include a description of actions taken by an owner or operator during a malfunction of an affected source to minimize emissions in accordance with §63.6605(b), including actions taken to correct a malfunction.

(5) If there are no deviations from any emission or operating limitations that apply to you, a statement that there were no deviations from the emission or operating limitations during the reporting period.

(6) If there were no periods during which the continuous monitoring system (CMS), including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), a statement that there were no periods during which the CMS was out-of-control during the reporting period.

(d) For each deviation from an emission or operating limitation that occurs for a stationary RICE where you are not using a CMS to comply with the emission or operating limitations in this subpart, the Compliance report must contain the information in paragraphs (c)(1) through (4) of this section and the information in paragraphs (d)(1) and (2) of this section.

(1) The total operating time of the stationary RICE at which the deviation occurred during the reporting period.

(2) Information on the number, duration, and cause of deviations (including unknown cause, if applicable), as applicable, and the corrective action taken.

(e) For each deviation from an emission or operating limitation occurring for a stationary RICE where you are using a CMS to comply with the emission and operating limitations in this subpart, you must include information in paragraphs (c)(1) through (4) and (e)(1) through (12) of this section.

(1) The date and time that each malfunction started and stopped.

(2) The date, time, and duration that each CMS was inoperative, except for zero (low-level) and high-level checks.

(3) The date, time, and duration that each CMS was out-of-control, including the information in §63.8(c)(8).

(4) The date and time that each deviation started and stopped, and whether each deviation occurred during a period of malfunction or during another period.

(5) A summary of the total duration of the deviation during the reporting period, and the total duration as a percent of the total source operating time during that reporting period.

(6) A breakdown of the total duration of the deviations during the reporting period into those that are due to control equipment problems, process problems, other known causes, and other unknown causes.

(7) A summary of the total duration of CMS downtime during the reporting period, and the total duration of CMS downtime as a percent of the total operating time of the stationary RICE at which the CMS downtime occurred during that reporting period.

(8) An identification of each parameter and pollutant (CO or formaldehyde) that was monitored at the stationary RICE.

(9) A brief description of the stationary RICE.

(10) A brief description of the CMS.

(11) The date of the latest CMS certification or audit.

(12) A description of any changes in CMS, processes, or controls since the last reporting period.

(f) Each affected source that has obtained a title V operating permit pursuant to 40 CFR part 70 or 71 must report all deviations as defined in this subpart in the semiannual monitoring report required by 40 CFR 70.6 (a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A). If an affected source submits a Compliance report pursuant to Table 7 of this subpart along with, or as part of, the semiannual monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), and the Compliance report includes all required information concerning deviations from any emission or operating limitation in this subpart, submission of the Compliance report shall be deemed to satisfy any obligation to report the same deviations in the semiannual monitoring report. However, submission of a Compliance report shall not otherwise affect any obligation the affected source may have to report deviations from permit requirements to the permit authority.

(g) If you are operating as a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must submit an annual report according to Table 7 of this subpart by the date specified unless the Administrator has approved a different schedule, according to the information described in paragraphs (b)(1) through (b)(5) of this section. You must report the data specified in (g)(1) through (g)(3) of this section.

(1) Fuel flow rate of each fuel and the heating values that were used in your calculations. You must also demonstrate that the percentage of heat input provided by landfill gas or digester gas is equivalent to 10 percent or more of the total fuel consumption on an annual basis.

(2) The operating limits provided in your federally enforceable permit, and any deviations from these limits.

(3) Any problems or errors suspected with the meters.

(h) If you own or operate an emergency stationary RICE with a site rating of more than 100 brake HP that operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in §63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in §63.6640(f)(4)(ii), you must submit an annual report according to the requirements in paragraphs (h)(1) through (3) of this section.

(1) The report must contain the following information:

(i) Company name and address where the engine is located.

(ii) Date of the report and beginning and ending dates of the reporting period.

(iii) Engine site rating and model year.

(iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.

(v) Hours operated for the purposes specified in §63.6640(f)(2)(ii) and (iii), including the date, start time, and end time for engine operation for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(vi) Number of hours the engine is contractually obligated to be available for the purposes specified in §63.6640(f)(2)(ii) and (iii).

(vii) Hours spent for operation for the purpose specified in §63.6640(f)(4)(ii), including the date, start time, and end time for engine operation for the purposes specified in §63.6640(f)(4)(ii). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.

(viii) If there were no deviations from the fuel requirements in §63.6604 that apply to the engine (if any), a statement that there were no deviations from the fuel requirements during the reporting period.

(ix) If there were deviations from the fuel requirements in §63.6604 that apply to the engine (if any), information on the number, duration, and cause of deviations, and the corrective action taken.

(2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.

(3) The annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in §63.13.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9677, Mar. 3, 2010; 78 FR 6705, Jan. 30, 2013]

§63.6655 What records must I keep?

(a) If you must comply with the emission and operating limitations, you must keep the records described in paragraphs (a)(1) through (a)(5), (b)(1) through (b)(3) and (c) of this section.

(1) A copy of each notification and report that you submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted, according to the requirement in §63.10(b)(2)(xiv).

(2) Records of the occurrence and duration of each malfunction of operation (*i.e.*, process equipment) or the air pollution control and monitoring equipment.

(3) Records of performance tests and performance evaluations as required in §63.10(b)(2)(viii).

(4) Records of all required maintenance performed on the air pollution control and monitoring equipment.

(5) Records of actions taken during periods of malfunction to minimize emissions in accordance with §63.6605(b), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation.

(b) For each CEMS or CPMS, you must keep the records listed in paragraphs (b)(1) through (3) of this section.

(1) Records described in §63.10(b)(2)(vi) through (xi).

(2) Previous (*i.e.*, superseded) versions of the performance evaluation plan as required in §63.8(d)(3).

(3) Requests for alternatives to the relative accuracy test for CEMS or CPMS as required in §63.8(f)(6)(i), if applicable.

(c) If you are operating a new or reconstructed stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, you must keep the records of your daily fuel usage monitors.

(d) You must keep the records required in Table 6 of this subpart to show continuous compliance with each emission or operating limitation that applies to you.

(e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;

(1) An existing stationary RICE with a site rating of less than 100 brake HP located at a major source of HAP emissions.

(2) An existing stationary emergency RICE.

(3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.

(f) If you own or operate any of the stationary RICE in paragraphs (f)(1) through (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. If the engine is used for the purposes specified in §63.6640(f)(2)(ii) or (iii) or §63.6640(f)(4)(ii), the owner or operator must keep records of the notification of the emergency situation, and the date, start time, and end time of engine operation for these purposes.

(1) An existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions that does not meet the standards applicable to non-emergency engines.

(2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 78 FR 6706, Jan. 30, 2013]

§63.6660 In what form and how long must I keep my records?

(a) Your records must be in a form suitable and readily available for expeditious review according to §63.10(b)(1).

(b) As specified in §63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.

(c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to §63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

Other Requirements and Information

§63.6665 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§63.1 through 63.15 apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with any of the requirements of the General Provisions specified in Table 8: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing stationary RICE that combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, an existing emergency stationary RICE, or an existing limited use stationary RICE. If you own or operate any of the following RICE with a

site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in the General Provisions specified in Table 8 except for the initial notification requirements: A new stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new emergency stationary RICE, or a new limited use stationary RICE.

[75 FR 9678, Mar. 3, 2010]

§63.6670 Who implements and enforces this subpart?

(a) This subpart is implemented and enforced by the U.S. EPA, or a delegated authority such as your State, local, or tribal agency. If the U.S. EPA Administrator has delegated authority to your State, local, or tribal agency, then that agency (as well as the U.S. EPA) has the authority to implement and enforce this subpart. You should contact your U.S. EPA Regional Office to find out whether this subpart is delegated to your State, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or tribal agency under 40 CFR part 63, subpart E, the authorities contained in paragraph (c) of this section are retained by the Administrator of the U.S. EPA and are not transferred to the State, local, or tribal agency.

(c) The authorities that will not be delegated to State, local, or tribal agencies are:

(1) Approval of alternatives to the non-opacity emission limitations and operating limitations in §63.6600 under §63.6(g).

(2) Approval of major alternatives to test methods under §63.7(e)(2)(ii) and (f) and as defined in §63.90.

(3) Approval of major alternatives to monitoring under §63.8(f) and as defined in §63.90.

(4) Approval of major alternatives to recordkeeping and reporting under §63.10(f) and as defined in §63.90.

(5) Approval of a performance test which was conducted prior to the effective date of the rule, as specified in §63.6610(b).

§63.6675 What definitions apply to this subpart?

Terms used in this subpart are defined in the Clean Air Act (CAA); in 40 CFR 63.2, the General Provisions of this part; and in this section as follows:

Alaska Railbelt Grid means the service areas of the six regulated public utilities that extend from Fairbanks to Anchorage and the Kenai Peninsula. These utilities are Golden Valley Electric Association; Chugach Electric Association; Matanuska Electric Association; Homer Electric Association; Anchorage Municipal Light & Power; and the City of Seward Electric System.

Area source means any stationary source of HAP that is not a major source as defined in part 63.

Associated equipment as used in this subpart and as referred to in section 112(n)(4) of the CAA, means equipment associated with an oil or natural gas exploration or production well, and includes all equipment from the well bore to the point of custody transfer, except glycol dehydration units, storage vessels with potential for flash emissions, combustion turbines, and stationary RICE.

Backup power for renewable energy means an engine that provides backup power to a facility that generates electricity from renewable energy resources, as that term is defined in Alaska Statute 42.45.045(l)(5) (incorporated by reference, see §63.14).

Black start engine means an engine whose only purpose is to start up a combustion turbine.

CAA means the Clean Air Act (42 U.S.C. 7401 *et seq.*, as amended by Public Law 101-549, 104 Stat. 2399).

Commercial emergency stationary RICE means an emergency stationary RICE used in commercial establishments such as office buildings, hotels, stores, telecommunications facilities, restaurants, financial institutions such as banks, doctor's offices, and sports and performing arts facilities.

Compression ignition means relating to a type of stationary internal combustion engine that is not a spark ignition engine.

Custody transfer means the transfer of hydrocarbon liquids or natural gas: After processing and/or treatment in the producing operations, or from storage vessels or automatic transfer facilities or other such equipment, including product loading racks, to pipelines or any other forms of transportation. For the purposes of this subpart, the point at which such liquids or natural gas enters a natural gas processing plant is a point of custody transfer.

Deviation means any instance in which an affected source subject to this subpart, or an owner or operator of such a source:

- (1) Fails to meet any requirement or obligation established by this subpart, including but not limited to any emission limitation or operating limitation;
- (2) Fails to meet any term or condition that is adopted to implement an applicable requirement in this subpart and that is included in the operating permit for any affected source required to obtain such a permit; or
- (3) Fails to meet any emission limitation or operating limitation in this subpart during malfunction, regardless or whether or not such failure is permitted by this subpart.
- (4) Fails to satisfy the general duty to minimize emissions established by §63.6(e)(1)(i).

Diesel engine means any stationary RICE in which a high boiling point liquid fuel injected into the combustion chamber ignites when the air charge has been compressed to a temperature sufficiently high for auto-ignition. This process is also known as compression ignition.

Diesel fuel means any liquid obtained from the distillation of petroleum with a boiling point of approximately 150 to 360 degrees Celsius. One commonly used form is fuel oil number 2. Diesel fuel also includes any non-distillate fuel with comparable physical and chemical properties (e.g. biodiesel) that is suitable for use in compression ignition engines.

Digester gas means any gaseous by-product of wastewater treatment typically formed through the anaerobic decomposition of organic waste materials and composed principally of methane and CO₂.

Dual-fuel engine means any stationary RICE in which a liquid fuel (typically diesel fuel) is used for compression ignition and gaseous fuel (typically natural gas) is used as the primary fuel.

Emergency stationary RICE means any stationary reciprocating internal combustion engine that meets all of the criteria in paragraphs (1) through (3) of this definition. All emergency stationary RICE must comply with the requirements specified in §63.6640(f) in order to be considered emergency stationary RICE. If the engine does not comply with the requirements specified in §63.6640(f), then it is not considered to be an emergency stationary RICE under this subpart.

- (1) The stationary RICE is operated to provide electrical power or mechanical work during an emergency situation. Examples include stationary RICE used to produce power for critical networks or equipment (including power supplied to portions of a facility) when electric power from the local utility (or the normal power source, if the facility runs on its own power production) is interrupted, or stationary RICE used to pump water in the case of fire or flood, etc.
- (2) The stationary RICE is operated under limited circumstances for situations not included in paragraph (1) of this definition, as specified in §63.6640(f).

(3) The stationary RICE operates as part of a financial arrangement with another entity in situations not included in paragraph (1) of this definition only as allowed in §63.6640(f)(2)(ii) or (iii) and §63.6640(f)(4)(i) or (ii).

Engine startup means the time from initial start until applied load and engine and associated equipment reaches steady state or normal operation. For stationary engine with catalytic controls, engine startup means the time from initial start until applied load and engine and associated equipment, including the catalyst, reaches steady state or normal operation.

Four-stroke engine means any type of engine which completes the power cycle in two crankshaft revolutions, with intake and compression strokes in the first revolution and power and exhaust strokes in the second revolution.

Gaseous fuel means a material used for combustion which is in the gaseous state at standard atmospheric temperature and pressure conditions.

Gasoline means any fuel sold in any State for use in motor vehicles and motor vehicle engines, or nonroad or stationary engines, and commonly or commercially known or sold as gasoline.

Glycol dehydration unit means a device in which a liquid glycol (including, but not limited to, ethylene glycol, diethylene glycol, or triethylene glycol) absorbent directly contacts a natural gas stream and absorbs water in a contact tower or absorption column (absorber). The glycol contacts and absorbs water vapor and other gas stream constituents from the natural gas and becomes "rich" glycol. This glycol is then regenerated in the glycol dehydration unit reboiler. The "lean" glycol is then recycled.

Hazardous air pollutants (HAP) means any air pollutants listed in or pursuant to section 112(b) of the CAA.

Institutional emergency stationary RICE means an emergency stationary RICE used in institutional establishments such as medical centers, nursing homes, research centers, institutions of higher education, correctional facilities, elementary and secondary schools, libraries, religious establishments, police stations, and fire stations.

ISO standard day conditions means 288 degrees Kelvin (15 degrees Celsius), 60 percent relative humidity and 101.3 kilopascals pressure.

Landfill gas means a gaseous by-product of the land application of municipal refuse typically formed through the anaerobic decomposition of waste materials and composed principally of methane and CO₂.

Lean burn engine means any two-stroke or four-stroke spark ignited engine that does not meet the definition of a rich burn engine.

Limited use stationary RICE means any stationary RICE that operates less than 100 hours per year.

Liquefied petroleum gas means any liquefied hydrocarbon gas obtained as a by-product in petroleum refining of natural gas production.

Liquid fuel means any fuel in liquid form at standard temperature and pressure, including but not limited to diesel, residual/crude oil, kerosene/naphtha (jet fuel), and gasoline.

Major Source, as used in this subpart, shall have the same meaning as in §63.2, except that:

(1) Emissions from any oil or gas exploration or production well (with its associated equipment (as defined in this section)) and emissions from any pipeline compressor station or pump station shall not be aggregated with emissions from other similar units, to determine whether such emission points or stations are major sources, even when emission points are in a contiguous area or under common control;

(2) For oil and gas production facilities, emissions from processes, operations, or equipment that are not part of the same oil and gas production facility, as defined in §63.1271 of subpart HHH of this part, shall not be aggregated;

(3) For production field facilities, only HAP emissions from glycol dehydration units, storage vessel with the potential for flash emissions, combustion turbines and reciprocating internal combustion engines shall be aggregated for a major source determination; and

(4) Emissions from processes, operations, and equipment that are not part of the same natural gas transmission and storage facility, as defined in §63.1271 of subpart HHH of this part, shall not be aggregated.

Malfunction means any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner which causes, or has the potential to cause, the emission limitations in an applicable standard to be exceeded. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.

Natural gas means a naturally occurring mixture of hydrocarbon and non-hydrocarbon gases found in geologic formations beneath the Earth's surface, of which the principal constituent is methane. Natural gas may be field or pipeline quality.

Non-selective catalytic reduction (NSCR) means an add-on catalytic nitrogen oxides (NO_x) control device for rich burn engines that, in a two-step reaction, promotes the conversion of excess oxygen, NO_x, CO, and volatile organic compounds (VOC) into CO₂, nitrogen, and water.

Oil and gas production facility as used in this subpart means any grouping of equipment where hydrocarbon liquids are processed, upgraded (*i.e.*, remove impurities or other constituents to meet contract specifications), or stored prior to the point of custody transfer; or where natural gas is processed, upgraded, or stored prior to entering the natural gas transmission and storage source category. For purposes of a major source determination, facility (including a building, structure, or installation) means oil and natural gas production and processing equipment that is located within the boundaries of an individual surface site as defined in this section. Equipment that is part of a facility will typically be located within close proximity to other equipment located at the same facility. Pieces of production equipment or groupings of equipment located on different oil and gas leases, mineral fee tracts, lease tracts, subsurface or surface unit areas, surface fee tracts, surface lease tracts, or separate surface sites, whether or not connected by a road, waterway, power line or pipeline, shall not be considered part of the same facility. Examples of facilities in the oil and natural gas production source category include, but are not limited to, well sites, satellite tank batteries, central tank batteries, a compressor station that transports natural gas to a natural gas processing plant, and natural gas processing plants.

Oxidation catalyst means an add-on catalytic control device that controls CO and VOC by oxidation.

Peaking unit or engine means any standby engine intended for use during periods of high demand that are not emergencies.

Percent load means the fractional power of an engine compared to its maximum manufacturer's design capacity at engine site conditions. Percent load may range between 0 percent to above 100 percent.

Potential to emit means the maximum capacity of a stationary source to emit a pollutant under its physical and operational design. Any physical or operational limitation on the capacity of the stationary source to emit a pollutant, including air pollution control equipment and restrictions on hours of operation or on the type or amount of material combusted, stored, or processed, shall be treated as part of its design if the limitation or the effect it would have on emissions is federally enforceable. For oil and natural gas production facilities subject to subpart HH of this part, the potential to emit provisions in §63.760(a) may be used. For natural gas transmission and storage facilities subject to subpart HHH of this part, the maximum annual facility gas throughput for storage facilities may be determined according to §63.1270(a)(1) and the maximum annual throughput for transmission facilities may be determined according to §63.1270(a)(2).

Production field facility means those oil and gas production facilities located prior to the point of custody transfer.

Production well means any hole drilled in the earth from which crude oil, condensate, or field natural gas is extracted.

Propane means a colorless gas derived from petroleum and natural gas, with the molecular structure C₃H₈.

Remote stationary RICE means stationary RICE meeting any of the following criteria:

(1) Stationary RICE located in an offshore area that is beyond the line of ordinary low water along that portion of the coast of the United States that is in direct contact with the open seas and beyond the line marking the seaward limit of inland waters.

(2) Stationary RICE located on a pipeline segment that meets both of the criteria in paragraphs (2)(i) and (ii) of this definition.

(i) A pipeline segment with 10 or fewer buildings intended for human occupancy and no buildings with four or more stories within 220 yards (200 meters) on either side of the centerline of any continuous 1-mile (1.6 kilometers) length of pipeline. Each separate dwelling unit in a multiple dwelling unit building is counted as a separate building intended for human occupancy.

(ii) The pipeline segment does not lie within 100 yards (91 meters) of either a building or a small, well-defined outside area (such as a playground, recreation area, outdoor theater, or other place of public assembly) that is occupied by 20 or more persons on at least 5 days a week for 10 weeks in any 12-month period. The days and weeks need not be consecutive. The building or area is considered occupied for a full day if it is occupied for any portion of the day.

(iii) For purposes of this paragraph (2), the term pipeline segment means all parts of those physical facilities through which gas moves in transportation, including but not limited to pipe, valves, and other appurtenance attached to pipe, compressor units, metering stations, regulator stations, delivery stations, holders, and fabricated assemblies. Stationary RICE located within 50 yards (46 meters) of the pipeline segment providing power for equipment on a pipeline segment are part of the pipeline segment. Transportation of gas means the gathering, transmission, or distribution of gas by pipeline, or the storage of gas. A building is intended for human occupancy if its primary use is for a purpose involving the presence of humans.

(3) Stationary RICE that are not located on gas pipelines and that have 5 or fewer buildings intended for human occupancy and no buildings with four or more stories within a 0.25 mile radius around the engine. A building is intended for human occupancy if its primary use is for a purpose involving the presence of humans.

Residential emergency stationary RICE means an emergency stationary RICE used in residential establishments such as homes or apartment buildings.

Responsible official means responsible official as defined in 40 CFR 70.2.

Rich burn engine means any four-stroke spark ignited engine where the manufacturer's recommended operating air/fuel ratio divided by the stoichiometric air/fuel ratio at full load conditions is less than or equal to 1.1. Engines originally manufactured as rich burn engines, but modified prior to December 19, 2002 with passive emission control technology for NO_x (such as pre-combustion chambers) will be considered lean burn engines. Also, existing engines where there are no manufacturer's recommendations regarding air/fuel ratio will be considered a rich burn engine if the excess oxygen content of the exhaust at full load conditions is less than or equal to 2 percent.

Site-rated HP means the maximum manufacturer's design capacity at engine site conditions.

Spark ignition means relating to either: A gasoline-fueled engine; or any other type of engine with a spark plug (or other sparking device) and with operating characteristics significantly similar to the theoretical Otto combustion cycle. Spark ignition engines usually use a throttle to regulate intake air flow to control power during normal operation. Dual-fuel engines in which a liquid fuel (typically diesel fuel) is used for CI and gaseous fuel (typically natural gas) is used as the primary fuel at an annual average ratio of less than 2 parts diesel fuel to 100 parts total fuel on an energy equivalent basis are spark ignition engines.

Stationary reciprocating internal combustion engine (RICE) means any reciprocating internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

Stationary RICE test cell/stand means an engine test cell/stand, as defined in subpart P of this part, that tests stationary RICE.

Stoichiometric means the theoretical air-to-fuel ratio required for complete combustion.

Storage vessel with the potential for flash emissions means any storage vessel that contains a hydrocarbon liquid with a stock tank gas-to-oil ratio equal to or greater than 0.31 cubic meters per liter and an American Petroleum Institute gravity equal to or greater than 40 degrees and an actual annual average hydrocarbon liquid throughput equal to or greater than 79,500 liters per day. Flash emissions occur when dissolved hydrocarbons in the fluid evolve from solution when the fluid pressure is reduced.

Subpart means 40 CFR part 63, subpart ZZZZ.

Surface site means any combination of one or more graded pad sites, gravel pad sites, foundations, platforms, or the immediate physical location upon which equipment is physically affixed.

Two-stroke engine means a type of engine which completes the power cycle in single crankshaft revolution by combining the intake and compression operations into one stroke and the power and exhaust operations into a second stroke. This system requires auxiliary scavenging and inherently runs lean of stoichiometric.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3607, Jan. 18, 2008; 75 FR 9679, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 76 FR 12867, Mar. 9, 2011; 78 FR 6706, Jan. 30, 2013]

Table 1a to Subpart ZZZZ of Part 63—Emission Limitations for Existing, New, and Reconstructed Spark Ignition, 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions

As stated in §§63.6600 and 63.6640, you must comply with the following emission limitations at 100 percent load plus or minus 10 percent for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .
1. 4SRB stationary RICE	a. Reduce formaldehyde emissions by 76 percent or more. If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004, you may reduce formaldehyde emissions by 75 percent or more until June 15, 2007 or	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. ¹
	b. Limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O ₂	

¹ Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[75 FR 9679, Mar. 3, 2010, as amended at 75 FR 51592, Aug. 20, 2010]

Table 1b to Subpart ZZZZ of Part 63—Operating Limitations for Existing, New, and Reconstructed SI 4SRB Stationary RICE >500 HP Located at a Major Source of HAP Emissions

As stated in §§63.6600, 63.6603, 63.6630 and 63.6640, you must comply with the following operating limitations for existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following operating limitation, except during periods of startup . . .
1. existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75 percent or more, if applicable) and using NSCR; or existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O ₂ and using NSCR;	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst measured during the initial performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 750 °F and less than or equal to 1250 °F. ¹
2. existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to reduce formaldehyde emissions by 76 percent or more (or by 75 percent or more, if applicable) and not using NSCR; or	Comply with any operating limitations approved by the Administrator.
existing, new and reconstructed 4SRB stationary RICE >500 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust to 350 ppbvd or less at 15 percent O ₂ and not using NSCR.	

¹Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.8(f) for a different temperature range.

[78 FR 6706, Jan. 30, 2013]

Table 2a to Subpart ZZZZ of Part 63—Emission Limitations for New and Reconstructed 2SLB and Compression Ignition Stationary RICE >500 HP and New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions

As stated in §§63.6600 and 63.6640, you must comply with the following emission limitations for new and reconstructed lean burn and new and reconstructed compression ignition stationary RICE at 100 percent load plus or minus 10 percent:

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .
1. 2SLB stationary RICE	a. Reduce CO emissions by 58 percent or more; or b. Limit concentration of formaldehyde in the stationary RICE exhaust to 12 ppmvd or less at 15 percent O ₂ . If you commenced construction or reconstruction between December 19, 2002 and June 15, 2004, you may limit concentration of formaldehyde to 17 ppmvd or less at 15 percent O ₂ until June 15, 2007	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. ¹
2. 4SLB stationary RICE	a. Reduce CO emissions by 93 percent or more; or	
	b. Limit concentration of formaldehyde in the stationary RICE exhaust to 14 ppmvd or less at 15 percent O ₂	

For each . . .	You must meet the following emission limitation, except during periods of startup . . .	During periods of startup you must . . .
3. CI stationary RICE	a. Reduce CO emissions by 70 percent or more; or	
	b. Limit concentration of formaldehyde in the stationary RICE exhaust to 580 ppbvd or less at 15 percent O ₂	

¹Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[75 FR 9680, Mar. 3, 2010]

Table 2b to Subpart ZZZZ of Part 63—Operating Limitations for New and Reconstructed 2SLB and CI Stationary RICE >500 HP Located at a Major Source of HAP Emissions, New and Reconstructed 4SLB Stationary RICE ≥250 HP Located at a Major Source of HAP Emissions, Existing CI Stationary RICE >500 HP

As stated in §§63.6600, 63.6601, 63.6603, 63.6630, and 63.6640, you must comply with the following operating limitations for new and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions; new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions; and existing CI stationary RICE >500 HP:

For each . . .	You must meet the following operating limitation, except during periods of startup . . .
1. New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to reduce CO emissions and using an oxidation catalyst; and New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and using an oxidation catalyst.	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water at 100 percent load plus or minus 10 percent from the pressure drop across the catalyst that was measured during the initial performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 450 °F and less than or equal to 1350 °F. ¹
2. Existing CI stationary RICE >500 HP complying with the requirement to limit or reduce the concentration of CO in the stationary RICE exhaust and using an oxidation catalyst	a. maintain your catalyst so that the pressure drop across the catalyst does not change by more than 2 inches of water from the pressure drop across the catalyst that was measured during the initial performance test; and b. maintain the temperature of your stationary RICE exhaust so that the catalyst inlet temperature is greater than or equal to 450 °F and less than or equal to 1350 °F. ¹
3. New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to reduce CO emissions and not using an oxidation catalyst; and	Comply with any operating limitations approved by the Administrator.
New and reconstructed 2SLB and CI stationary RICE >500 HP located at a major source of HAP emissions and new and reconstructed 4SLB stationary RICE ≥250 HP located at a major source of HAP emissions complying with the requirement to limit the concentration of formaldehyde in the stationary RICE exhaust and not using an oxidation catalyst; and	

For each . . .	You must meet the following operating limitation, except during periods of startup . . .
existing CI stationary RICE >500 HP complying with the requirement to limit or reduce the concentration of CO in the stationary RICE exhaust and not using an oxidation catalyst.	

¹Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.8(f) for a different temperature range.

[78 FR 6707, Jan. 30, 2013]

Table 2c to Subpart ZZZZ of Part 63—Requirements for Existing Compression Ignition Stationary RICE Located at a Major Source of HAP Emissions and Existing Spark Ignition Stationary RICE ≤500 HP Located at a Major Source of HAP Emissions

As stated in §§63.6600, 63.6602, and 63.6640, you must comply with the following requirements for existing compression ignition stationary RICE located at a major source of HAP emissions and existing spark ignition stationary RICE ≤500 HP located at a major source of HAP emissions:

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
1. Emergency stationary CI RICE and black start stationary CI RICE ¹	a. Change oil and filter every 500 hours of operation or annually, whichever comes first. ² b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. ³	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply. ³
2. Non-Emergency, non-black start stationary CI RICE <100 HP	a. Change oil and filter every 1,000 hours of operation or annually, whichever comes first. ² b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. ³	
3. Non-Emergency, non-black start CI stationary RICE 100≤HP≤300 HP	Limit concentration of CO in the stationary RICE exhaust to 230 ppmvd or less at 15 percent O ₂ .	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
4. Non-Emergency, non-black start CI stationary RICE 300<HP≤500	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd or less at 15 percent O ₂ ; or b. Reduce CO emissions by 70 percent or more.	
5. Non-Emergency, non-black start stationary CI RICE >500 HP	a. Limit concentration of CO in the stationary RICE exhaust to 23 ppmvd or less at 15 percent O ₂ ; or b. Reduce CO emissions by 70 percent or more.	
6. Emergency stationary SI RICE and black start stationary SI RICE. ¹	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; ² b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary. ³	
7. Non-Emergency, non-black start stationary SI RICE <100 HP that are not 2SLB stationary RICE	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; ² b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and replace as necessary;	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary. ³	
8. Non-Emergency, non-black start 2SLB stationary SI RICE <100 HP	a. Change oil and filter every 4,320 hours of operation or annually, whichever comes first; ² b. Inspect spark plugs every 4,320 hours of operation or annually, whichever comes first, and replace as necessary;	
	c. Inspect all hoses and belts every 4,320 hours of operation or annually, whichever comes first, and replace as necessary. ³	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
9. Non-emergency, non-black start 2SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 225 ppmvd or less at 15 percent O ₂ .	
10. Non-emergency, non-black start 4SLB stationary RICE 100≤HP≤500	Limit concentration of CO in the stationary RICE exhaust to 47 ppmvd or less at 15 percent O ₂ .	
11. Non-emergency, non-black start 4SRB stationary RICE 100≤HP≤500	Limit concentration of formaldehyde in the stationary RICE exhaust to 10.3 ppmvd or less at 15 percent O ₂ .	
12. Non-emergency, non-black start stationary RICE 100≤HP≤500 which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	Limit concentration of CO in the stationary RICE exhaust to 177 ppmvd or less at 15 percent O ₂ .	

¹If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the work practice requirements on the schedule required in Table 2c of this subpart, or if performing the work practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the work practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The work practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the work practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

²Sources have the option to utilize an oil analysis program as described in §63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2c of this subpart.

³Sources can petition the Administrator pursuant to the requirements of 40 CFR 63.6(g) for alternative work practices.

[78 FR 6708, Jan. 30, 2013, as amended at 78 FR 14457, Mar. 6, 2013]

Table 2d to Subpart ZZZZ of Part 63—Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions

As stated in §§63.6603 and 63.6640, you must comply with the following requirements for existing stationary RICE located at area sources of HAP emissions:

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
1. Non-Emergency, non-black start CI stationary RICE ≤300 HP	a. Change oil and filter every 1,000 hours of operation or annually, whichever comes first; ¹ b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.
2. Non-Emergency, non-black start CI stationary RICE 300<HP≤500	a. Limit concentration of CO in the stationary RICE exhaust to 49 ppmvd at 15 percent O ₂ ; or	
	b. Reduce CO emissions by 70 percent or more.	
3. Non-Emergency, non-black start CI stationary RICE >500 HP	a. Limit concentration of CO in the stationary RICE exhaust to 23 ppmvd at 15 percent O ₂ ; or	
	b. Reduce CO emissions by 70 percent or more.	
4. Emergency stationary CI RICE and black start stationary CI RICE. ²	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; ¹	
	b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
5. Emergency stationary SI RICE; black start stationary SI RICE; non-emergency, non-black start 4SLB stationary RICE >500 HP that operate 24 hours or less per calendar year; non-emergency, non-black start 4SRB stationary RICE >500 HP that operate 24 hours or less per calendar year. ²	a. Change oil and filter every 500 hours of operation or annually, whichever comes first; ¹ ; b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.	
6. Non-emergency, non-black start 2SLB stationary RICE	a. Change oil and filter every 4,320 hours of operation or annually, whichever comes first; ¹	
	b. Inspect spark plugs every 4,320 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 4,320 hours of operation or annually, whichever comes first, and replace as necessary.	
7. Non-emergency, non-black start 4SLB stationary RICE ≤500 HP	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; ¹	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	
8. Non-emergency, non-black start 4SLB remote stationary RICE >500 HP	a. Change oil and filter every 2,160 hours of operation or annually, whichever comes first; ¹	
	b. Inspect spark plugs every 2,160 hours of operation or annually, whichever comes first, and replace as necessary; and	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
	c. Inspect all hoses and belts every 2,160 hours of operation or annually, whichever comes first, and replace as necessary.	
9. Non-emergency, non-black start 4SLB stationary RICE >500 HP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Install an oxidation catalyst to reduce HAP emissions from the stationary RICE.	
10. Non-emergency, non-black start 4SRB stationary RICE ≤500 HP	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; ¹	
	b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	
11. Non-emergency, non-black start 4SRB remote stationary RICE >500 HP	a. Change oil and filter every 2,160 hours of operation or annually, whichever comes first; ¹	
	b. Inspect spark plugs every 2,160 hours of operation or annually, whichever comes first, and replace as necessary; and	
	c. Inspect all hoses and belts every 2,160 hours of operation or annually, whichever comes first, and replace as necessary.	
12. Non-emergency, non-black start 4SRB stationary RICE >500 HP that are not remote stationary RICE and that operate more than 24 hours per calendar year	Install NSCR to reduce HAP emissions from the stationary RICE.	
13. Non-emergency, non-black start stationary RICE which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis	a. Change oil and filter every 1,440 hours of operation or annually, whichever comes first; ¹ b. Inspect spark plugs every 1,440 hours of operation or annually, whichever comes first, and replace as necessary; and	

For each . . .	You must meet the following requirement, except during periods of startup . . .	During periods of startup you must . . .
	c. Inspect all hoses and belts every 1,440 hours of operation or annually, whichever comes first, and replace as necessary.	

¹Sources have the option to utilize an oil analysis program as described in §63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2d of this subpart.

²If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in Table 2d of this subpart, or if performing the management practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The management practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

[78 FR 6709, Jan. 30, 2013]

Table 3 to Subpart ZZZZ of Part 63—Subsequent Performance Tests

As stated in §§63.6615 and 63.6620, you must comply with the following subsequent performance test requirements:

For each . . .	Complying with the requirement to . . .	You must . . .
1. New or reconstructed 2SLB stationary RICE >500 HP located at major sources; new or reconstructed 4SLB stationary RICE ≥250 HP located at major sources; and new or reconstructed CI stationary RICE >500 HP located at major sources	Reduce CO emissions and not using a CEMS	Conduct subsequent performance tests semiannually. ¹
2. 4SRB stationary RICE ≥5,000 HP located at major sources	Reduce formaldehyde emissions	Conduct subsequent performance tests semiannually. ¹
3. Stationary RICE >500 HP located at major sources and new or reconstructed 4SLB stationary RICE 250≤HP≤500 located at major sources	Limit the concentration of formaldehyde in the stationary RICE exhaust	Conduct subsequent performance tests semiannually. ¹
4. Existing non-emergency, non-black start CI stationary RICE >500 HP that are not limited use stationary RICE	Limit or reduce CO emissions and not using a CEMS	Conduct subsequent performance tests every 8,760 hours or 3 years, whichever comes first.
5. Existing non-emergency, non-black start CI stationary RICE >500 HP that are limited use stationary RICE	Limit or reduce CO emissions and not using a CEMS	Conduct subsequent performance tests every 8,760 hours or 5 years, whichever comes first.

¹After you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.

[78 FR 6711, Jan. 30, 2013]

Table 4 to Subpart ZZZZ of Part 63—Requirements for Performance Tests

As stated in §§63.6610, 63.6611, 63.6620, and 63.6640, you must comply with the following requirements for performance tests for stationary RICE:

Table 4 to Subpart ZZZZ of Part 63—Requirements for Performance Tests

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
1. 2SLB, 4SLB, and CI stationary RICE	a. reduce CO emissions	i. Select the sampling port location and the number/location of traverse points at the inlet and outlet of the control device; and		(a) For CO and O ₂ measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line ('3-point long line'). If the duct is >12 inches in diameter <i>and</i> the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, appendix A-1, the duct may be sampled at '3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, appendix A-4.
		ii. Measure the O ₂ at the inlet and outlet of the control device; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM Method D6522-00 (Reapproved 2005) ^{ac} (heated probe not necessary)	(b) Measurements to determine O ₂ must be made at the same time as the measurements for CO concentration.
		iii. Measure the CO at the inlet and the outlet of the control device	(1) ASTM D6522-00 (Reapproved 2005) ^{abc} (heated probe not necessary) or Method 10 of 40 CFR part 60, appendix A-4	(c) The CO concentration must be at 15 percent O ₂ , dry basis.

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
2. 4SRB stationary RICE	a. reduce formaldehyde emissions	i. Select the sampling port location and the number/location of traverse points at the inlet and outlet of the control device; and		(a) For formaldehyde, O ₂ , and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line (‘3-point long line’). If the duct is >12 inches in diameter <i>and</i> the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, appendix A, the duct may be sampled at ‘3-point long line’; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, appendix A.
		ii. Measure O ₂ at the inlet and outlet of the control device; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM Method D6522-00 (Reapproved 2005) ^a (heated probe not necessary)	(a) Measurements to determine O ₂ concentration must be made at the same time as the measurements for formaldehyde or THC concentration.
		iii. Measure moisture content at the inlet and outlet of the control device; and	(1) Method 4 of 40 CFR part 60, appendix A-3, or Method 320 of 40 CFR part 63, appendix A, or ASTM D 6348-03 ^a	(a) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde or THC concentration.
		iv. If demonstrating compliance with the formaldehyde percent reduction requirement, measure formaldehyde at the inlet and the outlet of the control device	(1) Method 320 or 323 of 40 CFR part 63, appendix A; or ASTM D6348-03 ^a , provided in ASTM D6348-03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	(a) Formaldehyde concentration must be at 15 percent O ₂ , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.
		v. If demonstrating compliance with the THC percent reduction requirement, measure THC at the inlet and the outlet of the control device	(1) Method 25A, reported as propane, of 40 CFR part 60, appendix A-7	(a) THC concentration must be at 15 percent O ₂ , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.

For each . . .	Complying with the requirement to . . .	You must . . .	Using . . .	According to the following requirements . . .
3. Stationary RICE	a. limit the concentration of formaldehyde or CO in the stationary RICE exhaust	i. Select the sampling port location and the number/location of traverse points at the exhaust of the stationary RICE; and		(a) For formaldehyde, CO, O ₂ , and moisture measurement, ducts ≤6 inches in diameter may be sampled at a single point located at the duct centroid and ducts >6 and ≤12 inches in diameter may be sampled at 3 traverse points located at 16.7, 50.0, and 83.3% of the measurement line ('3-point long line'). If the duct is >12 inches in diameter <i>and</i> the sampling port location meets the two and half-diameter criterion of Section 11.1.1 of Method 1 of 40 CFR part 60, appendix A, the duct may be sampled at '3-point long line'; otherwise, conduct the stratification testing and select sampling points according to Section 8.1.2 of Method 7E of 40 CFR part 60, appendix A. If using a control device, the sampling site must be located at the outlet of the control device.
		ii. Determine the O ₂ concentration of the stationary RICE exhaust at the sampling port location; and	(1) Method 3 or 3A or 3B of 40 CFR part 60, appendix A-2, or ASTM Method D6522-00 (Reapproved 2005) ^a (heated probe not necessary)	(a) Measurements to determine O ₂ concentration must be made at the same time and location as the measurements for formaldehyde or CO concentration.
		iii. Measure moisture content of the stationary RICE exhaust at the sampling port location; and	(1) Method 4 of 40 CFR part 60, appendix A-3, or Method 320 of 40 CFR part 63, appendix A, or ASTM D 6348-03 ^a	(a) Measurements to determine moisture content must be made at the same time and location as the measurements for formaldehyde or CO concentration.
		iv. Measure formaldehyde at the exhaust of the stationary RICE; or	(1) Method 320 or 323 of 40 CFR part 63, appendix A; or ASTM D6348-03 ^a , provided in ASTM D6348-03 Annex A5 (Analyte Spiking Technique), the percent R must be greater than or equal to 70 and less than or equal to 130	(a) Formaldehyde concentration must be at 15 percent O ₂ , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.
		v. measure CO at the exhaust of the stationary RICE	(1) Method 10 of 40 CFR part 60, appendix A-4, ASTM Method D6522-00 (2005) ^{ac} , Method 320 of 40 CFR part 63, appendix A, or ASTM D6348-03 ^a	(a) CO concentration must be at 15 percent O ₂ , dry basis. Results of this test consist of the average of the three 1-hour or longer runs.

^aYou may also use Methods 3A and 10 as options to ASTM-D6522-00 (2005). You may obtain a copy of ASTM-D6522-00 (2005) from at least one of the following addresses: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, or University Microfilms International, 300 North Zeeb Road, Ann Arbor, MI 48106.

^bYou may obtain a copy of ASTM-D6348-03 from at least one of the following addresses: American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, or University Microfilms International, 300 North Zeeb Road, Ann Arbor, MI 48106.

[79 FR 11290, Feb. 27, 2014]

Table 5 to Subpart ZZZZ of Part 63—Initial Compliance With Emission Limitations, Operating Limitations, and Other Requirements

As stated in §§63.6612, 63.6625 and 63.6630, you must initially comply with the emission and operating limitations as required by the following:

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions and using oxidation catalyst, and using a CPMS	i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
2. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, using oxidation catalyst, and using a CPMS	i. The average CO concentration determined from the initial performance test is less than or equal to the CO emission limitation; and
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
3. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions and not using oxidation catalyst	i. The average reduction of emissions of CO determined from the initial performance test achieves the required CO percent reduction; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and iii. You have recorded the approved operating parameters (if any) during the initial performance test.

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
4. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, and not using oxidation catalyst	i. The average CO concentration determined from the initial performance test is less than or equal to the CO emission limitation; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
5. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Reduce CO emissions, and using a CEMS	i. You have installed a CEMS to continuously monitor CO and either O ₂ or CO ₂ at both the inlet and outlet of the oxidation catalyst according to the requirements in §63.6625(a); and ii. You have conducted a performance evaluation of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B; and
		iii. The average reduction of CO calculated using §63.6620 equals or exceeds the required percent reduction. The initial test comprises the first 4-hour period after successful validation of the CEMS. Compliance is based on the average percent reduction achieved during the 4-hour period.
6. Non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP located at an area source of HAP	a. Limit the concentration of CO, and using a CEMS	i. You have installed a CEMS to continuously monitor CO and either O ₂ or CO ₂ at the outlet of the oxidation catalyst according to the requirements in §63.6625(a); and
		ii. You have conducted a performance evaluation of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B; and
		iii. The average concentration of CO calculated using §63.6620 is less than or equal to the CO emission limitation. The initial test comprises the first 4-hour period after successful validation of the CEMS. Compliance is based on the average concentration measured during the 4-hour period.
7. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and using NSCR	i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction, or the average reduction of emissions of THC determined from the initial performance test is equal to or greater than 30 percent; and

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
8. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and not using NSCR	i. The average reduction of emissions of formaldehyde determined from the initial performance test is equal to or greater than the required formaldehyde percent reduction or the average reduction of emissions of THC determined from the initial performance test is equal to or greater than 30 percent; and
		ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
9. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or NSCR	i. The average formaldehyde concentration, corrected to 15 percent O ₂ , dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b); and
		iii. You have recorded the catalyst pressure drop and catalyst inlet temperature during the initial performance test.
10. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP, and existing non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. The average formaldehyde concentration, corrected to 15 percent O ₂ , dry basis, from the three test runs is less than or equal to the formaldehyde emission limitation; and ii. You have installed a CPMS to continuously monitor operating parameters approved by the Administrator (if any) according to the requirements in §63.6625(b); and
		iii. You have recorded the approved operating parameters (if any) during the initial performance test.
11. Existing non-emergency stationary RICE 100≤HP≤500 located at a major source of HAP, and existing non-emergency stationary CI RICE 300<HP≤500 located at an area source of HAP	a. Reduce CO emissions	i. The average reduction of emissions of CO or formaldehyde, as applicable determined from the initial performance test is equal to or greater than the required CO or formaldehyde, as applicable, percent reduction.

For each . . .	Complying with the requirement to . . .	You have demonstrated initial compliance if . . .
12. Existing non-emergency stationary RICE 100≤HP≤500 located at a major source of HAP, and existing non-emergency stationary CI RICE 300<HP≤500 located at an area source of HAP	a. Limit the concentration of formaldehyde or CO in the stationary RICE exhaust	i. The average formaldehyde or CO concentration, as applicable, corrected to 15 percent O ₂ , dry basis, from the three test runs is less than or equal to the formaldehyde or CO emission limitation, as applicable.
13. Existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install an oxidation catalyst	i. You have conducted an initial compliance demonstration as specified in §63.6630(e) to show that the average reduction of emissions of CO is 93 percent or more, or the average CO concentration is less than or equal to 47 ppmvd at 15 percent O ₂ ;
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b), or you have installed equipment to automatically shut down the engine if the catalyst inlet temperature exceeds 1350 °F.
14. Existing non-emergency 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year	a. Install NSCR	i. You have conducted an initial compliance demonstration as specified in §63.6630(e) to show that the average reduction of emissions of CO is 75 percent or more, the average CO concentration is less than or equal to 270 ppmvd at 15 percent O ₂ , or the average reduction of emissions of THC is 30 percent or more;
		ii. You have installed a CPMS to continuously monitor catalyst inlet temperature according to the requirements in §63.6625(b), or you have installed equipment to automatically shut down the engine if the catalyst inlet temperature exceeds 1250 °F.

[78 FR 6712, Jan. 30, 2013]

Table 6 to Subpart ZZZZ of Part 63—Continuous Compliance With Emission Limitations, and Other Requirements

As stated in §63.6640, you must continuously comply with the emissions and operating limitations and work or management practices as required by the following:

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
1. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and using an oxidation catalyst, and using a CPMS	i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved ^a ; and ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and iii. Reducing these data to 4-hour rolling averages; and

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
2. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, and new or reconstructed non-emergency CI stationary RICE >500 HP located at a major source of HAP	a. Reduce CO emissions and not using an oxidation catalyst, and using a CPMS	i. Conducting semiannual performance tests for CO to demonstrate that the required CO percent reduction is achieved ^a ; and ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
3. New or reconstructed non-emergency 2SLB stationary RICE >500 HP located at a major source of HAP, new or reconstructed non-emergency 4SLB stationary RICE ≥250 HP located at a major source of HAP, new or reconstructed non-emergency stationary CI RICE >500 HP located at a major source of HAP, and existing non-emergency stationary CI RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and using a CEMS	i. Collecting the monitoring data according to §63.6625(a), reducing the measurements to 1-hour averages, calculating the percent reduction or concentration of CO emissions according to §63.6620; and ii. Demonstrating that the catalyst achieves the required percent reduction of CO emissions over the 4-hour averaging period, or that the emission remain at or below the CO concentration limit; and
		iii. Conducting an annual RATA of your CEMS using PS 3 and 4A of 40 CFR part 60, appendix B, as well as daily and periodic data quality checks in accordance with 40 CFR part 60, appendix F, procedure 1.
4. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and using NSCR	i. Collecting the catalyst inlet temperature data according to §63.6625(b); and
		ii. Reducing these data to 4-hour rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		iv. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
5. Non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP	a. Reduce formaldehyde emissions and not using NSCR	i. Collecting the approved operating parameter (if any) data according to §63.6625(b); and
		ii. Reducing these data to 4-hour rolling averages; and
		iii. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
6. Non-emergency 4SRB stationary RICE with a brake HP ≥5,000 located at a major source of HAP	a. Reduce formaldehyde emissions	Conducting semiannual performance tests for formaldehyde to demonstrate that the required formaldehyde percent reduction is achieved, or to demonstrate that the average reduction of emissions of THC determined from the performance test is equal to or greater than 30 percent. ^a
7. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit ^a ; and
		ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
8. New or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP	a. Limit the concentration of formaldehyde in the stationary RICE exhaust and not using oxidation catalyst or NSCR	i. Conducting semiannual performance tests for formaldehyde to demonstrate that your emissions remain at or below the formaldehyde concentration limit ^a ; and
		ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
<p>9. Existing emergency and black start stationary RICE ≤500 HP located at a major source of HAP, existing non-emergency stationary RICE <100 HP located at a major source of HAP, existing emergency and black start stationary RICE located at an area source of HAP, existing non-emergency stationary CI RICE ≤300 HP located at an area source of HAP, existing non-emergency 2SLB stationary RICE located at an area source of HAP, existing non-emergency stationary SI RICE located at an area source of HAP which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, existing non-emergency 4SLB and 4SRB stationary RICE ≤500 HP located at an area source of HAP, existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that operate 24 hours or less per calendar year, and existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are remote stationary RICE</p>	<p>a. Work or Management practices</p>	<p>i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.</p>
<p>10. Existing stationary CI RICE >500 HP that are not limited use stationary RICE</p>	<p>a. Reduce CO emissions, or limit the concentration of CO in the stationary RICE exhaust, and using oxidation catalyst</p>	<p>i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and</p>
		<p>ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and</p>
		<p>iii. Reducing these data to 4-hour rolling averages; and</p>
		<p>iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and</p>
		<p>v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.</p>
<p>11. Existing stationary CI RICE >500 HP that are not limited use stationary RICE</p>	<p>a. Reduce CO emissions, or limit the concentration of CO in the stationary RICE exhaust, and not using oxidation catalyst</p>	<p>i. Conducting performance tests every 8,760 hours or 3 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and</p>
		<p>ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and</p>

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.
12. Existing limited use CI stationary RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and using an oxidation catalyst	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the catalyst inlet temperature data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the catalyst inlet temperature; and
		v. Measuring the pressure drop across the catalyst once per month and demonstrating that the pressure drop across the catalyst is within the operating limitation established during the performance test.
13. Existing limited use CI stationary RICE >500 HP	a. Reduce CO emissions or limit the concentration of CO in the stationary RICE exhaust, and not using an oxidation catalyst	i. Conducting performance tests every 8,760 hours or 5 years, whichever comes first, for CO or formaldehyde, as appropriate, to demonstrate that the required CO or formaldehyde, as appropriate, percent reduction is achieved or that your emissions remain at or below the CO or formaldehyde concentration limit; and
		ii. Collecting the approved operating parameter (if any) data according to §63.6625(b); and
		iii. Reducing these data to 4-hour rolling averages; and
		iv. Maintaining the 4-hour rolling averages within the operating limitations for the operating parameters established during the performance test.

For each . . .	Complying with the requirement to . . .	You must demonstrate continuous compliance by . . .
<p>14. Existing non-emergency 4SLB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year</p>	<p>a. Install an oxidation catalyst</p>	<p>i. Conducting annual compliance demonstrations as specified in §63.6640(c) to show that the average reduction of emissions of CO is 93 percent or more, or the average CO concentration is less than or equal to 47 ppmvd at 15 percent O₂; and either ii. Collecting the catalyst inlet temperature data according to §63.6625(b), reducing these data to 4-hour rolling averages; and maintaining the 4-hour rolling averages within the limitation of greater than 450 °F and less than or equal to 1350 °F for the catalyst inlet temperature; or iii. Immediately shutting down the engine if the catalyst inlet temperature exceeds 1350 °F.</p>
<p>15. Existing non-emergency 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that are operated more than 24 hours per calendar year</p>	<p>a. Install NSCR</p>	<p>i. Conducting annual compliance demonstrations as specified in §63.6640(c) to show that the average reduction of emissions of CO is 75 percent or more, the average CO concentration is less than or equal to 270 ppmvd at 15 percent O₂, or the average reduction of emissions of THC is 30 percent or more; and either ii. Collecting the catalyst inlet temperature data according to §63.6625(b), reducing these data to 4-hour rolling averages; and maintaining the 4-hour rolling averages within the limitation of greater than or equal to 750 °F and less than or equal to 1250 °F for the catalyst inlet temperature; or iii. Immediately shutting down the engine if the catalyst inlet temperature exceeds 1250 °F.</p>

^aAfter you have demonstrated compliance for two consecutive tests, you may reduce the frequency of subsequent performance tests to annually. If the results of any subsequent annual performance test indicate the stationary RICE is not in compliance with the CO or formaldehyde emission limitation, or you deviate from any of your operating limitations, you must resume semiannual performance tests.

[78 FR 6715, Jan. 30, 2013]

Table 7 to Subpart ZZZZ of Part 63—Requirements for Reports

As stated in §63.6650, you must comply with the following requirements for reports:

For each . . .	You must submit a . . .	The report must contain . . .	You must submit the report . . .
<p>1. Existing non-emergency, non-black start stationary RICE 100≤HP≤500 located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE >500 HP located at a major source of HAP; existing non-emergency 4SRB stationary RICE >500 HP located at a major source of HAP; existing non-emergency, non-black start stationary CI RICE >300 HP located at an area source of HAP; new or reconstructed non-emergency stationary RICE >500 HP located at a major source of HAP; and new or reconstructed non-emergency 4SLB stationary RICE 250≤HP≤500 located at a major source of HAP</p>	<p>Compliance report</p>	<p>a. If there are no deviations from any emission limitations or operating limitations that apply to you, a statement that there were no deviations from the emission limitations or operating limitations during the reporting period. If there were no periods during which the CMS, including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), a statement that there were not periods during which the CMS was out-of-control during the reporting period; or</p>	<p>i. Semiannually according to the requirements in §63.6650(b)(1)-(5) for engines that are not limited use stationary RICE subject to numerical emission limitations; and ii. Annually according to the requirements in §63.6650(b)(6)-(9) for engines that are limited use stationary RICE subject to numerical emission limitations.</p>
		<p>b. If you had a deviation from any emission limitation or operating limitation during the reporting period, the information in §63.6650(d). If there were periods during which the CMS, including CEMS and CPMS, was out-of-control, as specified in §63.8(c)(7), the information in §63.6650(e); or</p>	<p>i. Semiannually according to the requirements in §63.6650(b).</p>
		<p>c. If you had a malfunction during the reporting period, the information in §63.6650(c)(4).</p>	<p>i. Semiannually according to the requirements in §63.6650(b).</p>
<p>2. New or reconstructed non-emergency stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis</p>	<p>Report</p>	<p>a. The fuel flow rate of each fuel and the heating values that were used in your calculations, and you must demonstrate that the percentage of heat input provided by landfill gas or digester gas, is equivalent to 10 percent or more of the gross heat input on an annual basis; and</p>	<p>i. Annually, according to the requirements in §63.6650.</p>
		<p>b. The operating limits provided in your federally enforceable permit, and any deviations from these limits; and</p>	<p>i. See item 2.a.i.</p>
		<p>c. Any problems or errors suspected with the meters.</p>	<p>i. See item 2.a.i.</p>
<p>3. Existing non-emergency, non-black start 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are not remote stationary RICE and that operate more than 24 hours per calendar year</p>	<p>Compliance report</p>	<p>a. The results of the annual compliance demonstration, if conducted during the reporting period.</p>	<p>i. Semiannually according to the requirements in §63.6650(b)(1)-(5).</p>

For each . . .	You must submit a . . .	The report must contain . . .	You must submit the report . . .
4. Emergency stationary RICE that operate or are contractually obligated to be available for more than 15 hours per year for the purposes specified in §63.6640(f)(2)(ii) and (iii) or that operate for the purposes specified in §63.6640(f)(4)(ii)	Report	a. The information in §63.6650(h)(1)	i. annually according to the requirements in §63.6650(h)(2)-(3).

[78 FR 6719, Jan. 30, 2013]

Table 8 to Subpart ZZZZ of Part 63—Applicability of General Provisions to Subpart ZZZZ.

As stated in §63.6665, you must comply with the following applicable general provisions.

General provisions citation	Subject of citation	Applies to subpart	Explanation
§63.1	General applicability of the General Provisions	Yes.	
§63.2	Definitions	Yes	Additional terms defined in §63.6675.
§63.3	Units and abbreviations	Yes.	
§63.4	Prohibited activities and circumvention	Yes.	
§63.5	Construction and reconstruction	Yes.	
§63.6(a)	Applicability	Yes.	
§63.6(b)(1)-(4)	Compliance dates for new and reconstructed sources	Yes.	
§63.6(b)(5)	Notification	Yes.	
§63.6(b)(6)	[Reserved]		
§63.6(b)(7)	Compliance dates for new and reconstructed area sources that become major sources	Yes.	
§63.6(c)(1)-(2)	Compliance dates for existing sources	Yes.	
§63.6(c)(3)-(4)	[Reserved]		
§63.6(c)(5)	Compliance dates for existing area sources that become major sources	Yes.	
§63.6(d)	[Reserved]		
§63.6(e)	Operation and maintenance	No.	
§63.6(f)(1)	Applicability of standards	No.	
§63.6(f)(2)	Methods for determining compliance	Yes.	
§63.6(f)(3)	Finding of compliance	Yes.	
§63.6(g)(1)-(3)	Use of alternate standard	Yes.	
§63.6(h)	Opacity and visible emission standards	No	Subpart ZZZZ does not contain opacity or visible emission standards.
§63.6(i)	Compliance extension procedures and criteria	Yes.	

General provisions citation	Subject of citation	Applies to subpart	Explanation
§63.6(j)	Presidential compliance exemption	Yes.	
§63.7(a)(1)-(2)	Performance test dates	Yes	Subpart ZZZZ contains performance test dates at §§63.6610, 63.6611, and 63.6612.
§63.7(a)(3)	CAA section 114 authority	Yes.	
§63.7(b)(1)	Notification of performance test	Yes	Except that §63.7(b)(1) only applies as specified in §63.6645.
§63.7(b)(2)	Notification of rescheduling	Yes	Except that §63.7(b)(2) only applies as specified in §63.6645.
§63.7(c)	Quality assurance/test plan	Yes	Except that §63.7(c) only applies as specified in §63.6645.
§63.7(d)	Testing facilities	Yes.	
§63.7(e)(1)	Conditions for conducting performance tests	No.	Subpart ZZZZ specifies conditions for conducting performance tests at §63.6620.
§63.7(e)(2)	Conduct of performance tests and reduction of data	Yes	Subpart ZZZZ specifies test methods at §63.6620.
§63.7(e)(3)	Test run duration	Yes.	
§63.7(e)(4)	Administrator may require other testing under section 114 of the CAA	Yes.	
§63.7(f)	Alternative test method provisions	Yes.	
§63.7(g)	Performance test data analysis, recordkeeping, and reporting	Yes.	
§63.7(h)	Waiver of tests	Yes.	
§63.8(a)(1)	Applicability of monitoring requirements	Yes	Subpart ZZZZ contains specific requirements for monitoring at §63.6625.
§63.8(a)(2)	Performance specifications	Yes.	
§63.8(a)(3)	[Reserved]		
§63.8(a)(4)	Monitoring for control devices	No.	
§63.8(b)(1)	Monitoring	Yes.	
§63.8(b)(2)-(3)	Multiple effluents and multiple monitoring systems	Yes.	
§63.8(c)(1)	Monitoring system operation and maintenance	Yes.	
§63.8(c)(1)(i)	Routine and predictable SSM	No	
§63.8(c)(1)(ii)	SSM not in Startup Shutdown Malfunction Plan	Yes.	
§63.8(c)(1)(iii)	Compliance with operation and maintenance requirements	No	
§63.8(c)(2)-(3)	Monitoring system installation	Yes.	
§63.8(c)(4)	Continuous monitoring system (CMS) requirements	Yes	Except that subpart ZZZZ does not require Continuous Opacity Monitoring System (COMS).
§63.8(c)(5)	COMS minimum procedures	No	Subpart ZZZZ does not require COMS.
§63.8(c)(6)-(8)	CMS requirements	Yes	Except that subpart ZZZZ does not require COMS.

General provisions citation	Subject of citation	Applies to subpart	Explanation
§63.8(d)	CMS quality control	Yes.	
§63.8(e)	CMS performance evaluation	Yes	Except for §63.8(e)(5)(ii), which applies to COMS.
		Except that §63.8(e) only applies as specified in §63.6645.	
§63.8(f)(1)-(5)	Alternative monitoring method	Yes	Except that §63.8(f)(4) only applies as specified in §63.6645.
§63.8(f)(6)	Alternative to relative accuracy test	Yes	Except that §63.8(f)(6) only applies as specified in §63.6645.
§63.8(g)	Data reduction	Yes	Except that provisions for COMS are not applicable. Averaging periods for demonstrating compliance are specified at §§63.6635 and 63.6640.
§63.9(a)	Applicability and State delegation of notification requirements	Yes.	
§63.9(b)(1)-(5)	Initial notifications	Yes	Except that §63.9(b)(3) is reserved.
		Except that §63.9(b) only applies as specified in §63.6645.	
§63.9(c)	Request for compliance extension	Yes	Except that §63.9(c) only applies as specified in §63.6645.
§63.9(d)	Notification of special compliance requirements for new sources	Yes	Except that §63.9(d) only applies as specified in §63.6645.
§63.9(e)	Notification of performance test	Yes	Except that §63.9(e) only applies as specified in §63.6645.
§63.9(f)	Notification of visible emission (VE)/opacity test	No	Subpart ZZZZ does not contain opacity or VE standards.
§63.9(g)(1)	Notification of performance evaluation	Yes	Except that §63.9(g) only applies as specified in §63.6645.
§63.9(g)(2)	Notification of use of COMS data	No	Subpart ZZZZ does not contain opacity or VE standards.
§63.9(g)(3)	Notification that criterion for alternative to RATA is exceeded	Yes	If alternative is in use.
		Except that §63.9(g) only applies as specified in §63.6645.	
§63.9(h)(1)-(6)	Notification of compliance status	Yes	Except that notifications for sources using a CEMS are due 30 days after completion of performance evaluations. §63.9(h)(4) is reserved.
			Except that §63.9(h) only applies as specified in §63.6645.
§63.9(i)	Adjustment of submittal deadlines	Yes.	
§63.9(j)	Change in previous information	Yes.	
§63.10(a)	Administrative provisions for recordkeeping/reporting	Yes.	

General provisions citation	Subject of citation	Applies to subpart	Explanation
§63.10(b)(1)	Record retention	Yes	Except that the most recent 2 years of data do not have to be retained on site.
§63.10(b)(2)(i)-(v)	Records related to SSM	No.	
§63.10(b)(2)(vi)-(xi)	Records	Yes.	
§63.10(b)(2)(xii)	Record when under waiver	Yes.	
§63.10(b)(2)(xiii)	Records when using alternative to RATA	Yes	For CO standard if using RATA alternative.
§63.10(b)(2)(xiv)	Records of supporting documentation	Yes.	
§63.10(b)(3)	Records of applicability determination	Yes.	
§63.10(c)	Additional records for sources using CEMS	Yes	Except that §63.10(c)(2)-(4) and (9) are reserved.
§63.10(d)(1)	General reporting requirements	Yes.	
§63.10(d)(2)	Report of performance test results	Yes.	
§63.10(d)(3)	Reporting opacity or VE observations	No	Subpart ZZZZ does not contain opacity or VE standards.
§63.10(d)(4)	Progress reports	Yes.	
§63.10(d)(5)	Startup, shutdown, and malfunction reports	No.	
§63.10(e)(1) and (2)(i)	Additional CMS Reports	Yes.	
§63.10(e)(2)(ii)	COMS-related report	No	Subpart ZZZZ does not require COMS.
§63.10(e)(3)	Excess emission and parameter exceedances reports	Yes.	Except that §63.10(e)(3)(i) (C) is reserved.
§63.10(e)(4)	Reporting COMS data	No	Subpart ZZZZ does not require COMS.
§63.10(f)	Waiver for recordkeeping/reporting	Yes.	
§63.11	Flares	No.	
§63.12	State authority and delegations	Yes.	
§63.13	Addresses	Yes.	
§63.14	Incorporation by reference	Yes.	
§63.15	Availability of information	Yes.	

[75 FR 9688, Mar. 3, 2010, as amended at 78 FR 6720, Jan. 30, 2013]

Appendix A—Protocol for Using an Electrochemical Analyzer to Determine Oxygen and Carbon Monoxide Concentrations From Certain Engines

1.0 Scope and Application. What is this Protocol?

This protocol is a procedure for using portable electrochemical (EC) cells for measuring carbon monoxide (CO) and oxygen (O₂) concentrations in controlled and uncontrolled emissions from existing stationary 4-stroke lean burn and 4-stroke rich burn reciprocating internal combustion engines as specified in the applicable rule.

1.1 Analytes. What does this protocol determine?

This protocol measures the engine exhaust gas concentrations of carbon monoxide (CO) and oxygen (O₂).

Analyte	CAS No.	Sensitivity
Carbon monoxide (CO)	630-08-0	Minimum detectable limit should be 2 percent of the nominal range or 1 ppm, whichever is less restrictive.
Oxygen (O ₂)	7782-44-7	

1.2 Applicability. When is this protocol acceptable?

This protocol is applicable to 40 CFR part 63, subpart ZZZZ. Because of inherent cross sensitivities of EC cells, you must not apply this protocol to other emissions sources without specific instruction to that effect.

1.3 Data Quality Objectives. How good must my collected data be?

Refer to Section 13 to verify and document acceptable analyzer performance.

1.4 Range. What is the targeted analytical range for this protocol?

The measurement system and EC cell design(s) conforming to this protocol will determine the analytical range for each gas component. The nominal ranges are defined by choosing up-scale calibration gas concentrations near the maximum anticipated flue gas concentrations for CO and O₂, or no more than twice the permitted CO level.

1.5 Sensitivity. What minimum detectable limit will this protocol yield for a particular gas component?

The minimum detectable limit depends on the nominal range and resolution of the specific EC cell used, and the signal to noise ratio of the measurement system. The minimum detectable limit should be 2 percent of the nominal range or 1 ppm, whichever is less restrictive.

2.0 Summary of Protocol

In this protocol, a gas sample is extracted from an engine exhaust system and then conveyed to a portable EC analyzer for measurement of CO and O₂ gas concentrations. This method provides measurement system performance specifications and sampling protocols to ensure reliable data. You may use additions to, or modifications of vendor supplied measurement systems (e.g., heated or unheated sample lines, thermocouples, flow meters, selective gas scrubbers, etc.) to meet the design specifications of this protocol. Do not make changes to the measurement system from the as-verified configuration (Section 3.12).

3.0 Definitions

3.1 Measurement System. The total equipment required for the measurement of CO and O₂ concentrations. The measurement system consists of the following major subsystems:

3.1.1 Data Recorder. A strip chart recorder, computer or digital recorder for logging measurement data from the analyzer output. You may record measurement data from the digital data display manually or electronically.

3.1.2 Electrochemical (EC) Cell. A device, similar to a fuel cell, used to sense the presence of a specific analyte and generate an electrical current output proportional to the analyte concentration.

3.1.3 Interference Gas Scrubber. A device used to remove or neutralize chemical compounds that may interfere with the selective operation of an EC cell.

3.1.4 Moisture Removal System. Any device used to reduce the concentration of moisture in the sample stream so as to protect the EC cells from the damaging effects of condensation and to minimize errors in measurements caused by the scrubbing of soluble gases.

3.1.5 Sample Interface. The portion of the system used for one or more of the following: sample acquisition; sample transport; sample conditioning or protection of the EC cell from any degrading effects of the engine exhaust effluent; removal of particulate matter and condensed moisture.

3.2 Nominal Range. The range of analyte concentrations over which each EC cell is operated (normally 25 percent to 150 percent of up-scale calibration gas value). Several nominal ranges can be used for any given cell so long as the calibration and repeatability checks for that range remain within specifications.

3.3 Calibration Gas. A vendor certified concentration of a specific analyte in an appropriate balance gas.

3.4 Zero Calibration Error. The analyte concentration output exhibited by the EC cell in response to zero-level calibration gas.

3.5 Up-Scale Calibration Error. The mean of the difference between the analyte concentration exhibited by the EC cell and the certified concentration of the up-scale calibration gas.

3.6 Interference Check. A procedure for quantifying analytical interference from components in the engine exhaust gas other than the targeted analytes.

3.7 Repeatability Check. A protocol for demonstrating that an EC cell operated over a given nominal analyte concentration range provides a stable and consistent response and is not significantly affected by repeated exposure to that gas.

3.8 Sample Flow Rate. The flow rate of the gas sample as it passes through the EC cell. In some situations, EC cells can experience drift with changes in flow rate. The flow rate must be monitored and documented during all phases of a sampling run.

3.9 Sampling Run. A timed three-phase event whereby an EC cell's response rises and plateaus in a sample conditioning phase, remains relatively constant during a measurement data phase, then declines during a refresh phase. The sample conditioning phase exposes the EC cell to the gas sample for a length of time sufficient to reach a constant response. The measurement data phase is the time interval during which gas sample measurements can be made that meet the acceptance criteria of this protocol. The refresh phase then purges the EC cells with CO-free air. The refresh phase replenishes requisite O₂ and moisture in the electrolyte reserve and provides a mechanism to de-gas or desorb any interference gas scrubbers or filters so as to enable a stable CO EC cell response. There are four primary types of sampling runs: pre-sampling calibrations; stack gas sampling; post-sampling calibration checks; and measurement system repeatability checks. Stack gas sampling runs can be chained together for extended evaluations, providing all other procedural specifications are met.

3.10 Sampling Day. A time not to exceed twelve hours from the time of the pre-sampling calibration to the post-sampling calibration check. During this time, stack gas sampling runs can be repeated without repeated recalibrations, providing all other sampling specifications have been met.

3.11 Pre-Sampling Calibration/Post-Sampling Calibration Check. The protocols executed at the beginning and end of each sampling day to bracket measurement readings with controlled performance checks.

3.12 Performance-Established Configuration. The EC cell and sampling system configuration that existed at the time that it initially met the performance requirements of this protocol.

4.0 Interferences.

When present in sufficient concentrations, NO and NO₂ are two gas species that have been reported to interfere with CO concentration measurements. In the likelihood of this occurrence, it is the protocol user's responsibility to employ and properly maintain an appropriate CO EC cell filter or scrubber for removal of these gases, as described in Section 6.2.12.

5.0 Safety. [Reserved]

6.0 Equipment and Supplies.

6.1 What equipment do I need for the measurement system?

The system must maintain the gas sample at conditions that will prevent moisture condensation in the sample transport lines, both before and as the sample gas contacts the EC cells. The essential components of the measurement system are described below.

6.2 Measurement System Components.

6.2.1 Sample Probe. A single extraction-point probe constructed of glass, stainless steel or other non-reactive material, and of length sufficient to reach any designated sampling point. The sample probe must be designed to prevent plugging due to condensation or particulate matter.

6.2.2 Sample Line. Non-reactive tubing to transport the effluent from the sample probe to the EC cell.

6.2.3 Calibration Assembly (optional). A three-way valve assembly or equivalent to introduce calibration gases at ambient pressure at the exit end of the sample probe during calibration checks. The assembly must be designed such that only stack gas or calibration gas flows in the sample line and all gases flow through any gas path filters.

6.2.4 Particulate Filter (optional). Filters before the inlet of the EC cell to prevent accumulation of particulate material in the measurement system and extend the useful life of the components. All filters must be fabricated of materials that are non-reactive to the gas mixtures being sampled.

6.2.5 Sample Pump. A leak-free pump to provide undiluted sample gas to the system at a flow rate sufficient to minimize the response time of the measurement system. If located upstream of the EC cells, the pump must be constructed of a material that is non-reactive to the gas mixtures being sampled.

6.2.8 Sample Flow Rate Monitoring. An adjustable rotameter or equivalent device used to adjust and maintain the sample flow rate through the analyzer as prescribed.

6.2.9 Sample Gas Manifold (optional). A manifold to divert a portion of the sample gas stream to the analyzer and the remainder to a by-pass discharge vent. The sample gas manifold may also include provisions for introducing calibration gases directly to the analyzer. The manifold must be constructed of a material that is non-reactive to the gas mixtures being sampled.

6.2.10 EC cell. A device containing one or more EC cells to determine the CO and O₂ concentrations in the sample gas stream. The EC cell(s) must meet the applicable performance specifications of Section 13 of this protocol.

6.2.11 Data Recorder. A strip chart recorder, computer or digital recorder to make a record of analyzer output data. The data recorder resolution (i.e., readability) must be no greater than 1 ppm for CO; 0.1 percent for O₂; and one degree (either °C or °F) for temperature. Alternatively, you may use a digital or analog meter having the same resolution to observe and manually record the analyzer responses.

6.2.12 Interference Gas Filter or Scrubber. A device to remove interfering compounds upstream of the CO EC cell. Specific interference gas filters or scrubbers used in the performance-established configuration of the analyzer must continue to be used. Such a filter or scrubber must have a means to determine when the removal agent is exhausted. Periodically replace or replenish it in accordance with the manufacturer's recommendations.

7.0 Reagents and Standards. What calibration gases are needed?

7.1 Calibration Gases. CO calibration gases for the EC cell must be CO in nitrogen or CO in a mixture of nitrogen and O₂. Use CO calibration gases with labeled concentration values certified by the manufacturer to be within ± 5 percent of the label value. Dry ambient air (20.9 percent O₂) is acceptable for calibration of the O₂ cell. If needed, any lower percentage O₂ calibration gas must be a mixture of O₂ in nitrogen.

7.1.1 Up-Scale CO Calibration Gas Concentration. Choose one or more up-scale gas concentrations such that the average of the stack gas measurements for each stack gas sampling run are between 25 and 150 percent of those concentrations. Alternatively, choose an up-scale gas that does not exceed twice the concentration of the applicable outlet standard. If a measured gas value exceeds 150 percent of the up-scale CO calibration gas value at any time during the stack gas sampling run, the run must be discarded and repeated.

7.1.2 Up-Scale O₂ Calibration Gas Concentration.

Select an O₂ gas concentration such that the difference between the gas concentration and the average stack gas measurement or reading for each sample run is less than 15 percent O₂. When the average exhaust gas O₂ readings are above 6 percent, you may use dry ambient air (20.9 percent O₂) for the up-scale O₂ calibration gas.

7.1.3 Zero Gas. Use an inert gas that contains less than 0.25 percent of the up-scale CO calibration gas concentration. You may use dry air that is free from ambient CO and other combustion gas products (e.g., CO₂).

8.0 Sample Collection and Analysis

8.1 Selection of Sampling Sites.

8.1.1 Control Device Inlet. Select a sampling site sufficiently downstream of the engine so that the combustion gases should be well mixed. Use a single sampling extraction point near the center of the duct (e.g., within the 10 percent centroidal area), unless instructed otherwise.

8.1.2 Exhaust Gas Outlet. Select a sampling site located at least two stack diameters downstream of any disturbance (e.g., turbocharger exhaust, crossover junction or recirculation take-off) and at least one-half stack diameter upstream of the gas discharge to the atmosphere. Use a single sampling extraction point near the center of the duct (e.g., within the 10 percent centroidal area), unless instructed otherwise.

8.2 Stack Gas Collection and Analysis. Prior to the first stack gas sampling run, conduct that the pre-sampling calibration in accordance with Section 10.1. Use Figure 1 to record all data. Zero the analyzer with zero gas. Confirm and record that the scrubber media color is correct and not exhausted. Then position the probe at the sampling point and begin the sampling run at the same flow rate used during the up-scale calibration. Record the start time. Record all EC cell output responses and the flow rate during the "sample conditioning phase" once per minute until constant readings are obtained. Then begin the "measurement data phase" and record readings every 15 seconds for at least two minutes (or eight readings), or as otherwise required to achieve two continuous minutes of data that meet the specification given in Section 13.1. Finally, perform the "refresh phase" by introducing dry air, free from CO and other combustion gases, until several minute-to-minute readings of consistent value have been obtained. For each run use the "measurement data phase" readings to calculate the average stack gas CO and O₂ concentrations.

8.3 EC Cell Rate. Maintain the EC cell sample flow rate so that it does not vary by more than ± 10 percent throughout the pre-sampling calibration, stack gas sampling and post-sampling calibration check. Alternatively, the EC cell sample flow rate can be maintained within a tolerance range that does not affect the gas concentration readings by more than ± 3 percent, as instructed by the EC cell manufacturer.

9.0 Quality Control (Reserved)

10.0 Calibration and Standardization

10.1 Pre-Sampling Calibration. Conduct the following protocol once for each nominal range to be used on each EC cell before performing a stack gas sampling run on each field sampling day. Repeat the calibration if you replace an EC cell before completing all of the sampling runs. There is no prescribed order for calibration of the EC cells; however, each cell must complete the measurement data phase during calibration. Assemble the measurement system by following the manufacturer's recommended protocols including for preparing and preconditioning the EC cell. Assure the measurement system has no leaks and verify the gas scrubbing agent is not depleted. Use Figure 1 to record all data.

10.1.1 Zero Calibration. For both the O₂ and CO cells, introduce zero gas to the measurement system (e.g., at the calibration assembly) and record the concentration reading every minute until readings are constant for at least two consecutive minutes. Include the time and sample flow rate. Repeat the steps in this section at least once to verify the zero calibration for each component gas.

10.1.2 Zero Calibration Tolerance. For each zero gas introduction, the zero level output must be less than or equal to ± 3 percent of the up-scale gas value or ± 1 ppm, whichever is less restrictive, for the CO channel and less than or equal to ± 0.3 percent O₂ for the O₂ channel.

10.1.3 Up-Scale Calibration. Individually introduce each calibration gas to the measurement system (e.g., at the calibration assembly) and record the start time. Record all EC cell output responses and the flow rate during this "sample conditioning phase" once per minute until readings are constant for at least two minutes. Then begin the "measurement data phase" and record readings every 15 seconds for a total of two minutes, or as otherwise required. Finally, perform the "refresh phase" by introducing dry air, free from CO and other combustion gases, until readings are constant for at least two consecutive minutes. Then repeat the steps in this section at least once to verify the calibration for each component gas. Introduce all gases to flow through the entire sample handling system (i.e., at the exit end of the sampling probe or the calibration assembly).

10.1.4 Up-Scale Calibration Error. The mean of the difference of the "measurement data phase" readings from the reported standard gas value must be less than or equal to ± 5 percent or ± 1 ppm for CO or ± 0.5 percent O₂, whichever is less restrictive, respectively. The maximum allowable deviation from the mean measured value of any single "measurement data phase" reading must be less than or equal to ± 2 percent or ± 1 ppm for CO or ± 0.5 percent O₂, whichever is less restrictive, respectively.

10.2 Post-Sampling Calibration Check. Conduct a stack gas post-sampling calibration check after the stack gas sampling run or set of runs and within 12 hours of the initial calibration. Conduct up-scale and zero calibration checks using the protocol in Section 10.1. Make no changes to the sampling system or EC cell calibration until all post-sampling calibration checks have been recorded. If either the zero or up-scale calibration error exceeds the respective specification in Sections 10.1.2 and 10.1.4 then all measurement data collected since the previous successful calibrations are invalid and re-calibration and re-sampling are required. If the sampling system is disassembled or the EC cell calibration is adjusted, repeat the calibration check before conducting the next analyzer sampling run.

11.0 Analytical Procedure

The analytical procedure is fully discussed in Section 8.

12.0 Calculations and Data Analysis

Determine the CO and O₂ concentrations for each stack gas sampling run by calculating the mean gas concentrations of the data recorded during the "measurement data phase".

13.0 Protocol Performance

Use the following protocols to verify consistent analyzer performance during each field sampling day.

13.1 Measurement Data Phase Performance Check. Calculate the mean of the readings from the "measurement data phase". The maximum allowable deviation from the mean for each of the individual readings is ± 2 percent, or ± 1 ppm,

whichever is less restrictive. Record the mean value and maximum deviation for each gas monitored. Data must conform to Section 10.1.4. The EC cell flow rate must conform to the specification in Section 8.3.

Example: A measurement data phase is invalid if the maximum deviation of any single reading comprising that mean is greater than ± 2 percent or ± 1 ppm (the default criteria). For example, if the mean = 30 ppm, single readings of below 29 ppm and above 31 ppm are disallowed).

13.2 Interference Check. Before the initial use of the EC cell and interference gas scrubber in the field, and semi-annually thereafter, challenge the interference gas scrubber with NO and NO₂ gas standards that are generally recognized as representative of diesel-fueled engine NO and NO₂ emission values. Record the responses displayed by the CO EC cell and other pertinent data on Figure 1 or a similar form.

13.2.1 Interference Response. The combined NO and NO₂ interference response should be less than or equal to ± 5 percent of the up-scale CO calibration gas concentration.

13.3 Repeatability Check. Conduct the following check once for each nominal range that is to be used on the CO EC cell within 5 days prior to each field sampling program. If a field sampling program lasts longer than 5 days, repeat this check every 5 days. Immediately repeat the check if the EC cell is replaced or if the EC cell is exposed to gas concentrations greater than 150 percent of the highest up-scale gas concentration.

13.3.1 Repeatability Check Procedure. Perform a complete EC cell sampling run (all three phases) by introducing the CO calibration gas to the measurement system and record the response. Follow Section 10.1.3. Use Figure 1 to record all data. Repeat the run three times for a total of four complete runs. During the four repeatability check runs, do not adjust the system except where necessary to achieve the correct calibration gas flow rate at the analyzer.

13.3.2 Repeatability Check Calculations. Determine the highest and lowest average "measurement data phase" CO concentrations from the four repeatability check runs and record the results on Figure 1 or a similar form. The absolute value of the difference between the maximum and minimum average values recorded must not vary more than ± 3 percent or ± 1 ppm of the up-scale gas value, whichever is less restrictive.

14.0 Pollution Prevention (Reserved)

15.0 Waste Management (Reserved)

16.0 Alternative Procedures (Reserved)

17.0 References

- (1) "Development of an Electrochemical Cell Emission Analyzer Test Protocol", Topical Report, Phil Juneau, Emission Monitoring, Inc., July 1997.
- (2) "Determination of Nitrogen Oxides, Carbon Monoxide, and Oxygen Emissions from Natural Gas-Fired Engines, Boilers, and Process Heaters Using Portable Analyzers", EMC Conditional Test Protocol 30 (CTM-30), Gas Research Institute Protocol GRI-96/0008, Revision 7, October 13, 1997.
- (3) "ICAC Test Protocol for Periodic Monitoring", EMC Conditional Test Protocol 34 (CTM-034), The Institute of Clean Air Companies, September 8, 1999.
- (4) "Code of Federal Regulations", Protection of Environment, 40 CFR, Part 60, Appendix A, Methods 1-4; 10.

Table 1: Appendix A—Sampling Run Data.

Facility _____ Engine I.D. _____ Date _____											
Run Type:	()				()				()		()
(X)	Pre-Sample Calibration				Stack Gas Sample				Post-Sample Cal. Check		Repeatability Check
Run #	1	1	2	2	3	3	4	4	Time	Scrub. OK	Flow- Rate
Gas	O ₂	CO	O ₂	CO	O ₂	CO	O ₂	CO			
Sample Cond. Phase											
"											
"											
"											
"											
Measurement Data Phase											
"											
"											
"											
"											
"											
"											
"											
"											
"											
Mean											
Refresh Phase											
"											
"											
"											
"											

[78 FR 6721, Jan. 30, 2013]

**Indiana Department of Environmental Management
Office of Air Quality**

Addendum to the Technical Support Document (ATSD) for an
Administrative Part 70 Operating Permit Renewal

Source Background and Description

Source Name:	Lafarge North America, a contractor of ArcelorMittal USA, LLC
Source Location:	3210 Watling Street, East Chicago, Indiana 46312
County:	Lake
SIC Code:	3312
Operation Permit No.:	T089-36118-00458
Permit Reviewer:	Jean Fix

On November 4, 2015, the Office of Air Quality (OAQ) had a notice published in the Post Tribune in Merrillville, Indiana and The Times in Munster, Indiana, stating that Lafarge North America (Lafarge), a contractor of ArcelorMittal USA LLC, had applied for an Administrative Part 70 Operating Permit Renewal for the operation of a slag granulating and pelletizing operation. The notice also stated that the OAQ proposed to issue an Administrative Part 70 Operating Permit Renewal for this operation and provided information on how the public could review the proposed permit and other documentation. Finally, the notice informed interested parties that there was a period of thirty (30) days to provide comments on whether or not this permit should be issued as proposed.

Comments and Responses

On November 25, 2015, Michael Boozer of ChemReport, the environmental consultant to Lafarge, submitted comments to IDEM, OAQ on the draft Administrative Part 70 Operating Permit Renewal.

The Technical Support Document (TSD) is used by IDEM, OAQ for historical purposes. IDEM, OAQ does not make any changes to the original TSD, but the Permit will have the updated changes. The comments and revised permit language are provided below with deleted language as ~~strikeouts~~ and new language **bolded**.

Comment 1:

Section C.11 Continuous Compliance Plan [326 IAC 6.8-8-1] [326 IAC 6.8-8-8] in the permit:

"This is a new requirement not present in previously issued permits...Lafarge's two main sources of emissions are fugitive PM emissions from material processing operations and criteria pollutant emissions from the burning of diesel fuel at the EG-1 RICE generator set. All applicable requirements for each emissions source appear to be in the permit as there are numerous periodic monitoring, testing, recordkeeping and reporting requirements. As such, the preparation, submittal and maintenance of a continuous compliance plan would appear to be duplicative." They are requesting it be removed from the permit.

Response to Comment 1:

IDEM agrees with the recommended changes. This Lake County requirement is applicable to the source, ArcelorMittal, of which Lafarge is an on-site contractor. There are no specific applicable requirements for the individual emission units at Lafarge. The permit has been revised as follows:

~~C.11 — Continuous Compliance Plan [326 IAC 6.8-8-1] [326 IAC 6.8-8-8]~~

- ~~(a) Pursuant to 326 IAC 326 IAC 6.8-8-1, the Permittee shall submit to IDEM and maintain at source a copy of the Continuous Compliance Plan (CCP). The Permittee shall perform the inspections, monitoring and record keeping in accordance with the information in 326 IAC 6.8-8-5 through 326 IAC 6.8-8-7 or applicable procedures in the CCP.~~
- ~~(b) Pursuant to 326 IAC 6.8-8-8, the Permittee shall update the CCP, as needed, retain a copy of any changes and updates to the CCP at the source and make the updated CCP available for inspection by the department. The Permittee shall submit the updated CCP, if required to IDEM, OAQ within thirty (30) days of the update.~~
- ~~(c) Pursuant to 326 IAC 6.8-8, failure to submit a CCP, maintain all information required by the CCP at the source, or submit update to a CCP is a violation of 326 IAC 6.8-8.~~

The numbering sequence has been adjusted for all Section C conditions that follow without reproduction herein.

Comment 2:

Section D.1.5 Particulate Matter (PM) [326 IAC 6.8-10] under the section heading Compliance Determination Requirements [326 IAC 2-7-5] in the permit:

"The draft permit states that fugitive particulate emissions will be controlled according to the October 22, 2015 Fugitive Dust Control Plan (FDCP) for which Lafarge agrees. However, this section also states that "Opacity from the activities shall be determined as follows..." and then identifies specific protocols and EPA Test Methods to be used as listed in subparagraphs (a) through (i).

For clarification purposes, Lafarge is suggesting relocating the last sentence (bold) of the first paragraph in D.1.5 to the previous sentence as follows:

Opacity from the activities shall be determined according to D.1.5(a) through D.1.5(i) if it is determined that the control procedures specified in the FDCP do not demonstrate compliance with the fugitive emission limitations. IDEM, OAQ may request that the FDCP be revised and submitted for approval.

This change would eliminate any confusion by stating that the protocols in (a) through (i) are only required when the control procedures in the FDCP are not adequate."

Response to Comment 2:

Opacity requirements are covered under Section C.5 Fugitive Particulate Matter Emissions [326 IAC 6.8-10-3] (Lake County Fugitive Particulate Matter Control Requirements) as particulate matter emission limits. Section D.1.5 clarifies the testing methods by which the source may determine if it is in compliance with these required limits. These methods are used whenever there is a question as to compliance with the requirements, not just whenever it has been determined that the source is not meeting the requirements. The Fugitive Dust Control Plan (FDCP) establishes the process by which the emissions are controlled, in this case by water suppression, but does not establish criteria that determine if this control process is meeting the opacity requirements. Opacity requirements and FDCP requirements are two separate requirements under 326 IAC 6.8-10 and are not to be confused with an either/or situation. No changes were made as a result of this comment.

IDEM Contact

- (a) Questions regarding this proposed Administrative Part 70 Operating Permit Renewal can be directed to Jean Fix at the Indiana Department Environmental Management, Office of Air Quality, Permits Branch, 100 North Senate Avenue, MC 61-53 IGCN 1003, Indianapolis, Indiana 46204-2251 or by telephone at (317) 234-8531 or toll free at 1-800-451-6027 extension 4-8531.
- (b) A copy of the permit is available on the Internet at: <http://www.in.gov/ai/appfiles/idem-caats/>
- (c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM Permit Guide on the Internet at: <http://www.in.gov/idem/5881.htm>; and the Citizens' Guide to IDEM on the Internet at: <http://www.in.gov/idem/6900.htm>.

**Indiana Department of Environmental Management
Office of Air Quality**

Second Addendum to the Technical Support Document (ATSD) for an
Administrative Part 70 Operating Permit Renewal

Source Background and Description

Source Name:	Lafarge North America, a contractor of ArcelorMittal USA, LLC
Source Location:	3210 Watling Street, East Chicago, Indiana 46312
County:	Lake
SIC Code:	3312
Operation Permit No.:	T089-36118-00458
Permit Reviewer:	Jean Fix

During the final review of the proposed Administrative Part 70 Permit Renewal just prior to issue, further changes were made to the permit as described below.

Additional Changes

IDEM, OAQ has decided to make additional revisions to the permit as described below, with deleted language as ~~strikeouts~~ and new language **bolded**.

- (a) Upon further review IDEM OAQ has revised Condition D.2.1 to ensure the NO_x emissions from the existing generator are limited to less than forty (40) tons per year and enforceable in a practical manner. Therefore, a short term NO_x limit in terms of pounds per gallon will now be included in addition to the existing diesel fuel usage limit.

D.2.1 Nitrogen Oxide (NO_x) Emission Offset Minor Limitation [326 IA 2-3]

In order to render the requirements of 326 IAC 2-3 (Emission Offset Rules) not applicable and pursuant to SSM 089-34843-00458, issued May 5, 2015, the Permittee shall comply with the following:

- (a) The total diesel fuel ~~usage from~~ **used by** the one (1) generator, identified as EG-1 shall be limited to less than 142,857 gallons per twelve consecutive month period, with compliance demonstrated at the end of each month.
- (b) **The total NO_x emissions from the one (1) generator, identified as EG-1, shall not exceed an allowable NO_x emission rate of 0.448 pounds per gallon diesel fuel.**

Compliance with ~~this fuel usage limit~~ **these limits** shall limit the NO_x to less than 40 tons per year **twelve (12) consecutive month period**, and shall render the requirements of 326 IAC 2-3, (Emission Offset Rules), not applicable.

- (b) Conditions D.2.2 and D.2.3 have been revised to include IDEM's standard language for record keeping and reporting requirements.

D.2.2 Record Keeping Requirements

- (b) **Section C - General Record Keeping Requirements contains the Permittee's obligations with regard to the records required by this condition.**

D.2.3 Reporting Requirement

- (a) ~~A monthly summary of the diesel fuel usage from the one (1) generator, identified as EG-1 to document the compliance status with Condition D.2.1, shall be submitted to IDEM, OAQ on a quarterly basis, not later than thirty (30) days after the end of the quarter being reported.~~

A quarterly summary of the information to document the compliance status with Conditions D.2.1(a) shall be submitted not later than thirty (30) days after the end of each quarter being reported. Section C - General Reporting Requirements contains the Permittee's obligations with regard to the reporting required by this condition. The report submitted by the Permittee does require a certification that meets the requirements of 326 IAC 2-7-6(1) by a "responsible official" as defined by 326 IAC 2-7-1(35).

- (c) Descriptive language has been updated in Sections A, D and E and the Part 70 Quarterly Report:

A.3 Emission Units and Pollution Control Equipment Summary
[326 IAC 2-7-4(c)(3)][326 IAC 2-7-5(14)]

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, **constructed in approximately 2000, permitted in 2015**, including the following:

EG-2 Excess Granulated Slag Screening

- (d) Excess Slag Processing, **identified as EG-2, constructed in approximately 2000**, permitted in 2015, consisting of the following emission units and storage piles (unprocessed slag piles and processed/crushed slag piles):

- (1) One (1) above ground diesel fuel storage tanks, ~~each~~ with a capacity of 5,000 gallons or less.

SECTION D.1 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

LAFARGE NORTH AMERICA consists of the following permitted emission units and pollution control devices:

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, **constructed in approximately 2000, permitted in 2015**, including the following:

EG-2 Excess Granulated Slag Screening

- (d) Excess Slag Processing, **identified as EG-2, constructed in approximately 2000**, permitted in 2015, consisting of the following emission units and storage piles (unprocessed slag piles and processed/crushed slag piles):

* * *

(The information describing the process contained in this emissions unit description box is descriptive information and does not constitute enforceable conditions.)

SECTION D.2 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

LAFARGE NORTH AMERICA consists of the following permitted emission units and pollution control devices:

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, **constructed in approximately 2000**, permitted in ~~2000~~**2015, including the following:**
- (1) One (1) diesel fired generator, identified as EG-1, with a maximum site rating of 731 Horsepower (Hp).
 - (2) **One (1) above ground diesel fuel storage tank, with a capacity of 5,000 gallons or less.**

The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

SECTION E.1 EMISSIONS UNIT OPERATION CONDITIONS

Emissions Unit Description:

LAFARGE NORTH AMERICA consists of the following permitted emission units and pollution control devices:

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, **constructed in approximately 2000**, permitted in ~~2000~~**2015, including the following:**
- (1) One (1) diesel fired generator, identified as EG-1, with a maximum site rating of 731 Horsepower (Hp).

(The information describing the process contained in this facility description box is descriptive information and does not constitute enforceable conditions.)

Part 70 Quarterly Report

Source Name: Lafarge North America
Source Address: 3210 Watling Street, East Chicago, Indiana 46312
Part 70 Permit No.: T089-36118-00458
Facilities: One (1) Generator, identified as EG-1
Parameter: Fuel usage
Limits: The total diesel fuel ~~usage from~~ **used by** the one (1) Generator, identified as EG-1 shall be limited to less than 142,857 gallons per twelve consecutive month period, with compliance demonstrated at the end of each month

IDEM Contact

- (a) Questions regarding this proposed Administrative Part 70 Operating Permit Renewal can be directed to Jean Fix at the Indiana Department Environmental Management, Office of Air Quality, Permits Branch, 100 North Senate Avenue, MC 61-53 IGCN 1003, Indianapolis, Indiana 46204-2251 or by telephone at (317) 234-8531 or toll free at 1-800-451-6027 extension 4-8531.
- (b) A copy of the permit is available on the Internet at: <http://www.in.gov/ai/appfiles/idem-caats/>
- (c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM Permit Guide on the Internet at: <http://www.in.gov/idem/5881.htm>; and the Citizens' Guide to IDEM on the Internet at: <http://www.in.gov/idem/6900.htm>.

Indiana Department of Environmental Management
Office of Air Quality

Technical Support Document (TSD) for an Administrative Part 70 Operating Permit
Renewal

Source Background and Description

Source Name: Lafarge North America, a contractor of ArcelorMittal USA, LLC
Source Location: 3210 Watling Street, East Chicago, Indiana 46312
County: Lake
SIC Code: 3312
Permit Renewal No.: T089-36118-00458
Permit Reviewer: Jean Fix

The Office of Air Quality (OAQ) has reviewed the operating permit renewal application from Lafarge North America (Lafarge), a contractor of ArcelorMittal USA LLC, relating to the operation of a slag granulating and pelletizing operation. On August 3, 2015, Lafarge submitted an application to the OAQ requesting to renew its operating permit. Lafarge was issued its first Administrative Part 70 Operating Permit Renewal No.: T089-29726-00458, on May 5, 2011.

Source Definition

The source, a slag granulator and pelletizer, includes the primary operation, ArcelorMittal USA, LLC (Source ID 089-00316), an integrated steel mill, at 3210 Watling Street, East Chicago, Indiana, collocated with the secondary operation, ArcelorMittal Indiana Harbor, LLC (Source ID 089-00318), at 3001 Dickey Road, East Chicago, Indiana, and other onsite contractors:

	Company Name	Source ID	Operation Description
1	ArcelorMittal USA LLC	089-00316	Integrated steel mill
2	ArcelorMittal Indiana Harbor LLC	089-00318	Integrated steel mill
	Onsite Contractors		
3	Lafarge North America	089-00458	Slag granulator and pelletizer
4	Beemsterboer Slag Corp.	089-00356	Slag crushing and sizing
5	Beemsterboer Slag Corp.	089-00537	Metallurgical coke screening
6	Cokenergy LLC	089-00383	Heated gas steam from coal carbonization
7	Fritz Enterprises, Inc.	089-00465	Iron and steel recycling process and coke screening
8	Harsco Metals Americas	089-00358	Briquetting facility
9	Indiana Harbor Coke Company LP	089-00382	Heat recovery coal carbonization
10	Ironside Energy, LLC	089-00448	Industrial steam and electric power cogeneration
11	Mid-Continent Coal & Coke	089-00371	Metallurgical coke separation
12	Oil Technology, Inc.	089-00375	Used oil recycling
13	Oil Technology, Inc.	089-00369	Used oil recycling
14	Phoenix Services, LLC	089-00538	Slag and kish processing
15	Phoenix Services, LLC, dba Metal Services LLC	089-00536	Slag and kish processing
16	Tube City IMS	089-00353	Steel slab scarfer
17	Hoosier Pig Services LL	089-00582	Pig iron ingot casting

IDEM has determined that ArcelorMittal Indiana Harbor LLC, Lafarge and the other on-site contractors are under the common control of ArcelorMittal USA LLC. These plants are considered one source as defined by 326 IAC 2-7-1(22), due to contractual control. Therefore, the term "source" in the Part 70

documents refers to ArcelorMittal USA LLC, ArcelorMittal Indiana Harbor LLC, Lafarge and the other on-site contractors as one source.

Separate Part 70 permits have been issued to these sources solely for administrative purposes.

Permitted Emission Units and Pollution Control Equipment

Lafarge North America consists of the following permitted emission units and pollution control devices:

Expanded (Pelletized) Slag Production

- (a) One (1) slag pelletizer, identified as EU-302, with a maximum capacity of 3600 tons per day, with emissions inherently reduced by quench water, and exhausting to the atmosphere through the top of the structure, installed in 2000.

Granulated (Excess) Slag Production

- (b) One (1) slag granulator, identified as EU-301, with a maximum capacity of 3600 tons of slag per day, with emissions inherently reduced by quench water, and exhausting to stack S-301, installed in 2000. The following equipment is also used in connection with the slag granulator:
 - (1) Two (2) slurry dewatering drums, with negligible emissions due to water content and exhausting directly to the ambient air.
 - (2) Five (5) conveyors, identified as East Exit, West Exit, East Cross, West Cross, Granulator Stack, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (3) Two (2) stockpile stackers, identified as S-1 and S-2, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (4) Various granulated slag piles, termed "A-Lot" material, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (5) One (1) granulated slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

EG-1 Expanded (Pelletized) Slag Screening

- (c) One (1) Expanded (Pelletized) Slag Screening Operation, identified as EG-1, including the following:
 - (1) One (1) diesel fired generator, identified as EG-1, with a maximum site rating of 731 Horsepower (Hp).
 - (2) One (1) above ground diesel fuel storage tank, with a capacity of 5,000 gallons or less.
 - (3) One (1) 12 cubic yard front-end loader for loading unprocessed slag into the hopper and loading out processed/crushed slag onto transport trucks.
 - (4) Six (6) main conveyors, identified from C-1 to C-6, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (5) One (1) pellet crusher, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (6) One (1) pellet screening station, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

- (7) Various pelletized slag piles, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
- (8) One (1) pelletized slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
- (9) One (1) loading (feed) hopper, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

EG-2 Excess Granulated Slag Screening

- (d) Excess Slag Processing, permitted in 2015; consisting of the following emission units and storage piles (unprocessed slag piles and processed/crushed slag piles):
 - (1) One (1) above ground diesel fuel storage tanks, each with a capacity of 5,000 gallons or less.
 - (2) One (1) jaw crusher, with a maximum throughput rate of 150 tons per hour.
 - (3) Two (2) under-feed belt conveyors, with a maximum throughput rate of 93 tons per hour.
 - (4) Two (2) stacker conveyors with a maximum throughput rate of 93 tons per hour.
 - (5) One (1) 12 cubic yard front-end loader for loading unprocessed slag into the crusher and loading out processed/crushed slag onto transport trucks.
 - (6) One (1) granulated slag screening station, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (7) One (1) mini-jaw crusher, with a maximum throughput rate 57 of tons per hour.
 - (8) Various granulated slag piles, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.
 - (9) One (1) granulated slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

Insignificant Activities

The source consists of the following insignificant activities, as defined in 326 IAC 2-7-1(21):

- (1) Production of hot water for on-site personal use not related to any industrial or production process.
- (2) Pressure washing of equipment.
- (3) Portable electrical generators that can be moved by hand from one location to another. "Moved by hand" means that it can be moved without the assistance of any motorized or non-motorized vehicle, conveyance, or device.
- (4) Combustion emissions from propulsion of mobile sources.
- (5) Tobacco smoking rooms and areas.
- (6) Indoor and outdoor kerosene heaters.
- (7) Ventilation exhaust, central chiller water systems, refrigeration and air conditioning equipment, not related to any industrial or production process,

including natural draft hoods or ventilating systems that do not remove air pollutants.

- (8) Stack and vents from plumbing traps used to prevent the discharge of sewer gases, handling domestic sewage only, excluding those at wastewater treatment plants or those handling any industrial waste.
- (9) Air vents from air compressors.
- (10) Vents for air cooling of electric motors provided the air does not commingle with regulated air pollutants.
- (11) Painting, including interior and exterior painting of buildings, and solvent use, excluding degreasing operations utilizing halogenated organic solvents.
- (12) Brazing, soldering, or welding operations and associated equipment.
- (13) Portable blast-cleaning equipment with enclosures.
- (14) Batteries and battery charging stations, except at battery manufacturing plants.
- (15) Lubrication, including hand-held spray can lubrication, dipping metal parts into lubricating oil, and manual or automated addition of cutting oil in machining operations.
- (16) Activities performed using hand-held equipment including the following:
 - (i) Machining wood, metal, or plastic
 - (ii) Turning wood, metal, or plastic
 - (iii) Drilling
 - (iv) Grinding
 - (v) Sawing
 - (vi) Surface grinding
- (17) Rest rooms and associated cleanup operations and supplies.
- (18) Office supplies and equipment.
- (19) Photocopying equipment and associated supplies.
- (20) Storage of drums containing maintenance raw materials.
- (21) Portable containers used for the collection, storage, or disposal of materials provided the container capacity is equal to or less than forty-six hundredths (0.46) cubic meters and the container is closed except when the material is added or removed.
- (22) Activities and equipment associated with on-site medical care not otherwise specifically regulated.
- (23) Vacuum producing devices for the purpose of removing potential accidental releases.
- (24) Equipment used for quality control/assurance or inspection purposes, including sampling equipment used to withdraw materials for analysis.
- (25) Fugitive emissions related to movement of passenger vehicles, provided the emissions are not counted for applicability purposes under 326 IAC 2-7-1(22)(B), and any required fugitive dust control plan or its equivalent is submitted.

- (26) Electrical resistance welding.
- (27) Air compressors and pneumatically operated equipment, including hand tools.
- (28) Compressor or pump lubrication and seal oil systems.
- (29) Electric or steam heated drying ovens and autoclaves, including only the heating emissions and not any associated process emissions.
- (30) Manual loading and unloading operations.
- (31) Natural gas-fired combustion sources with heat input equal to or less than ten million (10,000,000) Btu per hour.
- (32) Equipment powered by diesel fuel fired or natural gas fired internal combustion engines of capacity equal to or less than five hundred thousand (500,000) Btu/hour, except where total capacity of equipment operated by one stationary source exceeds two million (2,000,000) Btu/hour.
- (33) A petroleum fuel, other than gasoline, dispensing facility, having a storage tank capacity less than or equal to ten thousand five hundred (10,500) gallons, and dispensing three thousand five hundred (3,500) gallons per day or less.
- (34) Storage tanks with capacity less than or equal to one thousand (1,000) gallons and annual throughputs less than twelve thousand (12,000) gallons.
- (35) Vessels storing hydraulic and lubricating oil.
- (36) Application of greases and lubricants.
- (37) Machining where an aqueous cutting coolant continuously floods the machining Interface.
- (38) Degreasing operations that do not exceed one hundred forty-five (145) gallons per twelve (12) months, except if subject to 326 IAC 20-6.
- (39) Cleaners and solvents characterized as follows where the use of which, for all cleaners and solvents combined, does not exceed one hundred forty-five (145) gallons per twelve (12) months.
 - (a) Having a vapor pressure equal to or less than two kilo Pascals (2.0 kPa) (fifteen millimeters of mercury (15 mm Hg) or three-tenths pound per square inch (0.3 psi)) measured at thirty-eight degrees Centigrade (38°C) (one hundred degrees Fahrenheit (100°F)).
 - (b) Having a vapor pressure equal to or less than seven-tenths kilo Pascals (0.7 kPa) (five millimeters of mercury (5 mm Hg) or one-tenth pound per square inch (0.1 psi)) measured at twenty degrees Centigrade (20°C) (sixty-eight degrees Fahrenheit (68°F)).
- (40) The following equipment related to manufacturing activities not resulting in the emission of HAPs: brazing equipment, cutting torches, soldering equipment; welding equipment.
- (41) Closed loop heating and cooling systems.

- (42) Any of the following structural steel and bridge fabrication activities: cutting two hundred thousand (200,000) linear feet or less of one (1) inch plate or equivalent using eighty (80) tons or less of welding consumables.

Existing Emission Units Removed

Upon applicant review, the source requested guidance on replacement of EG-2 generator that has been removed from the site. Email response received October 15, 2015 asked that the generator be removed from the permit. The applicant will file a modification application requesting construction approval of a new generator when one has been chosen. This unit has been removed from all areas (descriptive and regulatory) of the permit renewal:

- (a) One (1) diesel fired generator, identified as EG-2, with a maximum output rating or 2010 Hp.

Seven (7) Conveyors identified as C7 - C15 have been removed from the permit. Applicant review field reconnaissance identified that of the fifteen (15) main conveyors permitted, only six (6) main conveyors are utilized in the EG-1 Expanded (Pelletized) Slag Screening process. Two (2) of the original fifteen (15) are utilized in the EG-2 Excess Granulated Slag Screening process, and have been moved to that section of the permit.

Existing Approvals

Since the issuance of the Administrative Part 70 Operating Permit T089-29726-00458 on May 5, 2011, the source has constructed or has been operating under the following additional approvals:

- (a) Significant Source Modification No. 089-34843-00458 issued on March 13, 2015
(b) Significant Permit Modification No. 089-35328-00458 issued on April 2, 2015.

All terms and conditions of previous permits issued pursuant to permitting programs approved into the State Implementation Plan have been either incorporated as originally stated, revised, or deleted by this permit. All previous registrations and permits are superseded by this permit.

Air Pollution Control Justification as an Integral Part of the Process

Lafarge has submitted the following justification for the introduction of water in the granulator and pelletizer to be considered as integral in controlling emissions from slag cooling.

The water is used to quench the slag in this process. During operation, the hot, molten slag is run through a box where it is sprayed with a much cooler stream of water which quenches the slag quickly. The design of the system allows the slag to cool so quickly that it vitrifies the slag into granules. This quick cooling helps reduce the oxidation of sulfur and nitrogen and the water helps to suppress particulate matter emissions. Because the entire process is based on the water spray operation, it should be considered an integral means of reducing emissions.

IDEM has determined that the water spray will be considered as an integral part of the slag cooling process. Therefore, the permitting level will be determined using the potential to emit after the introduction of water.

Pursuant to SSM 089-11512-00316, issued on March 14, 2000, the water spray will be considered as an integral part of the slag cooling process. Therefore, the permitting level will be determined using the potential to emit after the introduction of water.

Enforcement Issue

There are no enforcement actions pending.

Emission Calculations

Part 70 permit level was determined in a previous approval. Therefore, the potential to emit was not recalculated for this source.

County Attainment Status

The source is located in Lake County.

Pollutant	Designation
SO ₂	Better than national standards.
CO	Attainment effective February 18, 2000, for the part of the city of East Chicago bounded by Columbus Drive on the north; the Indiana Harbor Canal on the west; 148th Street, if extended, on the south; and Euclid Avenue on the east. Unclassifiable or attainment effective November 15, 1990, for the remainder of East Chicago and Lake County.
O ₃	40 CFR 81.315 as amended by 77 FR 34228. ^{1,2}
PM _{2.5}	Attainment effective February 6, 2012, for the annual PM _{2.5} standard.
PM _{2.5}	Unclassifiable or attainment effective December 13, 2009, for the 24-hour PM _{2.5} standard.
PM ₁₀	Attainment effective March 11, 2003, for the cities of East Chicago, Hammond, Whiting, and Gary. Unclassifiable effective November 15, 1990, for the remainder of Lake County.
NO ₂	Cannot be classified or better than national standards.
Pb	Unclassifiable or attainment effective December 31, 2011.
¹ Nonattainment Severe 17 effective November 15, 1990, for the Chicago-Gary-Lake County area for the 1-hour ozone standard which was revoked effective June 15, 2005.	
² The department has filed a legal challenge to U.S. EPA's designation in 77 FR 34228.	

- (a) **Ozone Standards**
 U.S. EPA, in the Federal Register Notice 77 FR 112 dated June 11, 2012, has designated Lake County as nonattainment for ozone. On August 1, 2012, the air pollution control board issued an emergency rule adopting the U.S. EPA's designation. This rule became effective August 9, 2012. IDEM does not agree with U.S. EPA's designation of nonattainment. IDEM filed a suit against U.S. EPA in the U.S. Court of Appeals for the DC Circuit on July 19, 2012. However, in order to ensure that sources are not potentially liable for a violation of the Clean Air Act, the OAQ is following the U.S. EPA's designation. Volatile organic compounds (VOC) and Nitrogen Oxides (NO_x) are regulated under the Clean Air Act (CAA) for the purposes of attaining and maintaining the National Ambient Air Quality Standards (NAAQS) for ozone. Therefore, VOC and NO_x emissions are considered when evaluating the rule applicability relating to ozone. Therefore, VOC and NO_x emissions were evaluated pursuant to the requirements of Emission Offset, 326 IAC 2-3.
- (b) **PM_{2.5}**
 Lake County has been classified as attainment for PM_{2.5}. Therefore, direct PM_{2.5}, SO₂, and NO_x emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.
- (c) **Other Criteria Pollutants**
 Lake County has been classified as attainment or unclassifiable in Indiana for all other criteria pollutants. Therefore, these emissions were reviewed pursuant to the requirements for Prevention of Significant Deterioration (PSD), 326 IAC 2-2.

Fugitive Emissions

Since this source is classified as an integrated iron and steel plant, it is considered one of the twenty-eight (28) listed source categories, as specified in 326 IAC 2-2, 326 IAC 2-3, and 326 IAC 2-7. Therefore, fugitive emissions are counted toward the determination of PSD, Emission Offset, and Part 70 Permit applicability.

Unrestricted Potential Emissions

This table reflects the unrestricted potential emissions of the source.

Pollutant	Emissions (tons/year)
PM	Greater than 100
PM10	Greater than 100
PM2.5	Greater than 100
SO ₂	Greater than 100
VOC	Greater than 100
CO	Greater than 100
CO ₂ e	Greater than 100,000
NO _x	Greater than 100
Single HAP	Greater than 10
Total HAP	Greater than 25

On June 23, 2014, in the case of *Utility Air Regulatory Group v. EPA*, cause no. 12-1146, (available at http://www.supremecourt.gov/opinions/13pdf/12-1146_4g18.pdf) the United States Supreme Court ruled that the U.S. EPA does not have the authority to treat greenhouse gases (GHGs) as an air pollutant for the purpose of determining operating permit applicability or PSD Major source status. On July 24, 2014, the U.S. EPA issued a memorandum to the Regional Administrators outlining next steps in permitting decisions in light of the Supreme Court's decision. U.S. EPA's guidance states that U.S. EPA will no longer require PSD or Title V permits for sources "previously classified as 'Major' based solely on greenhouse gas emissions."

The Indiana Environmental Rules Board adopted the GHG regulations required by U.S. EPA at 326 IAC 2-2-1(zz), pursuant to Ind. Code § 13-14-9-8(h) (Section 8 rulemaking). A rule, or part of a rule, adopted under Section 8 is automatically invalidated when the corresponding federal rule, or part of the rule, is invalidated. Due to the United States Supreme Court Ruling, IDEM, OAQ cannot consider GHG emissions to determine operating permit applicability or PSD applicability to a source or modification.

- (a) The potential to emit (as defined in 326 IAC 2-7-1(30)) of PM, PM₁₀, PM_{2.5}, SO₂, VOC, CO and NO_x is equal to or greater than 100 tons per year. Therefore, the source is subject to the provisions of 326 IAC 2-7 and will be issued a Administrative Part 70 Operating Permit Renewal.
- (b) The potential to emit (as defined in 326 IAC 2-7-1(30)) of any single HAP is equal to or greater than ten (10) tons per year and/or the potential to emit (as defined in 326 IAC 2-7-1(30)) of a combination of HAPs is equal to or greater than twenty-five (25) tons per year. Therefore, the source is subject to the provisions of 326 IAC 2-7.

Part 70 Permit Conditions

This source is subject to the requirements of 326 IAC 2-7, because the source met the following:

- (a) Emission limitations and standards, including those operational requirements and limitations that assure compliance with all applicable requirements at the time of issuance of Part 70 permit.
- (b) Monitoring and related record keeping requirements which assume that all reasonable information is provided to evaluate continuous compliance with the applicable requirements.

Potential to Emit After Issuance

The table below summarizes the potential to emit, reflecting all limits, of the emission units. Any new control equipment is considered federally enforceable only after issuance of this Part 70 permit renewal, and only to the extent that the effect of the control equipment is made practically enforceable in the permit.

Process/ Emission Unit	Potential To Emit of the Entire Source After Issuance of Renewal (tons/year)								
	PM	PM ₁₀ *	PM _{2.5} **	SO ₂	NO _x	VOC	CO	Total HAPs	Worst Single HAP
Slag granulator and slag pelletizer production	40.17	25.75	22.71	65.20	6.52	64.35	42.37	0.79	.65 Volatiles
EG-2 Excess Granulated Slag Screening	7.10	3.22	0.47	-	-	-	-	-	-
EG-1 Expanded (Pellet) Slag Screening	6.24	2.89	0.43	-	-	-	-	-	-
Generators EG-1	0.60	0.35	0.34	0.01	32.00	0.54	5.13	0.009	.004 Benzene
Unpaved Road Emissions	208.39	49.57	4.96	-	-	-	-	-	-
Wind Eroded Slag Piles	10.25	4.85	0.73	-	-	-	-	-	-
Subtotal PTE of Lafarge	272.75	86.63	29.64	65.21	38.52	64.89	47.50	.80	.654
ArcelorMittal USA LLC	>100	>100	>100	>100	>100	>100	>100	>25	>10
Total PTE of Entire Source	>373	>187	>130	>166	>139	>165	>148	>26	>10
Title V Major Source Thresholds	NA	100	100	100	100	100	100	25	10
PSD Major Source Thresholds	100	100	100	100	NA	NA	100	NA	NA
Emission Offset/ Nonattainment NSR Major Source Thresholds	NA	NA	NA	NA	100	100	NA	NA	NA
*source emits Fluoride and H ₂ S considered PSD pollutants, not considered HAPs									

On June 23, 2014, in the case of *Utility Air Regulatory Group v. EPA*, cause no. 12-1146, (available at http://www.supremecourt.gov/opinions/13pdf/12-1146_4g18.pdf) the United States Supreme Court ruled that the U.S. EPA does not have the authority to treat greenhouse gases (GHGs) as an air pollutant for the purpose of determining operating permit applicability or PSD

Major source status. On July 24, 2014, the U.S. EPA issued a memorandum to the Regional Administrators outlining next steps in permitting decisions in light of the Supreme Court's decision. U.S. EPA's guidance states that U.S. EPA will no longer require PSD or Title V permits for sources "previously classified as 'Major' based solely on greenhouse gas emissions."

The Indiana Environmental Rules Board adopted the GHG regulations required by U.S. EPA at 326 IAC 2-2-1(zz), pursuant to Ind. Code § 13-14-9-8(h) (Section 8 rulemaking). A rule, or part of a rule, adopted under Section 8 is automatically invalidated when the corresponding federal rule, or part of the rule, is invalidated. Due to the United States Supreme Court Ruling, IDEM, OAQ cannot consider GHG emissions to determine operating permit applicability or PSD applicability to a source or modification.

- (a) This existing source is a major stationary source, under PSD (326 IAC 2-2), because a PSD regulated pollutant is emitted at a rate of 100 tons per year or more, and it is one of the twenty-eight (28) listed source categories, as specified in 326 IAC 2-2-1(ff)(1).
- (b) This existing source is a major stationary source, under Emission Offset (326 IAC 2-3), because VOC and NOx are nonattainment regulated pollutants, and are emitted at a rate of 100 tons per year or more.
- (c) These emissions are based upon emissions data from ArcelorMittal 089-00316, the primary source.

Federal Rule Applicability

NSPS:

(a) **40 CFR 60, Subpart OOO -Standards of Performance for Nonmetallic Mineral Processing Plants**

The provisions of this subpart are applicable to the following affected facilities in fixed or portable nonmetallic mineral processing plants: each crusher, grinding mill, screening operation, bucket elevator, belt conveyor, bagging operation, storage bin, enclosed truck or railcar loading station. Also, crushers and grinding mills at hot mix asphalt facilities that reduce the size of nonmetallic minerals embedded in recycled asphalt pavement and subsequent affected facilities up to, but not including, the first storage silo or bin are subject to the provisions of this subpart.

The provisions of Subpart OOO are not applicable to the equipment used in the steel slag processing because slag is not nonmetallic mineral, pursuant to 40 CFR 60.671.

(b) **40 CFR Part 60, Subpart LL - Standards of Performance for Metallic Mineral Processing Plants**

The provisions of this subpart are applicable to the following affected facilities in metallic mineral processing plants: Each crusher and screen in open-pit mines; each crusher, screen, bucket elevator, conveyor belt transfer point, thermal dryer, product packaging station, storage bin, enclosed storage area, truck loading station, truck unloading station, railcar loading station, and railcar unloading station at the mill or concentrator with the following exceptions. All facilities located in underground mines are exempted from the provisions of this subpart. At uranium ore processing plants, all facilities subsequent to and including the beneficiation of uranium ore are exempted from the provisions of this subpart.

The provisions of Subpart LL are not applicable to the equipment used in the steel slag processing because the operations are not producing metallic mineral concentrates from ore. The slag handling and crushing operations are not performed in open pit mines.

(c) **40 CFR Part 60, Subpart IIII -- Standards of Performance for Stationary Compression Ignition Internal Combustion Engines**

This rule applies to manufacturers, owners and operators of stationary CI ICE that commence construction (date the engine was ordered) as specified below:

- (1) Manufacturers of stationary CI ICE with a displacement of less than 30 liters per cylinder where the model year is:
 - (i) 2007 or later, for engines that are not fire pump engines;
 - (ii) The model year listed in Table 3 to this subpart or later model year, for fire pump engines.
- (2) Owners and operators of stationary CI ICE that commence construction after July 11, 2005, where the stationary CI ICE are:
 - (i) Manufactured after April 1, 2006, and are not fire pump engines, or
 - (ii) Manufactured as a certified National Fire Protection Association (NFPA) fire pump engine after July 1, 2006.
- (3) Owners and operators of any stationary CI ICE that are modified or reconstructed after July 11, 2005 and any person that modifies or reconstructs any stationary CI ICE after July 11, 2005.
- (4) The provisions of 60.4208 of this subpart are applicable to all owners and operators of stationary CI ICE that commence construction after July 11, 2005.
- (5) The provisions of this subpart are not applicable to stationary CI ICE being tested at a stationary CI ICE test cell/stand.

The one (1) diesel generator, identified as EG-1, with a site rating of 731 HP, is not subject to Subpart IIII because the construction date of the engine is before 2002, which predates the applicability of July 11, 2005, and the manufacturing date of April 1, 2006 for non fire pumps.

(d) **40 CFR Part 60, Subpart JJJJ - Standards of Performance for Stationary Spark Ignition Internal Combustion Engines**

This rule applies to manufacturers, owners and operators of stationary CI ICE that commence construction (date the engine was ordered) as specified below:

- (1) Manufacturers of stationary SI ICE with a maximum engine power less than or equal to 19 kilowatt (KW) (25 horsepower (HP)) that are manufactured on or after July 1, 2008.
- (2) Manufacturers of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) that are gasoline fueled or that are rich burn engines fueled by liquefied petroleum gas (LPG), where the date of manufacture is:
 - (i) On or after July 1, 2008; or
 - (ii) On or after January 1, 2009, for emergency engines.
- (3) Manufacturers of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) that are not gasoline fueled and are not rich burn engines fueled by LPG, where the manufacturer participates in the voluntary manufacturer certification program described in this subpart and where the date of manufacture is:

- (i) On or after July 1, 2007, for engines with a maximum engine power greater than or equal to 500 HP (except lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP);
 - (ii) On or after January 1, 2008, for lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP;
 - (iii) On or after July 1, 2008, for engines with a maximum engine power less than 500 HP; or
 - (iv) On or after January 1, 2009, for emergency engines.
- (4) Owners and operators of stationary SI ICE that commence construction after June 12, 2006, where the stationary SI ICE are manufactured:
- (i) On or after July 1, 2007, for engines with a maximum engine power greater than or equal to 500 HP (except lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP);
 - (ii) on or after January 1, 2008, for lean burn engines with a maximum engine power greater than or equal to 500 HP and less than 1,350 HP;
 - (iii) on or after July 1, 2008, for engines with a maximum engine power less than 500 HP; or
 - (iv) on or after January 1, 2009, for emergency engines with a maximum engine power greater than 19 KW (25 HP).
- (5) Owners and operators of stationary SI ICE that are modified or reconstructed after June 12, 2006, and any person that modifies or reconstructs any stationary SI ICE after June 12, 2006.
- (6) The provisions of 60.4236 of this subpart are applicable to all owners and operators of stationary SI ICE that commence construction after June 12, 2006.
- (7) The provisions of this subpart are not applicable to stationary SI ICE being tested at an engine test cell/stand.
- (8) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or 40 CFR part 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.
- (9) For the purposes of this subpart, stationary SI ICE using alcohol-based fuels are considered gasoline engines.
- (10) Stationary SI ICE may be eligible for exemption from the requirements of this subpart as described in 40 CFR part 1068, subpart C (or the exemptions described in 40 CFR parts 90 and 1048, for engines that would need to be certified to standards in those parts), except that owners and operators, as well as manufacturers, may be eligible to request an exemption for national security.
- (11) Owners and operators of facilities with internal combustion engines that are acting as temporary replacement units and that are located at a stationary source

for less than 1 year and that have been properly certified as meeting the standards that would be applicable to such engine under the appropriate nonroad engine provisions, are not required to meet any other provisions under this subpart with regard to such engines.

The one (1) diesel generator, identified as EG-1 with a site rating of 731 is not subject to Subpart JJJJ because the engine is not a spark ignition internal combustion engine.

- (e) There are no other New Source Performance Standards (NSPS) (326 IAC 12 and 40 CFR Part 60) applicable to included in this Part 70 permit renewal.

NESHAP:

- (a) **40 CFR Part 63, Subpart ZZZZ - National Emission Standards for Hazardous Air Pollutants for Reciprocating Internal Combustion Engines (RICE).**

This subpart applies to any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.

Nonapplicable portions of the NESHAP will not be included in the permit.

- (1) The one (1) stationary diesel generator, identified as EG-1 with a site rating of 731 HP is subject to the following portions of Subpart ZZZZ:

40 CFR 63.6580
40 CFR 63.6585
40 CFR 63.6590(a)(1)(i), (iv)
40 CFR 63.6595
40 CFR 63.6600
40 CFR 63.6605
40 CFR 63.6610
40 CFR 63.6615
40 CFR 63.6620
40 CFR 63.6625
40 CFR 63.6630(b), (c)
40 CFR 63.6635
40 CFR 63.6640(a), (b)
40 CFR 63.6645
40 CFR 63.6650
40 CFR 63.6655
40 CFR 63.6660
40 CFR 63.6665
40 CFR 63.6670
40 CFR 63.6675

Table 2b to Subpart ZZZZ of Part 63

- (b) There are no other National Emission Standards for Hazardous Air Pollutants (NESHAPs) (326 IAC 14, 326 IAC 20 and 40 CFR Part 63) included in this Part 70 permit renewal.

CAM

- (a) Pursuant to 40 CFR 64.2, Compliance Assurance Monitoring (CAM) is applicable to each new or modified pollutant-specific emission unit that meets the following criteria:

- (1) has a potential to emit before controls equal to or greater than the Part 70 major source threshold for the pollutant involved;
- (2) is subject to an emission limitation or standard for that pollutant; and

- (3) uses a control device, as defined in 40 CFR 64.1, to comply with that emission limitation or standard.

Based on this evaluation, the requirements of 40 CFR Part 64, CAM, are not applicable to any of the existing units as part of this Part 70 permit renewal since none of the emission units at this source uses a control device.

State Rule Applicability - Entire Source

326 IAC 1-6-3 (Preventive Maintenance Plan)

The source is subject to 326 IAC 1-6-3.

326 IAC 1-5-2 (Emergency Reduction Plans)

The source is subject to 326 IAC 1-5-2.

326 IAC 2-2 (Prevention of Significant Deterioration)

Lafarge North America (Plant ID 089-00458) is an on-site contractor (a slag granulating and pelletizing operation) at ArcelorMittal USA, LLC. These two plants are considered one source due to contractual control. ArcelorMittal USA, LLC is a PSD major source under 326 IAC 2-2.

326 IAC 2-3 Emission Offset

Pursuant to SSM 089-11512-00316, issued on March 14, 2000, the Permittee may split the slag stream between the granulator/pelletizer system and the slag pits; however, the Permittee shall not utilize both the granulator/pelletizer system and the slag pits in order to increase slag processing throughput. Any operational change or modification that would increase slag processing throughput to either system would need prior approval from the IDEM OAQ. In addition, at all times the slag granulator or pelletizer is operating, the associated quench water spray shall be operating.

The following limitations shall apply to the source:

- (1) The total diesel fuel usage from the one (1) Generator, identified as EG-1 shall be limited to less than 142,857 gallons per twelve consecutive month period, with compliance demonstrated at the end of each month.

Compliance with this fuel usage limit shall limit the NO_x to less than 40 tons per year, and shall render the requirements of 326 IAC 2-3 (Emission Offset Rules) not applicable.

326 IAC 2-6 (Emission Reporting)

The source has already been determined to be subject to 326 IAC 2-6(a)(1) that requires the Permittee to submit by July 1 of each year an emission statement covering the previous calendar year.

326 IAC 2-7-6(5) (Annual Compliance Certification)

The U.S. EPA Federal Register 79 FR 54978 notice does not exempt Title V Permittees from the requirements of 40 CFR 70.6(c)(5)(iv) or 326 IAC 2-7-6(5)(D), but the submittal of the Title V annual compliance certification to IDEM satisfies the requirement to submit the Title V annual compliance certifications to EPA. IDEM does not intend to revise any permits since the requirements of 40 CFR 70.6(c)(5)(iv) or 326 IAC 2-7-6(5)(D) still apply, but Permittees can note on their Title V annual compliance certification that submission to IDEM has satisfied reporting to EPA per Federal Register 79 FR 54978. This only applies to Title V Permittees and Title V compliance certifications.

326 IAC 5-1 (Opacity Limitations)

This source is subject to the opacity limitations specified in 326 IAC 5-1-2.

State Rule Applicability – Individual Facilities

326 IAC 2-4.1 (Major Sources of Hazardous Air Pollutants (HAP))

The PTE for HAP at Lafarge is less than ten (10) tons per year for a single HAP and less than twenty-five (25) tons per year for a combination of HAPs. Therefore, 326 IAC 2-4.1 does not apply.

326 IAC 6.8-1-1 (Particulate Matter Limitations for Lake County)

This rule applies to sources located in Lake County that are specifically listed in 326 IAC 6.8-2, through 326 IAC 6.8-11 and sources or facilities that are not specifically listed but have:

- (1) the potential to emit one hundred (100) tons of PM per year or more; or
- (2) actual emissions of ten(10) tons of PM per year or more.

The entire source has the PTE greater than 100 tons of PM per year; therefore, the Expanded (Pelletized) Slag Production, the Granulated (Excess) Slag Production, the EG-1 Expanded (Pelletized) Slag Screening, and the EG-2 Excess Granulated Slag Screening operations are subject to this rule.

Pursuant to 326 IAC 6.8-1-2 the particulate matter emissions from the Expanded (Pelletized) Slag Production, the Granulated (Excess) Slag Production, the EG-1 Expanded (Pelletized) Slag Screening, and the EG-2 Excess Granulated Slag Screening operations shall not exceed 0.03 grains per dry standard cubic foot (gr/dscf).

326 IAC 6.8-10-3 (PM Emission Limitations)

The PM emissions from the following sources of emissions shall be limited as follows:

- (a) The average instantaneous opacity of fugitive particulate emissions from a paved road shall not exceed ten percent (10%).
- (b) The average instantaneous opacity of fugitive particulate emissions from an unpaved road shall not exceed ten percent (10%).
- (c) The opacity of fugitive particulate emissions from exposed areas shall not exceed ten percent (10%) on a six (6) minute average.
- (d) The opacity of fugitive particulate emissions from continuous transfer of material onto and out of storage piles shall not exceed ten percent (10%) on a three (3) minute average.
- (e) The opacity of fugitive particulate emissions from storage piles shall not exceed ten percent (10%) on a six (6) minute average.
- (f) There shall be a zero (0) percent frequency of visible emission observations of a material during the inplant transportation of material by truck or rail at any time.
- (g) The opacity of fugitive particulate emissions from the inplant transportation of material by front end loaders and skip hoists shall not exceed ten percent (10%).
- (h) Material processing facilities shall include the following:
 - (1) There shall be a zero (0) percent frequency of visible emission observations from a building enclosing all or part of the material processing equipment, except from a vent in the building.
 - (2) The PM₁₀ emissions from building vents shall not exceed twenty-two thousandths (0.022) grains per dry standard cubic foot and ten percent (10%) opacity.

- (3) The PM₁₀ stack emissions from a material processing facility shall not exceed twenty-two thousandths (0.022) grains per dry standard cubic foot and ten percent (10%) opacity.
- (4) The opacity of fugitive particulate emissions from the material processing facilities, except a crusher at which a capture system is not used, shall not exceed ten percent (10%) opacity.
- (5) The opacity of fugitive particulate emissions from a crusher at which a capture system is not used shall not exceed fifteen percent (15%).
- (i) The opacity of particulate emissions from dust handling equipment shall not exceed ten percent (10%).
- (j) Material transfer limits shall be as follows:
 - (1) The average instantaneous opacity of fugitive particulate emissions from batch transfer shall not exceed ten percent (10%).
 - (2) Where adequate wetting of the material for fugitive particulate emissions control is prohibitive to further processing or reuse of the material, the opacity shall not exceed ten percent (10%), three (3) minute average.
 - (3) Slag handling activities at integrated iron and steel plants shall comply with the following particulate emissions limits:
 - (A) The opacity of fugitive particulate emissions from transfer from pots and trucks into pits shall not exceed twenty percent (20%) on a six (6) minute average.
 - (B) The opacity of fugitive particulate emissions from transfer from pits into front end loaders and from transfer from front end loaders into trucks shall comply with the fugitive particulate emission limits in 326 IAC 6.8-10-3(9).
- (k) Any facility or operation not specified in 326 IAC 6.8-10-3 shall meet a twenty percent (20%), three (3) minute average opacity standard.

The Permittee shall achieve these limits by controlling fugitive particulate matter emissions according to the Fugitive Dust Control Plan, submitted on October 22, 2015.

Compliance Determination and Monitoring Requirements

Permits issued under 326 IAC 2-7 are required to ensure that sources can demonstrate compliance with all applicable state and federal rules on a continuous basis. All state and federal rules contain compliance provisions; however, these provisions do not always fulfill the requirement for a continuous demonstration. When this occurs, IDEM, OAQ, in conjunction with the source, must develop specific conditions to satisfy 326 IAC 2-7-5. As a result, Compliance Determination Requirements are included in the permit. The Compliance Determination Requirements in Section D of the permit are those conditions that are found directly within state and federal rules and the violation of which serves as grounds for enforcement action.

If the Compliance Determination Requirements are not sufficient to demonstrate continuous compliance, they will be supplemented with Compliance Monitoring Requirements, also in Section D of the permit. Unlike Compliance Determination Requirements, failure to meet Compliance Monitoring conditions would serve as a trigger for corrective actions and not grounds for enforcement action. However, a violation in relation to a compliance monitoring condition will arise through a source's failure to take the appropriate corrective actions within a specific time period.

There are no specified compliance monitoring requirements applicable to this source.

Compliance Determination for this source is as follows:

Opacity from the activities shall be determined as follows:

- (a) **Paved Roads and Parking Lots**
The average instantaneous opacity shall be the average of twelve (12) instantaneous opacity readings, taken for four (4) vehicle passes, consisting of three (3) opacity readings for each vehicle pass. The three (3) opacity readings for each vehicle pass shall be taken as follows:
 - (1) The first will be taken at the time of emission generation.
 - (2) The second will be taken five (5) seconds later.
 - (3) The third will be taken five (5) seconds later or ten (10) seconds after the first.The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.
- (b) **Unpaved Roads and Parking**
The fugitive particulate emissions from unpaved roads shall be controlled by the implementation of a work program and work practice under the fugitive dust control plan.
- (c) **Batch Transfer**
The average instantaneous opacity shall consist of the average of three (3) opacity readings taken five (5) seconds, ten (10) seconds, and fifteen (15) seconds after the end of one (1) batch loading or unloading operation. The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume.
- (d) **Continuous Transfer**
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9. The opacity readings shall be taken at least four (4) feet from the point of origin.
- (e) **Wind Erosion from Storage Piles**
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9, except that the opacity shall be observed at approximately four (4) feet from the surface at the point of maximum opacity. The observer shall stand approximately fifteen (15) feet from the plume and at approximately right angles to the plume. The limitations may not apply during periods when application of fugitive particulate control measures are either ineffective or unreasonable due to sustained very high wind speeds. During such periods, the company must continue to implement all reasonable fugitive particulate control measures and maintain records documenting the application of measures and the basis for a claim that meeting the opacity limitation was not reasonable given prevailing wind conditions.
- (f) **Wind Erosion from Exposed Areas**
The opacity shall be determined using 40 CFR 60, Appendix A, Method 9.
- (g) **Material Transported by Truck or Rail**
Compliance with this limitation shall be determined by 40 CFR 60, Appendix A, Method 22, except that the observation shall be taken at approximately right angles to the prevailing wind from the leeward side of the truck or railroad car. Material transported by

truck or rail that is enclosed and covered shall be considered in compliance with the inplant transportation requirement.

- (h) **Material Transported by Front End Loader or Skip Hoist**
Compliance with this limitation shall be determined by the average of three (3) opacity readings taken at five (5) second intervals. The three (3) opacity readings shall be taken as follows:

- (1) The first will be taken at the time of emission generation.
- (2) The second will be taken five (5) seconds later.
- (3) The third will be taken five (5) seconds later or ten (10) seconds after the first.

The three (3) readings shall be taken at the point of maximum opacity. The observer shall stand at least fifteen (15) feet from the plume approximately and at right angles to the plume. Each reading shall be taken approximately four (4) feet above the surface of the roadway or parking area.

- (i) **Material Processing Limitations**
Compliance with all opacity limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 9. Compliance with all visible emissions limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 22. Compliance with all particulate matter limitations from material processing equipment shall be determined using 40 CFR 60, Appendix A, Method 5 or 17.

Proposed Changes

The changes listed below have been made to the Administrative Part 70 Operating Permit No. 089-36118-00458. Deleted language appears as ~~strike through~~ and new language appears in **bold**:

- (a) The applicant requested a reallocation of permitted units into separate sections identifying the different slag operations. Units have been rearranged in this renewal to match the four (4) slag processes utilized by Lafarge. Identified below as:

Expanded (Pelletized) Slag Production
Granulated (Excess) Slag Production
EG-1 Expanded (Pelletized) Slag Screening
EG-2 Excess Granulated Slag Screening

- (b) The applicant requested guidance on replacement of EG-2 generator that has been removed from the site. Email response received October 15, 2015 asked that the generator be removed from the permit and applicant will file a modification application requesting construction approval of a new generator when one has been chosen. This unit has been removed from all areas (descriptive and regulatory) of the permit renewal.

~~**EG-2 Excess Granulated Slag Screening**~~

- ~~(1) One (1) diesel fired generator, identified as EG-2, with a maximum output rating of 2010 Hp.~~

- (c) Seven (7) conveyors identified as C7 - C15 have been removed from the permit. Applicant field reconnaissance identified that of the fifteen (15) main conveyors permitted, only six (6) main conveyors are utilized in the EG-1 Expanded (Pelletized) Slag Screening process. Two (2) of the original fifteen (15) are utilized in the EG-2

Excess Granulated Slag Screening process, and have been moved to that section of the permit.

EG-1 Expanded (Pelletized) Slag Screening

- (14) ~~Fifteen (15)~~ **Six (6)** main conveyors, identified from C-1 to C-156, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.

EG-2 Excess Granulated Slag Screening

- (63) ~~One (1)~~ **Two (2)** under-feed belt conveyors, with a maximum throughput rate of 93 tons per hour.
- (74) ~~One (1)~~ **Two (2)** stacker conveyors with a maximum throughput rate of 93 tons per hour.

- (d) Applicant review identified unpermitted units that are being added to this renewal:

EG-1 Expanded (Pelletized) Slag Screening

- (9) **One (1) loading (feed) hopper, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.**

EG-2 Excess Granulated Slag Screening

- (7) **One (1) mini-jaw crusher, with a maximum throughput rate of 57 tons per hour.**
- (8) **Various granulated slag piles, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.**
- (9) **One (1) granulated slag barge loader, with particulate matter emissions reduced by inherent moisture content and exhausting directly to the ambient air.**

Recommendation

The staff recommends to the Commissioner that the Administrative Part 70 Operating Permit Renewal be approved. This recommendation is based on the following facts and conditions:

Unless otherwise stated, information used in this review was derived from the application and additional information submitted by the applicant.

An application for the purposes of this review was received on August 3, 2015.

Conclusion

The operation of this slag granulating and pelletizing operation shall be subject to the conditions of the attached Administrative Part 70 Operating Permit Renewal No. T089-36118-00458.

IDEM Contact

- (a) Questions regarding this proposed permit can be directed to Jean Fix at the Indiana Department Environmental Management, Office of Air Quality, Permits Branch, 100 North Senate Avenue,

MC 61-53 IGCN 1003, Indianapolis, Indiana 46204-2251 or by telephone at (317) 234-8531 or toll free at 1-800-451-6027 extension 4-8531.

- (b) A copy of the findings is available on the Internet at: <http://www.in.gov/ai/appfiles/idem-caats/>
- (c) For additional information about air permits and how the public and interested parties can participate, refer to the IDEM Permit Guide on the Internet at: <http://www.in.gov/idem/5881.htm>; and the Citizens' Guide to IDEM on the Internet at: <http://www.in.gov/idem/6900.htm>.

for 2-7 (Part 70) Applicability purposes

Process/Facility	Uncontrolled Potential to Emit							
	PM Emissions (tons/yr)	PM10 Emissions (tons/yr)	PM2.5 Emissions (tons/yr)	SO2 Emissions (tons/yr)	CO Emissions (tons/yr)	VOC Emissions (tons/yr)	NOx Emissions (tons/yr)	Combined HAPs Emissions (tons/yr)
<i>Non-Fugitives</i>								
Expanded (pelletized) Slag Production	7.50	5.10	5.10	15.00	9.75	14.81	1.50	0.18
Granulated (excess) Slag Production	32.67	20.65	17.61	50.20	32.63	49.54	5.02	0.61
EG-1 Expanded (Pellet) Slag Screening	6.24	2.89	0.43	--	--	--	--	--
EG-2 Excess Granulated Slag Screening	7.10	3.22	0.47	--	--	--	--	--
Stationary Diesel Generator, EG-1	2.24	1.28	1.28	0.04	17.61	2.26	76.84	0.031
<i>Fugitives</i>								
Unpaved Road Emissions (mitigated)	416.79	99.14	9.91	--	--	--	--	--
Wind Eroded Slag Piles	20.51	9.70	1.47	--	--	--	--	--
TOTAL UNLIMITED PTE	493.04	141.99	36.28	65.24	59.99	66.61	83.36	0.82

Process/Facility	Limited Potential to Emit							
	PM Emissions (tons/yr)	PM10 Emissions (tons/yr)	PM2.5 Emissions (tons/yr)	SO2 Emissions (tons/yr)	CO Emissions (tons/yr)	VOC Emissions (tons/yr)	NOx Emissions (tons/yr)	Combined HAPs Emissions (tons/yr)
<i>Non-Fugitives</i>								
Expanded (pelletized) Slag Production	7.50	5.10	5.10	15.00	9.75	14.81	1.50	0.18
Granulated (excess) Slag Production	32.67	20.65	17.61	50.20	32.63	49.54	5.02	0.61
EG-1 Expanded (Pellet) Slag Screening	6.24	2.89	0.43	--	--	--	--	--
EG-2 Excess Granulated Slag Screening	7.10	3.22	0.47	--	--	--	--	--
Stationary Diesel Generator, EG-1	1.00	0.57	0.56	0.02	8.50	0.90	32.00	0.016
<i>Fugitives</i>								
Unpaved Road Emissions (controlled)	208.39	49.57	4.96	--	--	--	--	--
Wind Eroded Slag Piles	10.25	4.85	0.73	--	--	--	--	--
TOTAL LIMITED PTE	273.2	86.9	29.9	65.2	50.9	65.2	38.5	0.8

Appendix A: Emission Calculations
Large Reciprocating Internal Combustion Engines - Diesel Fuel
Output Rating (>600 HP)
Maximum Input Rate (>4.2 MMBtu/hr)

Company Name: Lafarge North America
Address City IN Zip: 3210 Watling St., East Chicago, IN 46312
Administrative TVOPR No.: 089-36118-00458
Reviewer: Jean Fix
Date Application Received: 3-Aug-2015

Emissions calculated based on output rating (hp)

Output Horsepower Rating (hp)	731.0	EG-1 (Stationary)
Maximum Hours Operated per Year	8760	
Potential Throughput (hp-hr/yr)	6,403,560	
Sulfur Content (S) of Fuel (% by weight)	0.0015	

	Pollutant						
	PM*	PM10*	direct PM2.5*	SO2	NOx	VOC	CO
Emission Factor in lb/hp-hr	7.00E-04	4.01E-04	4.01E-04	1.21E-05 #REF! (.00809S)	2.40E-02	7.05E-04	5.50E-03
PTE of EG-1, tons/yr	2.24	1.28	1.28	0.04	**see below	2.26	17.61
TOTAL PTE, tons/yr	2.24	1.28	1.28	0.04	76.84	2.26	17.61

*PM10 emission factor in lb/hp-hr was calculated using the emission factor in lb/MMBtu and a brake specific fuel consumption of 7,000 Btu / hp-hr (AP-42 Table 3.3-1).

**NOx emission factor: uncontrolled = 0.024 lb/hp-hr, controlled by ignition timing retard = 0.013 lb/hp-hr

Hazardous Air Pollutants (HAPs)

	Pollutant						
	Benzene	Toluene	Xylene	Formaldehyde	Acetaldehyde	Acrolein	Total PAH HAPs***
Emission Factor in lb/hp-hr****	5.43E-06	1.97E-06	1.35E-06	5.52E-07	1.76E-07	5.52E-08	1.48E-06
PTE of EG-1, tons/yr	1.74E-02	6.30E-03	4.33E-03	1.77E-03	5.65E-04	1.77E-04	3.05E-02
TOTAL PTE, tons/yr	1.74E-02	6.30E-03	4.33E-03	1.77E-03	5.65E-04	1.77E-04	3.05E-02

***PAH = Polyaromatic Hydrocarbon (PAHs are considered HAPs, since they are considered Polycyclic Organic Matter)

****Emission factors in lb/hp-hr were calculated using emission factors in lb/MMBtu and a brake specific fuel consumption of 7,000 Btu / hp-hr (AP-42 Table 3.3-1).

Methodology

Emission Factors are from AP 42 (Supplement B 10/96) Tables 3.4-1 , 3.4-2, 3.4-3, and 3.4-4.

Methodology

Potential Throughput (hp-hr/yr) = [Output Horsepower Rating (hp)] * [Maximum Hours Operated per Year]
 Potential Emission (tons/yr) = [Potential Throughput (hp-hr/yr)] * [Emission Factor (lb/hp-hr)] / [2,000 lb/ton]

Potential Emission of Total HAPs (tons/yr)	6.11E-02
---	-----------------

Green House Gas Emissions (GHG)

	Pollutant		
	CO2	CH4	N2O
Emission Factor in lb/hp-hr	1.16E+00	6.35E-05	9.30E-06
PTE of EG-1, tons/yr	3.71E+03	2.03E-01	2.98E-02
TOTAL PTE, tons/yr	3.71E+03	2.03E-01	2.98E-02

Summed Potential Emissions in tons/yr	3.71E+03
CO2e Total in tons/yr	3.73E+03

Methodology

Emission Factors are from AP 42 (Supplement B 10/96) Tables 3.4-1 , 3.4-2, 3.4-3, and 3.4-4.

CH4 and N2O Emission Factor from 40 CFR 98 Subpart C Table C-2.

Global Warming Potentials (GWP) from Table A-1 of 40 CFR Part 98 Subpart A.

Methodology

Potential Throughput (hp-hr/yr) = [Output Horsepower Rating (hp)] * [Maximum Hours Operated per Year]

Potential Emission (tons/yr) = [Potential Throughput (hp-hr/yr)] * [Emission Factor (lb/hp-hr)] / [2,000 lb/ton]

CO2e (tons/yr) = CO2 Potential Emission ton/yr x CO2 GWP (1) + CH4 Potential Emission ton/yr x CH4 GWP (25) + N2O Potential Emission ton/yr x N2O GWP (298).

Appendix A: Emission Calculations
Large Reciprocating Internal Combustion Engines - Diesel Fuel
Output Rating (>600 HP)
Maximum Input Rate (>4.2 MMBtu/hr)

Company Name: Lafarge North America
Address City IN Zip: 3210 Watling St., East Chicago, IN 46312
Administrative TVOPR No.: 089-36118-00458
Reviewer: Jean Fix
Date Application Received: 3-Aug-2015

Diesel Fuel Limitations for EG-1 Engine

Heat Input Capacity (MMBtu/hr)	5.117	EG-1 (731 HP)
Maximum Hours Operated per Year	8760	
Potential Throughput (MMBtu/yr)	44,825	20,000.00 MMBtu/yr limit*gal/0.140 MMBtu = 142,857 gal/yr
Sulfur Content (S) of Fuel (% by weight)	0.0015	diesel fuel limit

EG-1 Engine = 731 hp x 7,000 Btu/hp-hr = 5,117,000 Btu/hr x MM/1,000,000 = 5.117 MMBtu/hr

	Pollutant						
	PM*	PM10*	direct PM2.5*	SO2	NOx	VOC	CO
Emission Factor in lb/MMBtu	0.10	0.0573	0.0556	0.002 (1.01S)	3.2 **see below	0.09	0.85
Potential Emission in tons/yr	1.00	0.57	0.56	0.02	32.00	0.90	8.50

*PM emission factor is from AP-42 Section 3.4, Table 3.4-1. The emission factors for PM10 and PM2.5 are from AP-42 Section 3.4, Table 3.4-2. The PM10 emission factor is the sum of filterable PM10 and condensable particulate. The PM2.5 emission factor is the sum of filterable particulate less than 3 um and condensable particulate.

**NOx emissions: uncontrolled = 3.2 lb/MMBtu, controlled with ignition timing retard = 1.9 lb/MMBtu

Hazardous Air Pollutants (HAPs)

	Pollutant						Total PAH HAPs***
	Benzene	Toluene	Xylene	Formaldehyde	Acetaldehyde	Acrolein	
Emission Factor in lb/MMBtu	7.76E-04	2.81E-04	1.93E-04	7.89E-05	2.52E-05	7.88E-06	2.12E-04
Potential Emission in tons/yr	7.76E-03	2.81E-03	1.93E-03	7.89E-04	2.52E-04	7.88E-05	2.12E-03

***PAH = Polyaromatic Hydrocarbon (PAHs are considered HAPs, since they are considered Polycyclic Organic Matter)

Potential Emission of Total HAPs (tons/yr)	1.57E-02
---	-----------------

Green House Gas Emissions (GHG)

	Pollutant		
	CO2	CH4	N2O
Emission Factor in lb/MMBtu	1.65E+02	8.10E-03	1.32E-03
Potential Emission in tons/yr	1.65E+03	8.10E-02	1.32E-02

Summed Potential Emissions in tons/yr	1.65E+03
CO2e Total in tons/yr	1.66E+03

	PM*	PM10*	direct PM2.5*	SO2	NOx	VOC	CO
TOTAL PTE LIMITATIONS, tons/yr	1.00	0.57	0.56	0.02	32.00	0.90	8.50

TOTAL Diesel Fuel Oil Limit for 1 Engine **142,857.00 gals/yr**

¹Short term Diesel Fuel Oil Limit for 1 Engine **0.448 lbs/gal**

¹NOx emission factor AP-42 Table 3.4-1 x conversion factor MMBtu to gallons (0.14)

Company Name: Lafarge North America
Address City IN Zip: 3210 Watling St., East Chicago, IN 46312
Administrative TVOPR No.: 089-36118-00458
Reviewer: Jean Fix
Date Application Received: 3-Aug-2015

****Expanded (pelletized) Slag Production****

actual slag production

1997 1,019,214 tons/yr

1998 967,217 tons/yr

potential pellet/gran production

1,303,926 tons/yr

Pelletizer worst-case

300,000 tons/yr

Granulator worst-case

1,003,926 tons/yr

Max Throughput (Pellet/Gran) (tons/hr)

Slag Pelletizer

Potential to emit after integral wet suppression

	Pollutant								
	<i>PM¹</i>	<i>PM₁₀</i>	<i>PM_{2.5}</i>	<i>SO₂</i>	<i>NO_x</i>	<i>VOC</i>	<i>CO</i>	<i>F</i>	<i>H₂S</i>
Emission Factor (lb/ton)	0.0500	0.0340	0.0340	0.1000	0.0100	0.0010	0.0650	0.0277	0.0700
Potential Emissions (tons/yr)	7.50	5.10	5.10	15.00	1.50	0.15	9.75	4.16	10.50

Emission factors are from original SSM089-11512-00316

	HAPs						
	<i>Volatiles</i>	<i>Hydrogen Cyanide (HCN)</i>	<i>Cadmium (Cd)</i>	<i>Chromium (Cr)</i>	<i>Manganese (Mn)</i>	<i>Lead (Pb)</i>	<i>Nickel (Ni)</i>
Emission Factor (lb/MMBtu)	1.00E-03	1.58E-07	1.50E-07	2.60E-06	2.05E-04	1.80E-06	1.10E-06
Potential Emissions (tons/yr)	0.1500	0.0000	0.0000	0.0004	0.0308	0.0003	0.0002

Total HAPs (tons/yr) = 0.18

Methodology

Criteria Pollutant Potential Emissions (tons/yr) = Max. Throughput (tons/hr) * Emission Factor (lb/hp-hr) * (8760 hrs/yr) * (1 ton/2000 lbs)

HAPs Potential Emissions (tons/yr) = Max. Throughput (tons/hr) * Emission Factor (lb/MMBtu) * (8760 hrs/yr) * (1 ton/2000 lbs)

Emission factors are from original SSM089-11512-00316

Company Name: Lafarge North America
Address City IN Zip: 3210 Watling St., East Chicago, IN 46312
Administrative TVOPR No.: 089-36118-00458
Reviewer: Jean Fix
Date Application Received: 3-Aug-2015

Granulated (Excess) Slag Production

actual slag production

1997 1,019,214 tons/yr

1998 967,217 tons/yr

potential pellet/gran production

1,303,926 tons/yr

Pelletizer worst-case

300,000 tons/yr

Granulator worst-case

1,003,926 tons/yr

Max Throughput (Pellet/Gran) (tons/hr)

Slag Granulator

Potential to emit after integral wet suppression

	Pollutant								
	<i>PM¹</i>	<i>PM₁₀</i>	<i>PM_{2.5}</i>	<i>SO₂</i>	<i>NO_x</i>	<i>VOC</i>	<i>CO</i>	<i>F</i>	<i>H₂S</i>
Emission Factor (lb/ton)	0.0500	0.0340	0.0340	0.1000	0.0100	0.0010	0.0650	0.0277	0.0700
Potential Emissions (tons/yr)	25.10	17.07	17.07	50.20	5.02	0.50	32.63	13.90	35.14

Emission factors are from original SSM089-11512-00316

	HAPs						
	<i>Volatiles</i>	<i>Hydrogen Cyanide (HCN)</i>	<i>Cadmium (Cd)</i>	<i>Chromium (Cr)</i>	<i>Manganese (Mn)</i>	<i>Lead (Pb)</i>	<i>Nickel (Ni)</i>
Emission Factor (lb/MMBtu)	1.00E-03	1.58E-07	1.50E-07	2.60E-06	2.05E-04	1.80E-06	1.10E-06
Potential Emissions (tons/yr)	0.5020	0.0001	0.0001	0.0013	0.1029	0.0009	0.0006

Total HAPs (tons/yr) = 0.61

Methodology

Criteria Pollutant Potential Emissions (tons/yr) = Max. Throughput (tons/hr) * Emission Factor (lb/hp-hr) * (8760 hrs/yr) * (1 ton/2000 lbs)

HAPs Potential Emissions (tons/yr) = Max. Throughput (tons/hr) * Emission Factor (lb/MMBtu) * (8760 hrs/yr) * (1 ton/2000 lbs)

Emission factors are from original SSM 089-11512-00316

Company Name: Lafarge North America
 Address City IN Zip: 3210 Watling St., East Chicago, IN 46312
 Administrative TVOPR No.: 089-36118-00458
 Reviewer: Jean Fix
 Date Application Received: 3-Aug-2015

Process Equipment Emissions Granulated (Excess) Slag Production

Operation/Equipment	Max Throughput (tons/hr)	Emission Factors (lb/tn)			Uncontrolled Emissions Potential-to-Emit (PTE) (tpy)			Control Efficiency	Controlled Emissions (tpy)		
		PM	PM ₁₀	PM _{2.5}	PM	PM ₁₀	PM _{2.5}		PM	PM ₁₀	PM _{2.5}
Granulated (Excess) Slag Production Emissions											
Dewatering Drum Drop to Conveyor C-1	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Dewatering Drum Drop from Conveyor C-1 to C-2	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Conveyor C-1 drop to Stacker S-1	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Conveyor C-2 drop to Stacker S-2	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Stacker S-1 drop to Run-out Pile P-1 DP1	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Front-end loader pick-up at Run-out Pile P-1 DP2	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Front-end loader drop into dump truck (transport to "A-Lot") DP3	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Stackers S-1 or S-2 drop to granulated slag piles P-2 or P-3 DP1	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Front-end loader reclaim of pile P-2 or P-3	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Front-end loader drop into dump truck (either for direct transport or to barge)	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Dump truck drop to Slag barge hopper	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Slag barge hopper drop to Slag barge loader	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
Slag barge loader to slag barge	115	0.00116	0.000549	8E-05	0.58	0.28	0.04	0.0%	0.58	0.28	0.04
TOTAL PTE from Gran Slag Production					7.57	3.58	0.54	0.00	7.57	3.58	0.54

Methodology

AP-42 Reference: 13.2.4 Aggregate Handling & Storage Piles (Fugitive Emissions)

Emission Factor Equation: $E = k(0.0032)[(U/5)^{1.3}]/[(M/2)^{1.4}]$

Where:

E = emission factor

k = particle size multiplier (dimensionless 0.74 for PM, 0.35 for PM-10 and 0.053 for PM2.5)

U = wind speed (16.34 mph), average windspeed at the Gary airport from data collected 7AM to 7PM daily between 10/2010 and 04/2014

M = moisture content (10%) based on Lafarge documentation and inspector confirmation

¹Normally AP-42 Chapter 13.2.4 is used for the handling and open storage of previously processed slag piles. AP-42 Chapter 11.19.2 is used for fresh unprocessed slag piles.

The excess slag production operation begins with very wet slag that is drained of the excess moisture, then transported to storage piles or off site. It still maintains higher moisture than typical for AP-42 Chapter 11.19

To account for this moisture content of the slag, AP-42 Chapter 13.2.4 provides a more appropriate emissions factor.

Process Equipment Emissions - EG-2 Excess Granulated Slag Screening

Operation/Equipment	Max Throughput (tons/hr)	Emission Factors (lb/tn)			Uncontrolled Emissions Potential-to-Emit (PTE) (tpy)			Control Efficiency	Controlled Emissions (tpy)		
		PM	PM ₁₀	PM _{2.5}	PM	PM ₁₀	PM _{2.5}		PM	PM ₁₀	PM _{2.5}
EG-2 Excess Granulated Slag Screening											
Front end loading into Jaw Crusher, DP-4 ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Slag Crushing ²	93	0.0012	0.00054	0.0001	0.49	0.22	0.04	0.0%	0.49	0.22	0.04
Jaw Crusher to Under Conveyor 1, DP-5 ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Under Conveyor 1 to Screener, DP-6 ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Slag Screening ²	93	0.0022	0.00074	0.00005	0.90	0.30	0.02	0.0%	0.90	0.30	0.02
Screener to Stacker Conveyor 1, DP-10 ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Stacker Conveyor 1 to Crushed Slag Pile, DP-11 ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Front-end loader Drop to Transport Trucks, DP-12 ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Dump truck drop to Slag Barge Hopper ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Slag barge hopper drop to Slag barge loader ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Slag barge loader to slag barge ¹	93	0.00116	0.000549	8.3E-05	0.47	0.22	0.03	0.0%	0.47	0.22	0.03
Screener to Under Conveyor 2, DP-7 ¹	57	0.00116	0.000549	8.3E-05	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Under Conveyor 2 to Mini-Jaw Crusher, DP-8 ¹	57	0.00116	0.000549	8.3E-05	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Mini-Jaw Crushing ²	57	0.0012	0.00054	0.0001	0.30	0.13	0.02	0.0%	0.30	0.13	0.02
Mini-Jaw Crusher to Stacker Conveyor 2, DP-9 ¹	57	0.00116	0.000549	8.3E-05	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Stacker Conveyor 2 to Rejected Slag Pile back to Jaw Crusher via front-end loader, DP-13 ¹	57	0.00116	0.000549	8.3E-05	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
TOTAL PTE from Excess Slag Screening					7.10	3.22	0.47	0.00	7.10	3.22	0.47

Methodology

AP-42 Reference: 13.2.4 Aggregate Handling & Storage Piles (Fugitive Emissions)

Emission Factor Equation: $E=k(0.0032)[(U/5)^{1.3}]/[(M/2)^{1.4}]$

Where:

E = emission factor

k = particle size multiplier (dimensionless 0.74 for PM, 0.35 for PM-10 and 0.053 for PM2.5)

U = wind speed (16.34 mph), average windspeed at the Gary airport from data collected 7AM to 7PM daily between 10/2010 and 04/2014

M = moisture content (10%) based on Lafarge documentation and inspector confirmation

¹Normally AP-42 Chapter 13.2.4 is used for the handling and open storage of previously processed slag piles. AP-42 Chapter 11.19.2 is used for fresh unprocessed slag piles.

The excess slag operation consists of old unprocessed slag that has been broken down through weathering and moisture over time and has become granulated, similar to processed slag.

Inspection of the old slag piles has concluded that the material is a type of aggregate, but with a higher moisture content.

To account for the "processed" nature of the slag, AP-42 Chapter 13.2.4 provides a more appropriate emissions factor.

AP-42 Reference 11.19.2 Crushed Stone Processing & Pulverized Mineral Processing

Emission Factors based on Table 11.19.2-2 Emission Factors for Crushed Stone Processing Operations - Tertiary Crushing (controlled)

²"Slag crushing" process in this case is more a separation of moisture rich particulates than a conventional crushing of larger, dry particulates and emissions are much less.

To account for the lower emissions based on particle size and moisture content, the Tertiary Crushing using wet suppression control emission factors found in AP-42 Chapter 11.19.2 are used.

²"Slag screening" is the process of shaking the crushed material to separate the moisture rich slag into disaggregated and rejected particles.

To account for the lower emissions based on moisture content, the Screening using wet suppression control emission factors found in AP-42 Chapter 11.19.2 are used.

Process Equipment Emissions - EG-1 Expanded (Pelletized) Slag Screening

Operation/Equipment	Max Throughput (tons/hr)	Emission Factors (lb/tn)			Uncontrolled Emissions Potential-to-Emit (PTE) (tpy)			Control Efficiency	Controlled Emissions (tpy)		
		PM	PM ₁₀	PM _{2.5}	PM	PM ₁₀	PM _{2.5}		PM	PM ₁₀	PM _{2.5}
Pelletized Slag Screening											
Front-end loader dig out at pellitizer DP1 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Front-end loader drop to dump truck DP2 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Dump truck drop to pelletized slag piles DP3 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Front-end loader from pile to Feed hopper DP4 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Feed hopper to under conveyor DP5 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Under Conveyor drop to pellet screener (DP6) ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Pellet screening ²	34	0.0022	0.00074	5E-05	0.33	0.11	0.01	0.0%	0.33	0.11	0.01
Pellet Screener to Stacker Conveyor 1 (fine) DP7 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Stacker Conveyor 1 to slag pile (fine) DP8 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Screener to Stacker Conveyor 2 DP14 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Stacker Conveyor 2 to slag pile (coarse) DP15 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Screener to reject conveyor (large slag) DP9 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
reject conveyor to Short conveyor DP10 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Short conveyor to Jaw Crusher DP11 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Jaw (pellet) crushing ²	34	0.0012	0.00054	0.0001	0.18	0.08	0.02	0.0%	0.18	0.08	0.02
Jaw (pellet) crusher to return conveyor DP12 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Return Conveyor to pellet screener DP13 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Front-end loader pickup of sizing plant piles ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Front-end loader drop to transport truck offsite (fine and coarse) DP16 ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Dump truck drop to slag barge hopper ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Slag barge hopper drop to slag barge loader ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
Slag barge loader to slag barge ¹	34	0.00191	0.0009	0.0001	0.29	0.14	0.02	0.0%	0.29	0.14	0.02
TOTAL PTE from Pellet Slag Screening					6.24	2.89	0.43	0.00	6.24	2.89	0.43

Methodology

AP-42 Reference: 13.2.4 Aggregate Handling & Storage Piles (Fugitive Emissions)

Emission Factor Equation: $E = k(0.0032)[(U/5)^{1.3}]/[(M/2)^{1.4}]$

Where:

E = emission factor

k = particle size multiplier (dimensionless 0.74 for PM, 0.35 for PM-10 and 0.053 for PM2.5)

U = wind speed (16.34 mph), average windspeed at the Gary airport from data collected 7AM to 7PM daily between 10/2010 and 04/2014

M = moisture content (7%) based on Lafarge documentation and inspector confirmation

¹Normally AP-42 Chapter 13.2.4 is used for the handling and open storage of previously processed slag piles. AP-42 Chapter 11.19.2 is used for fresh unprocessed slag piles.

The expanded slag operation consists of separating "pelletized" slag into different sizes for off site processes. This material has a higher moisture content than conventional AP-42 Chap. 11.19.2 To account for the higher moisture content of the slag, AP-42 Chapter 13.2.4 provides a more appropriate emissions factor.

AP-42 Reference 11.19.2 Crushed Stone Processing & Pulverized Mineral Processing

Emission Factors based on Table 11.19.2-2 Emission Factors for Crushed Stone Processing Operations - Tertiary Crushing (controlled)

²"Slag crushing" process in this case is a separation of moisture rich particulates than a conventional crushing of denser, dry particulates and emissions are much less.

To account for the lower emissions based on particle size and moisture content, the Tertiary Crushing using wet suppression control emission factors found in AP-42 Chapter 11.19.2 are used.

^{2a}"Pellet screening" is the initial process of shaking the material to separate the moisture rich slag into large, coarse and fine particles.

To account for the lower emissions based on moisture content, the Screening using wet suppression control emission factors found in AP-42 Chapter 11.19.2 are used.

**Appendix A: Emission Calculations
Fugitive Dust Emissions - Unpaved Roads**

Company Name: Lafarge North America
Address City IN Zip: 3210 Watling St., East Chicago, IN 46312
Administrative TVOPR No.: 089-36118-00458
Reviewer: Jean Fix
Date Application Received: 3-Aug-2015

Unpaved Roads at Industrial Site

The following calculations determine the amount of emissions created by unpaved roads, based on 8,760 hours of use and AP-42, Ch 13.2.2 (11/2006).

Vehicle Information (provided by source)

Type	Maximum number of vehicles	Number of one-way trips per day per vehicle	Maximum trips per day (trip/day)	Maximum Weight Loaded (tons/trip)	Total Weight driven per day (ton/day)	Maximum one-way distance (feet/trip)	Maximum one-way distance (mi/trip)	Maximum one-way miles (miles/day)	Maximum one-way miles (miles/yr)
Granulated Run-out slag piles to "A-Lot" piles	2.0	86.0	172.0	32.0	5504.0	4500	0.852	146.6	53505.7
Granulated Run-out slag piles to barge	2.0	86.0	172.0	32.0	5504.0	4500	0.852	146.6	53505.7
EG-2 Granulated processed slag to barge	2.0	86.0	172.0	32.0	5504.0	4500	0.852	146.6	53505.7
EG-1 Pelletized slag to unprocessed stockpiles	2.0	38.0	76.0	22.0	1672.0	5500	1.042	79.2	28895.8
EG-1 Pelletized processed slag to barge	2.0	38.0	76.0	22.0	1672.0	5500	1.042	79.2	28895.8
Totals			668.0		19856.0	24500.0	4.640	598.1	218308.7
Average Vehicle Weight Per Trip =	29.7	tons/trip							
Average Miles Per Trip =	0.90	miles/trip							

Unmitigated Emission Factor, $E_f = k \cdot [(s/12)^a] \cdot [(W/3)^b]$ (Equation 1a from AP-42 13.2.2)

	PM	PM10	PM2.5	
where k =	4.9	1.5	0.15	lb/mi = particle size multiplier (AP-42 Table 13.2.2-2 for Industrial Roads)
s =	3.4	3.4	3.4	% = tested content from SSM089-11512-00316
a =	0.7	0.9	0.9	= constant (AP-42 Table 13.2.2-2 for Industrial Roads)
W =	29.7	29.7	29.7	tons = average vehicle weight (provided by source)
b =	0.45	0.45	0.45	= constant (AP-42 Table 13.2.2-2 for Industrial Roads)

Taking natural mitigation due to precipitation into consideration, Mitigated Emission Factor, $E_{ext} = E_f \cdot [(365 - P)/365]$ (Equation 2 from AP-42 13.2.2)

Mitigated Emission Factor, $E_{ext} = E_f \cdot [(365 - P)/365]$
 where P = 120 days of rain greater than or equal to 0.01 inches (see Fig. 13.2.2-1)

	PM	PM10	PM2.5	
Unmitigated Emission Factor, $E_f =$	5.69	1.35	0.14	lb/mile
Mitigated Emission Factor, $E_{ext} =$	3.82	0.91	0.09	lb/mile
Dust Control Efficiency =	50%	50%	50%	(pursuant to control measures outlined in fugitive dust control plan)

Process	Unmitigated PTE of PM (tons/yr)	Unmitigated PTE of PM10 (tons/yr)	Unmitigated PTE of PM2.5 (tons/yr)	Mitigated PTE of PM (tons/yr)	Mitigated PTE of PM10 (tons/yr)	Mitigated PTE of PM2.5 (tons/yr)	Controlled PTE of PM (tons/yr)	Controlled PTE of PM10 (tons/yr)	Controlled PTE of PM2.5 (tons/yr)
Granulated Run-out slag piles to "A-Lot" piles	152.18	36.20	3.62	102.15	24.30	2.43	51.08	12.15	1.21
Granulated Run-out slag piles to barge	152.18	36.20	3.62	102.15	24.30	2.43	51.08	12.15	1.21
EG-2 Granulated processed slag to barge	152.18	36.20	3.62	102.15	24.30	2.43	51.08	12.15	1.21
EG-1 Pelletized slag to unprocessed stockpiles	82.19	19.55	1.96	55.17	13.12	1.31	27.58	6.56	0.66
EG-1 Pelletized processed slag to barge	82.19	19.55	1.96	55.17	13.12	1.31	27.58	6.56	0.66
Totals	620.93	147.71	14.77	416.79	99.14	9.91	208.39	49.57	4.96

Methodology

Total Weight driven per day (ton/day) = [Maximum Weight Loaded (tons/trip)] * [Maximum trips per day (trip/day)]
 Maximum one-way distance (mi/trip) = [Maximum one-way distance (feet/trip)] / [5280 ft/mile]
 Maximum one-way miles (miles/day) = [Maximum trips per year (trip/day)] * [Maximum one-way distance (mi/trip)]
 Average Vehicle Weight Per Trip (ton/trip) = SUM[Total Weight driven per day (ton/day)] / SUM[Maximum trips per day (trip/day)]
 Average Miles Per Trip (miles/trip) = SUM[Maximum one-way miles (miles/day)] / SUM[Maximum trips per year (trip/day)]
 Unmitigated PTE (tons/yr) = (Maximum one-way miles (miles/yr)) * (Unmitigated Emission Factor (lb/mile)) * (ton/2000 lbs)
 Mitigated PTE (tons/yr) = (Maximum one-way miles (miles/yr)) * (Mitigated Emission Factor (lb/mile)) * (ton/2000 lbs)
 Controlled PTE (tons/yr) = (Mitigated PTE (tons/yr)) * (1 - Dust Control Efficiency)

Abbreviations

PM = Particulate Matter
 PM10 = Particulate Matter (<10 um)
 PM2.5 = Particulate Matter (<2.5 um)
 PTE = Potential to Emit

granulated slag calculators per SSM089-11512-00316

unit weight 80 lb/ft³
 Dump truck capacity 800 ft³
 total granulated slag production 1,003,926 tons/yr
 distance traveled 4500 ft/load
 number of trips 2 trips/load

pelletized slag calculators per SSM089-11512-00316

unit weight 55 lb/ft³
 Dump truck capacity 800 ft³
 total pelletized slag production 300,000 tons/yr
 distance traveled 5500 ft/load
 number of trips 2 trips/load

Source Name: Lafarge North America
Address City IN Zip: 3210 Watling St., East Chicago, IN 46312
County: Lake
SIC Code: 3312
Administrative TVOPR No.: 089-36118-00458

Permit Reviewer: Jean Fix

Date Application Received: 3-Aug-2015

Emission Factor Equation from AP-42 Chapter 13.2.4, 1995:

1. Fugitive Emissions from Storage Piles

Storage pile emissions, which result from wind erosion, are determined by the following calculations:

$$E_f = 1.7 * k * (s/1.5) * (365-p) / 235 * (f/15)$$

PM = 3.68 lb/ac/day
 PM10 = 1.74 lb/ac/day
 PM2.5 = 0.26 lb/ac/day

where:	k (PM) =	0.74	particle size multiplier (dimensionless)
	k (PM10) =	0.35	particle size multiplier (dimensionless)
	k (PM2.5) =	0.053	particle size multiplier (dimensionless)
	s =	0.79	% silt content of material
	p =	120	days of rain greater than or equal to 0.01 inches
	f =	80	% of wind greater than or equal to 12 mph

Storage capacity (SC) of site (tons) = (# acres)*(43560 sqft/acre)*(25 ft high)*(1/40 ton/cuft)
Storage capacity (SC) of site (tons) = 830362.5

PTE of PM (tons/year) = $E_f * SC * (40 \text{ cuft/ton}) * 365 \text{ day/yr} / (2000 \text{ lb/ton} * 43560 \text{ sqft/acre} * 25 \text{ ft})$

Uncontrolled		Controlled	
PTE of PM (tons/year) =	20.51	PTE of PM (tons/year) =	10.25
PTE of PM10 (tons/year) =	9.70	PTE of PM10 (tons/year) =	4.85
PTE of PM2.5 (tons/year) =	1.47	PTE of PM2.5 (tons/year) =	0.73

Based conservatively on 30.5 acres of storage capacity. (SSM 089-11512-00316)



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • www.idem.IN.gov

Michael R. Pence
Governor

Carol S. Comer
Commissioner

SENT VIA U.S. MAIL: CONFIRMED DELIVERY AND SIGNATURE REQUESTED

TO: Timothy Weible
Lafarge North America
11435 CR 176
Paulding, OH 45879

DATE: January 20, 2016

FROM: Matt Stuckey, Branch Chief
Permits Branch
Office of Air Quality

SUBJECT: Final Decision
Administrative Title V Operating Permit Renewal
089-36118-00458

Enclosed is the final decision and supporting materials for the air permit application referenced above. Please note that this packet contains the original, signed, permit documents.

The final decision is being sent to you because our records indicate that you are the contact person for this application. However, if you are not the appropriate person within your company to receive this document, please forward it to the correct person.

A copy of the final decision and supporting materials has also been sent via standard mail to:
Tom Whitt, Slag Ops Mgr
Michael Boozer, Chemreport Incorporated
Responsible Official, ArcelorMittal
OAQ Permits Branch Interested Parties List

If you have technical questions regarding the enclosed documents, please contact the Office of Air Quality, Permits Branch at (317) 233-0178, or toll-free at 1-800-451-6027 (ext. 3-0178), and ask to speak to the permit reviewer who prepared the permit. If you think you have received this document in error, please contact Joanne Smiddie-Brush of my staff at 1-800-451-6027 (ext 3-0185), or via e-mail at jbrush@idem.IN.gov.

Final Applicant Cover letter.dot 8/27/2015



INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

We Protect Hoosiers and Our Environment.

100 N. Senate Avenue • Indianapolis, IN 46204
(800) 451-6027 • (317) 232-8603 • www.idem.IN.gov

Michael R. Pence
Governor

Carol S. Comer
Commissioner

January 20, 2016

TO: East Chicago Public Library – Robert A. Pastrick Branch

From: Matthew Stuckey, Branch Chief
Permits Branch
Office of Air Quality

Subject: **Important Information for Display Regarding a Final Determination**

Applicant Name: Lafarge North America
Permit Number: 089-36118-00458

You previously received information to make available to the public during the public comment period of a draft permit. Enclosed is a copy of the final decision and supporting materials for the same project. Please place the enclosed information along with the information you previously received. To ensure that your patrons have ample opportunity to review the enclosed permit, **we ask that you retain this document for at least 60 days.**

The applicant is responsible for placing a copy of the application in your library. If the permit application is not on file, or if you have any questions concerning this public review process, please contact Joanne Smiddie-Brush, OAQ Permits Administration Section at 1-800-451-6027, extension 3-0185.

Enclosures
Final Library.dot 8/27/2015

Mail Code 61-53

IDEM Staff	VHAUN 1/20/2016 089-36118-00458 FINAL Lafarge North America - contractor of ArcelorMittal (316)			AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender		Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: CERTIFICATE OF MAILING ONLY	

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee	Remarks
1		Timothy Weible Lafarge North America - contractor of ArcelorMitta 11435 CR 176 Paulding OH 45879 (Source CAATS)					VIA CERTIFIED MAIL USPS					
2		Tom Whitt Slag Ops Mgr Lafarge North America - contractor of ArcelorMitta 3210 Watling St Box 2-974 East Chicago IN 46312 (RO CAATS)										
3		East Chicago City Council 4525 Indianapolis Blvd East Chicago IN 46312 (Local Official)										
4		East Chicago Public Library 1008 W. Chicago Ave. East Chicago IN 46312 (Library)										
5		Lake County Health Department-Gary 1145 W. 5th Ave Gary IN 46402-1795 (Health Department)										
6		WJOB / WZVN Radio 6405 Olcott Ave Hammond IN 46320 (Affected Party)										
7		Shawn Sobocinski 5950 Old Porter Rd Aprt 306 Portage IN 46368-1558 (Affected Party)										
8		Mark Coleman 8 Turret Rd. Portage IN 46368-1072 (Affected Party)										
9		Mr. Chris Hernandez Pipefitters Association, Local Union 597 1461 East Summit St Crown Point IN 46307 (Affected Party)										
10		Craig Hogarth 7901 West Morris Street Indianapolis IN 46231 (Affected Party)										
11		Responsible Official Arcelor Mittal 3210 Watling St. East Chicago IN 46312-1610 (source - addl contact)										
12		Lake County Commissioners 2293 N. Main St, Building A 3rd Floor Crown Point IN 46307 (Local Official)										
13		Anthony Copeland 2006 E. 140th Street East Chicago IN 46312 (Affected Party)										
14		Barbara G. Perez 506 Lilac Street East Chicago IN 46312 (Affected Party)										
15		Mr. Robert Garcia 3733 Parrish Avenue East Chicago IN 46312 (Affected Party)										

Total number of pieces Listed by Sender	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is \$50,000 per piece subject to a limit of \$50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is \$500. The maximum indemnity payable is \$25,000 for registered mail, sent with optional postal insurance. See Domestic Mail Manual R900, S913, and S921 for limitations of coverage on inured and COD mail. See International Mail Manual for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
14			

Mail Code 61-53

IDEM Staff	VHAUN 1/20/2016 089-36118-00458 FINAL Lafarge North America - contractor of ArcelorMittal (316) 36118			AFFIX STAMP HERE IF USED AS CERTIFICATE OF MAILING
Name and address of Sender		Indiana Department of Environmental Management Office of Air Quality – Permits Branch 100 N. Senate Indianapolis, IN 46204	Type of Mail: CERTIFICATE OF MAILING ONLY	

Line	Article Number	Name, Address, Street and Post Office Address	Postage	Handing Charges	Act. Value (If Registered)	Insured Value	Due Send if COD	R.R. Fee	S.D. Fee	S.H. Fee	Rest. Del. Fee	Remarks
1		Karen Kroczek 8212 Madison Ave Munster IN 46321-1627 (Affected Party)										
2		Joseph Hero 11723 S Oakridge Drive St. John IN 46373 (Affected Party)										
3		Gary City Council 401 Broadway # 209 Gary IN 46402 (Local Official)										
4		Mr. Larry Davis 268 South, 600 West Hebron IN 46341 (Affected Party)										
5		Michael Boozer Chemreport Incorporated 9725 12th Street Kenosha WI 53144 (Consultant)										
6		Ryan Dave 939 Cornwallis Munster IN 46321 (Affected Party)										
7												
8												
9												
10												
11												
12												
13												
14												
15												

Total number of pieces Listed by Sender 6	Total number of Pieces Received at Post Office	Postmaster, Per (Name of Receiving employee)	The full declaration of value is required on all domestic and international registered mail. The maximum indemnity payable for the reconstruction of nonnegotiable documents under Express Mail document reconstructing insurance is \$50,000 per piece subject to a limit of \$50, 000 per occurrence. The maximum indemnity payable on Express mil merchandise insurance is \$500. The maximum indemnity payable is \$25,000 for registered mail, sent with optional postal insurance. See Domestic Mail Manual R900, S913, and S921 for limitations of coverage on inured and COD mail. See International Mail Manual for limitations o coverage on international mail. Special handling charges apply only to Standard Mail (A) and Standard Mail (B) parcels.
---	--	--	--